

SONY

VIDEOCASSETTE RECORDER


UVW-1800

VIDEOCASSETTE PLAYER

UVW-1600

SERVICE MANUAL

Vol.2 1st Edition

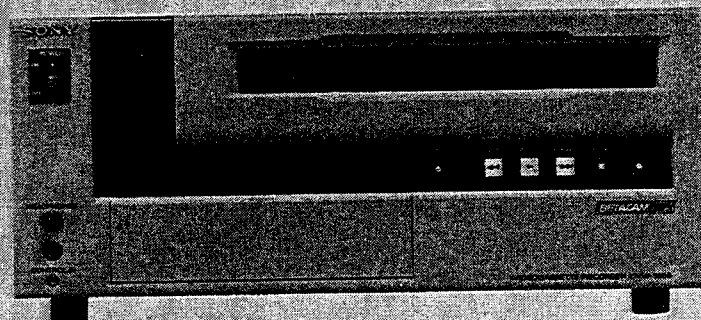

BETACAM SP

For customers in the USA

WARNING

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

You are cautioned that any changes or modifications not expressly approved in this manual could void your authority to operate this equipment.

The shielded interface cable recommended in this manual must be used with this equipment in order to comply with the limits for a digital device pursuant to Subpart B of Part 15 of FCC Rules.



This symbol is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

WARNING: Using this unit at a voltage other than 120 V may require the use of a different line cord or attachment plug, or both.
To reduce the risk of fire or electric shock, refer servicing to qualified service personnel.

For customers in Canada

This apparatus complies with the Class A limits for radio noise emissions set out in Radio Interference Regulations.

Pour les utilisateurs au Canada

Cet appareil est conforme aux normes Classe A pour bruits radioélectriques, spécifiées dans le Règlement sur le brouillage radioélectrique.

このマニュアルに記載されている事柄の著作権は当社にあり、説明内容は機器購入者の使用を目的としています。

従って、当社の許可なしに無断で複製したり、説明内容(操作、保守等)と異なる目的で本マニュアルを使用することを禁止します。

The material contained in this manual consists of information that is the property of Sony Corporation and is intended solely for use by the purchasers of the equipment described in this manual.

Sony Corporation expressly prohibits the duplication of any portion of this manual or the use thereof for any purpose other than the operation or maintenance of the equipment described in this manual without the express written permission of Sony Corporation.

Le matériel contenu dans ce manuel consiste en informations qui sont la propriété de Sony Corporation et sont destinées exclusivement à l'usage des acquéreurs de l'équipement décrit dans ce manuel.

Sony Corporation interdit formellement la copie de quelque partie que ce soit de ce manuel ou son emploi pour tout autre but que des opérations ou entretiens de l'équipement à moins d'une permission écrite de Sony Corporation.

Das in dieser Anleitung enthaltene Material besteht aus Informationen, die Eigentum der Sony Corporation sind, und ausschließlich zum Gebrauch durch den Käufer der in dieser Anleitung beschriebenen Ausrüstung bestimmt sind.

Die Sony Corporation untersagt ausdrücklich die Vervielfältigung jeglicher Teile dieser Anleitung oder den Gebrauch derselben für irgendeinen anderen Zweck als die Bedienung oder Wartung der in dieser Anleitung beschriebenen Ausrüstung ohne ausdrückliche schriftliche Erlaubnis der Sony Corporation.

このマニュアルについて

本書は、カセットレコーダ UVW-1800 およびカセットプレーヤ UVW-1600 のサービスマニュアル VOL. 2 です。
本書では、ブロックダイアグラム、マウント図、回路図、パーツリストを記載しています。

構成

本書の構成を把握していただくために、全章の概略を以下に説明します。

- 第14章 BLOCK DIAGRAMS
- 第15章 BOARD LAYOUTS
- 第16章 SCHEMATIC DIAGRAMS
- 第17章 SEMICONDUCTOR PIN ASSIGNMENTS
- 第18章 SPARE PARTS AND OPTIONAL FIXTURES

Introducing this manual

This manual is the Service Manual Vol. 2 of the video cassette recorder model UVW-1800 and the video cassette player model UVW-1600.
This manual contains block diagrams, board layouts, schematic diagrams, parts lists.

Contains

The sections covered in the manual are summarized below to give you a general understanding of the manual.

- Section 14 BLOCK DIAGRAMS
- Section 15 BOARD LAYOUTS
- Section 16 SCHEMATIC DIAGRAMS
- Section 17 SEMICONDUCTOR PIN ASSIGNMENTS
- Section 18 SPARE PARTS AND OPTIONAL FIXTURES

関連マニュアル

本機には、この「サービスマニュアル VOL. 2」の他に、下記のマニュアルが用意されています。

- **オペレーションマニュアル (本機に付属しています)**

本機を実際に運用および操作するのに必要な情報を記載しています。

- **インストレーションマニュアル (本機に付属していません)**

本機の設置時に必要なラックマウント、周辺機器との接続の際のコネクター情報等を記載しています。

- **サービスマニュアル vol.1 (本機に付属していません)**

本機の保守に関する情報と、部品交換および調整などのサービスに関する情報を記載しています。

Related manuals

In addition to this Service Manual Vol. 2, the following manuals are provided.

- **Operation Manual (Supplied with equipment)**

Explains how to operate this equipment.

- **Installation Manual (Not supplied with equipment)**

Contains rack mount information necessary for installation of the equipment, the connector information necessary for connecting the unit with peripherals and others.

- **Service Manual Vol. 1 (Not supplied with equipment)**

Contains the maintenance information and servicing information necessary for parts replacement and adjustment.

目次 TABLE OF CONTENTS

Volume 1

- 1. OPERATING INSTRUCTION**
- 2. INSTALLATION**
- 3. SERVICE OVERVIEW**
- 4. MAINTENANCE MENU**
- 5. PERIODIC MAINTENANCE AND INSPECTION**
- 6. REPLACEMENT OF MECHANICAL PARTS**
- 7. TAPE PATH ALIGNMENT**
- 8. ELECTRICAL ALIGNMENT OVERVIEW**
- 9. POWER SUPPLY AND SYSTEM CONTROL
ALIGNMENT**
- 10. SERVO ALIGNMENT**
- 11. AUDIO/TIMECODE ALIGNMENT**
- 12. VIDEO ALIGNMENT**
- 13. ELECTRICAL ALIGNMENT AFTER
REPLACEMENT BOARDS**

14. BLOCK DIAGRAMS

Overall (1/2)	14-1
Overall (2/2)	14-2
Y/C Rec Process (Decode, Mod.), CTDM	14-4
RF REC/PB Amplifier, Rotary	14-6
Erase Oscillator	14-8
PB RF EQ, Demodulator	14-10
Encode, Output Driver	14-12
Time Base Corrector, CTDM (Expand)	14-14
Time Base Corrector	14-17
Audio PB, In/Out, LTC PB	14-18
LTC Erase/Bias Osc, Mode Control,	14-20
LTC REC, Crosstalk Cancel	14-22
System Control	14-23
Servo (1)	
Servo (2)	

15. BOARD LAYOUTS

AP-31	15-4
AP-31A	15-6
AR-14	15-8
CP-225	15-10
CP-225A	15-12
CP-226	15-14
CP-226J	
CP-226A	
CP-226AJ	
CP-237	15-16
CP-237A	
DR-214	15-18
KY-249	15-20
KY-249A	15-22
MS-39	15-24
MS-39A	
RP-70	15-26
RP-70A	15-28
SS-53	15-30
TBC-25	15-34
VP-43	15-38
VP-43A	
VRA-5	15-42
FRAME (1)	15-46
CL-25	
HP-61	
HP-61A	
PC-62	
PD-35	
FRAME (2)	15-48
PTC-66	
PTC-67	
PTC-68	
RM-126	
RM-127	
SE-207	
TR-84	
VR-155	

SOPS-1045AC	15-50
SOPS-1045M	
MB-470	15-52
MB-470A	15-56
MB-471	15-60
MB-471A	15-62

16. SCHEMATIC DIAGRAMS


AP-31 (1/3)	16-4
AP-31 (2/3)	16-8
AP-31 (3/3)	16-12
AP-31A (1/3)	16-16
AP-31A (2/3)	16-20
AP-31A (3/3)	16-24
AR-14 (1/4)	16-28
AR-14 (2/4)	16-32
AR-14 (3/4)	16-36
AR-14 (4/4)	16-40
CP-225/A	16-43
CP-226/A	16-45
DR-214 (1/2)	16-48
DR-214 (2/2)	16-52
KY-249	16-56
KY-249A	16-60
MS-39/A	16-64
RP-70/A (1/2)	16-68
RP-70/A (2/2)	16-72
SS-53 (1/4)	16-76
SS-53 (2/4)	16-80
SS-53 (3/4)	16-84
SS-53 (4/4)	16-88
TBC-25 (1/4)	16-92
TBC-25 (2/4)	16-96
TBC-25 (3/4)	16-100
TBC-25 (4/4)	16-104
VP-43/A (1/7)	16-108
VP-43/A (2/7)	16-112
VP-43/A (3/7)	16-116
VP-43/A (4/7)	16-120
VP-43/A (5/7)	16-124
VP-43/A (6/7)	16-128
VP-43/A (7/7)	16-132
VRA-5 (1/4)	16-136
VRA-5 (2/4)	16-140
VRA-5 (3/4)	16-144
VRA-5 (4/4)	16-148
SOPS-1045AC	16-151
SOPS-1045M	
MB-470/A (1/4)	16-153
MB-470/A (2/4)	16-155
MB-470/A (3/4)	16-157
MB-470/A (4/4)	16-159
MB-471/A (1/2)	16-161
MB-471/A (2/2)	16-163

FRAME (1/2)	16-165
CL-25	
DUS-355	
PD-35	
PTC-66	
PTC-67	
PTC-68	
RM-126	
RM-127	
SE-207	
TR-84	
FRAME (2/2)	16-167
CP-237	
CP-237A	
HP-61	
HP-61A	
VR-155	

17. SEMICONDUCTOR PIN ASSIGNMENTS


18. SPARE PARTS AND OPTIONAL FIXTURES


18-1. Notes on Spare Parts	18-1
18-2. Exploded Views	18-2
Reel Chassis (1)	18-4
Loading Ring	18-6
Reel Chassis (2)	18-8
Drum & Tension Regulator Assembly	18-10
DR-214 Board Assembly	18-12
Press Assy, Pinch	18-14
Cassette Compartment Assembly	18-16
Chassis & Ornamental Panel Block	18-18
Card Rack Block (1)	18-20
Card Rack Block (2)	18-22
Chassis Block	18-24
Connector Panel Block	18-26
18-3. Electrical Parts Lists	18-29
18-4. Packing Materials & Accessories	18-103
18-5. Optional Fixtures	18-103

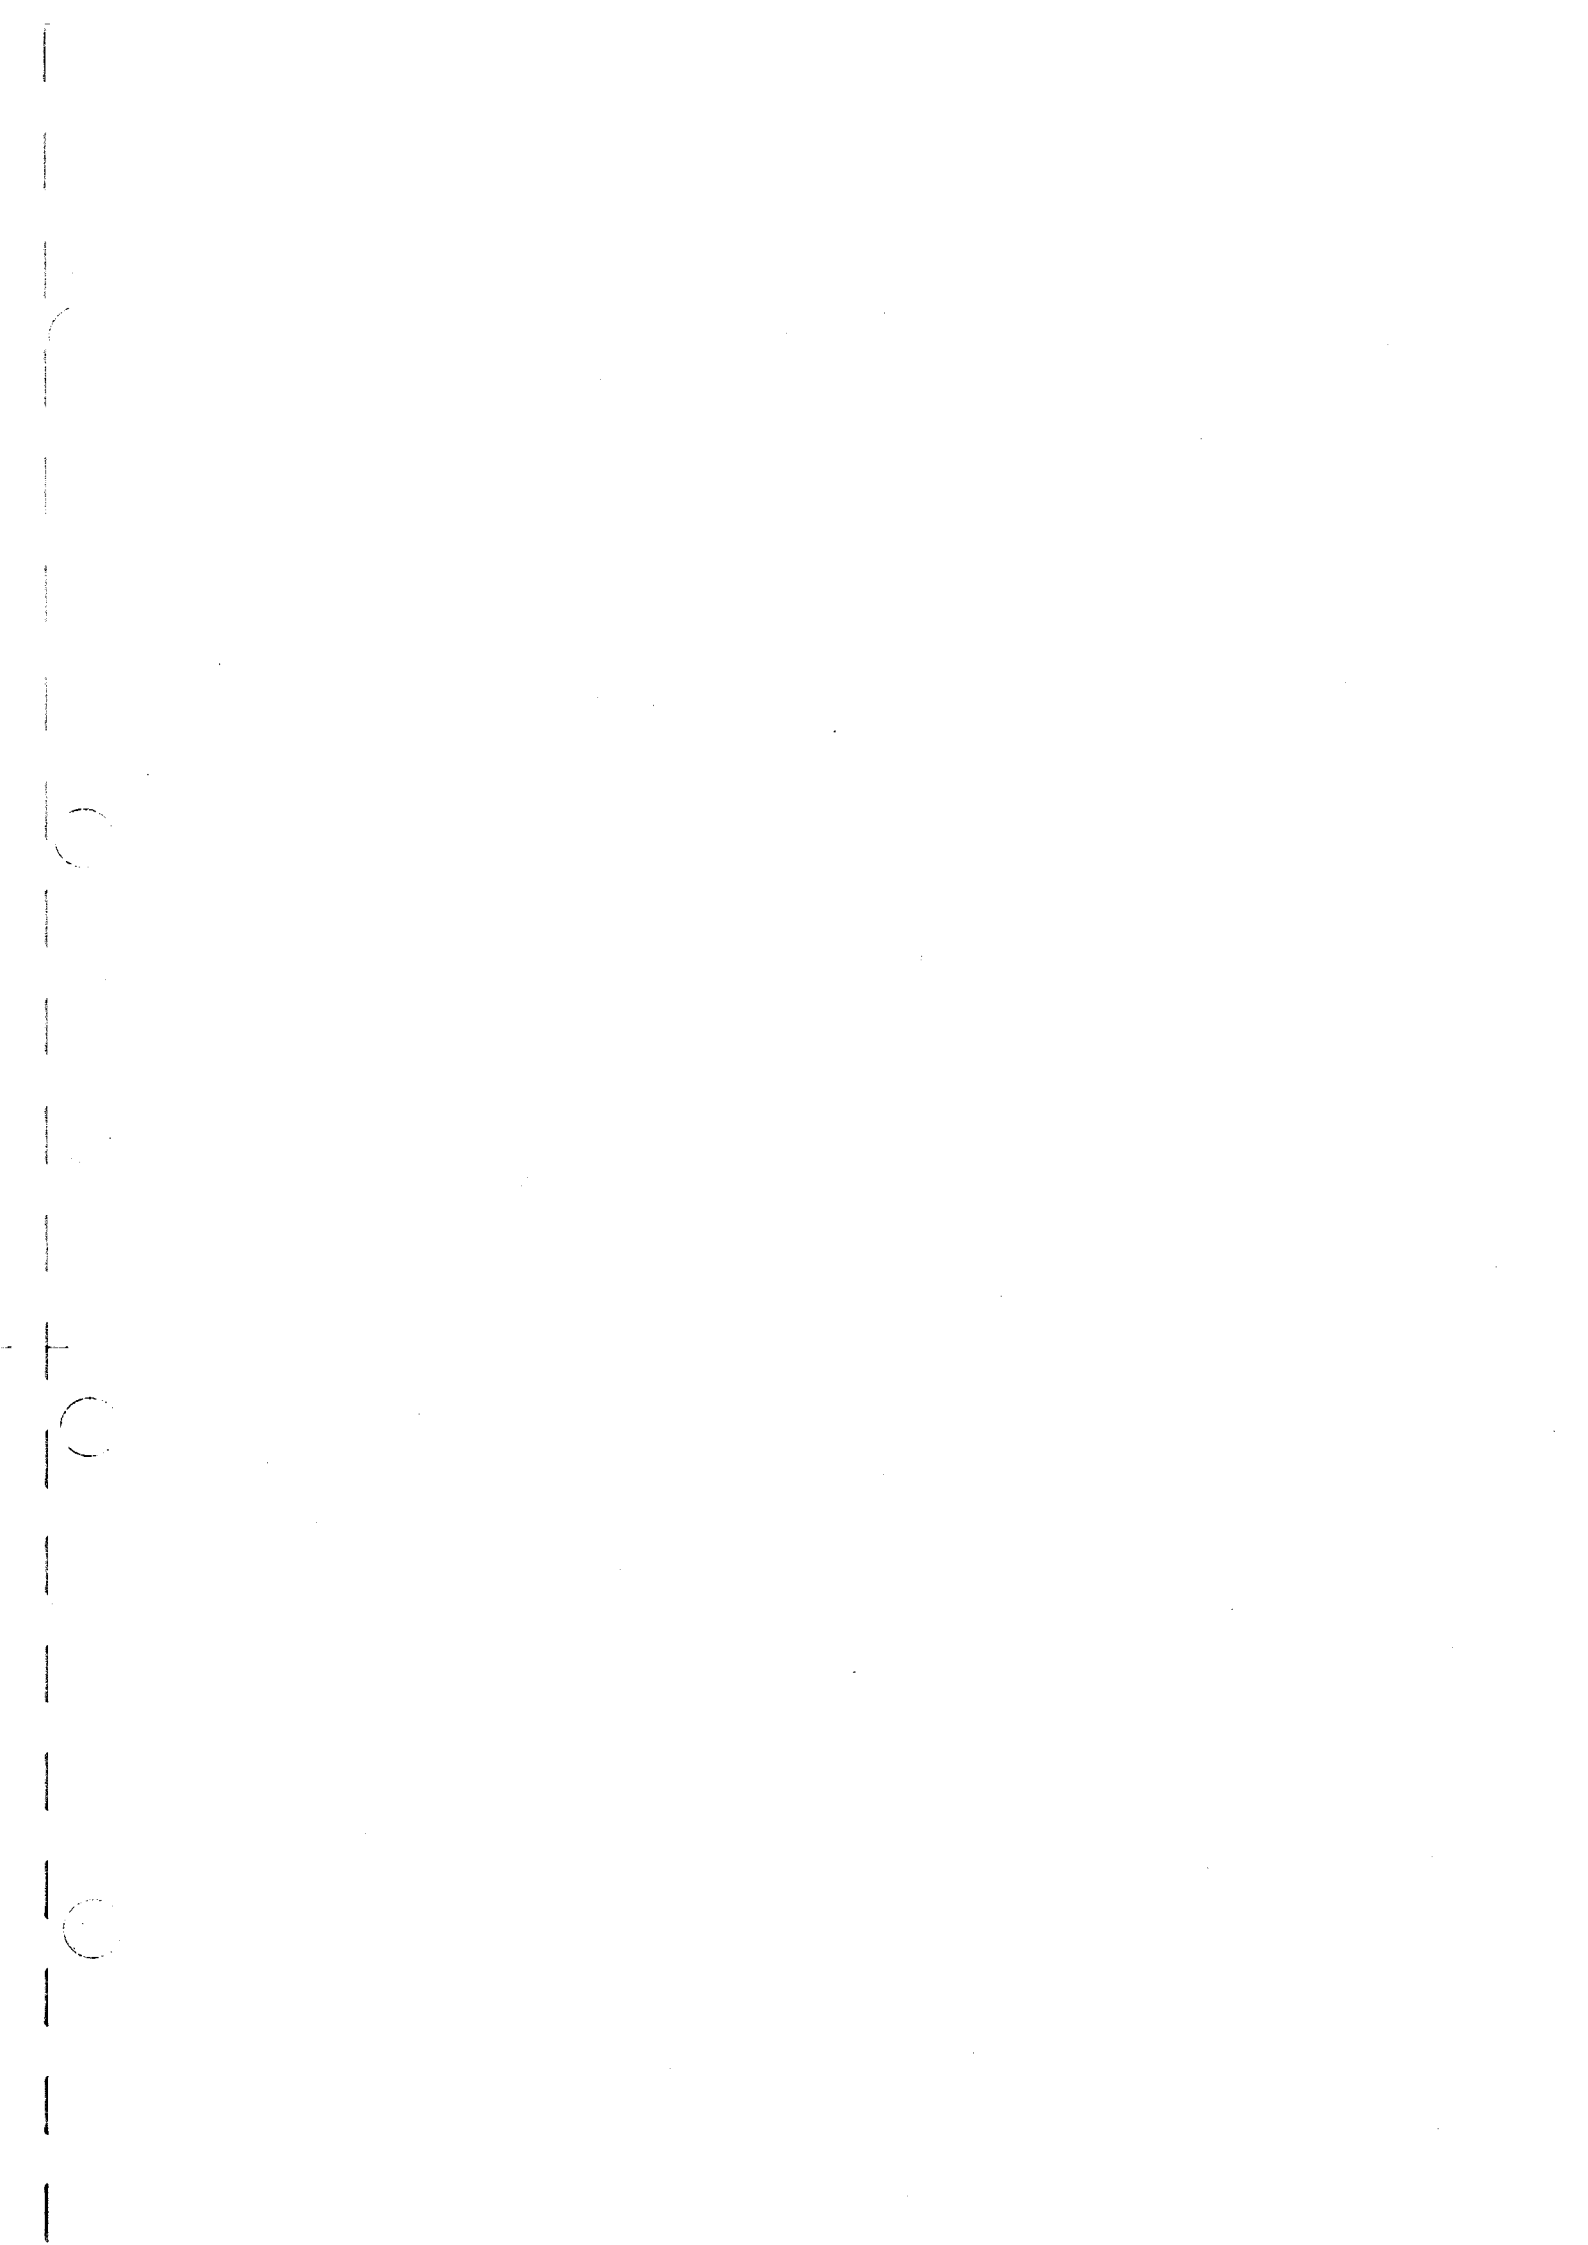

SECTION 14
BLOCK DIAGRAMS

OVERALL (1/2)

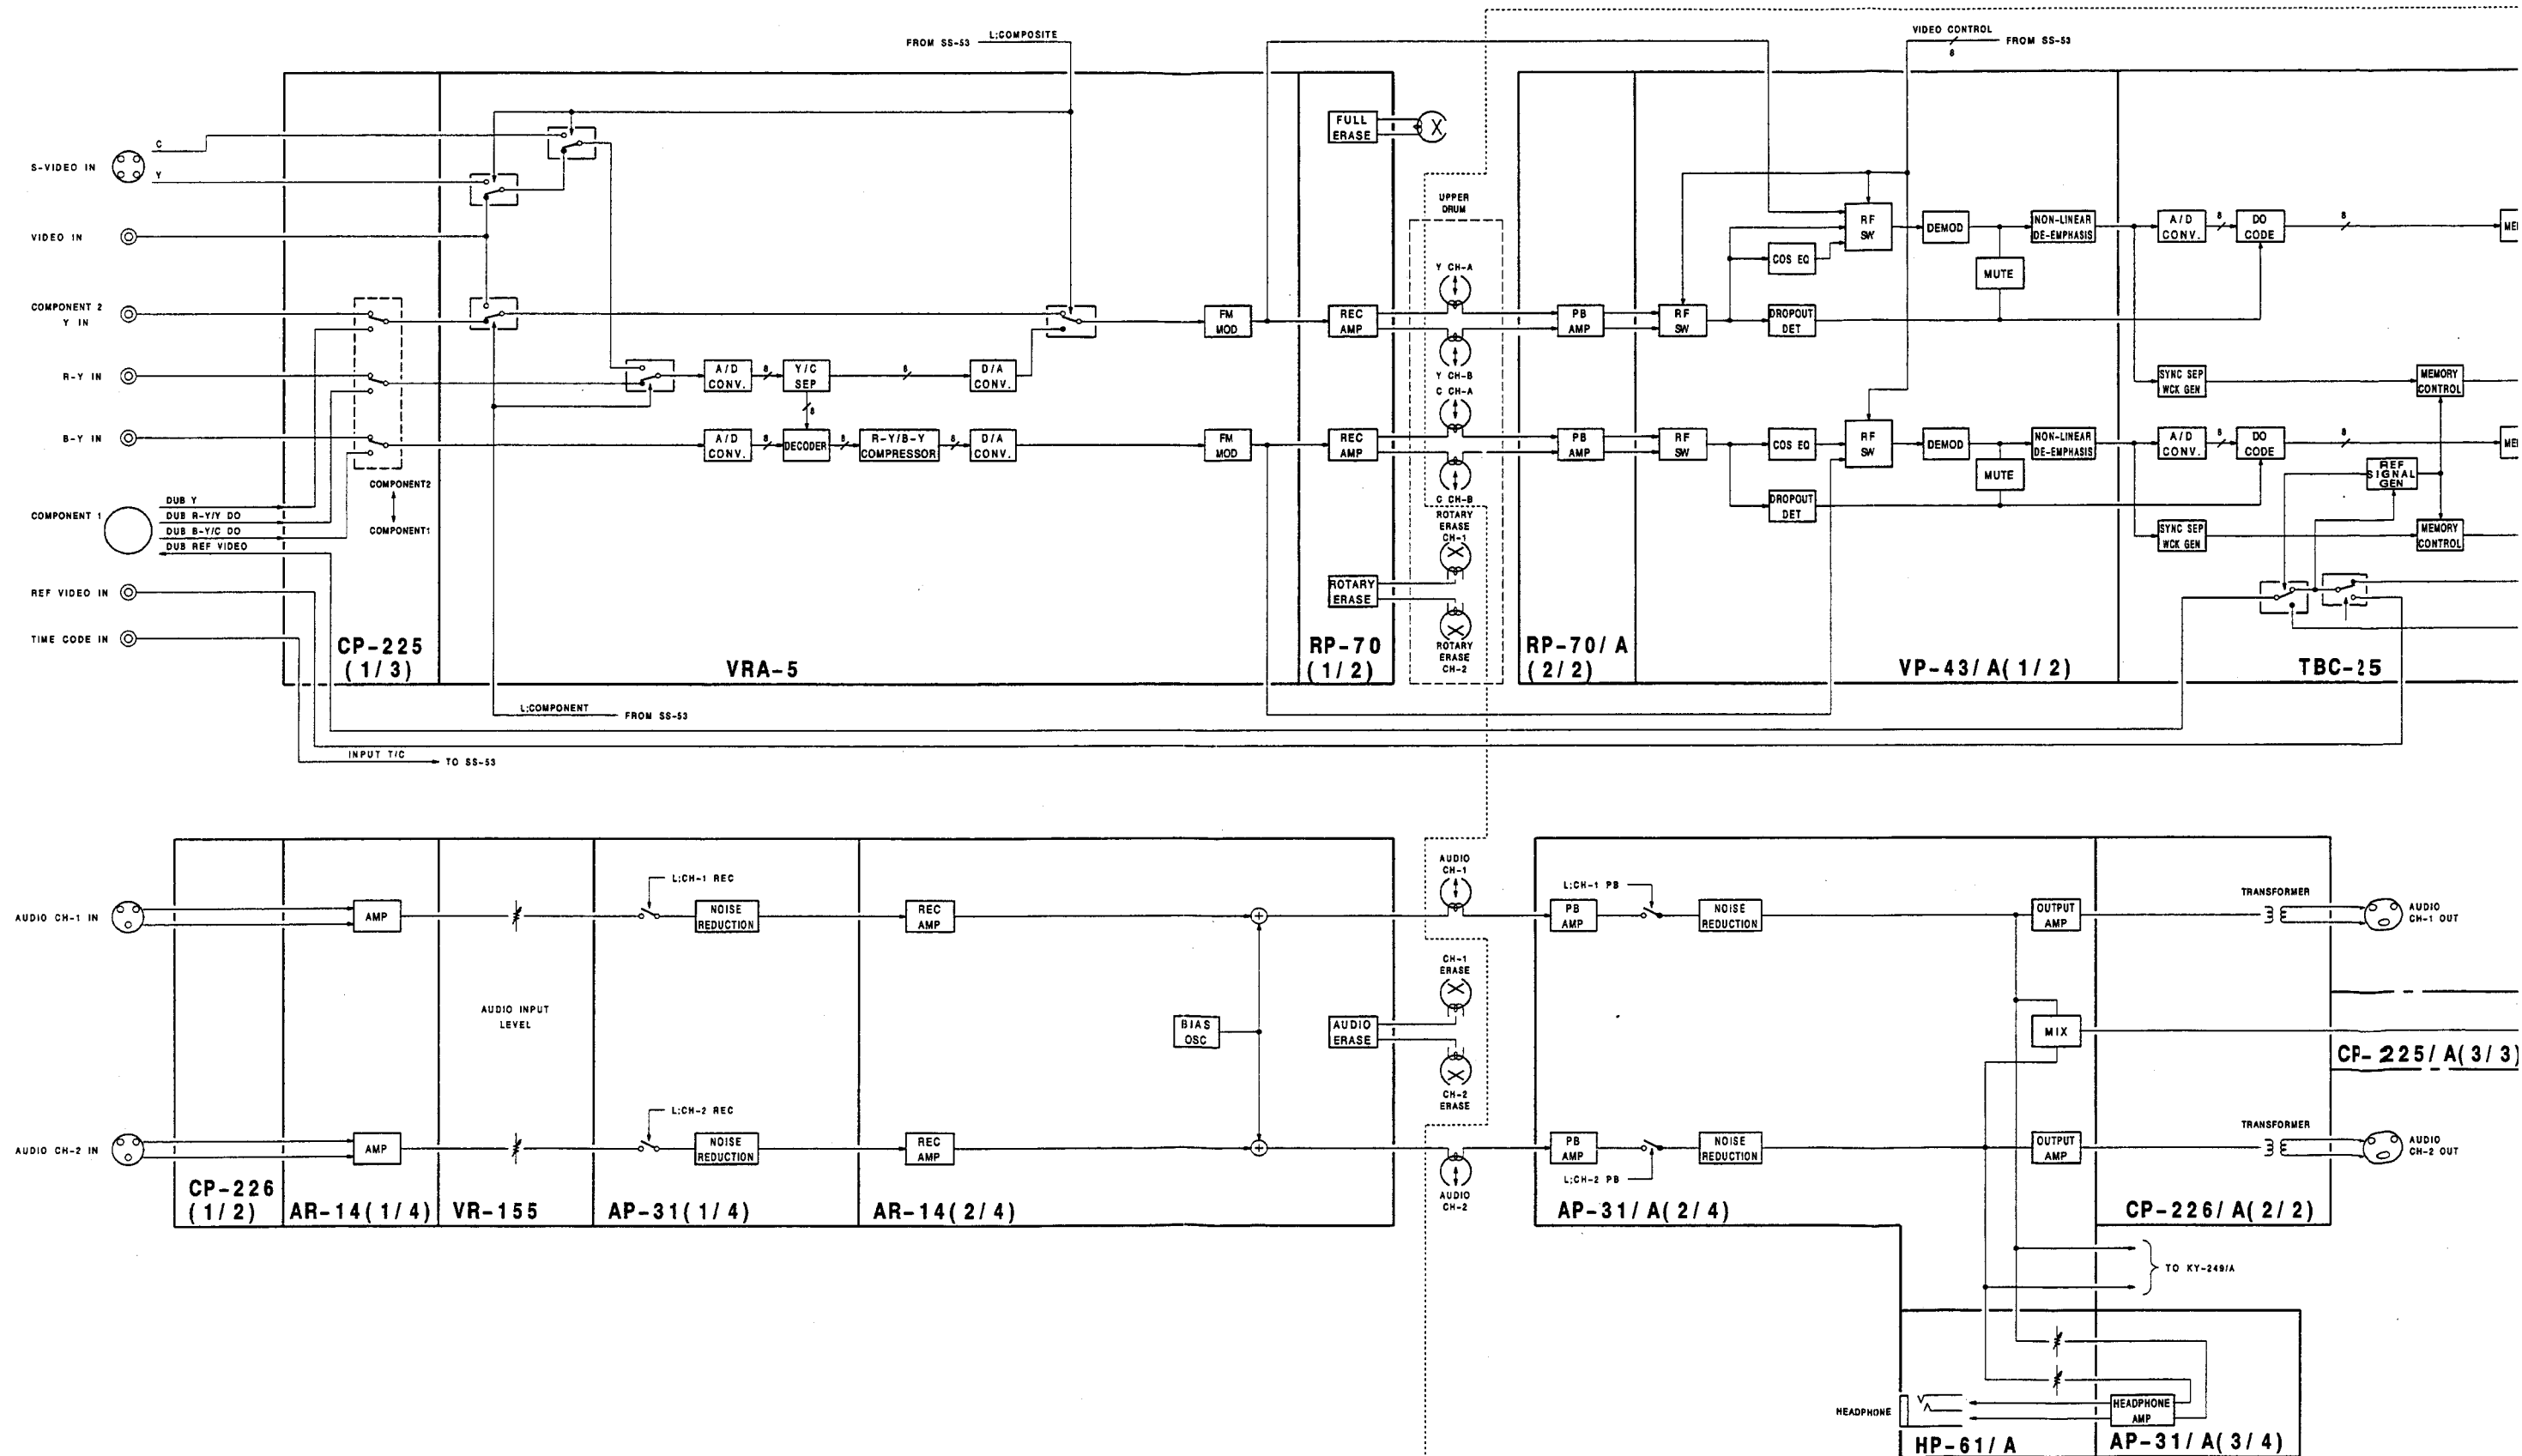


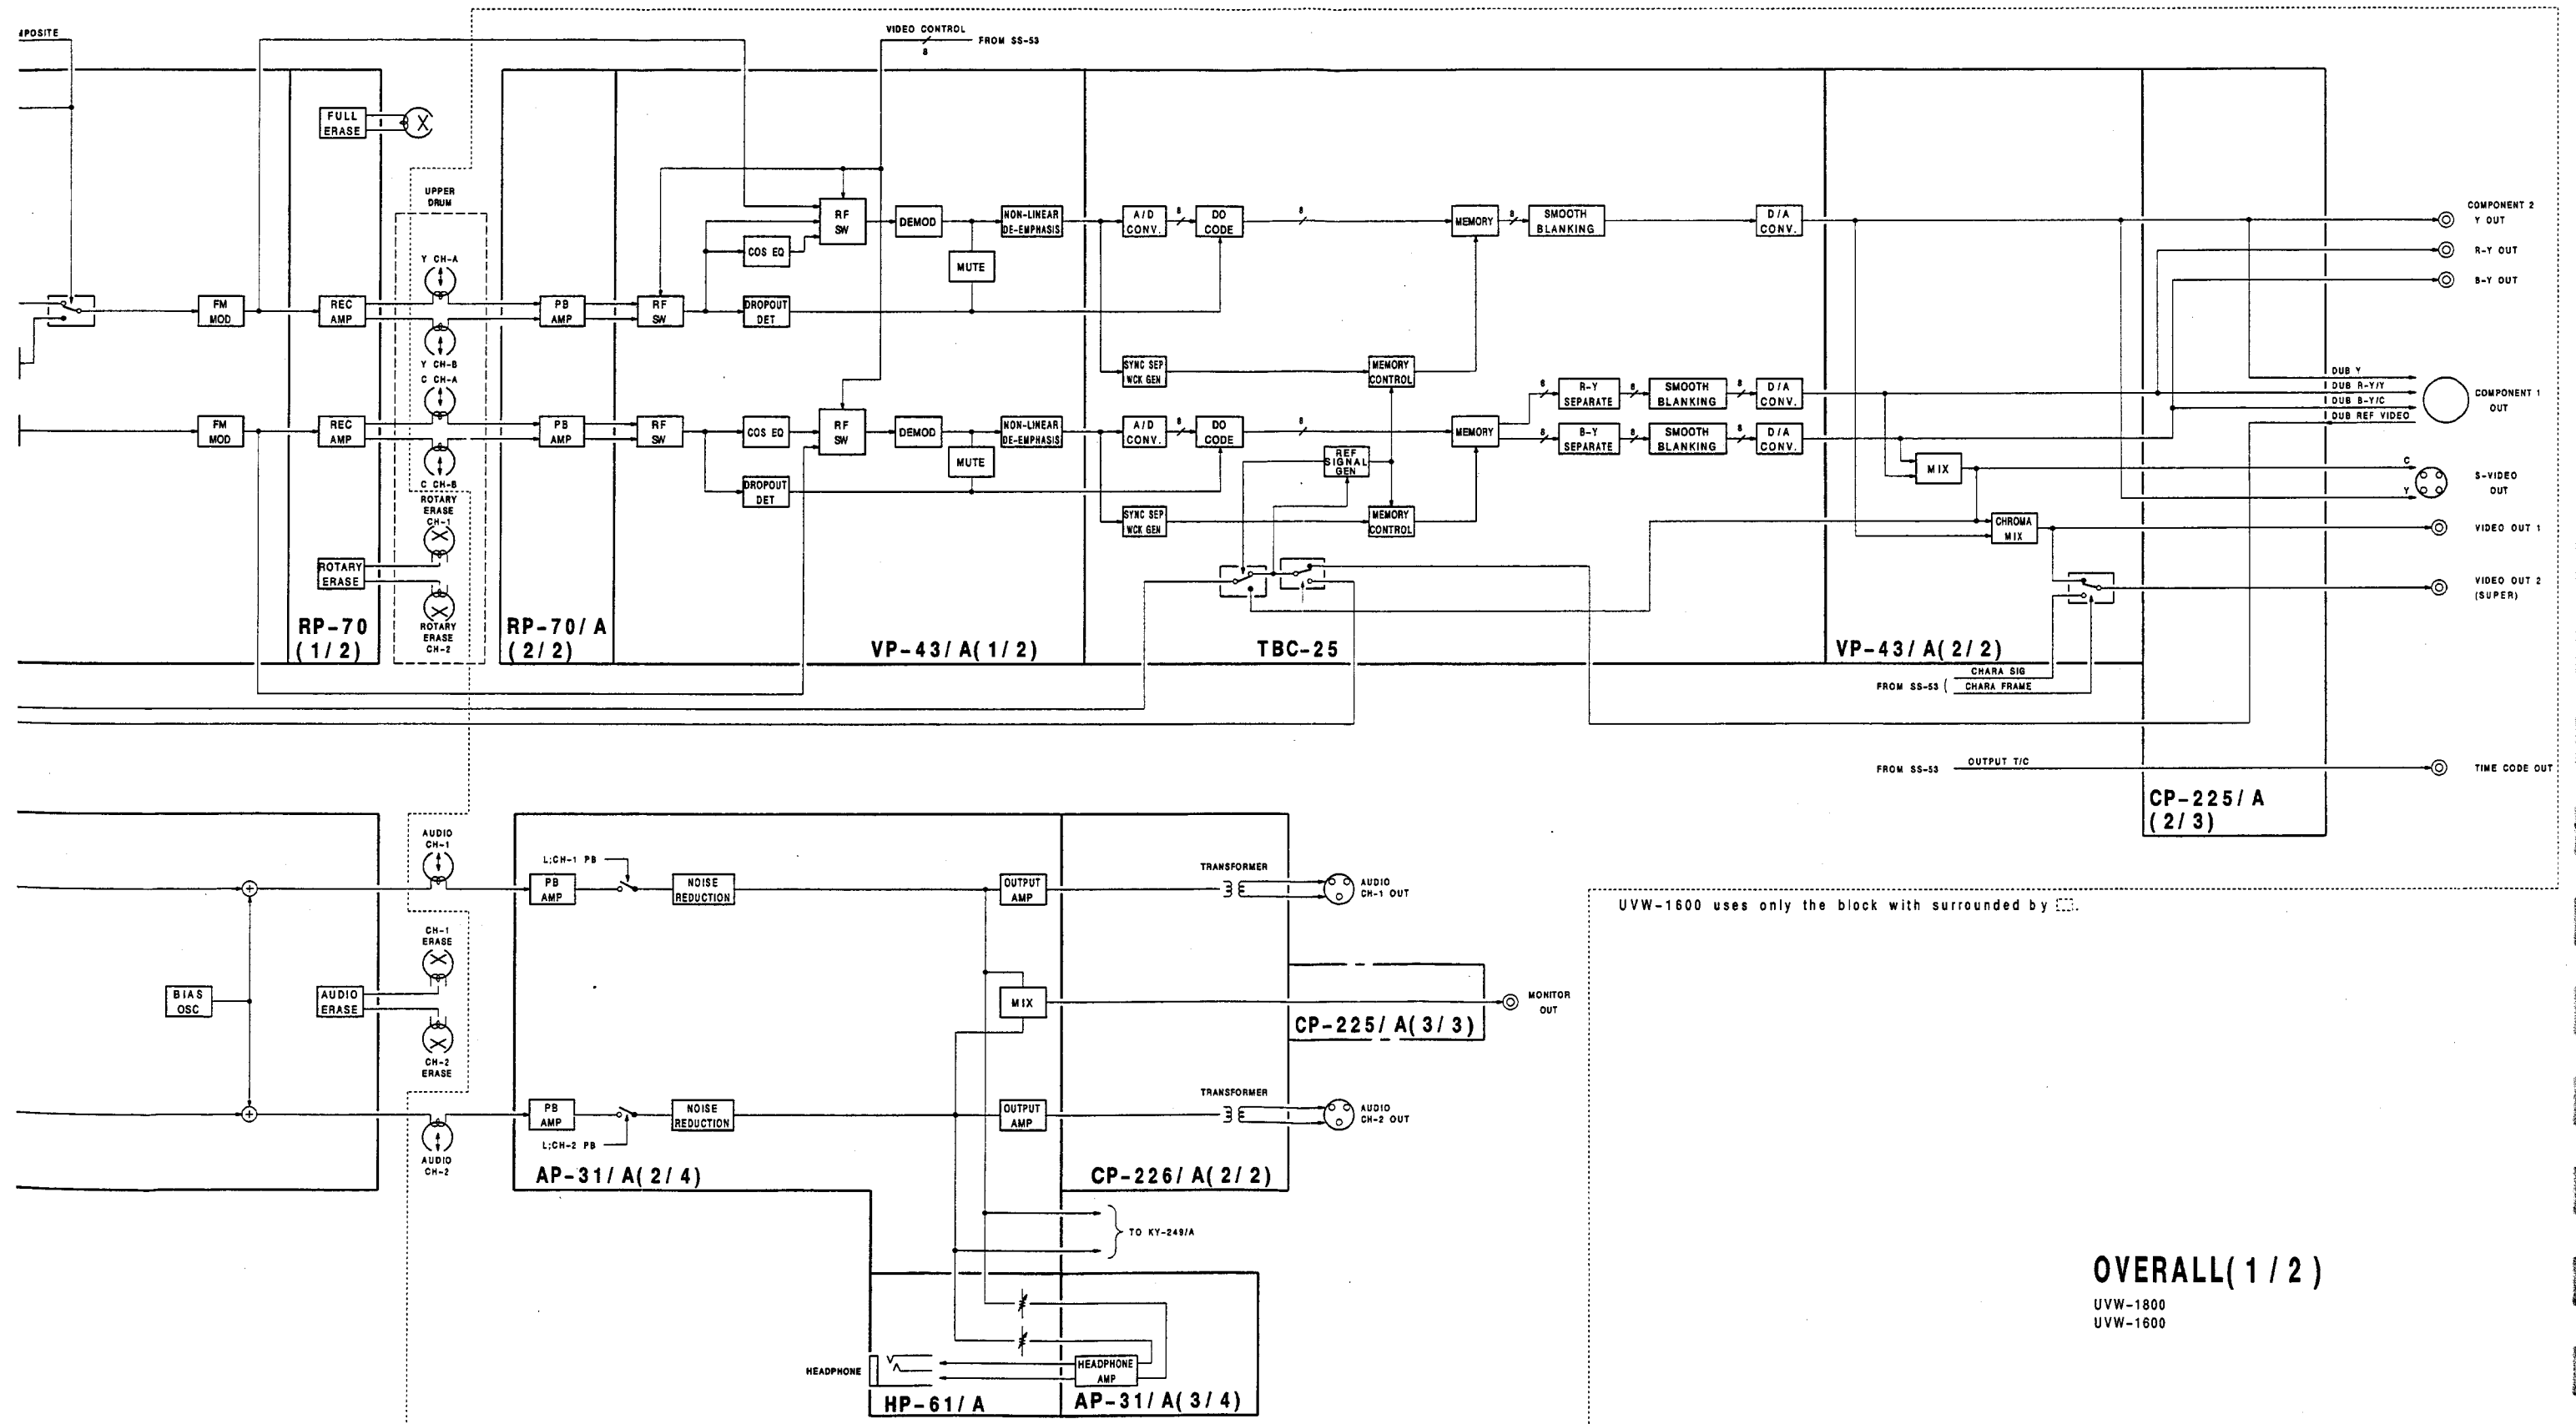


UVW-1600 uses only the block with surrounded by []

OVERALL(1/2)
UVW-1800
UVW-1600

OVERALL(2/2)

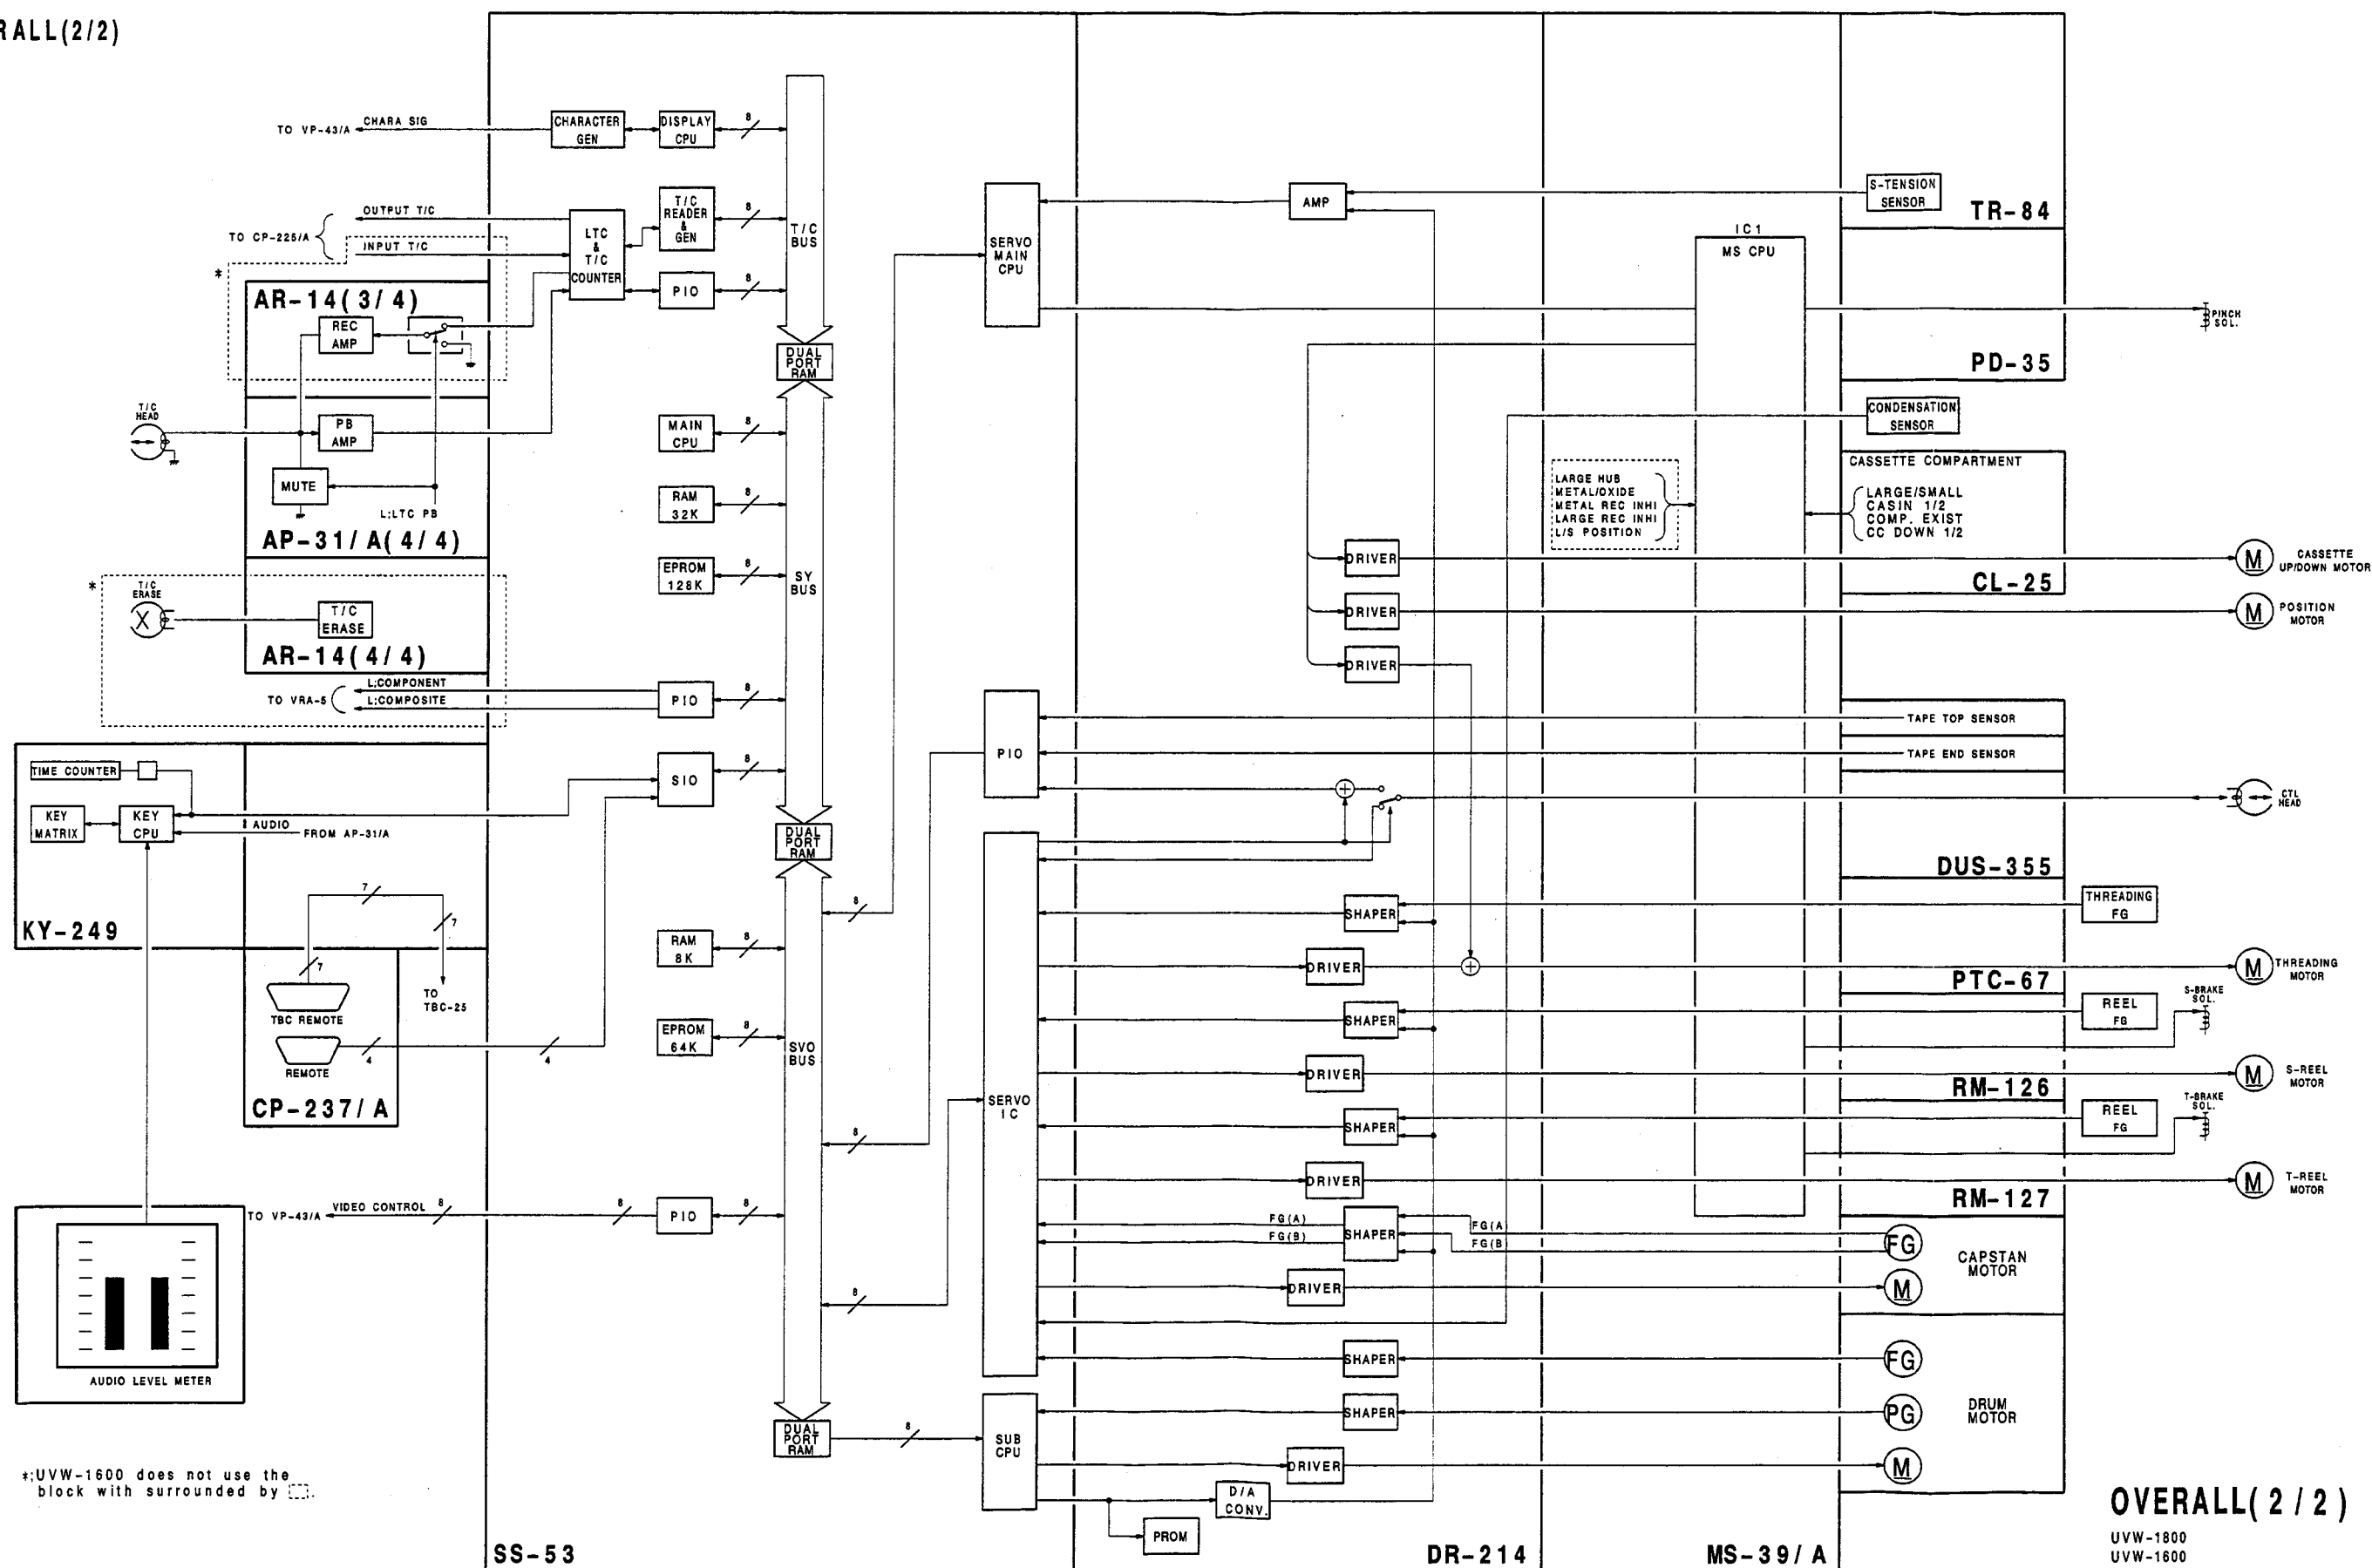


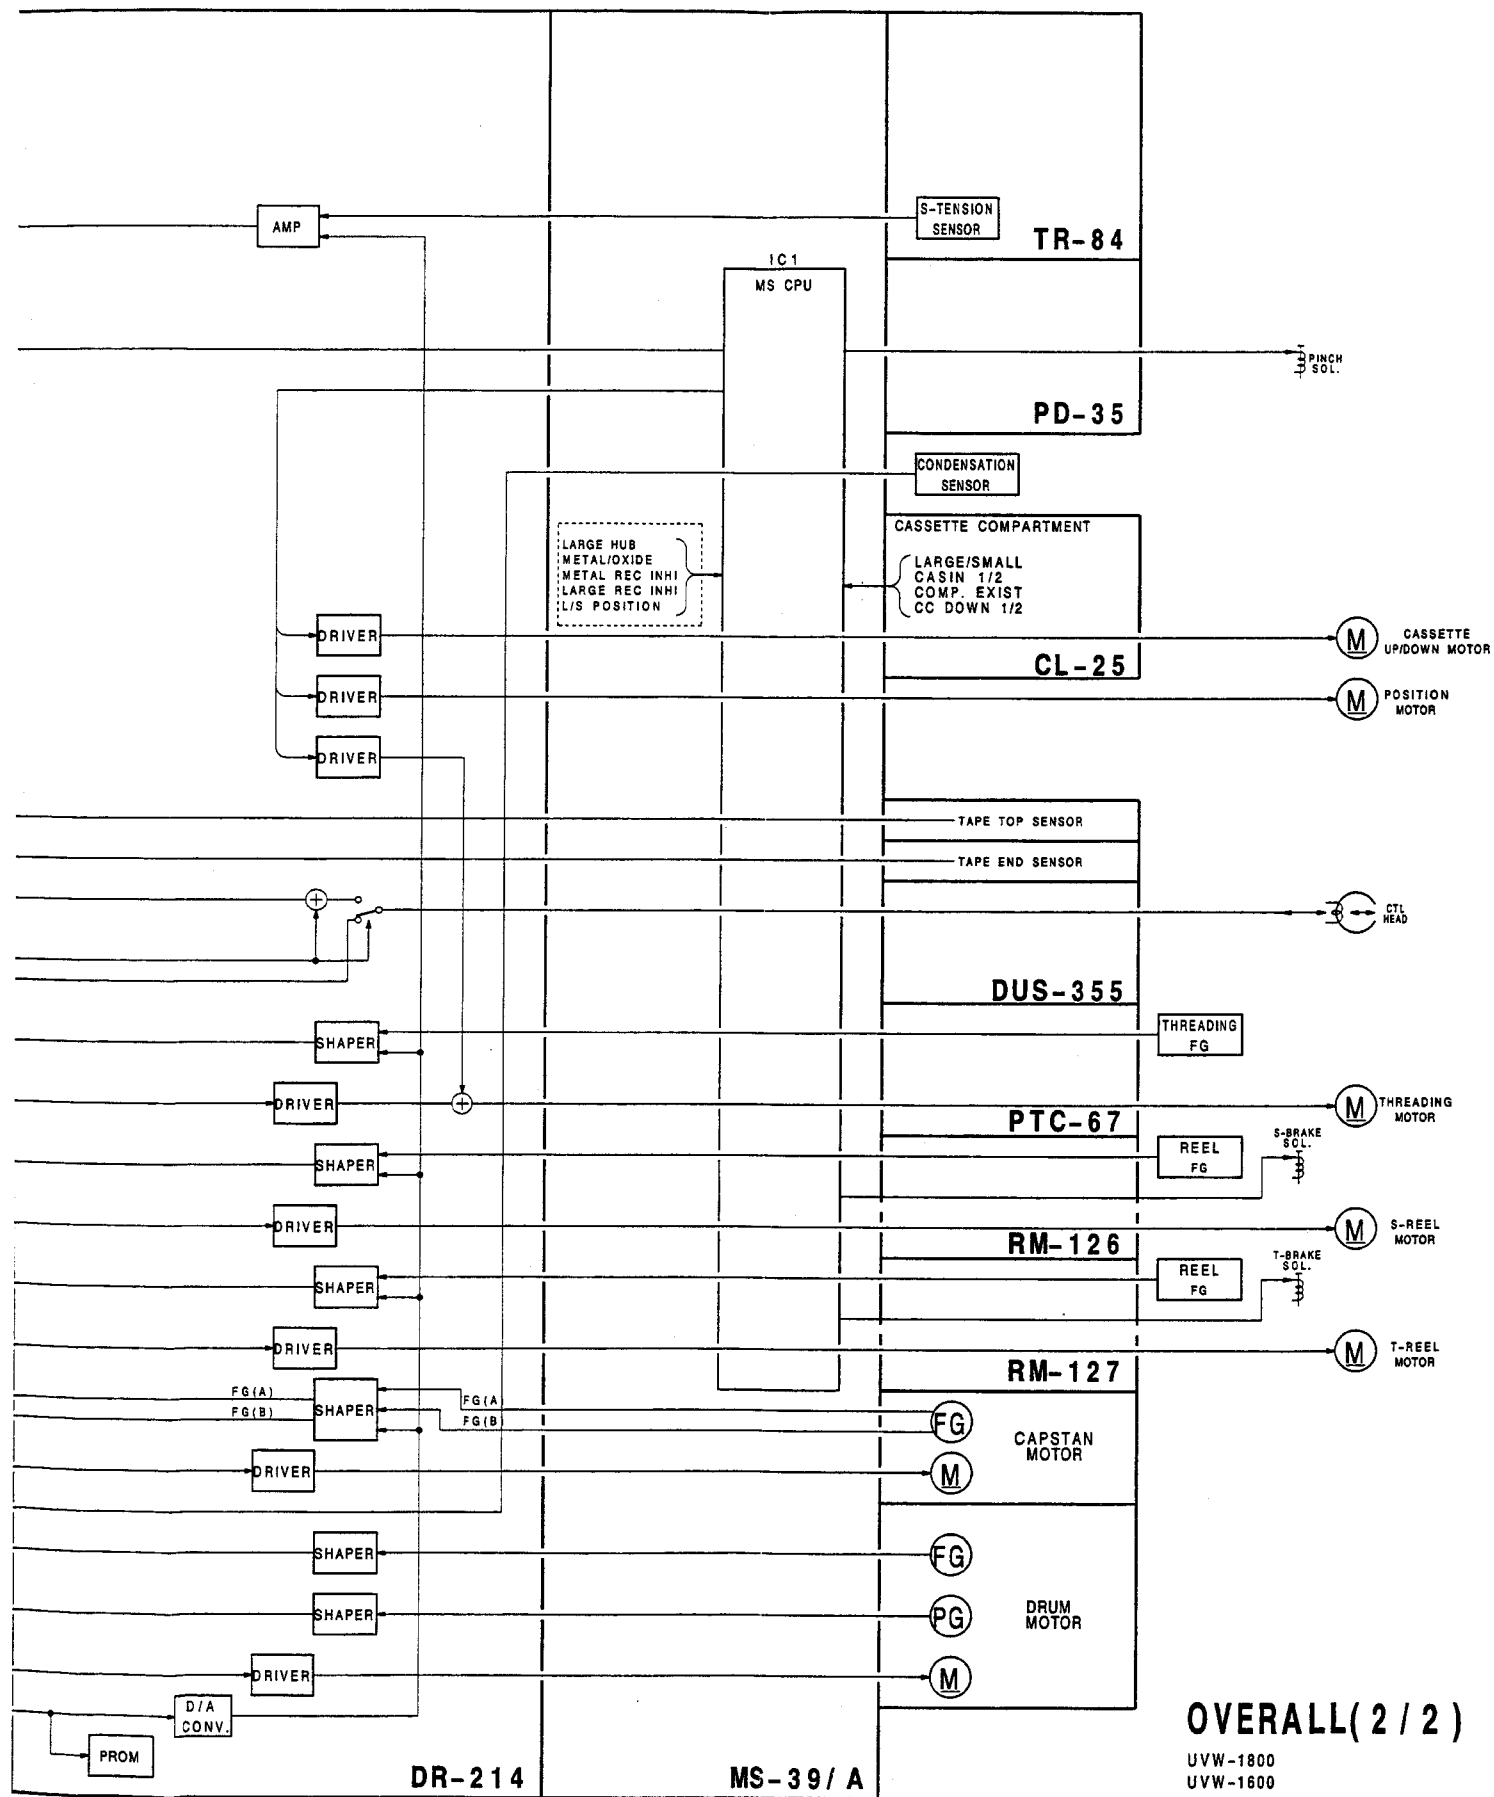


OVERALL(2 / 2)

UVW-1800
UVW-1600


① TP101 REC/EE
(COMPOSITE)




① TP101 REC/EE
(COMPONENT)




② TP201 REC/EE
(COMPOSITE)




② TP201 REC/EE
(COMPONENT)




③ TP202 REC/EE
(COMPONENT)




④ TP305 REC/EE




⑤ TP502 REC/EE




⑥ TP602 REC/EE




⑦ TP503 REC/EE
TP603 REC/EE




Y/C REC PROCESS(DECODE,MOD.),CTDM

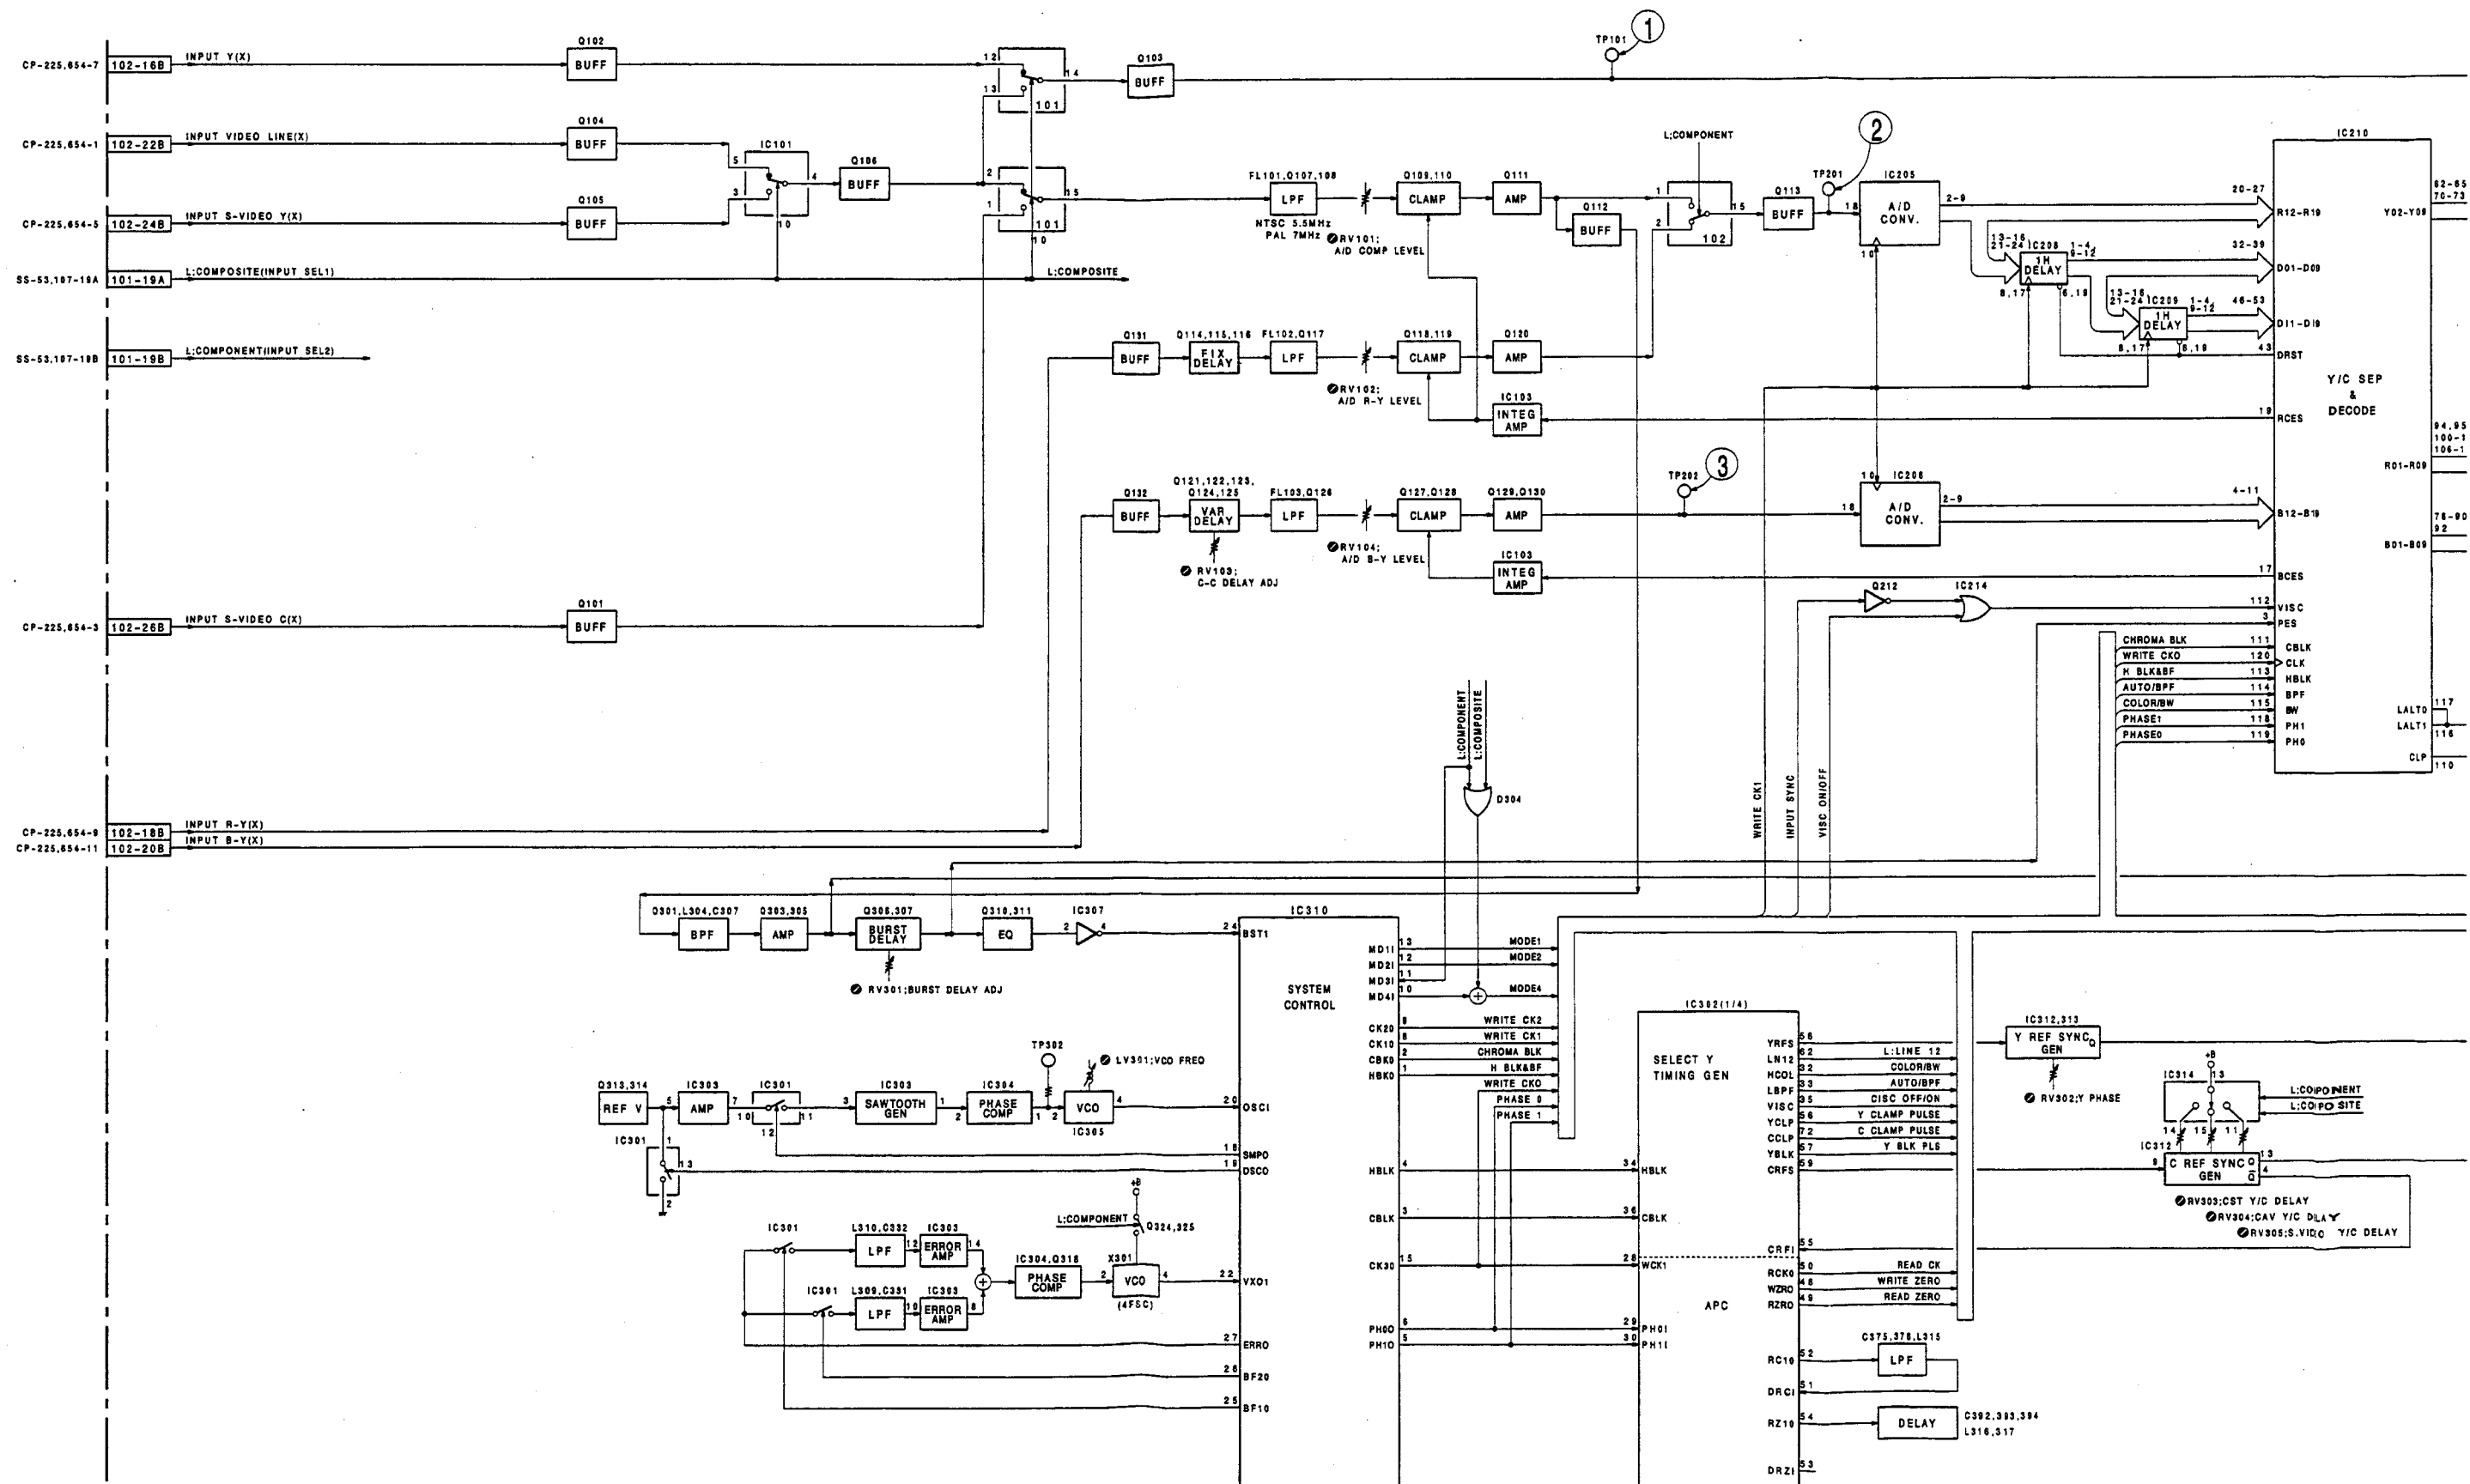

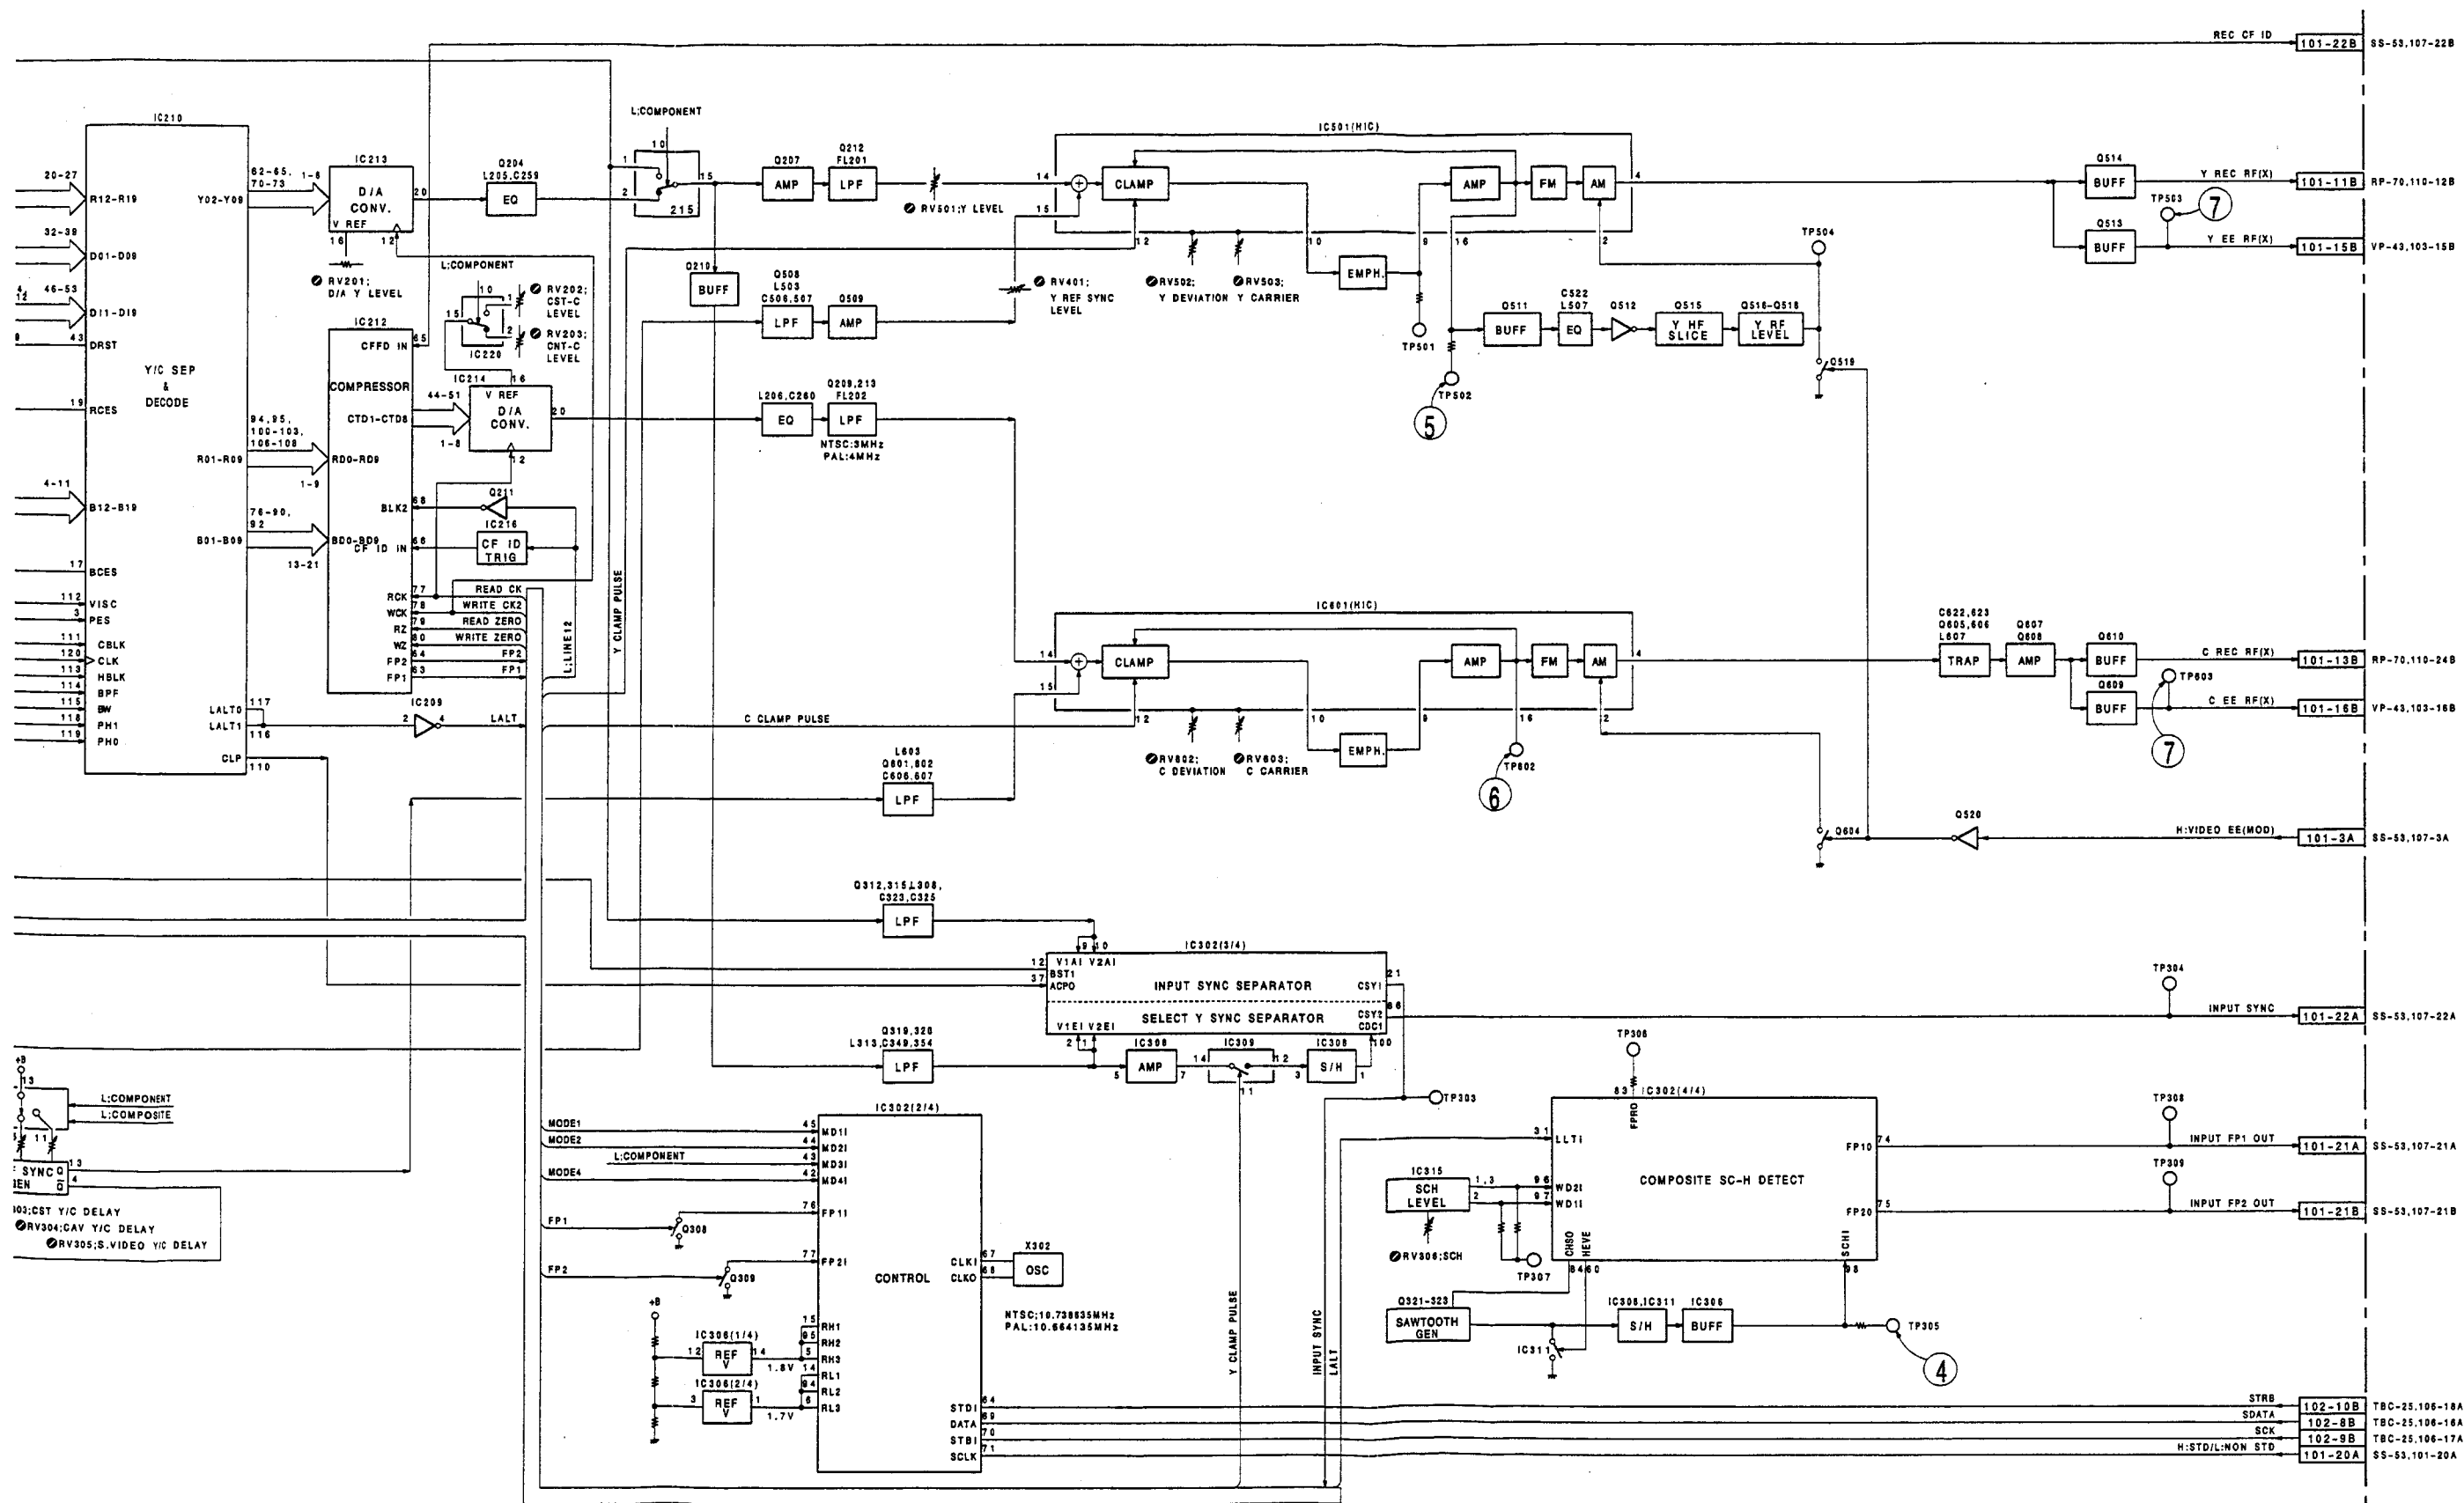


RF	RF
----	----

RF REC/PB AMPLIFIER,ROTARY ERASE OSCILLATOR

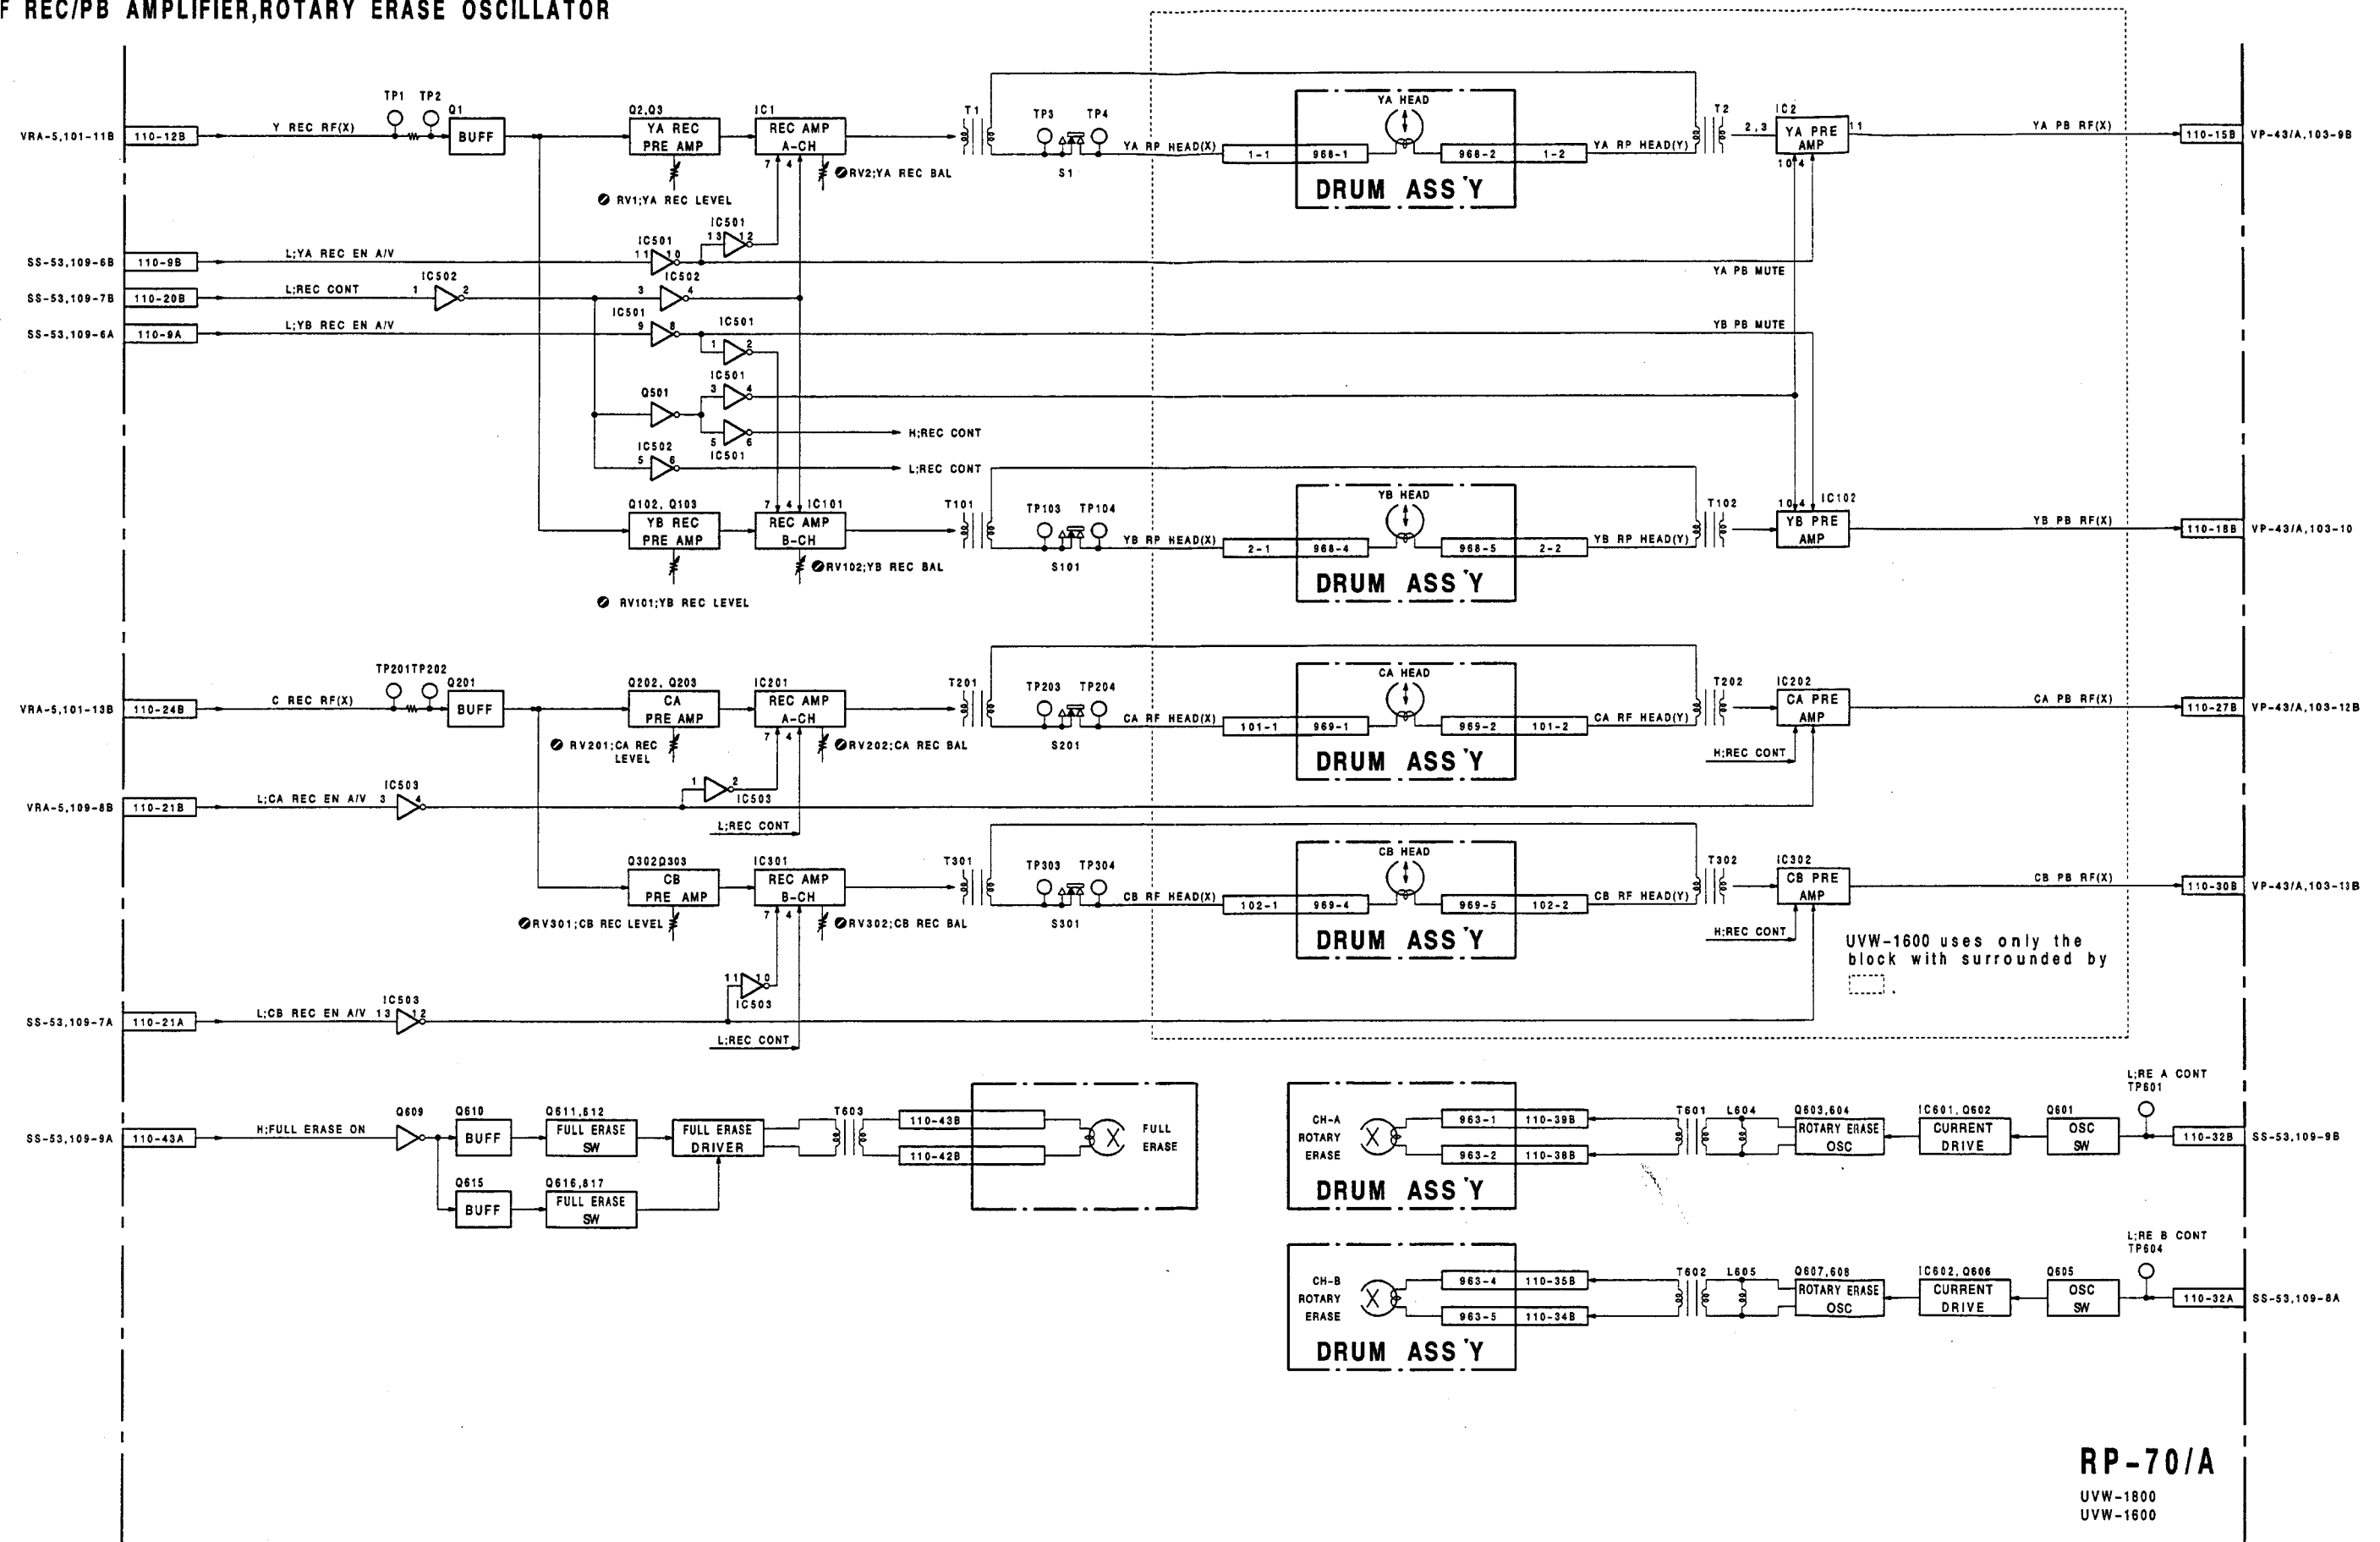


RF RF

① TP201 PB




② TP401 PB




PB RF EQ, DEMODULATOR

PB RF EQ, DEMOD. DEMOD., PB RF EQ

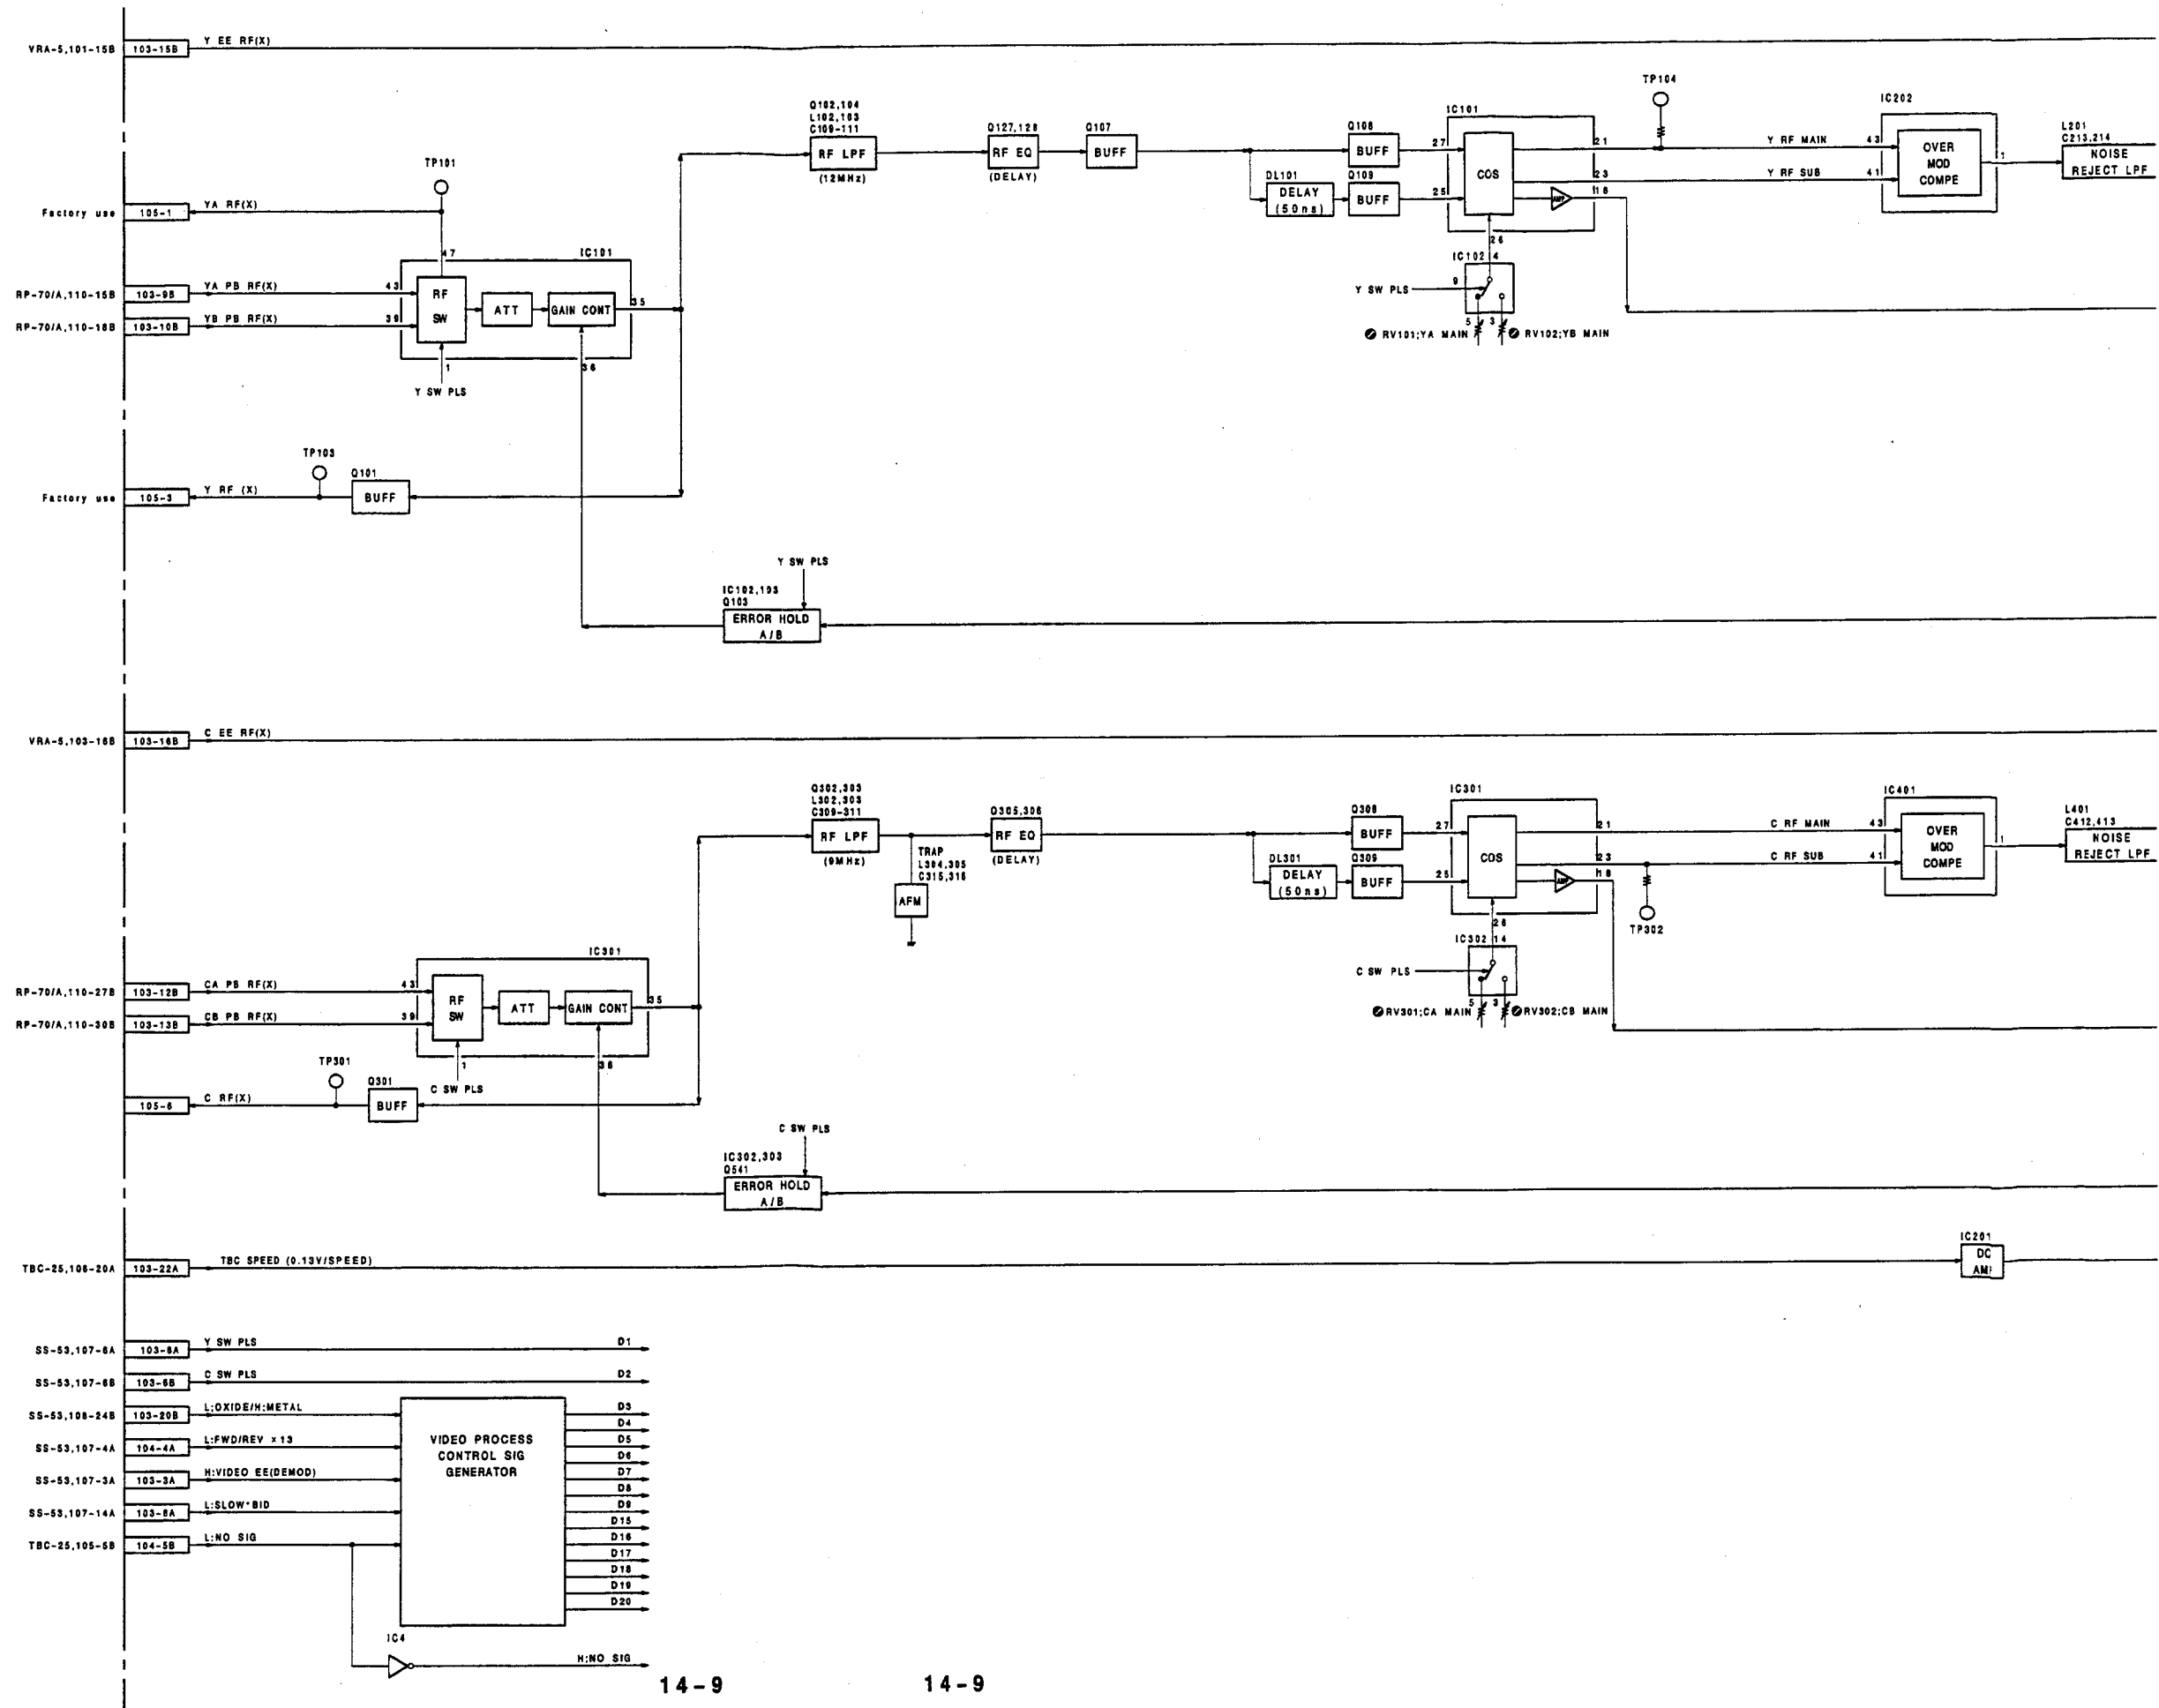


PB RF EQ, DEMOD. DEMOD., PB RF EQ

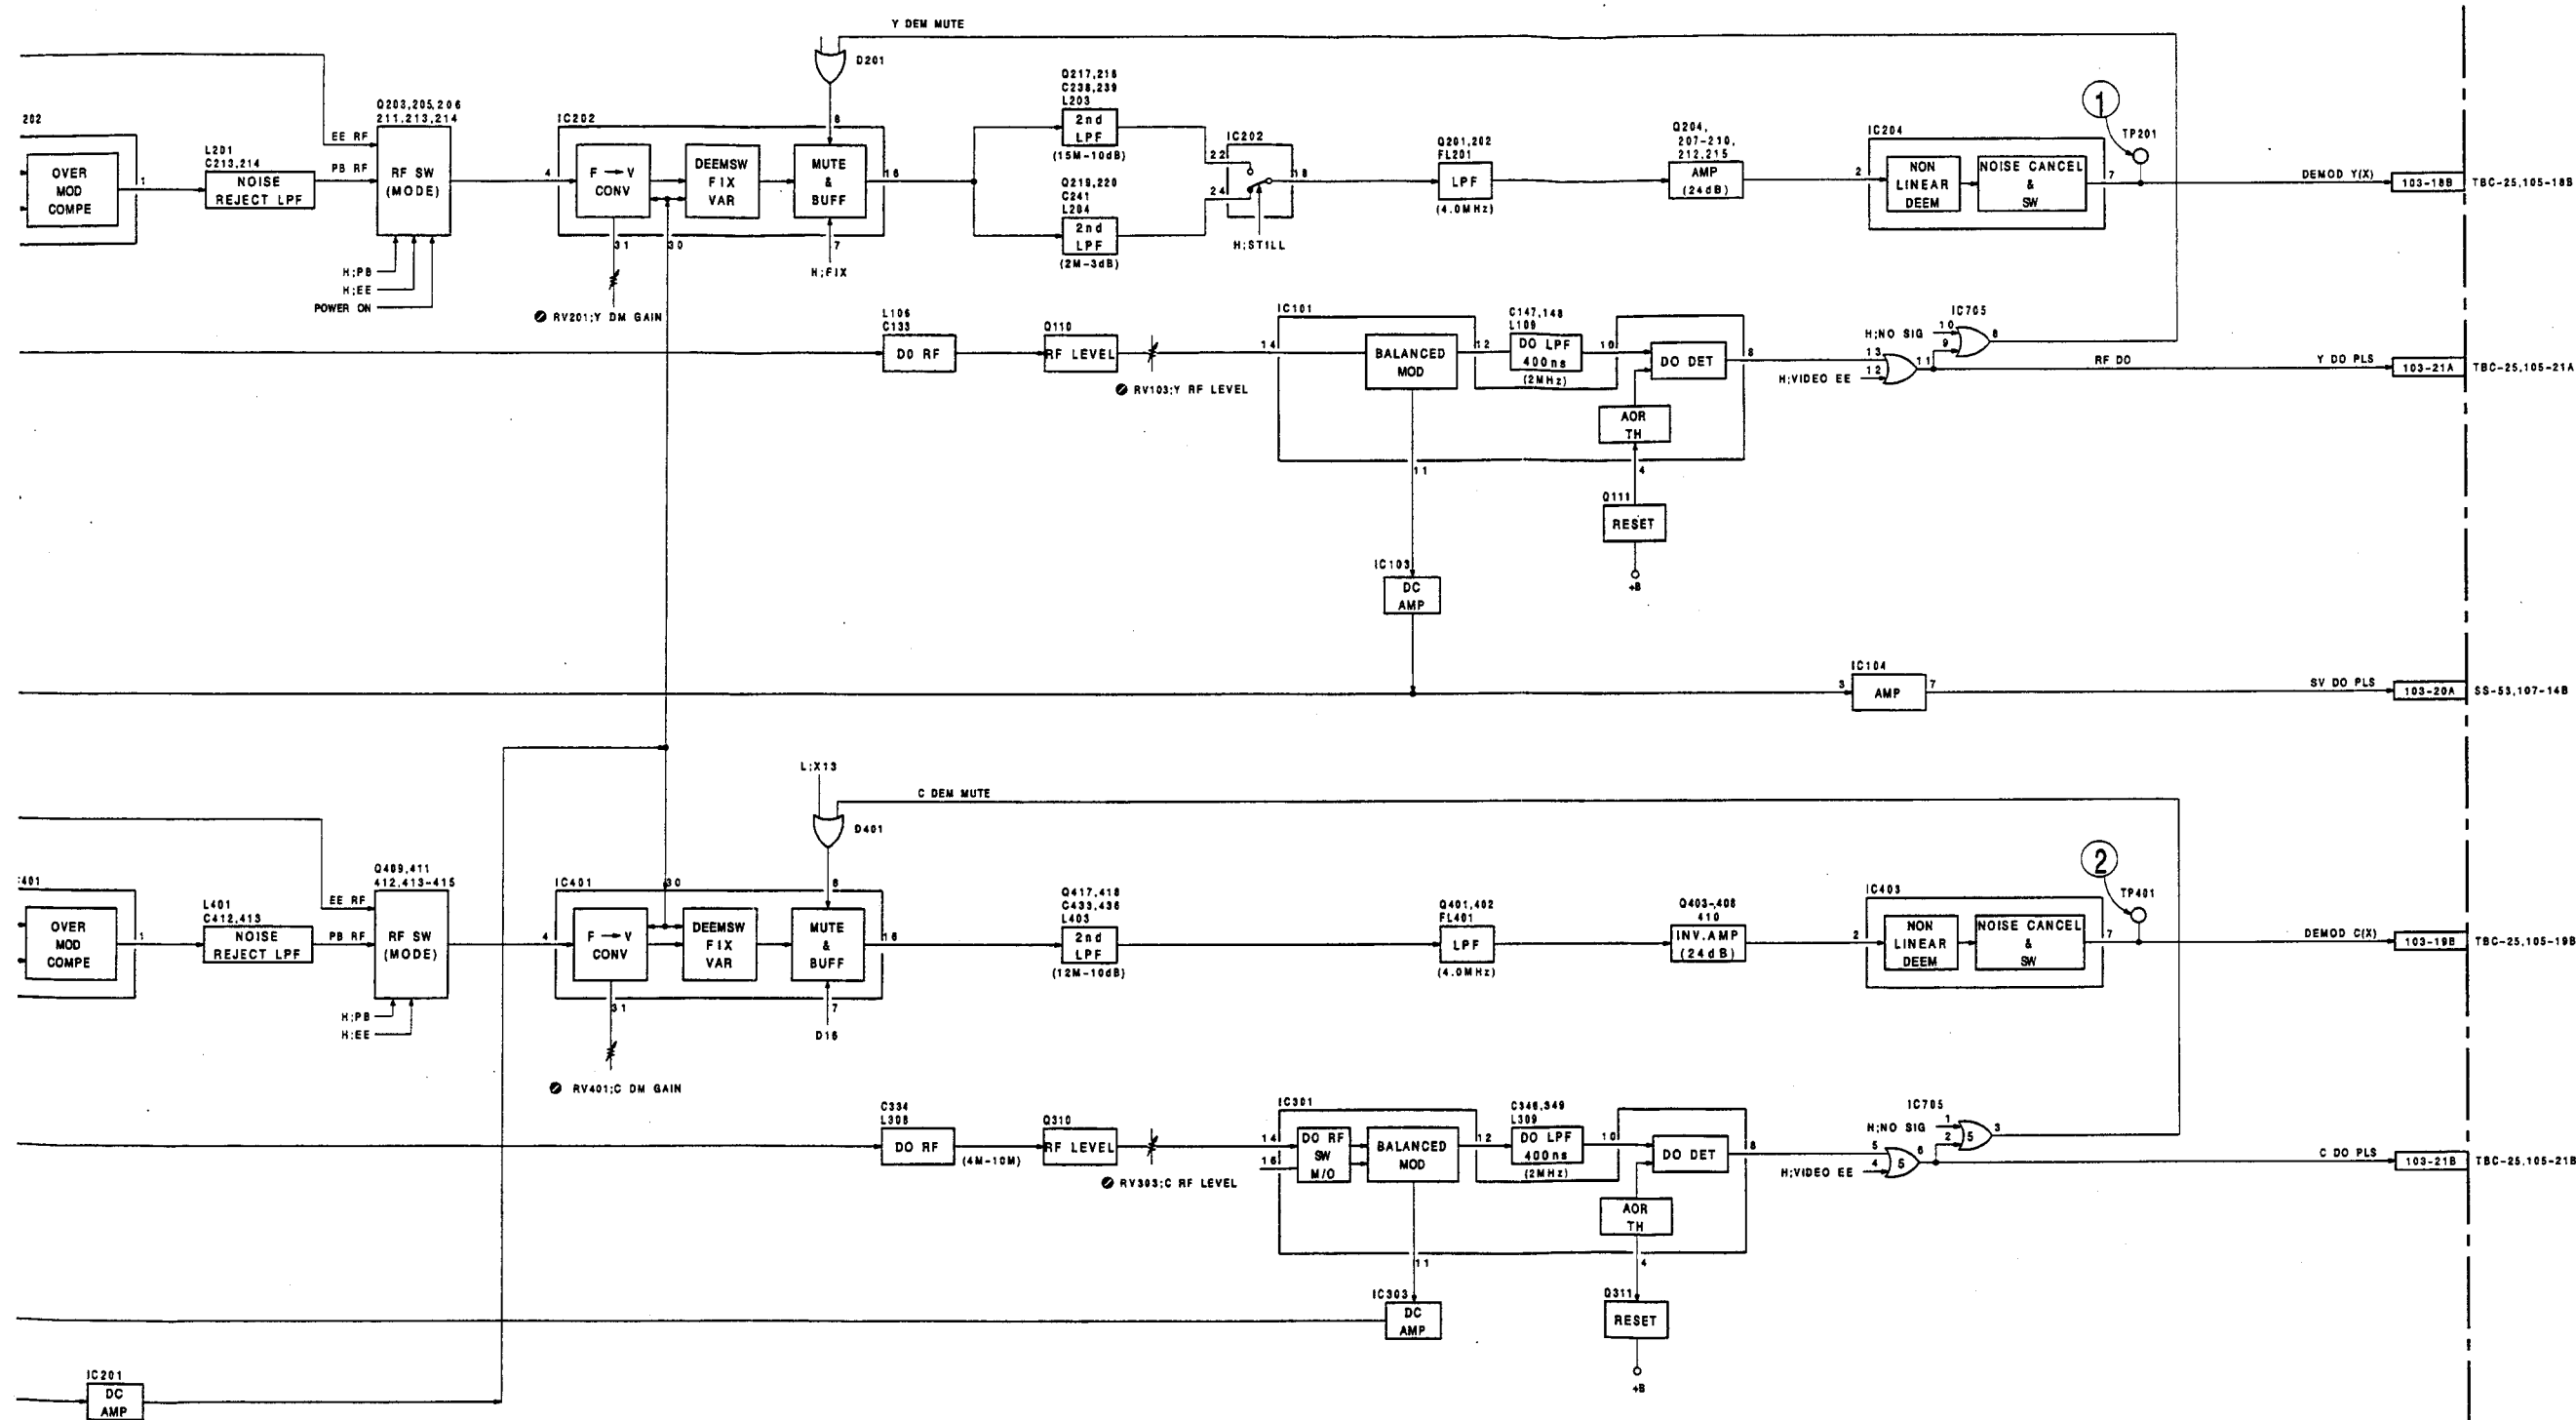


VP-43/A(1/2)
UVW-1800
UVW-1600

ENCODE,OUTPUT DRIVER

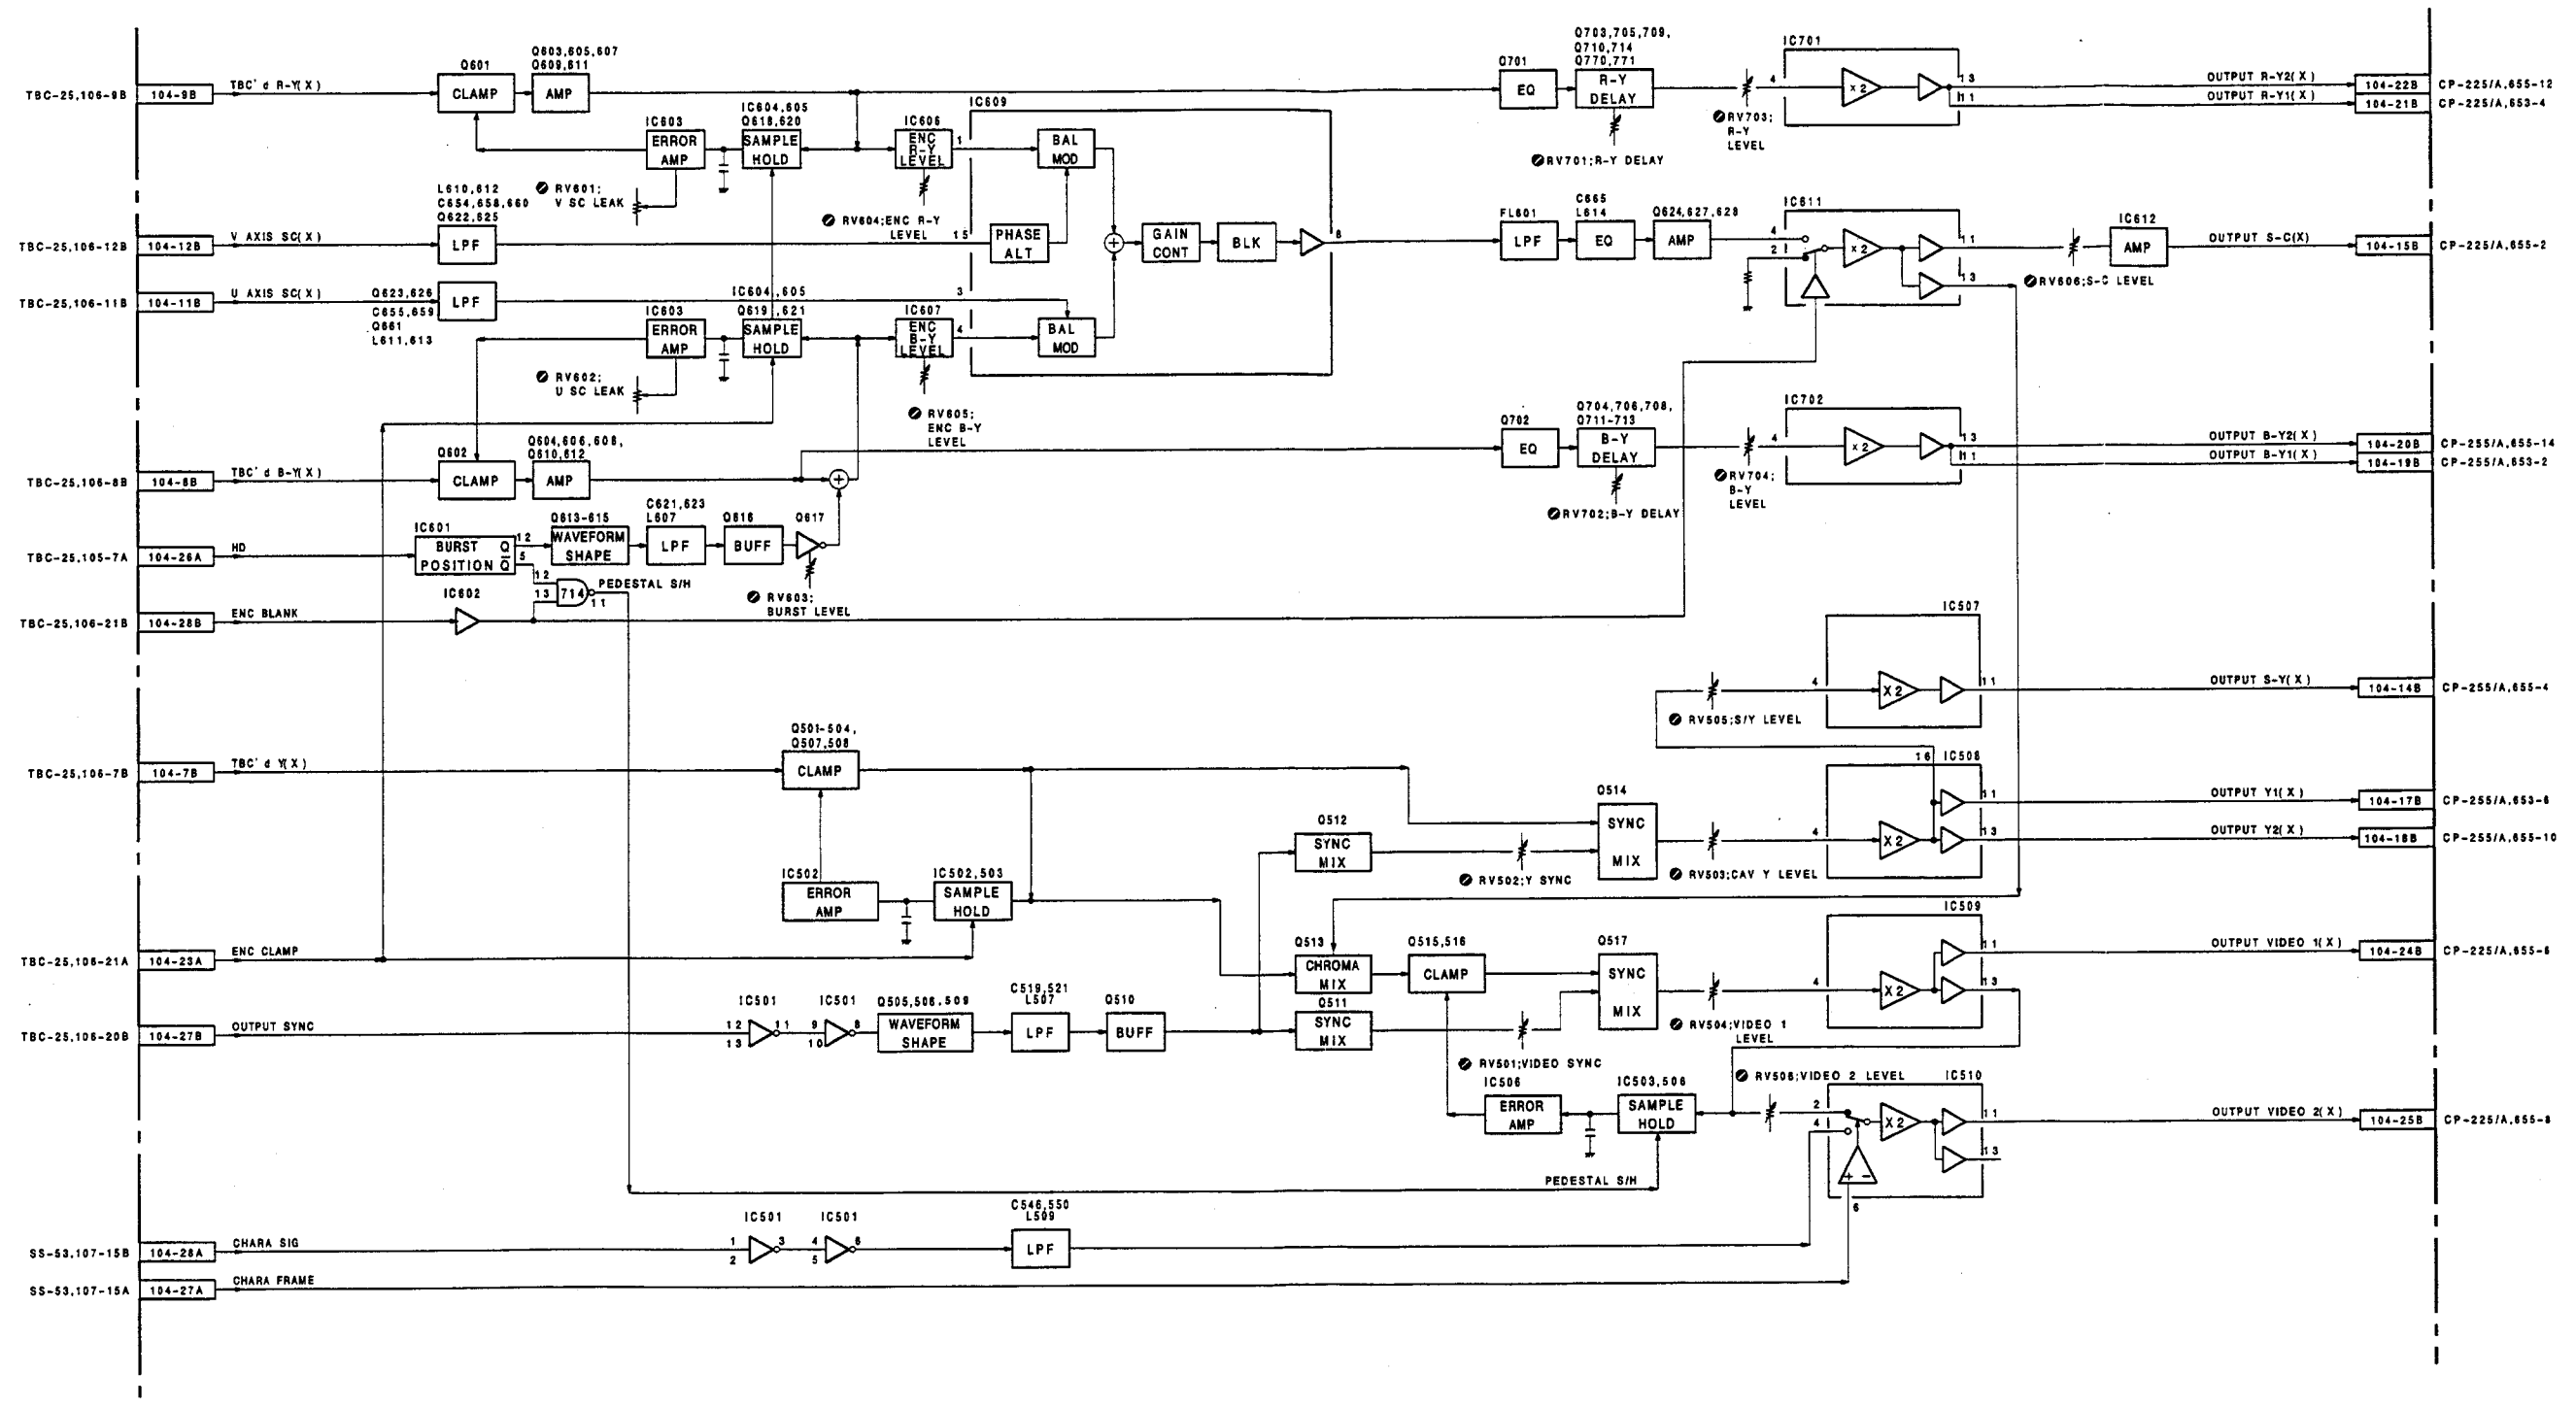


ENCODE,OUTPUT OUTPUT,ENCODE


① TP101 PB




⑥ TP303 PB




② TP201 PB




⑦ TP402 PB




③ TP500 PB




④ TP501 PB




⑤ TP502 PB



TIME BASE CORRECTOR,CTDM(EXPAND)




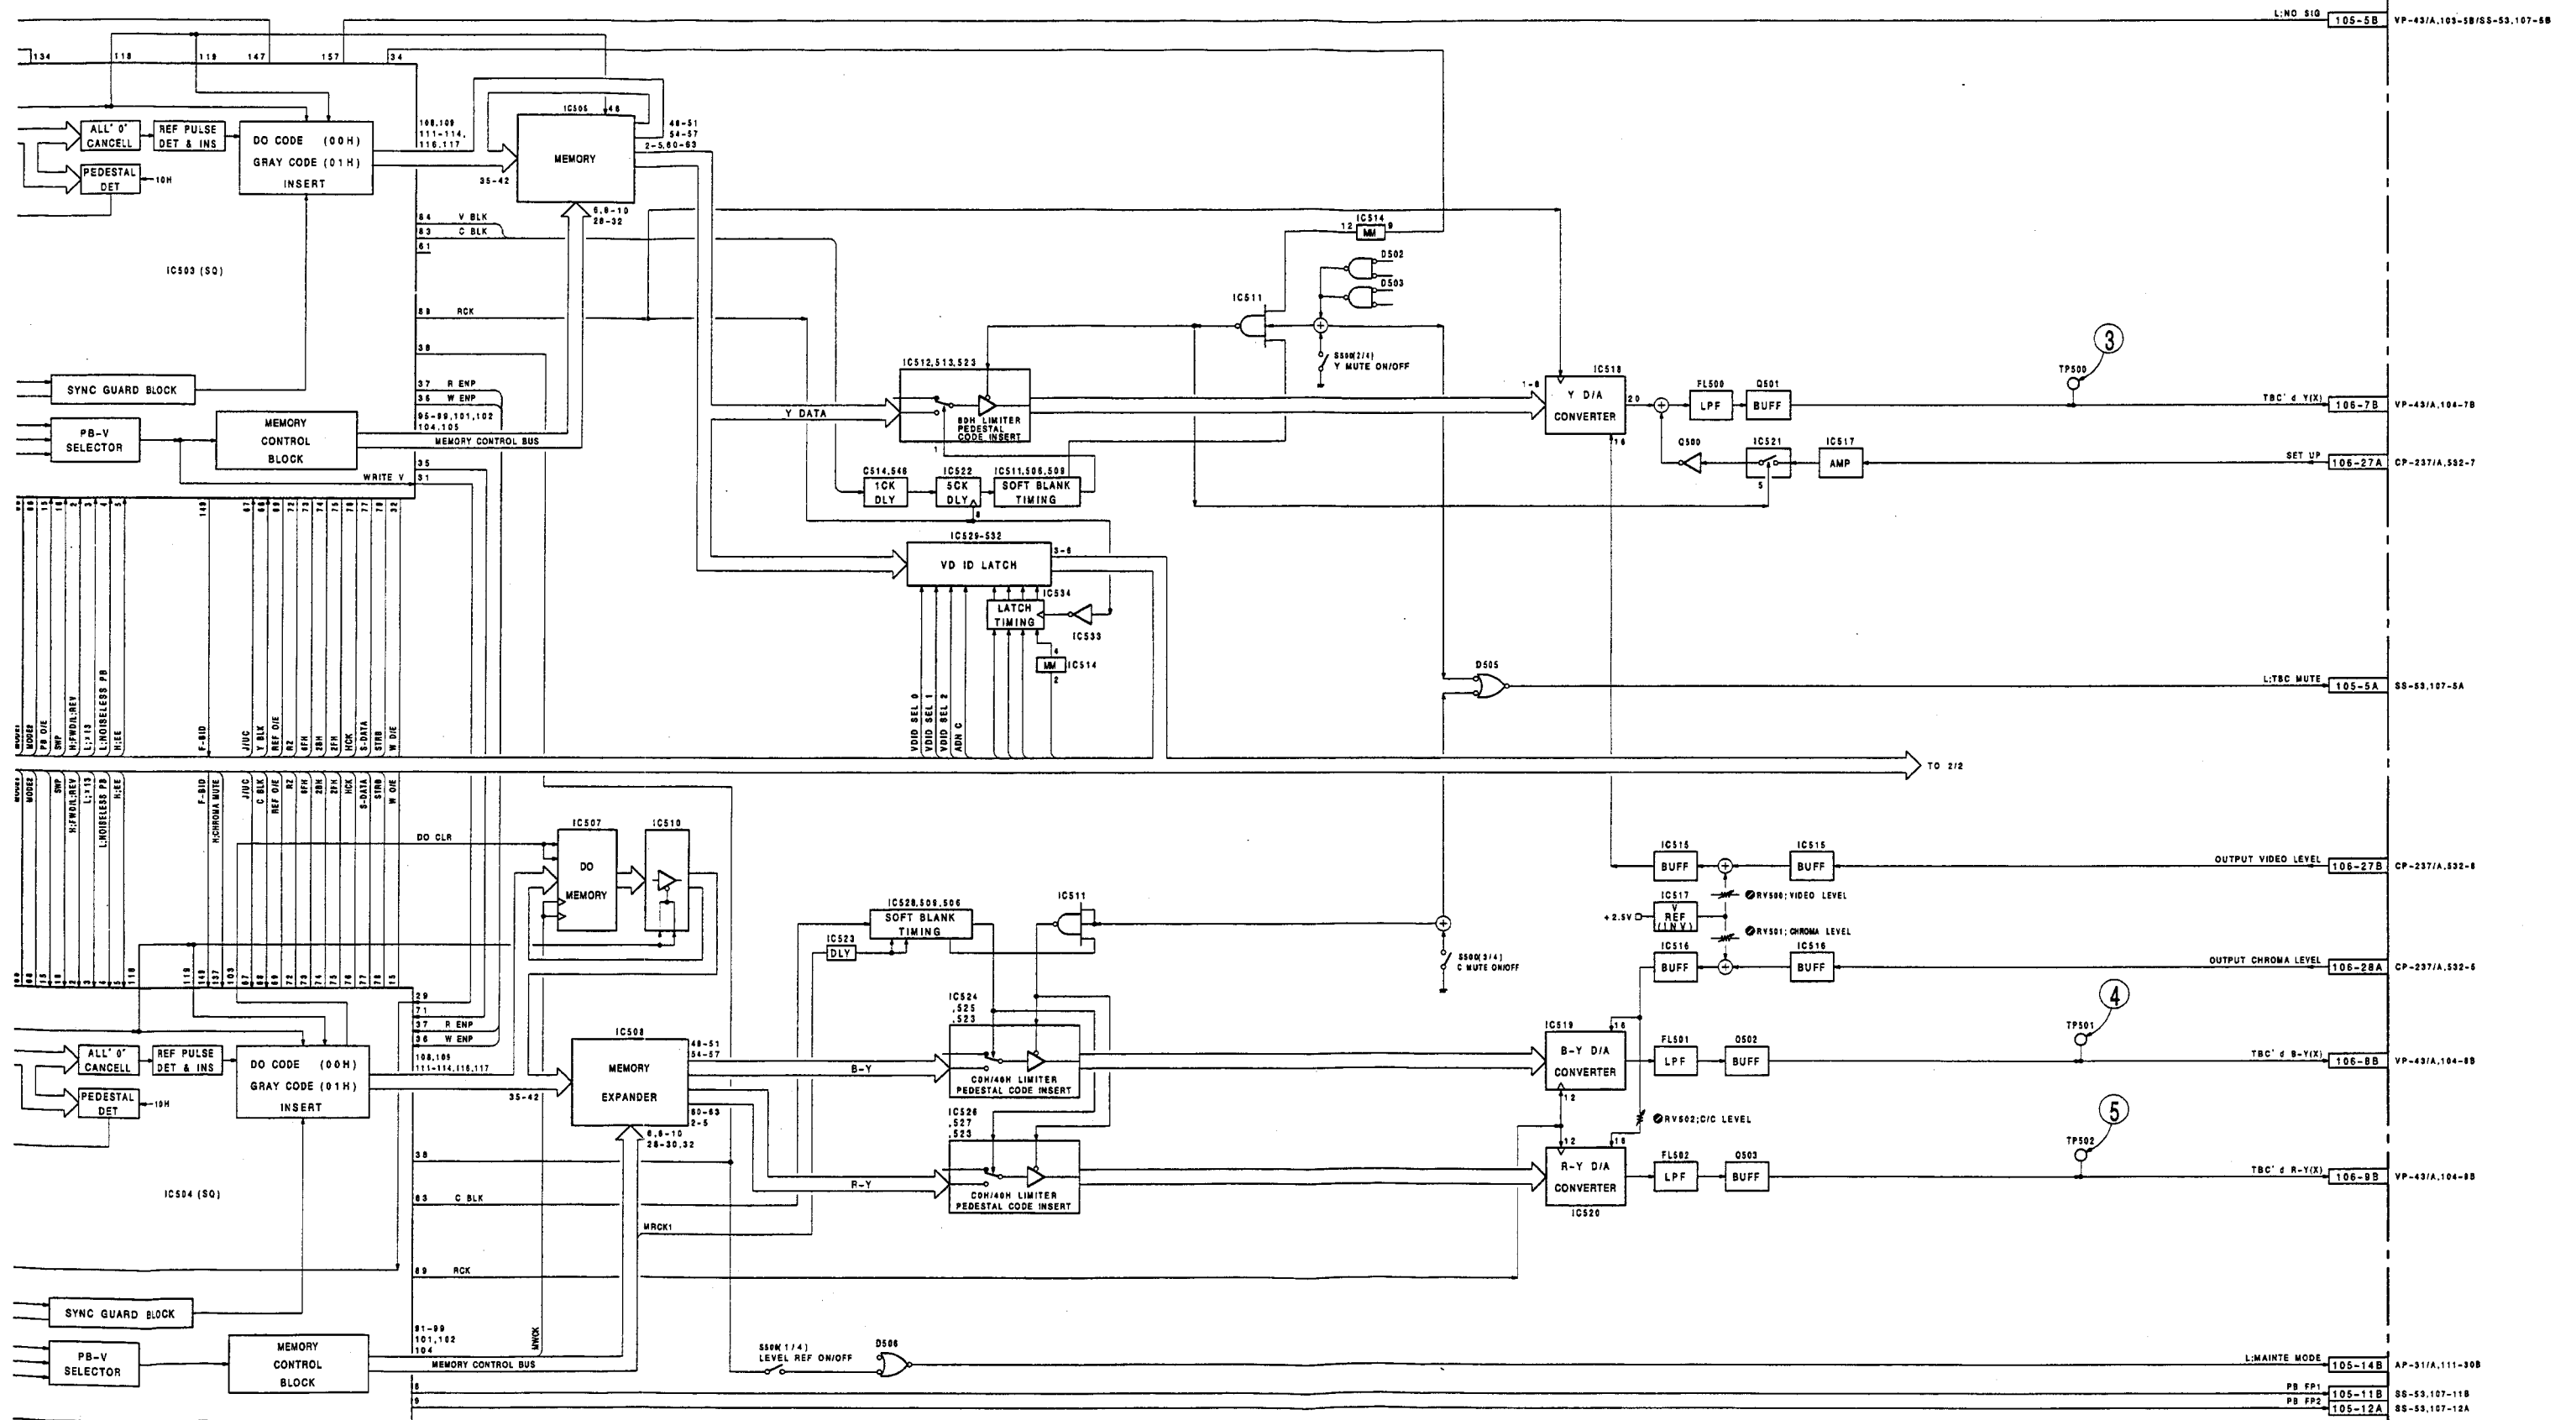


TBC-25(1/2)

UVW-1800
UVW-1600

TIME BASE CORRECTOR

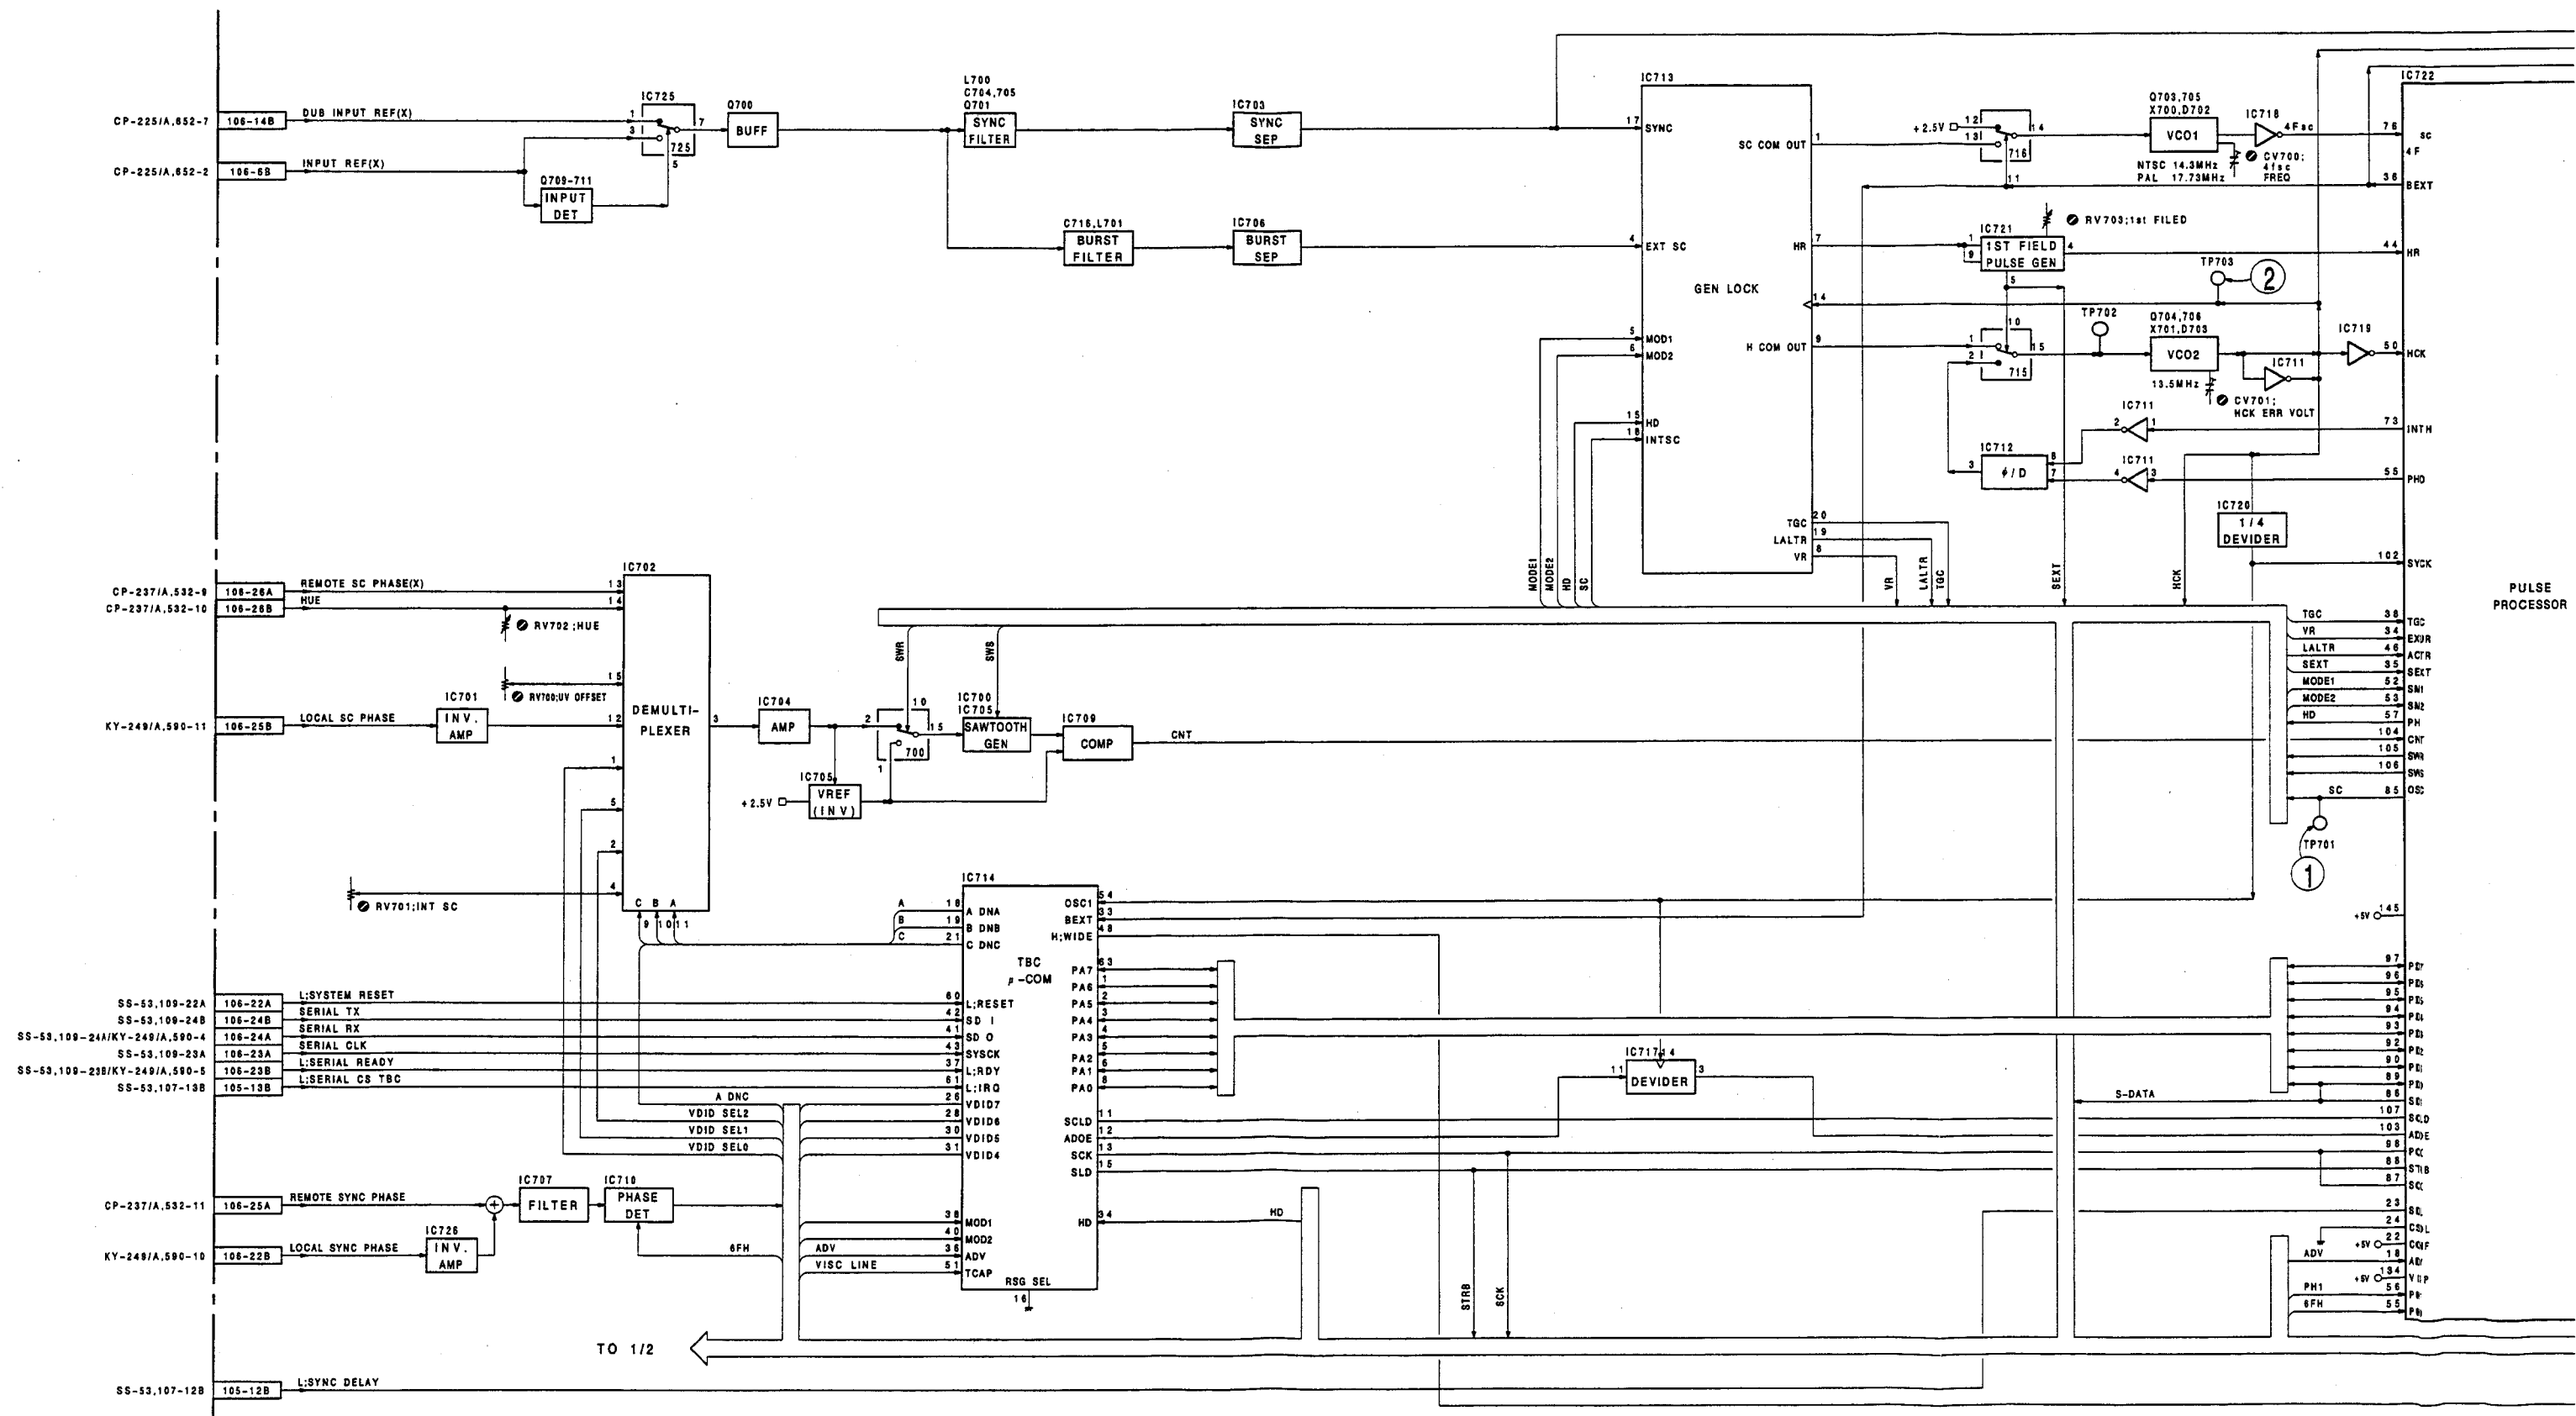


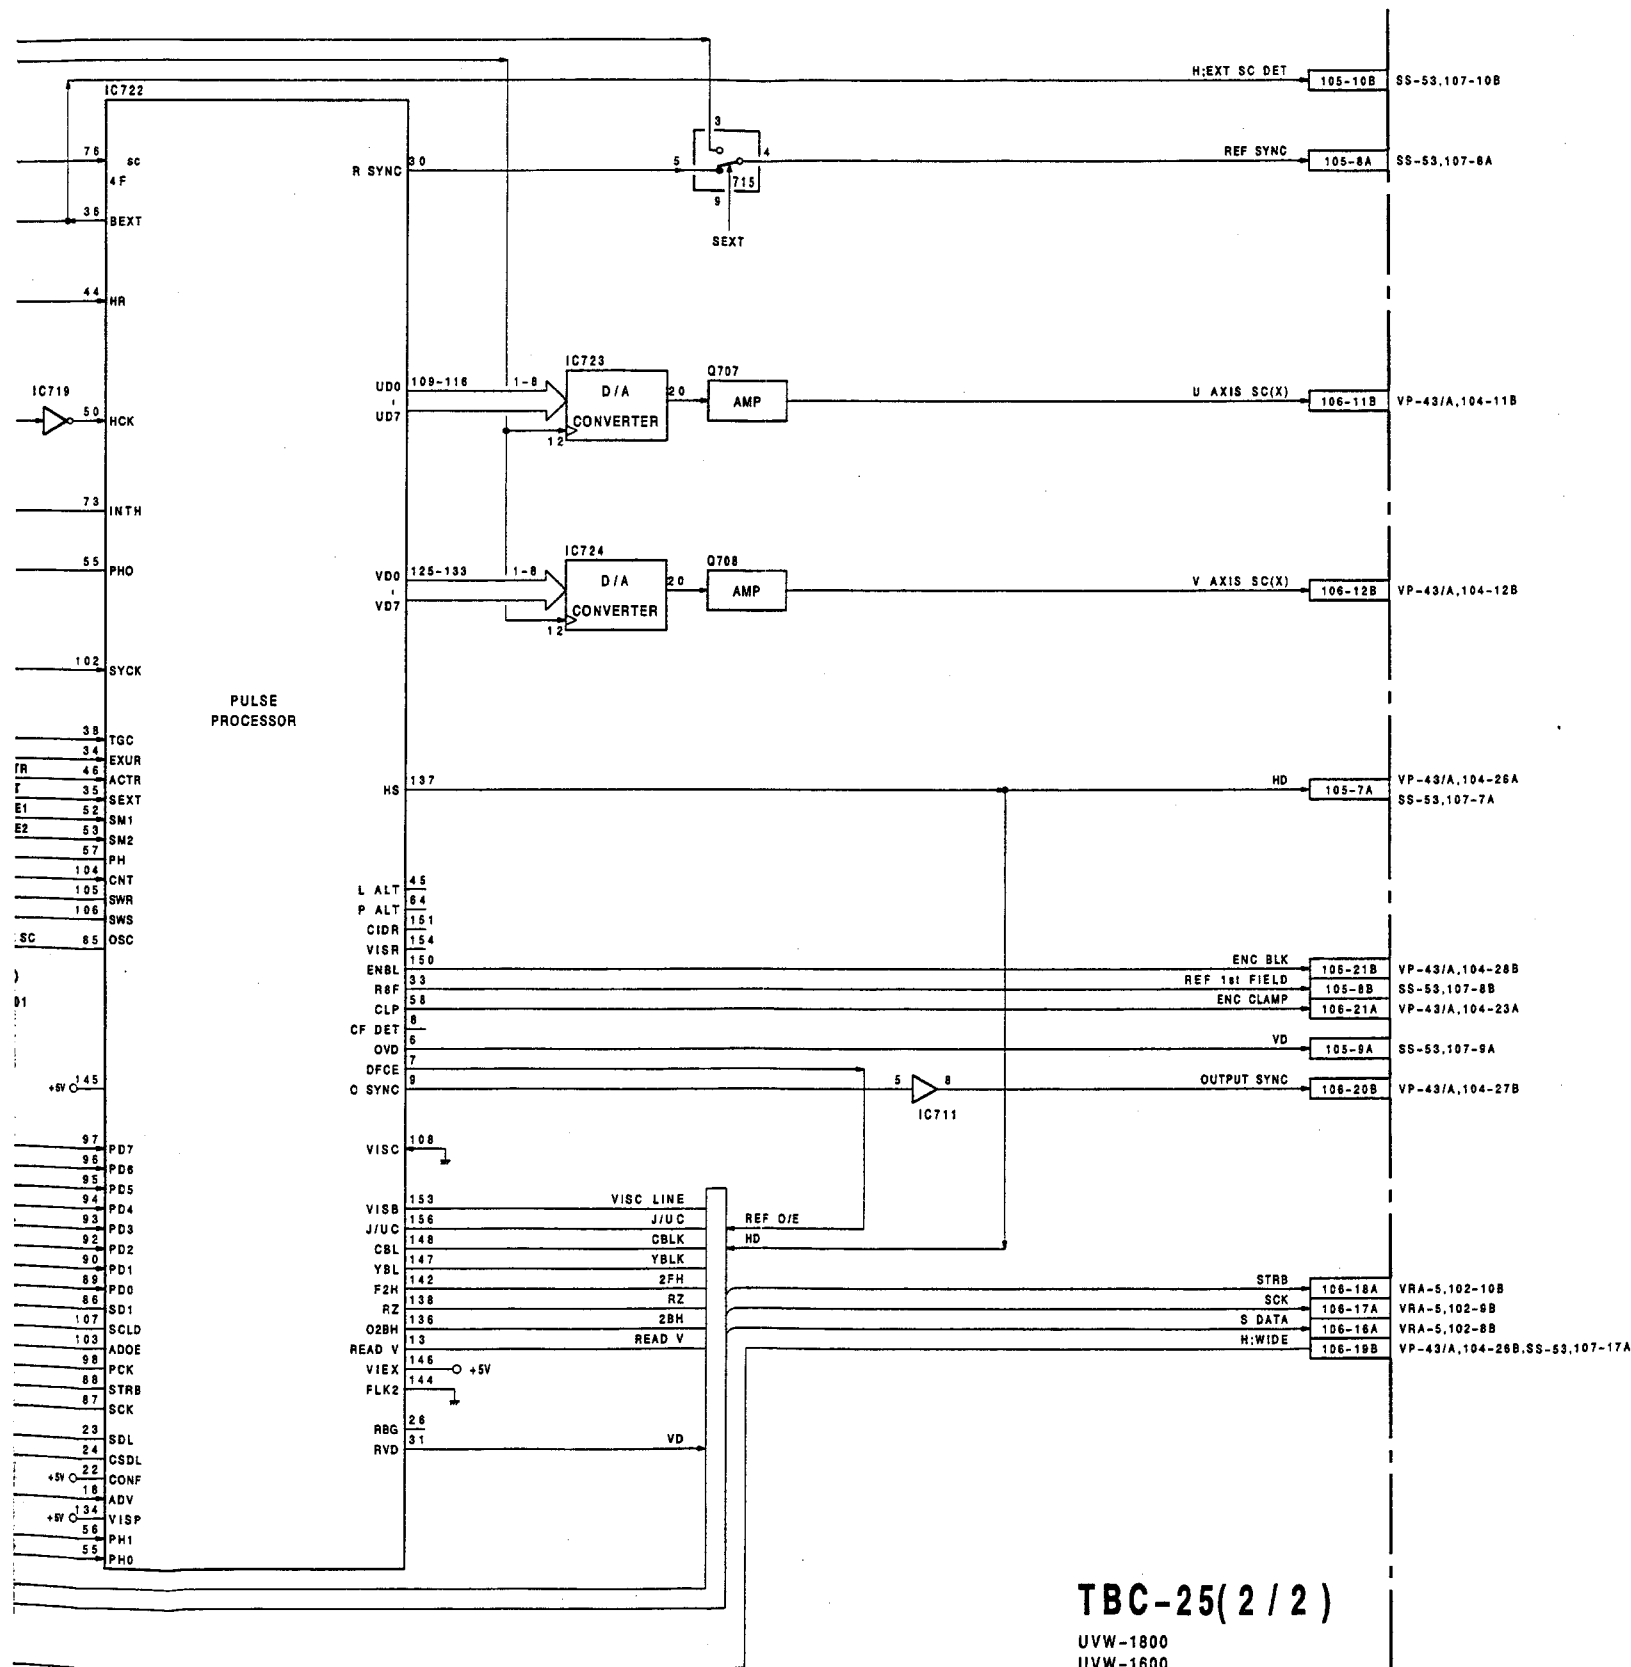


TBC-25(2/2)

UVW-1800
UVW-1600

① TP701 PB




② TP703 PB




AUDIO(1) AUDIO(1)


AUDIO PB,IN/OUT,LTC PB

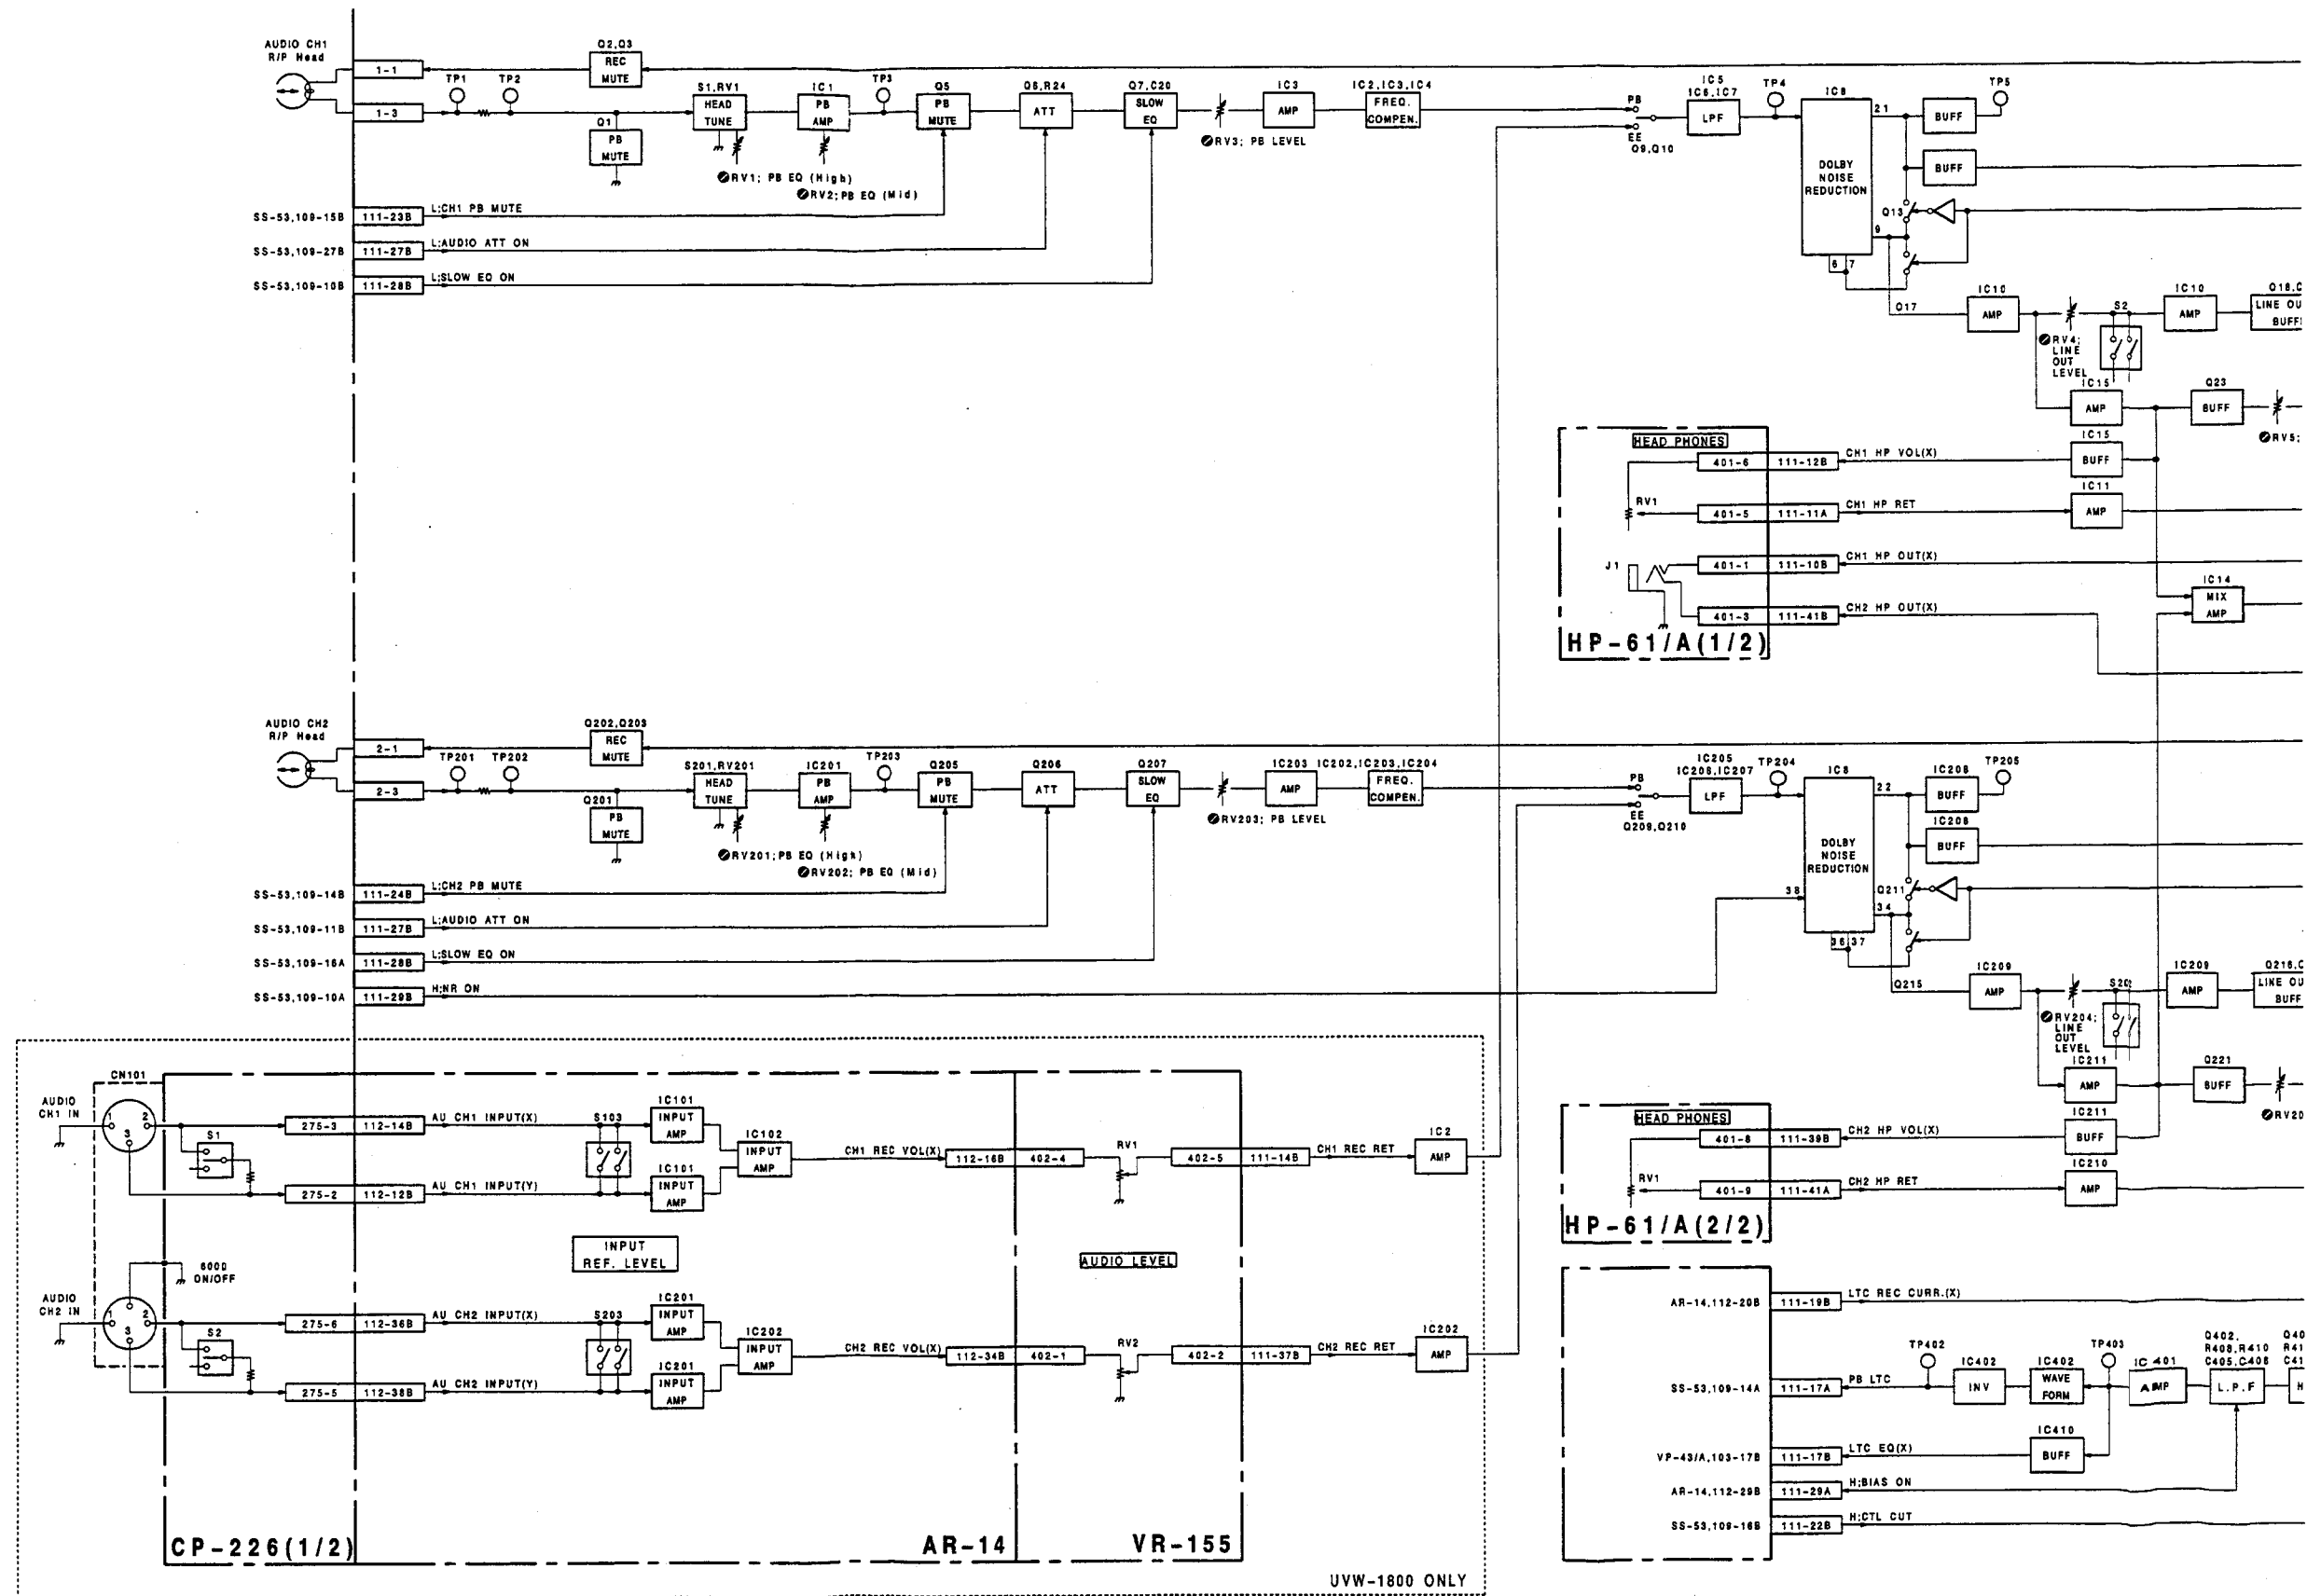

AUDIO ERASE/BIAS OSC,MODE CONTROL,LTC REC,CROSSTALK CANCEL

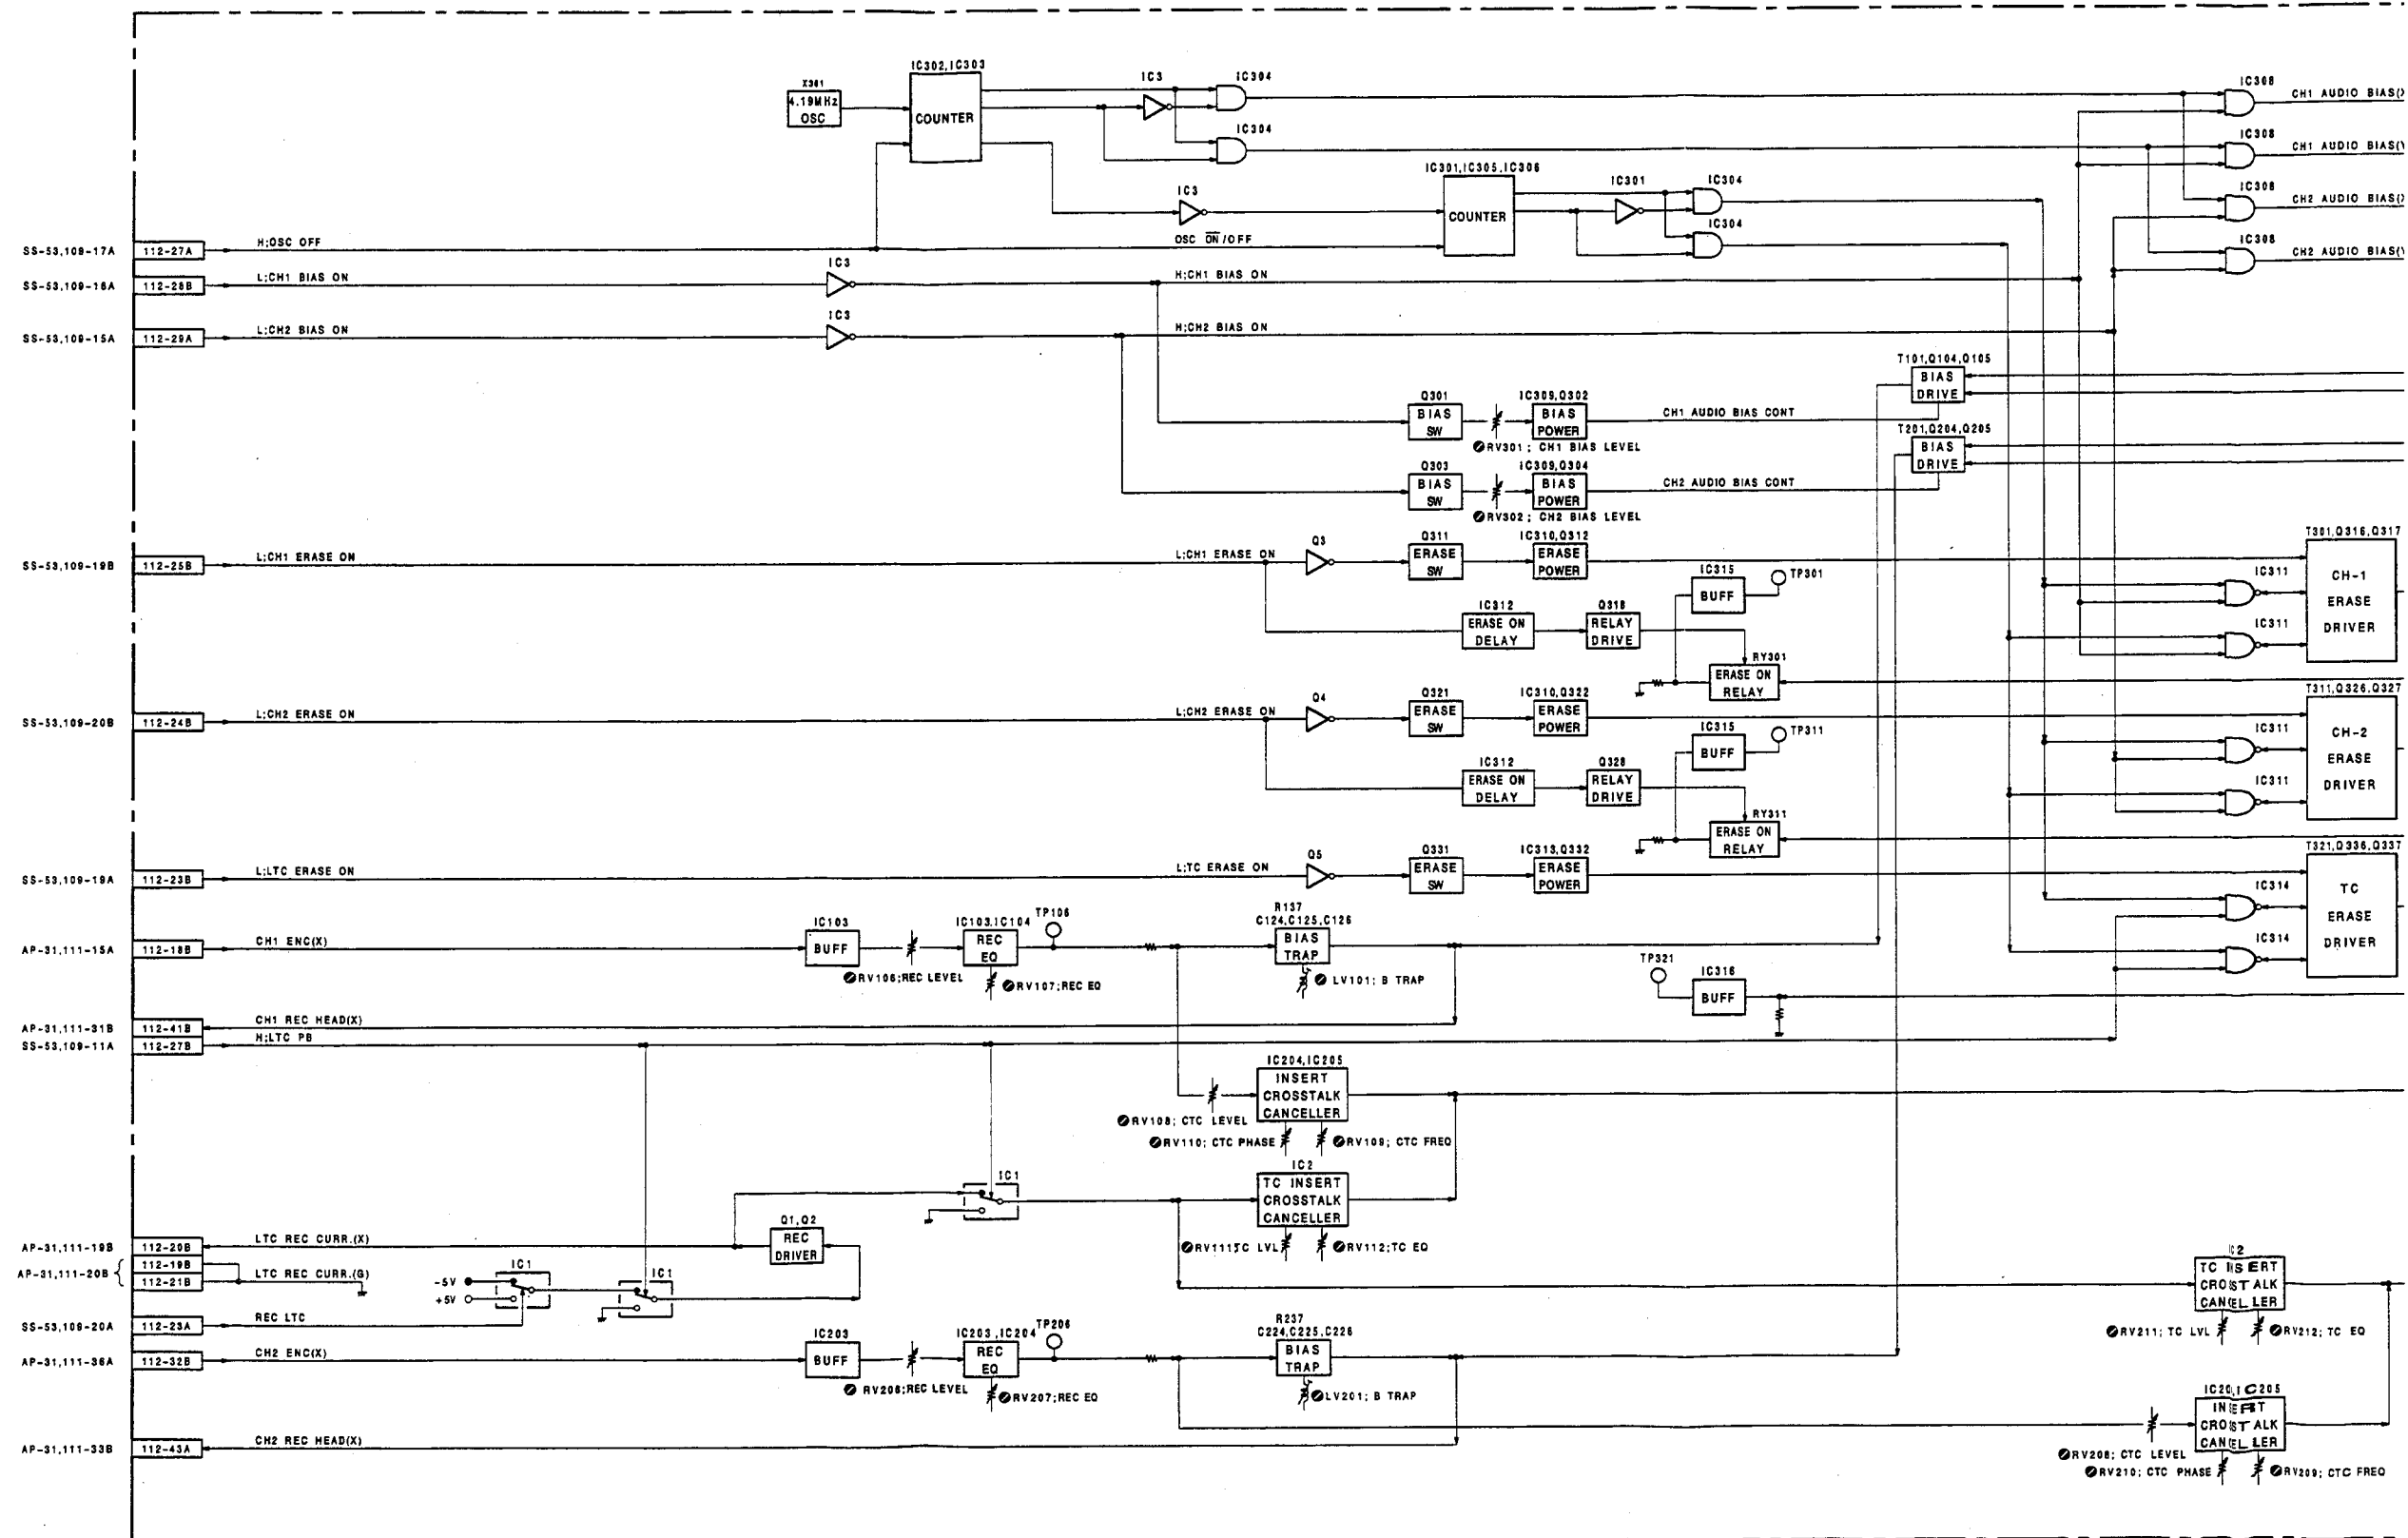


AUDIO(2) AUDIO(2)

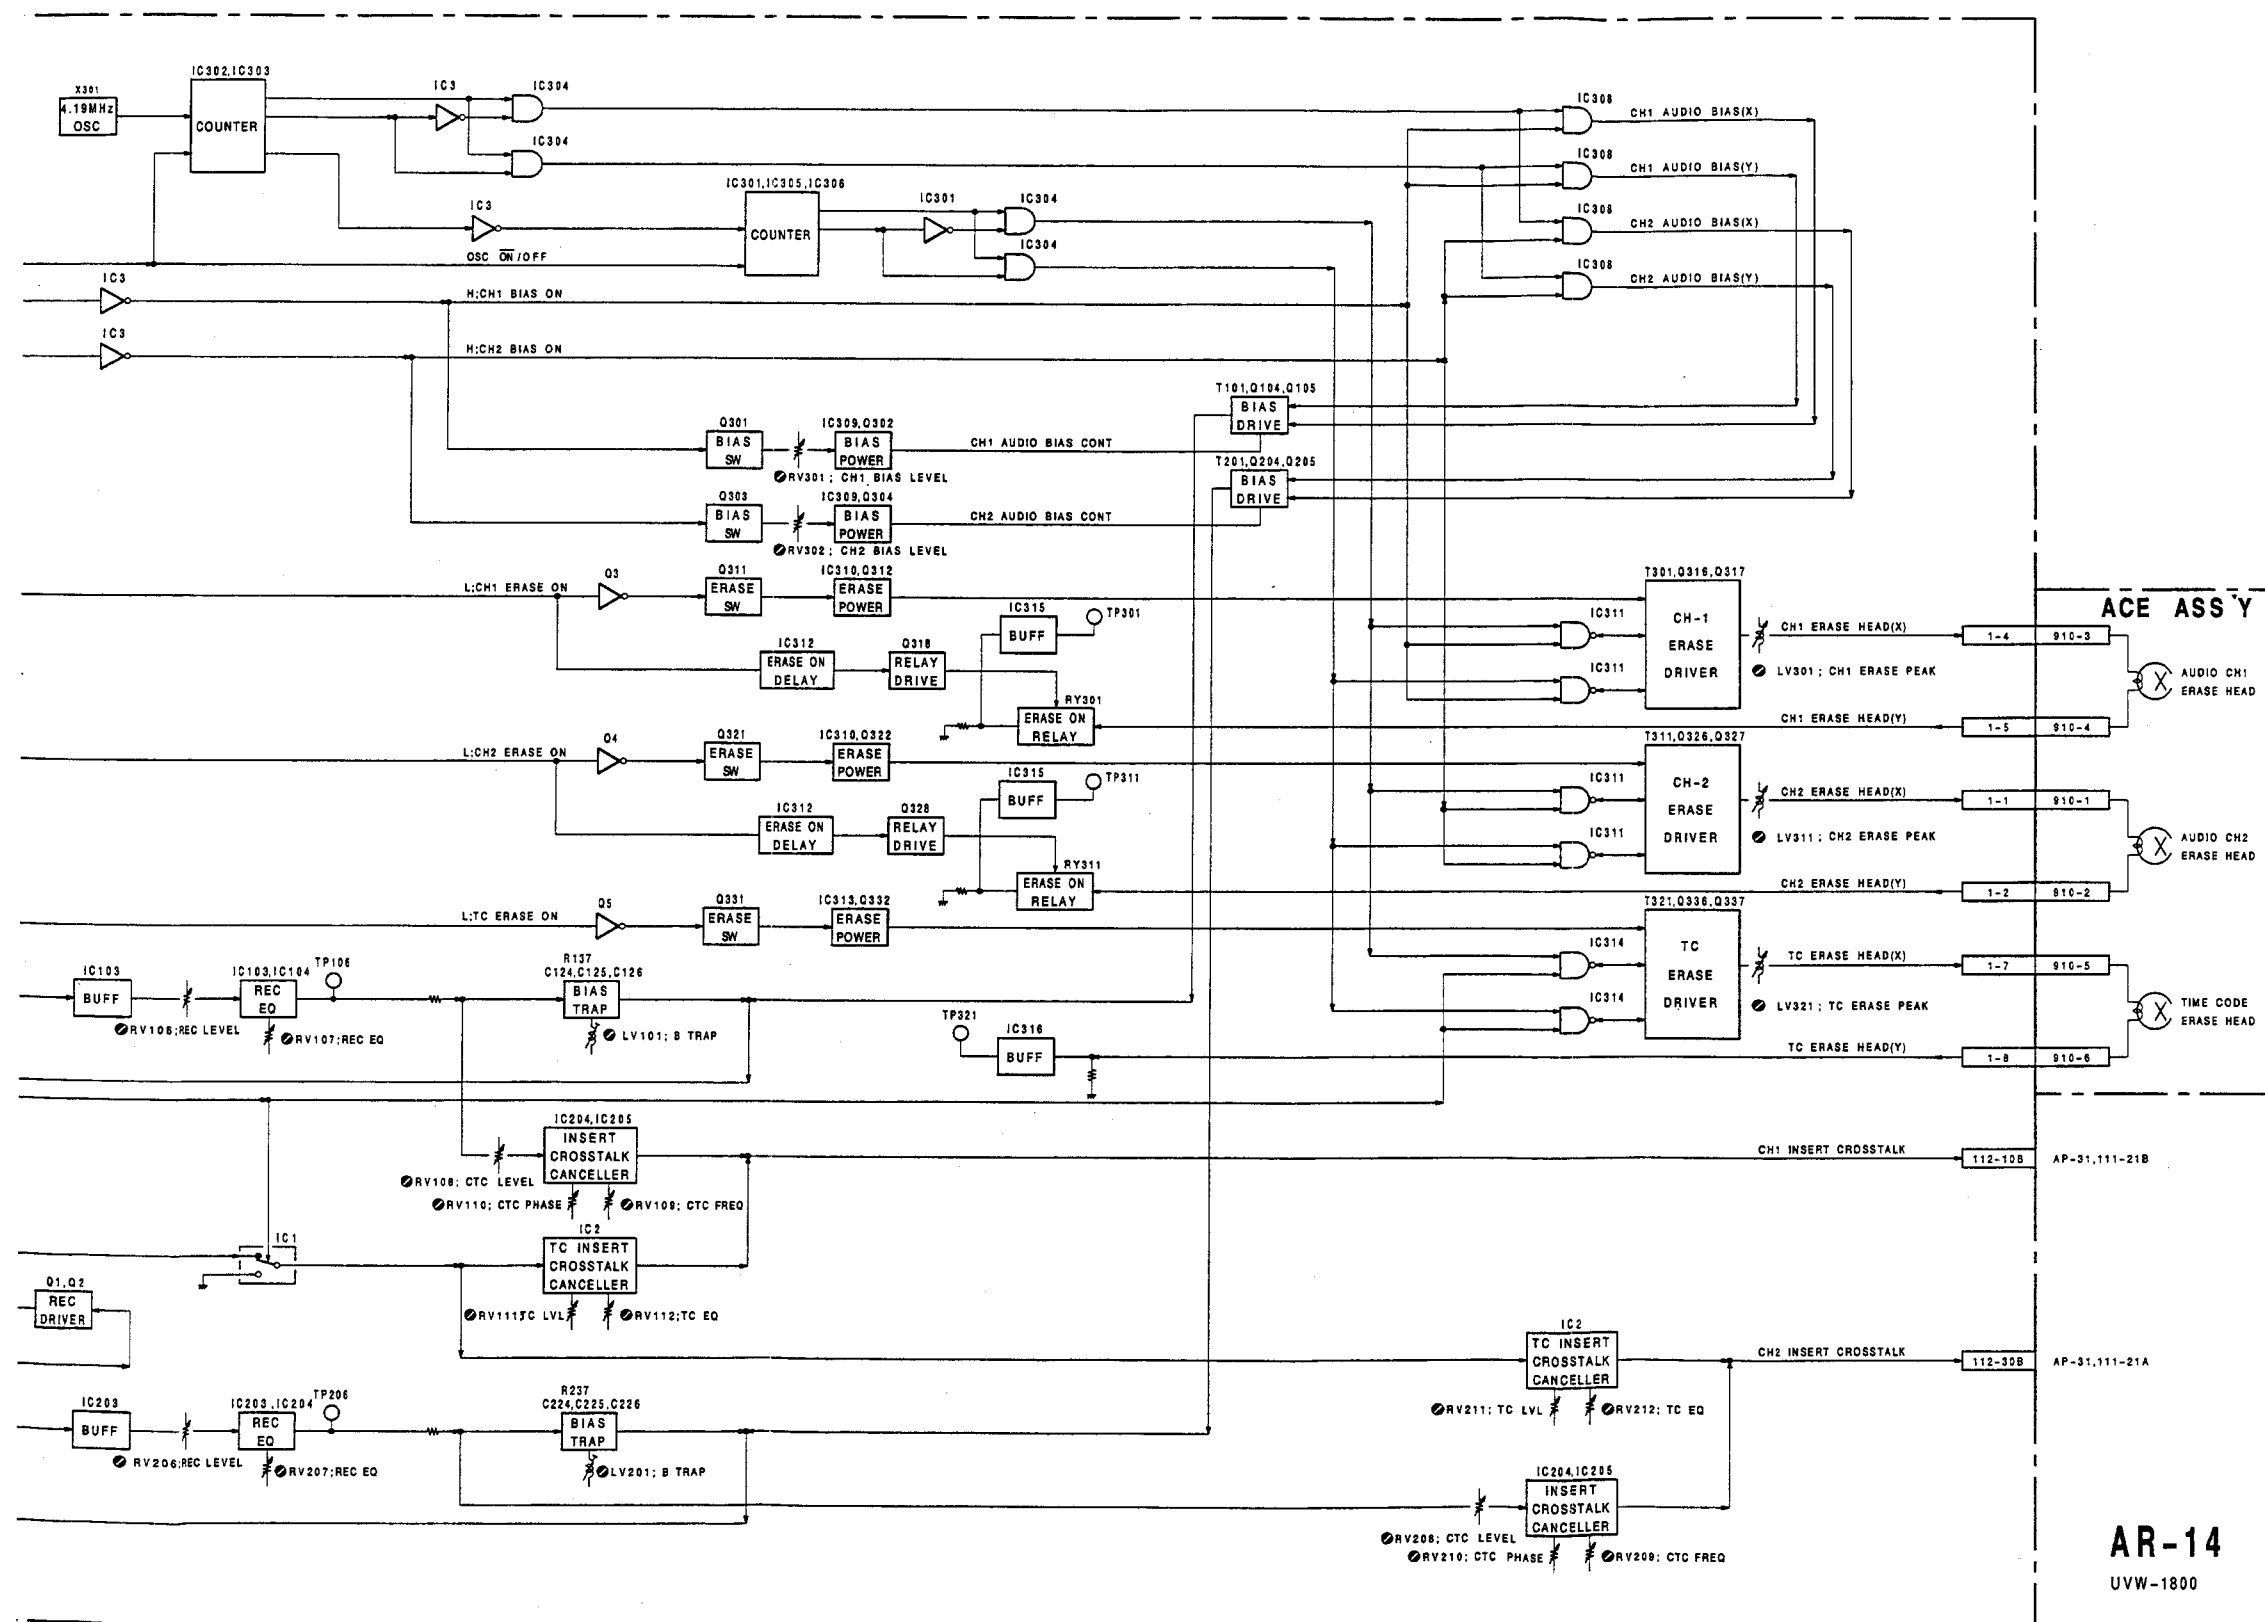


SYSTEM CONTROL

① TP219 EE/REC/PB




② TP225 PB




SYSTEM CONTROL SYSTEM CONTROL

SYSTEM CONTROL BLOCK

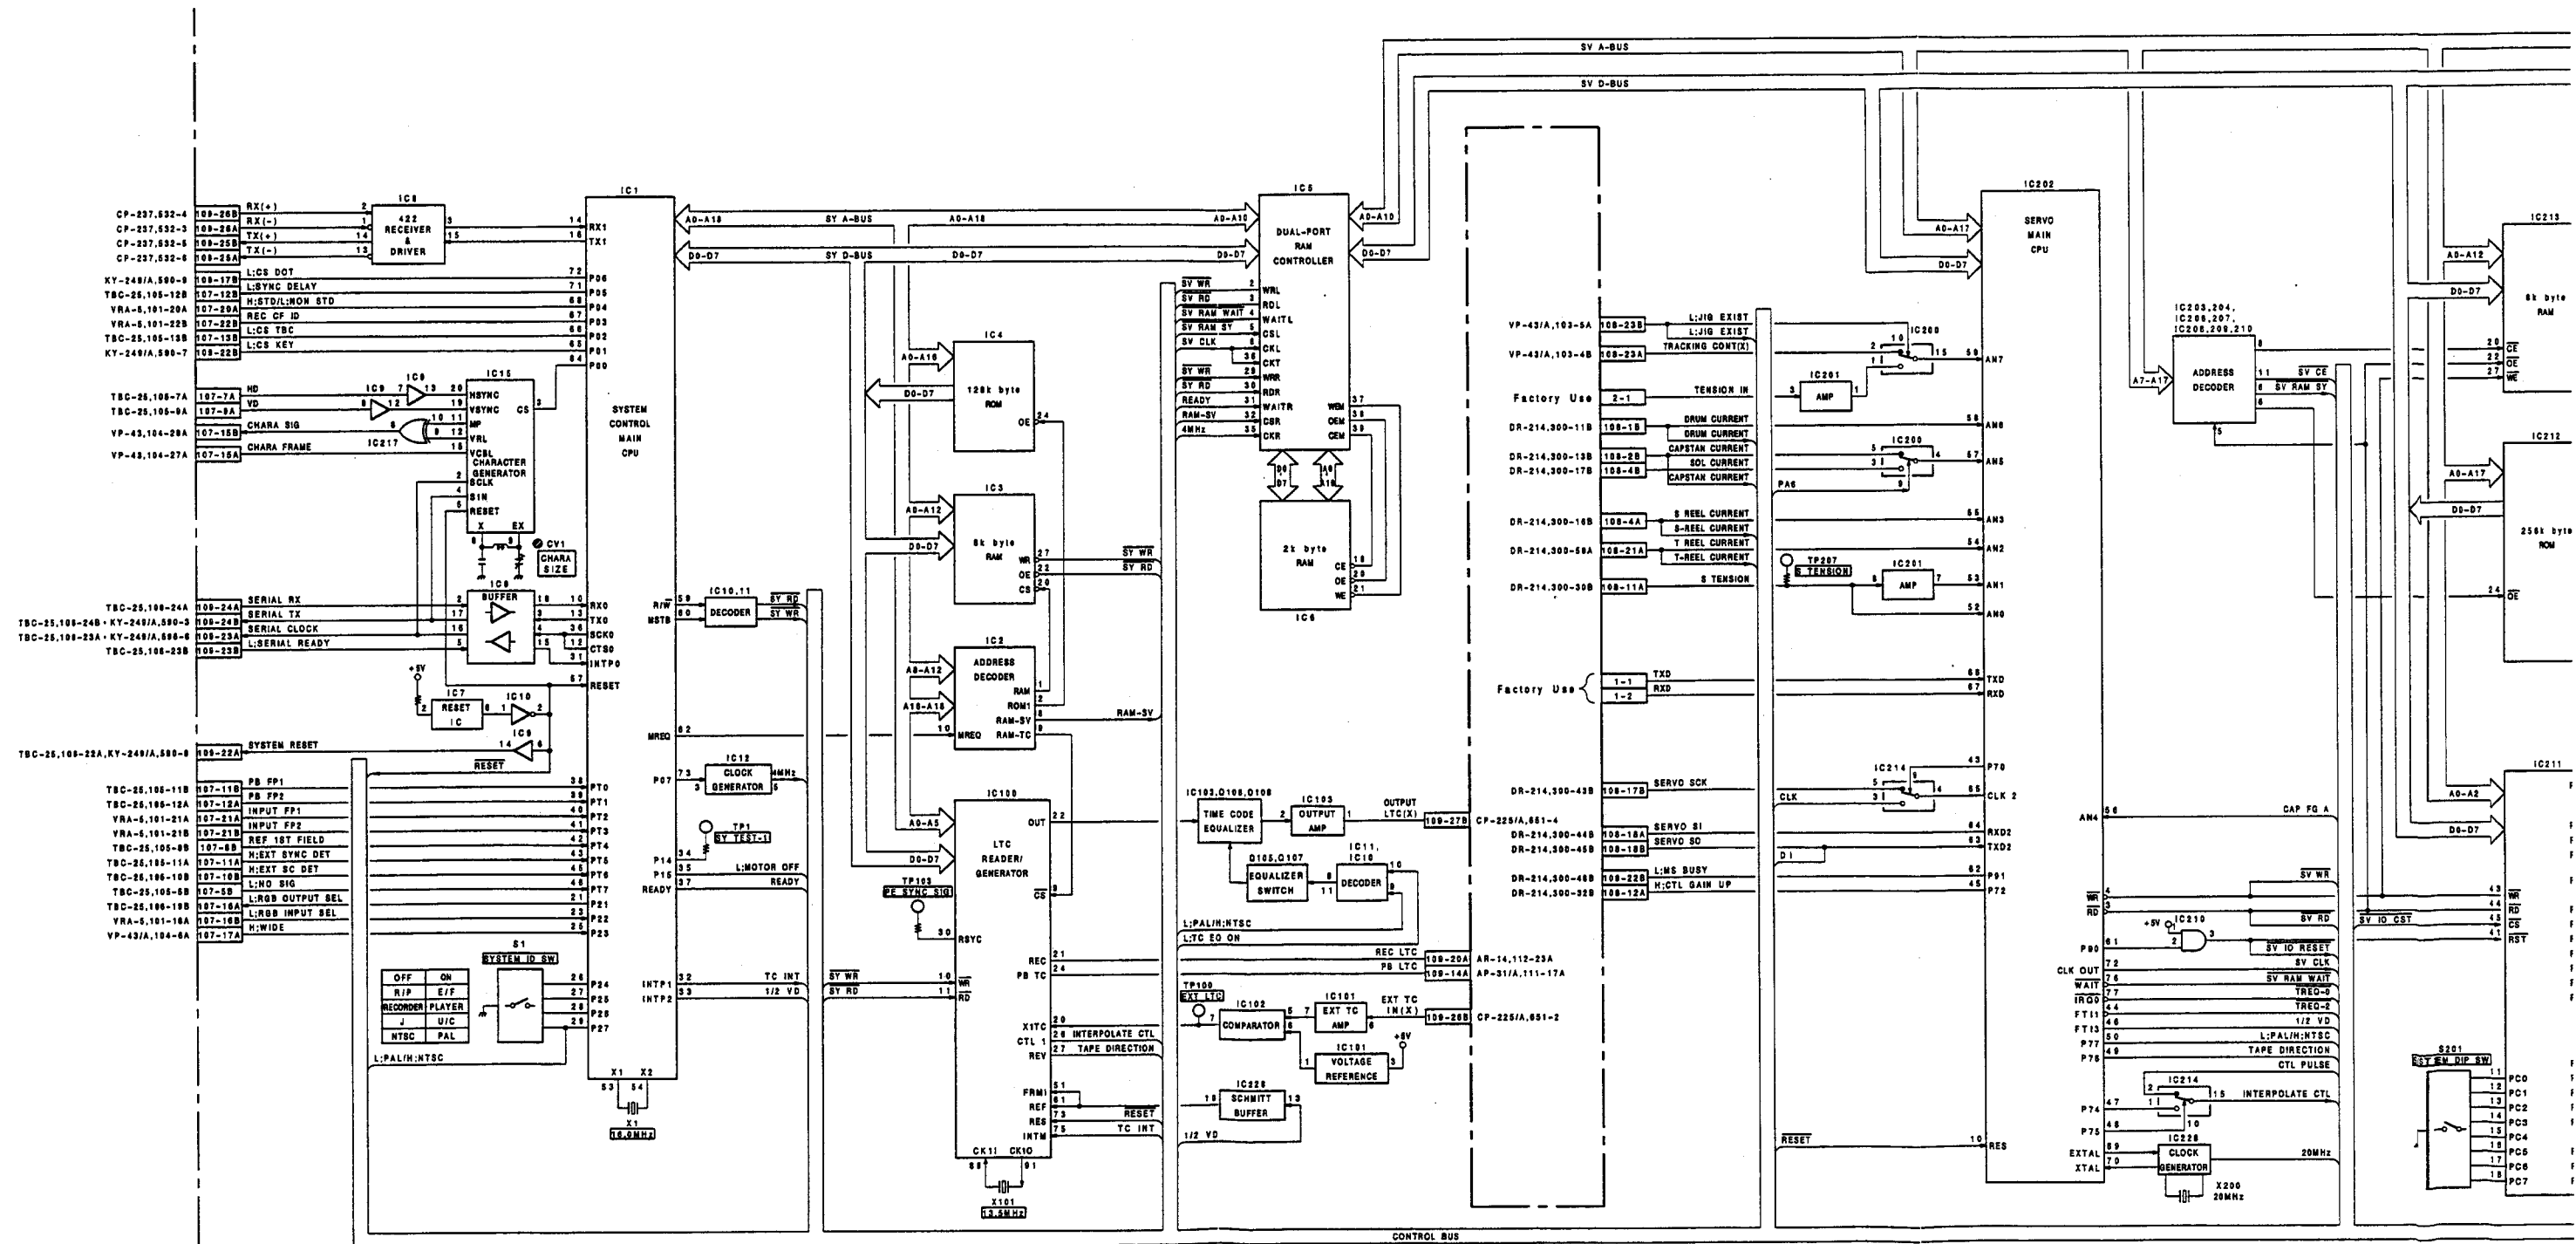


SYSTEM CONTROL SYSTEM CONTROL

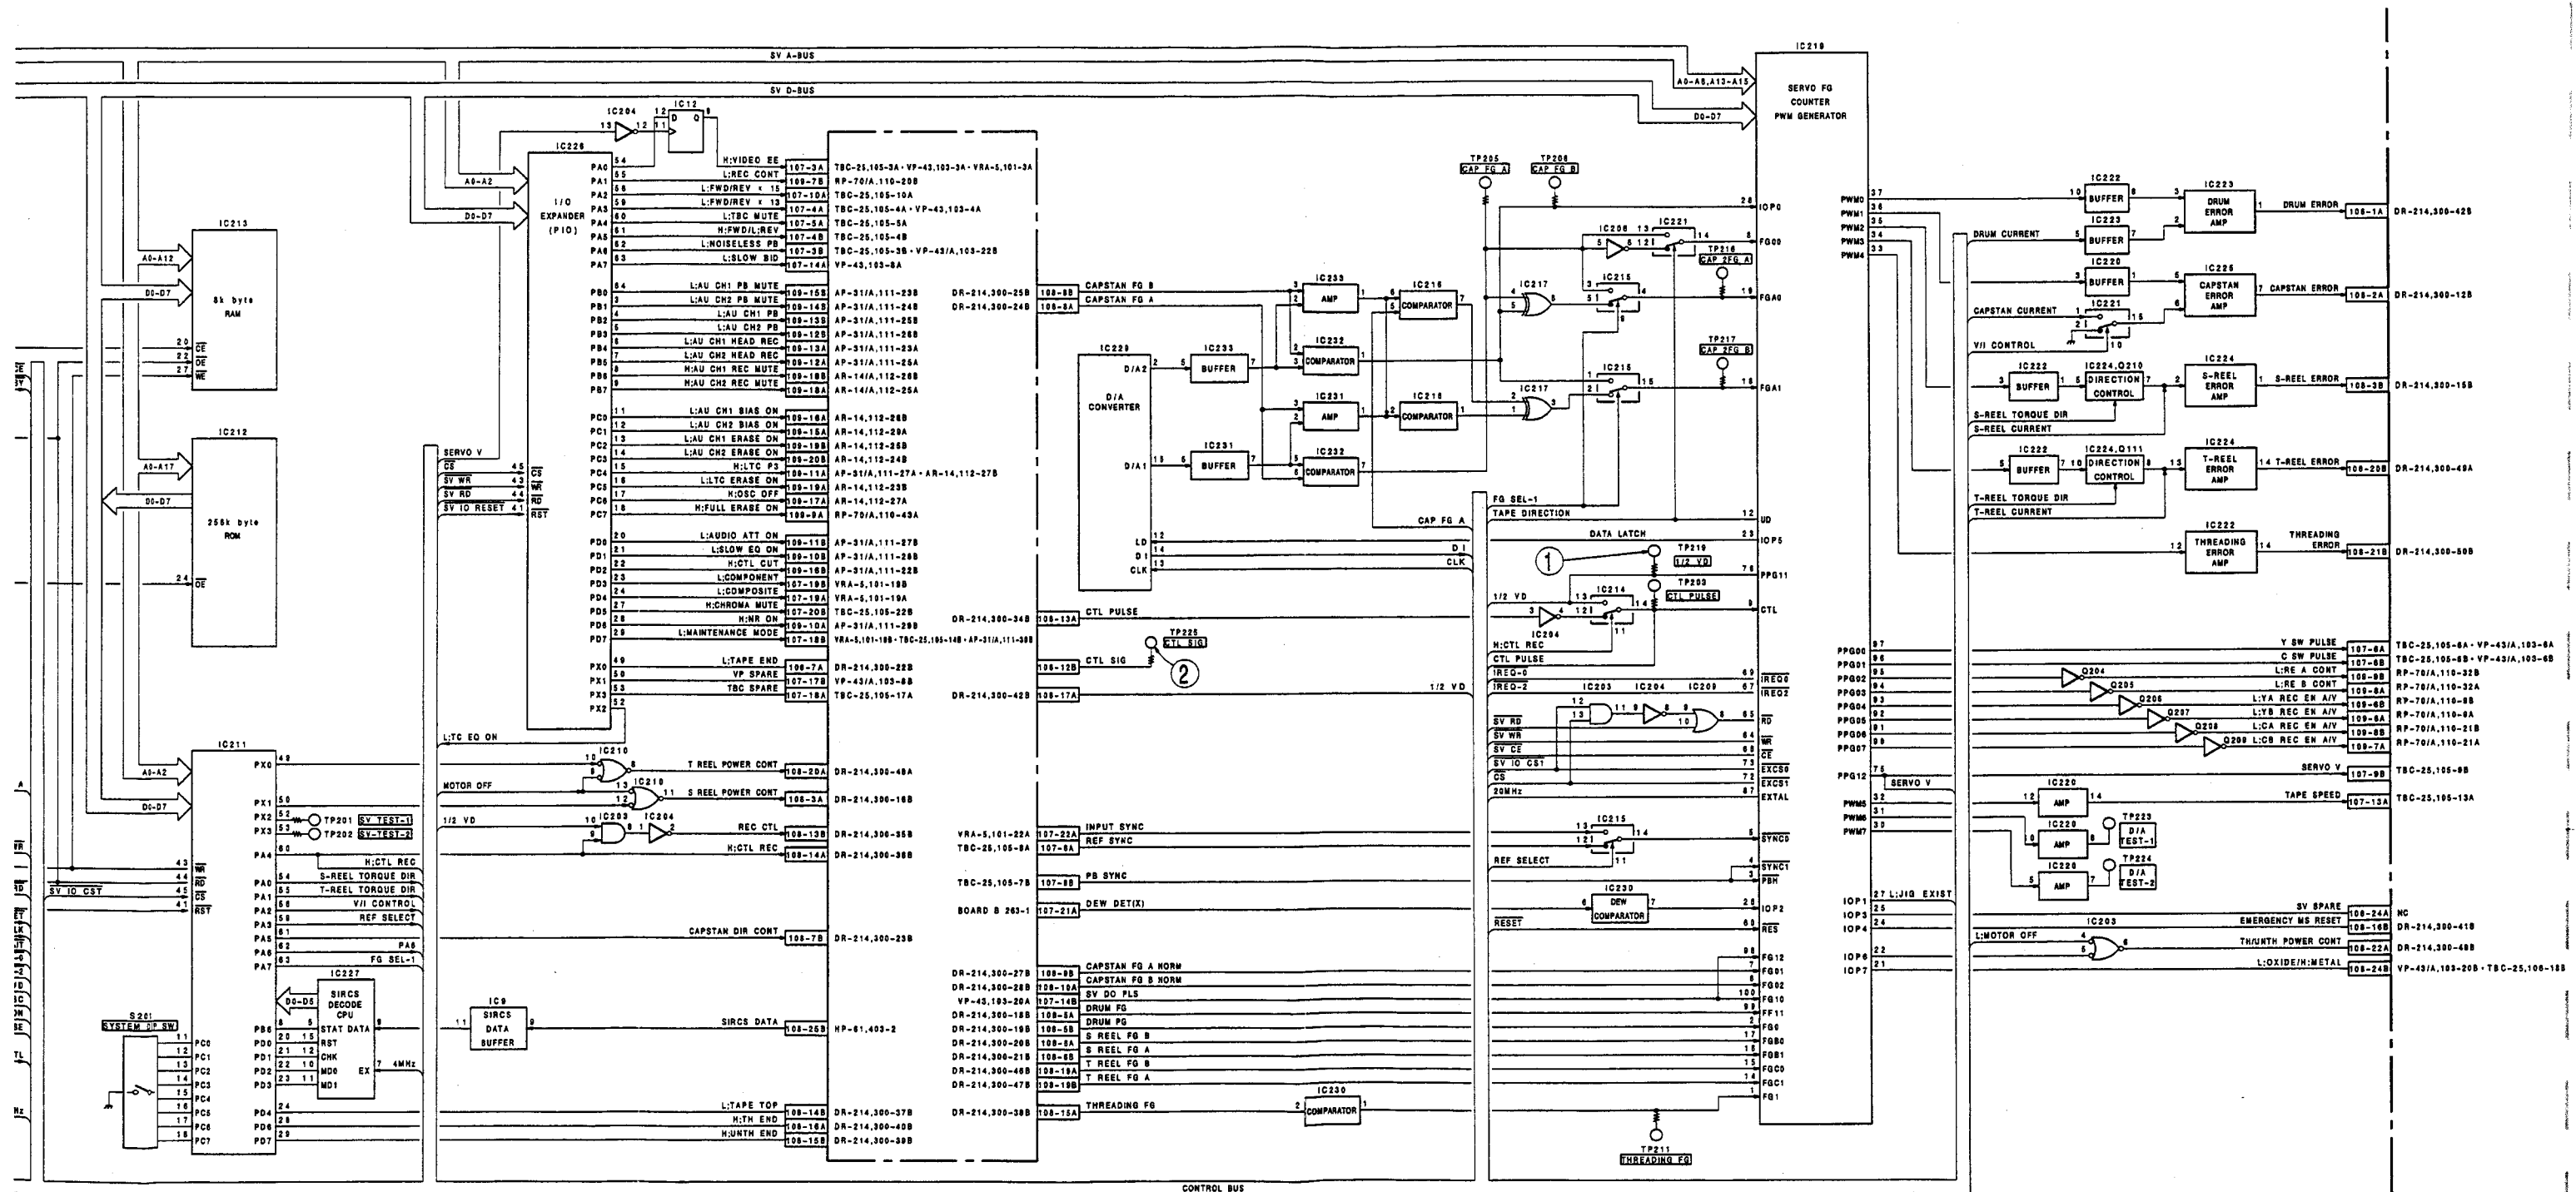


SS-53/A

UVW-1800
UVW-1600


SERVO(1)

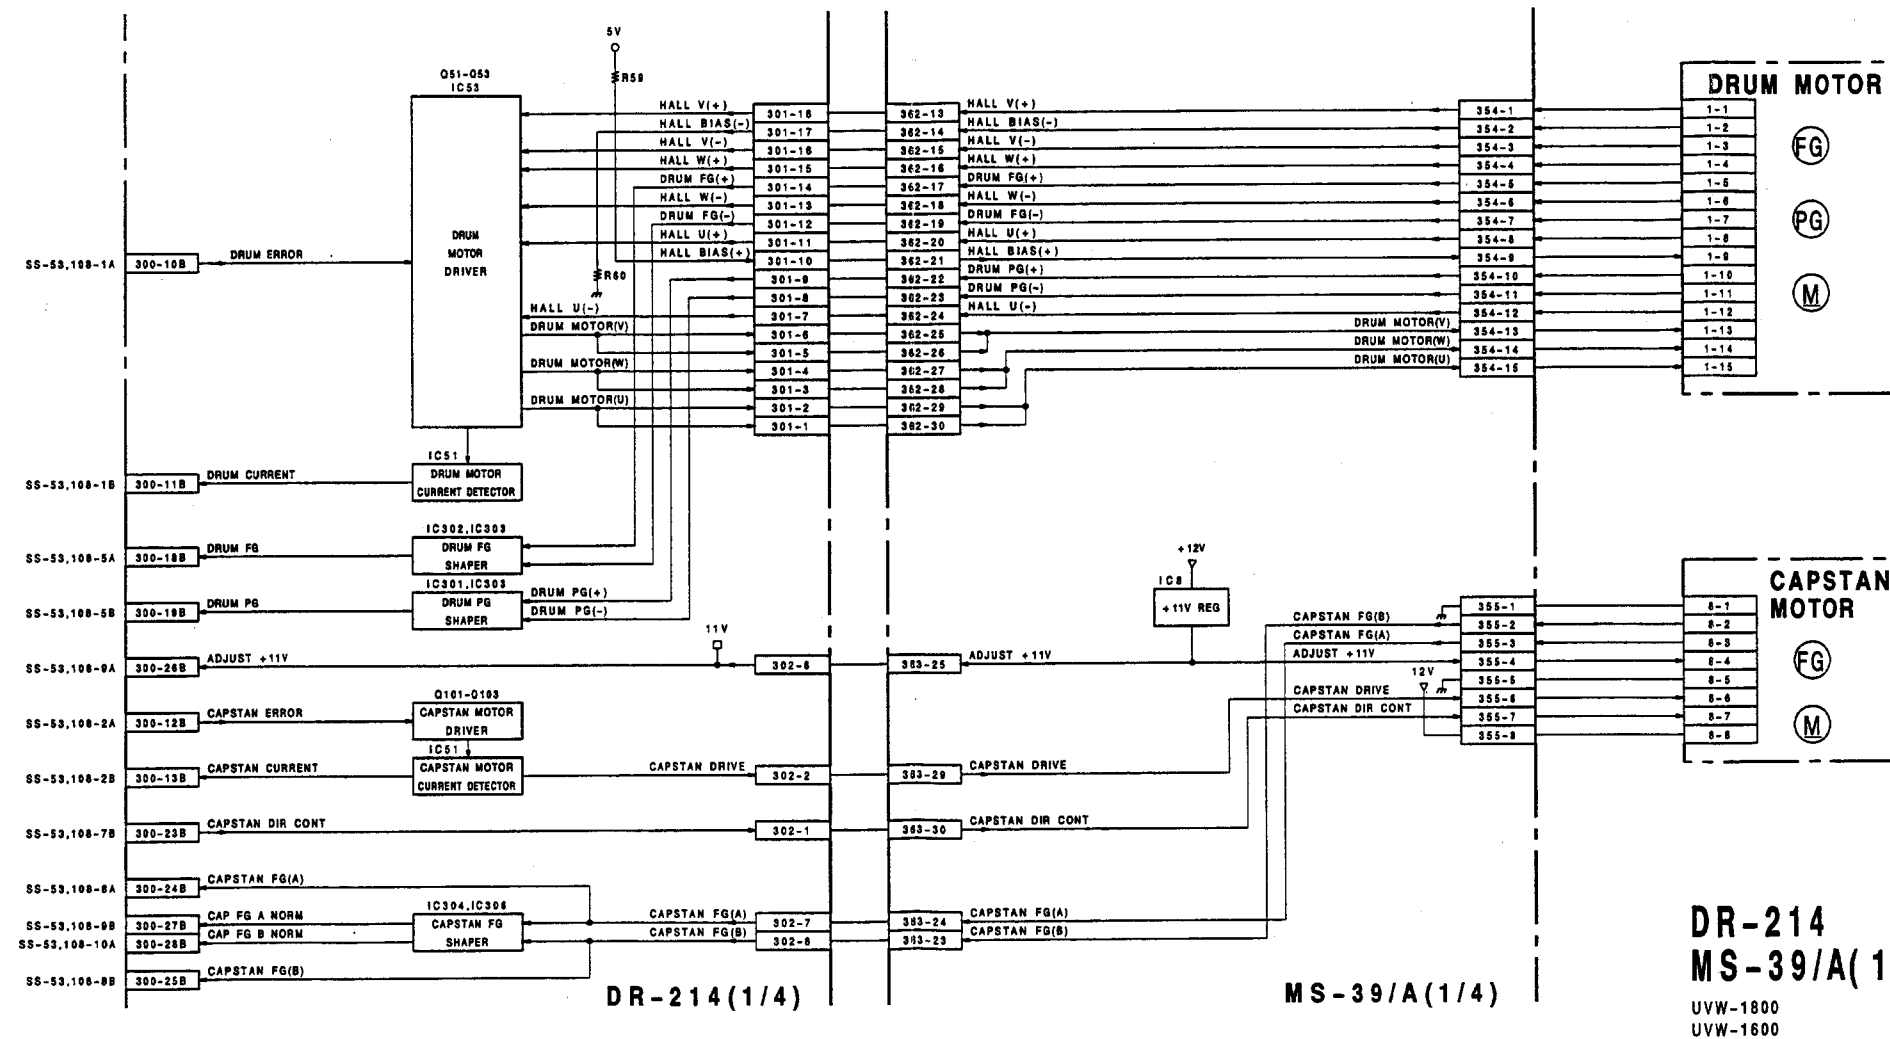

SERVO(1) SERVO(1)




SERVO(2)

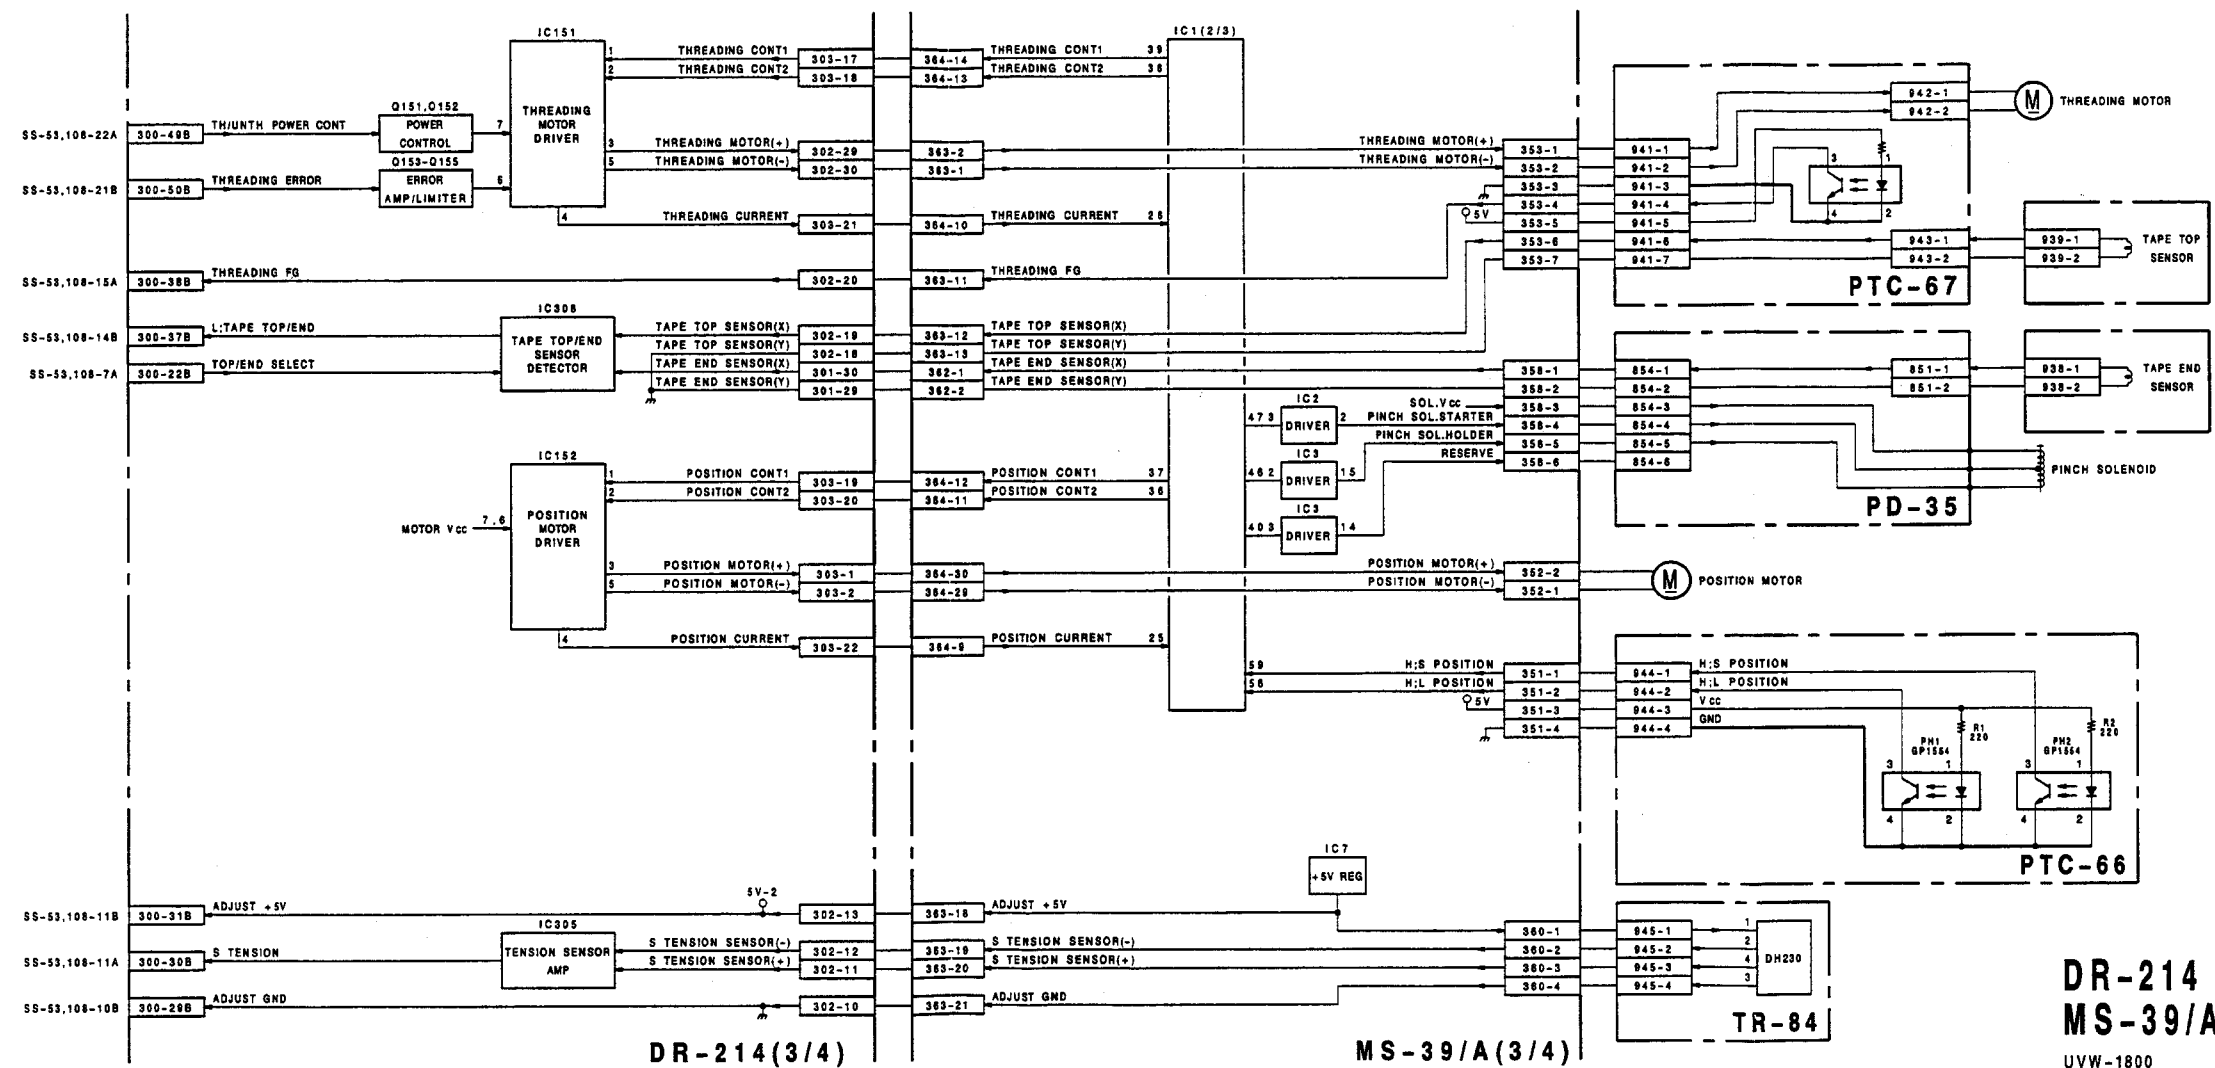


DR-214
MS-39/A(3/4)
UVW-1800
UVW-1600

SERVO(2) SERVO(2)

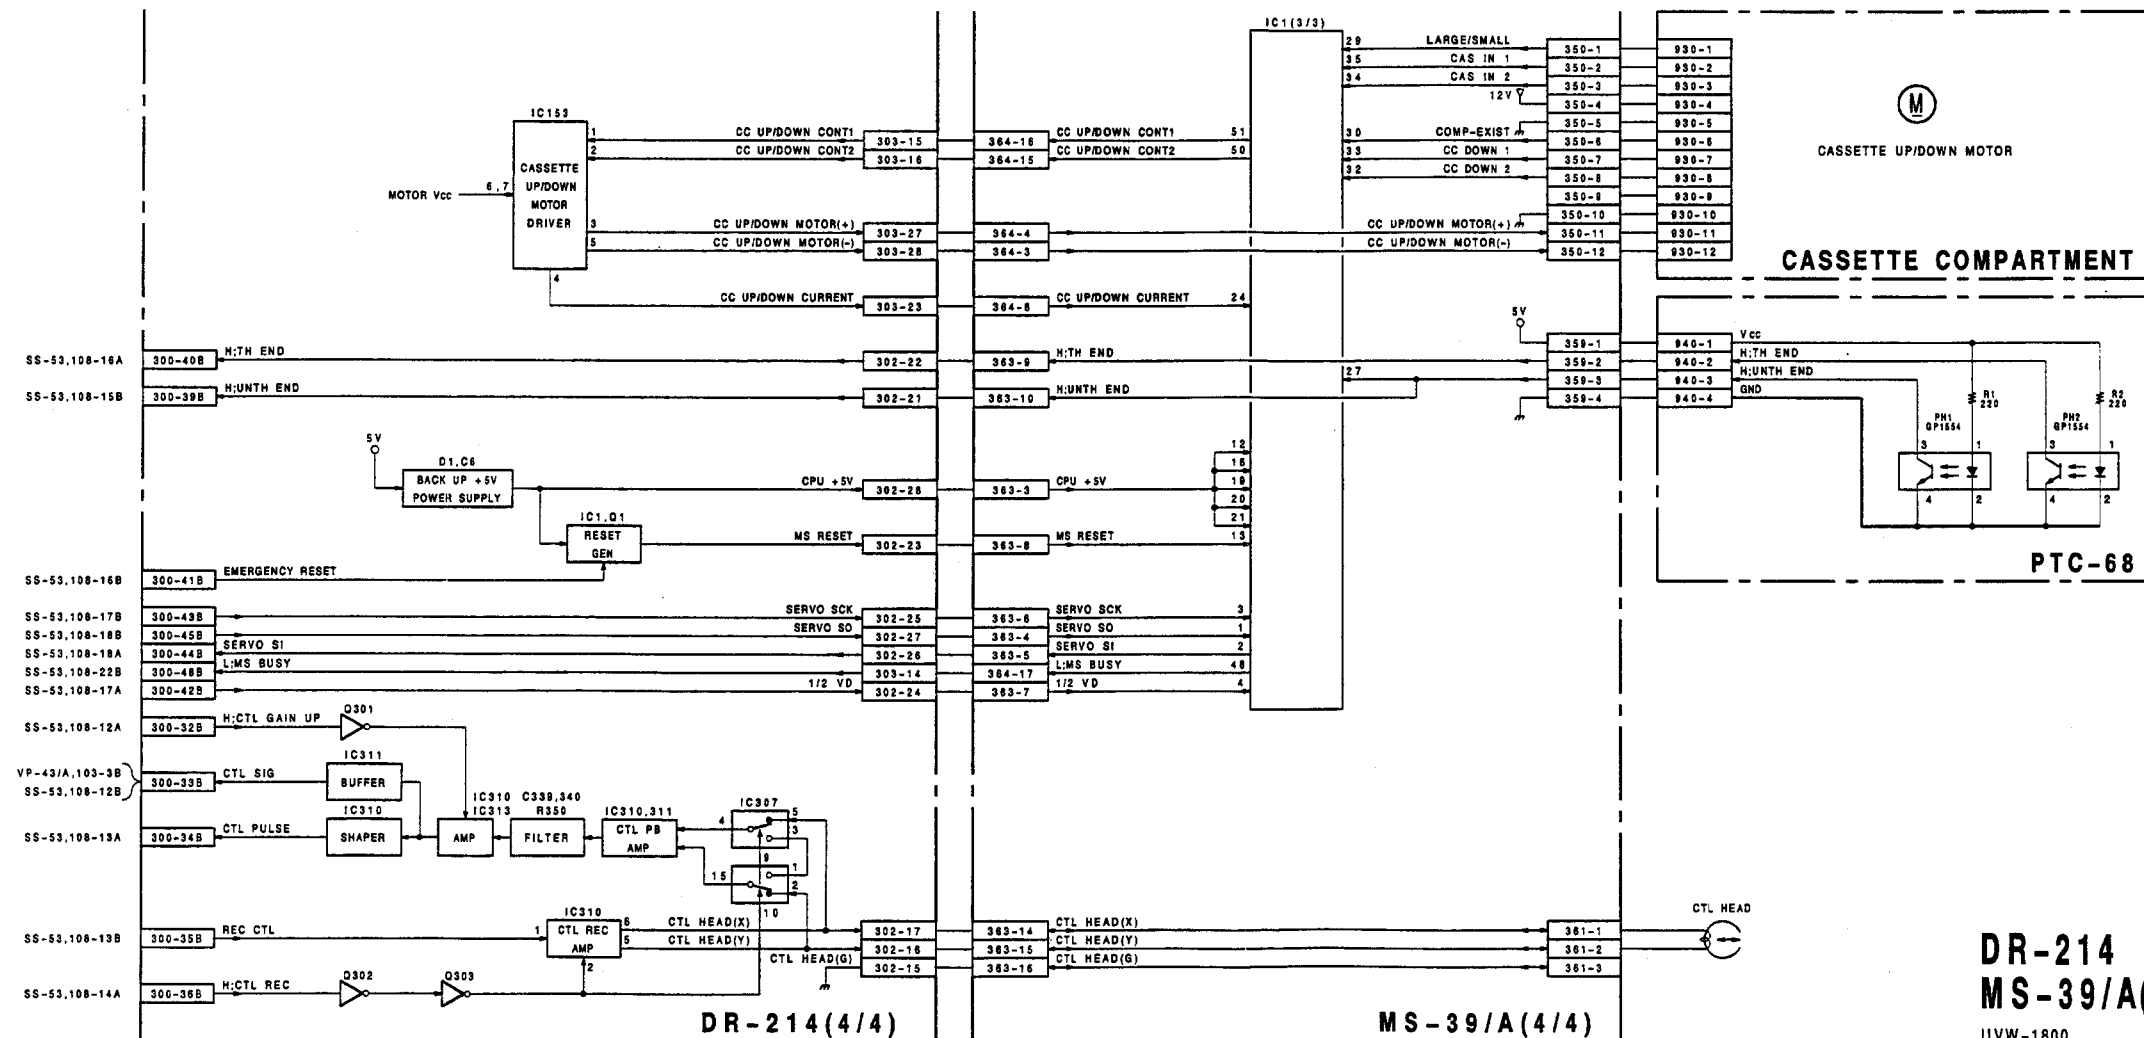


DR-214
MS-39/A(4/4)
UVW-1800
UVW-1600

POWER SUPPLY

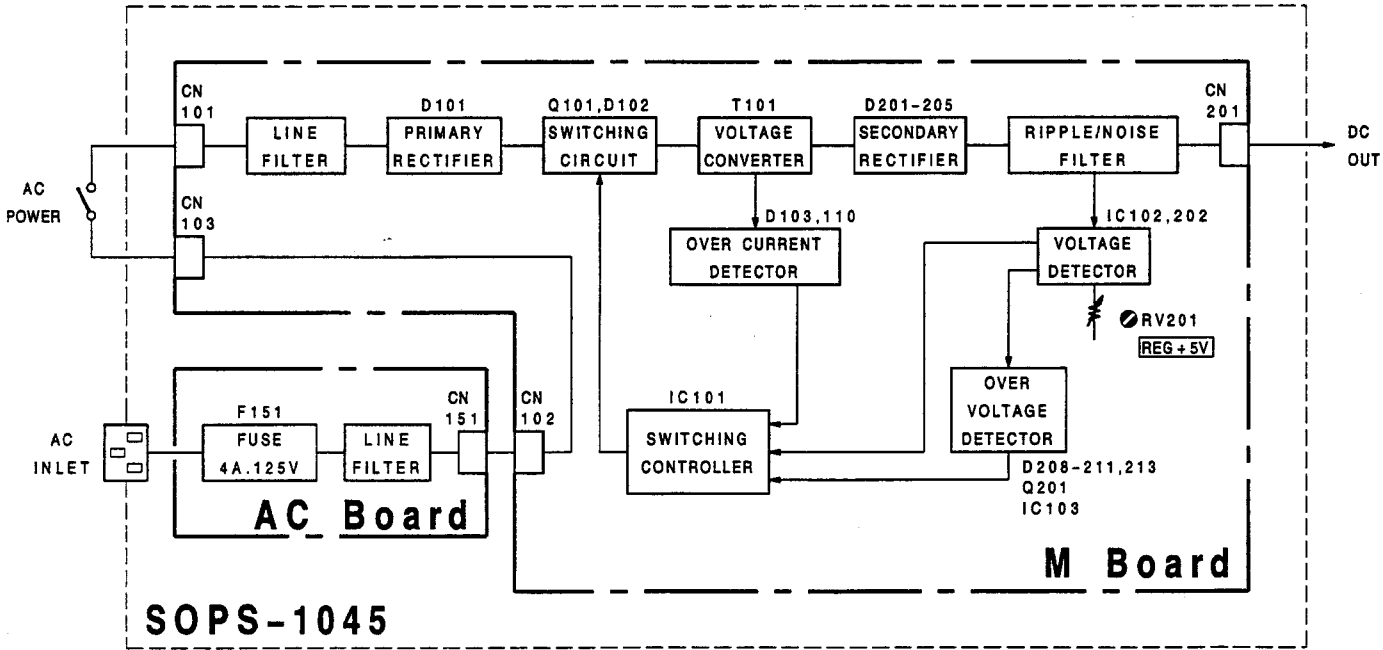

SOPS-1045AC
SOPS-1045M
UVW-1800
UVW-1600


POWER SUPPLY POWER SUPPLY

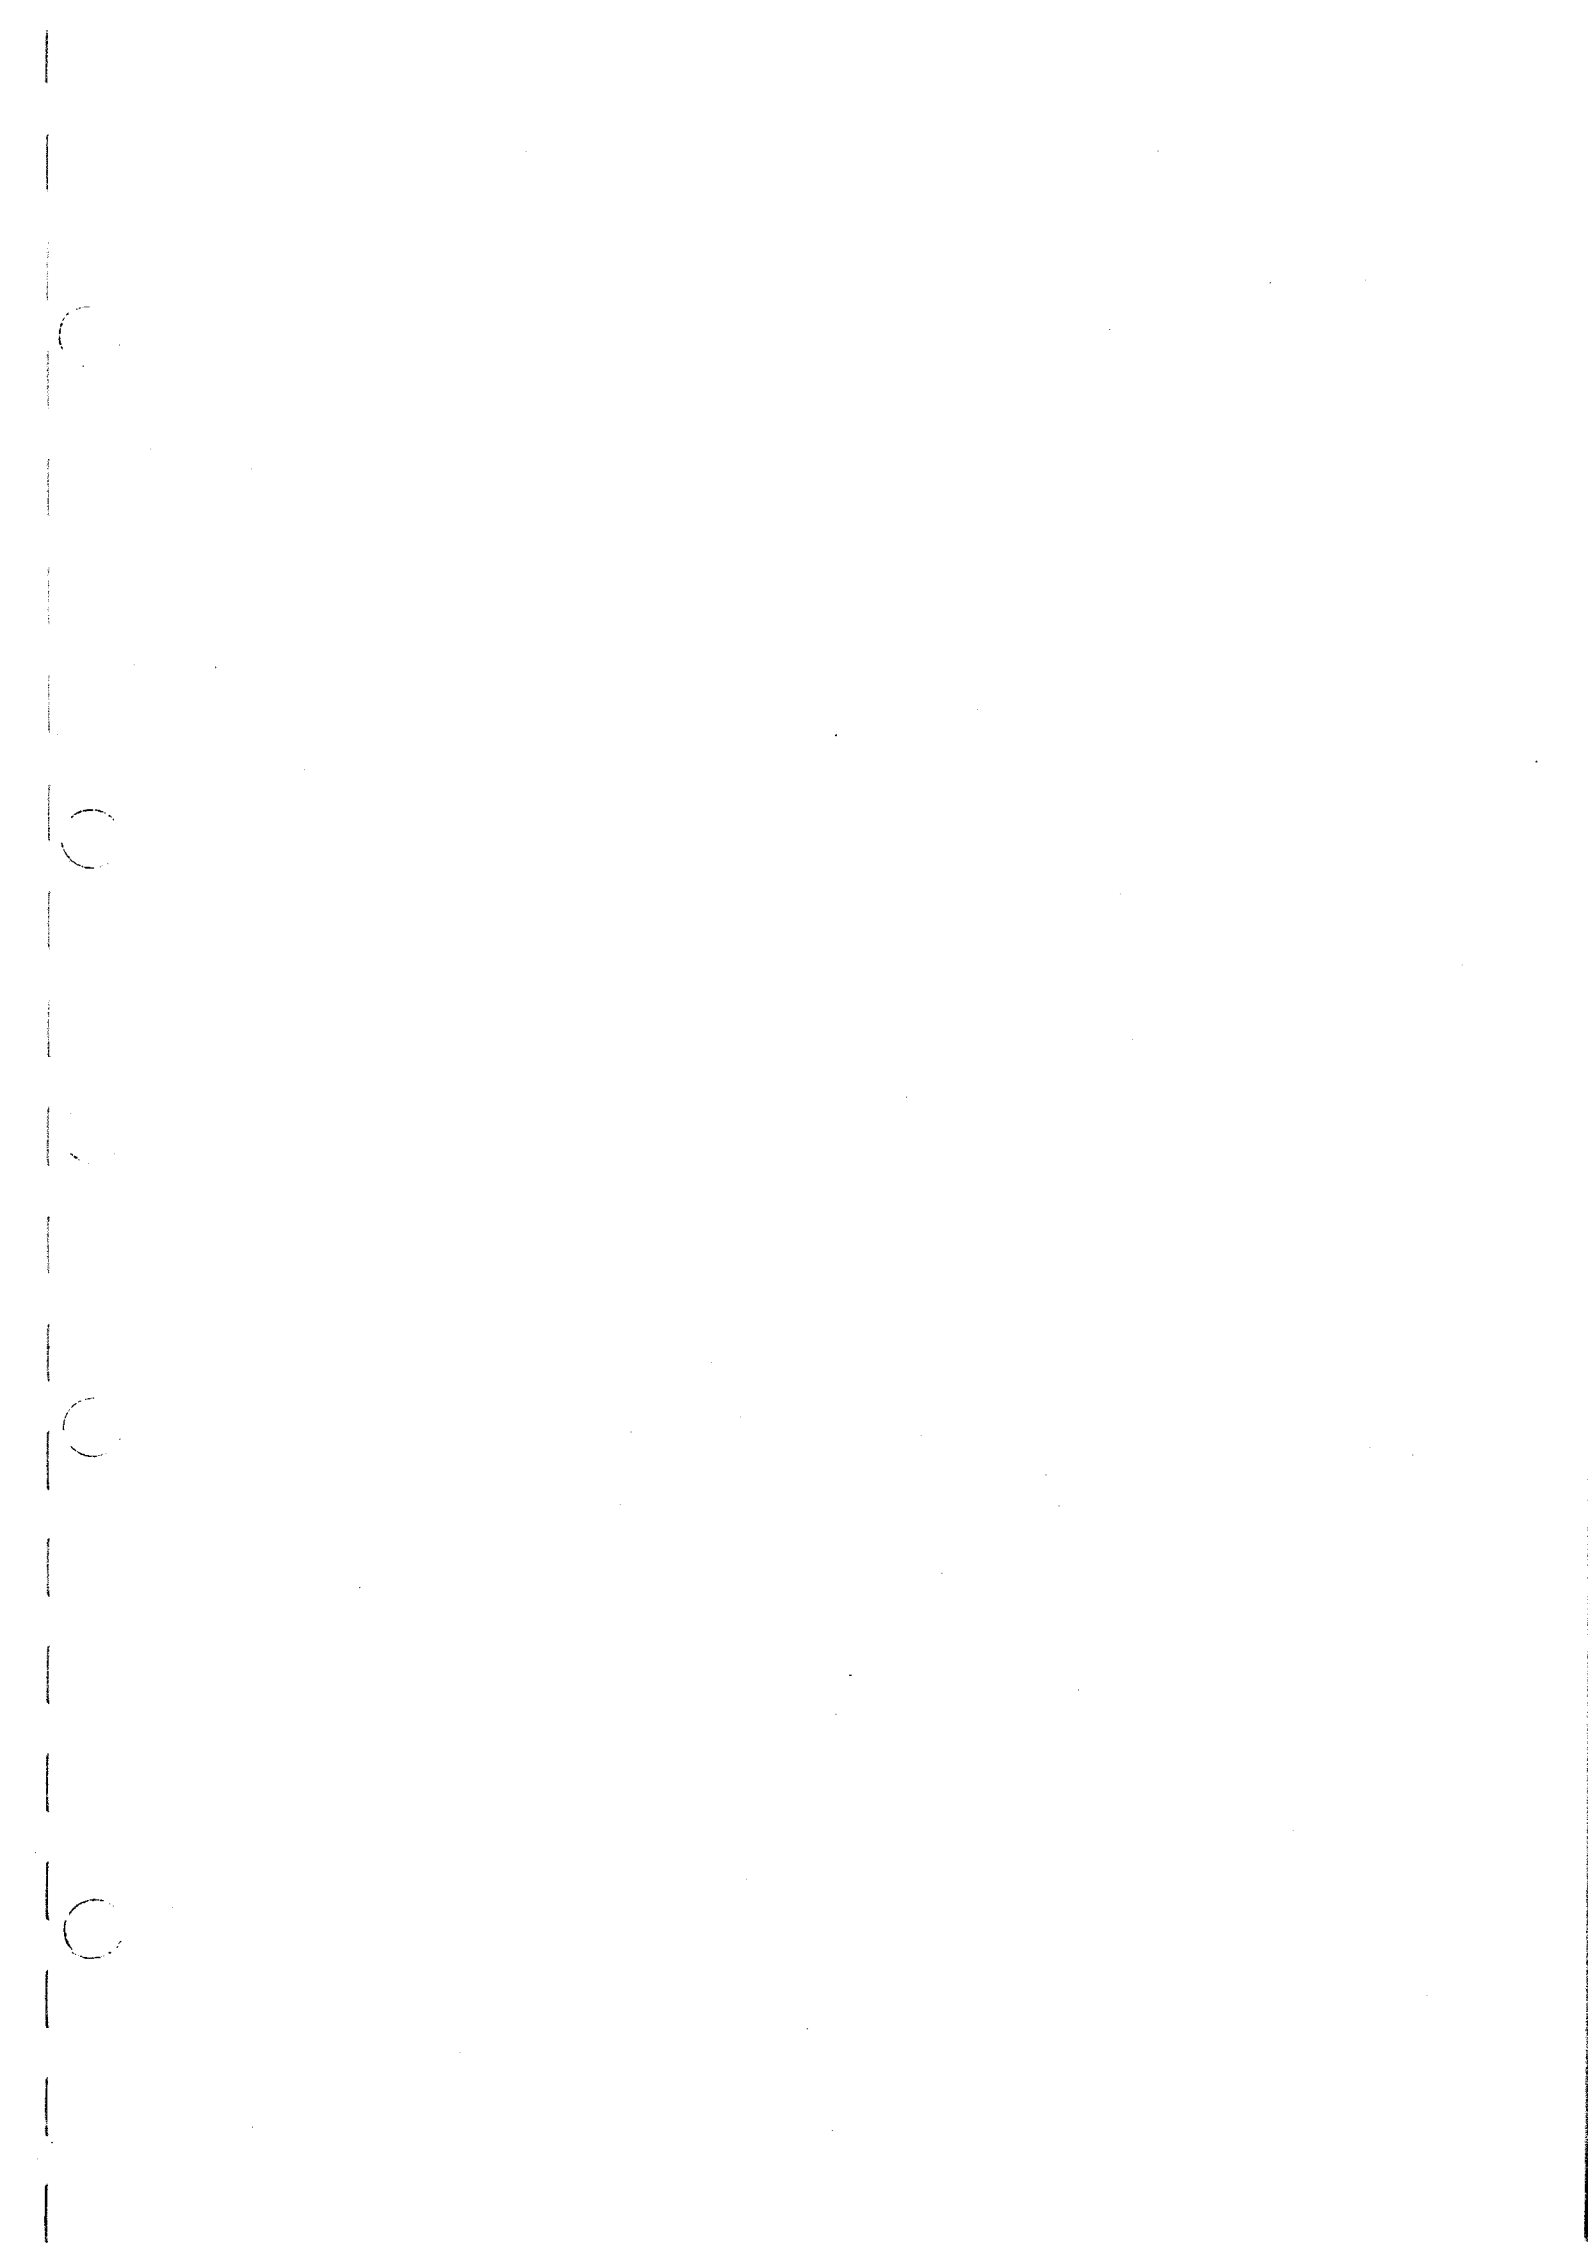


SECTION 15 BOARD LAYOUTS


BOARD LAYOUT INDEX

	Board	Page
A	AP-31	15-4
	AP-31A	15-6
	AR-14	15-8
C	CL-25	15-46
	CP-225	15-10
	CP-225A	15-12
	CP-226/226J	15-14
	CP-226A/226AJ	15-14
	CP-237	15-16
	CP-237A	15-16
D	DR-214	15-18
H	HP-61	15-46
	HP-61A	15-46
K	KY-249	15-20
	KY-249A	15-22
M	MB-470	15-52
	MB-470A	15-56
	MB-471	15-60
	MB-471A	15-62
	MS-39/39A	15-24
P	PC-62	15-46
	PD-35	15-46
	PTC-66	15-48
	PTC-67	15-48
	PTC-68	15-48
R	RM-126	15-48
	RM-127	15-48
	RP-70	15-26
	RP-70A	15-28
S	SE-207	15-48
	SOPS-1045 AC	15-50
	SOPS-1045 M	15-50
	SS-53	15-30
T	TBC-25	15-34
	TR-84	15-48
V	VP-43/43A	15-38
	VR-155	15-48
	VRA-5	15-42

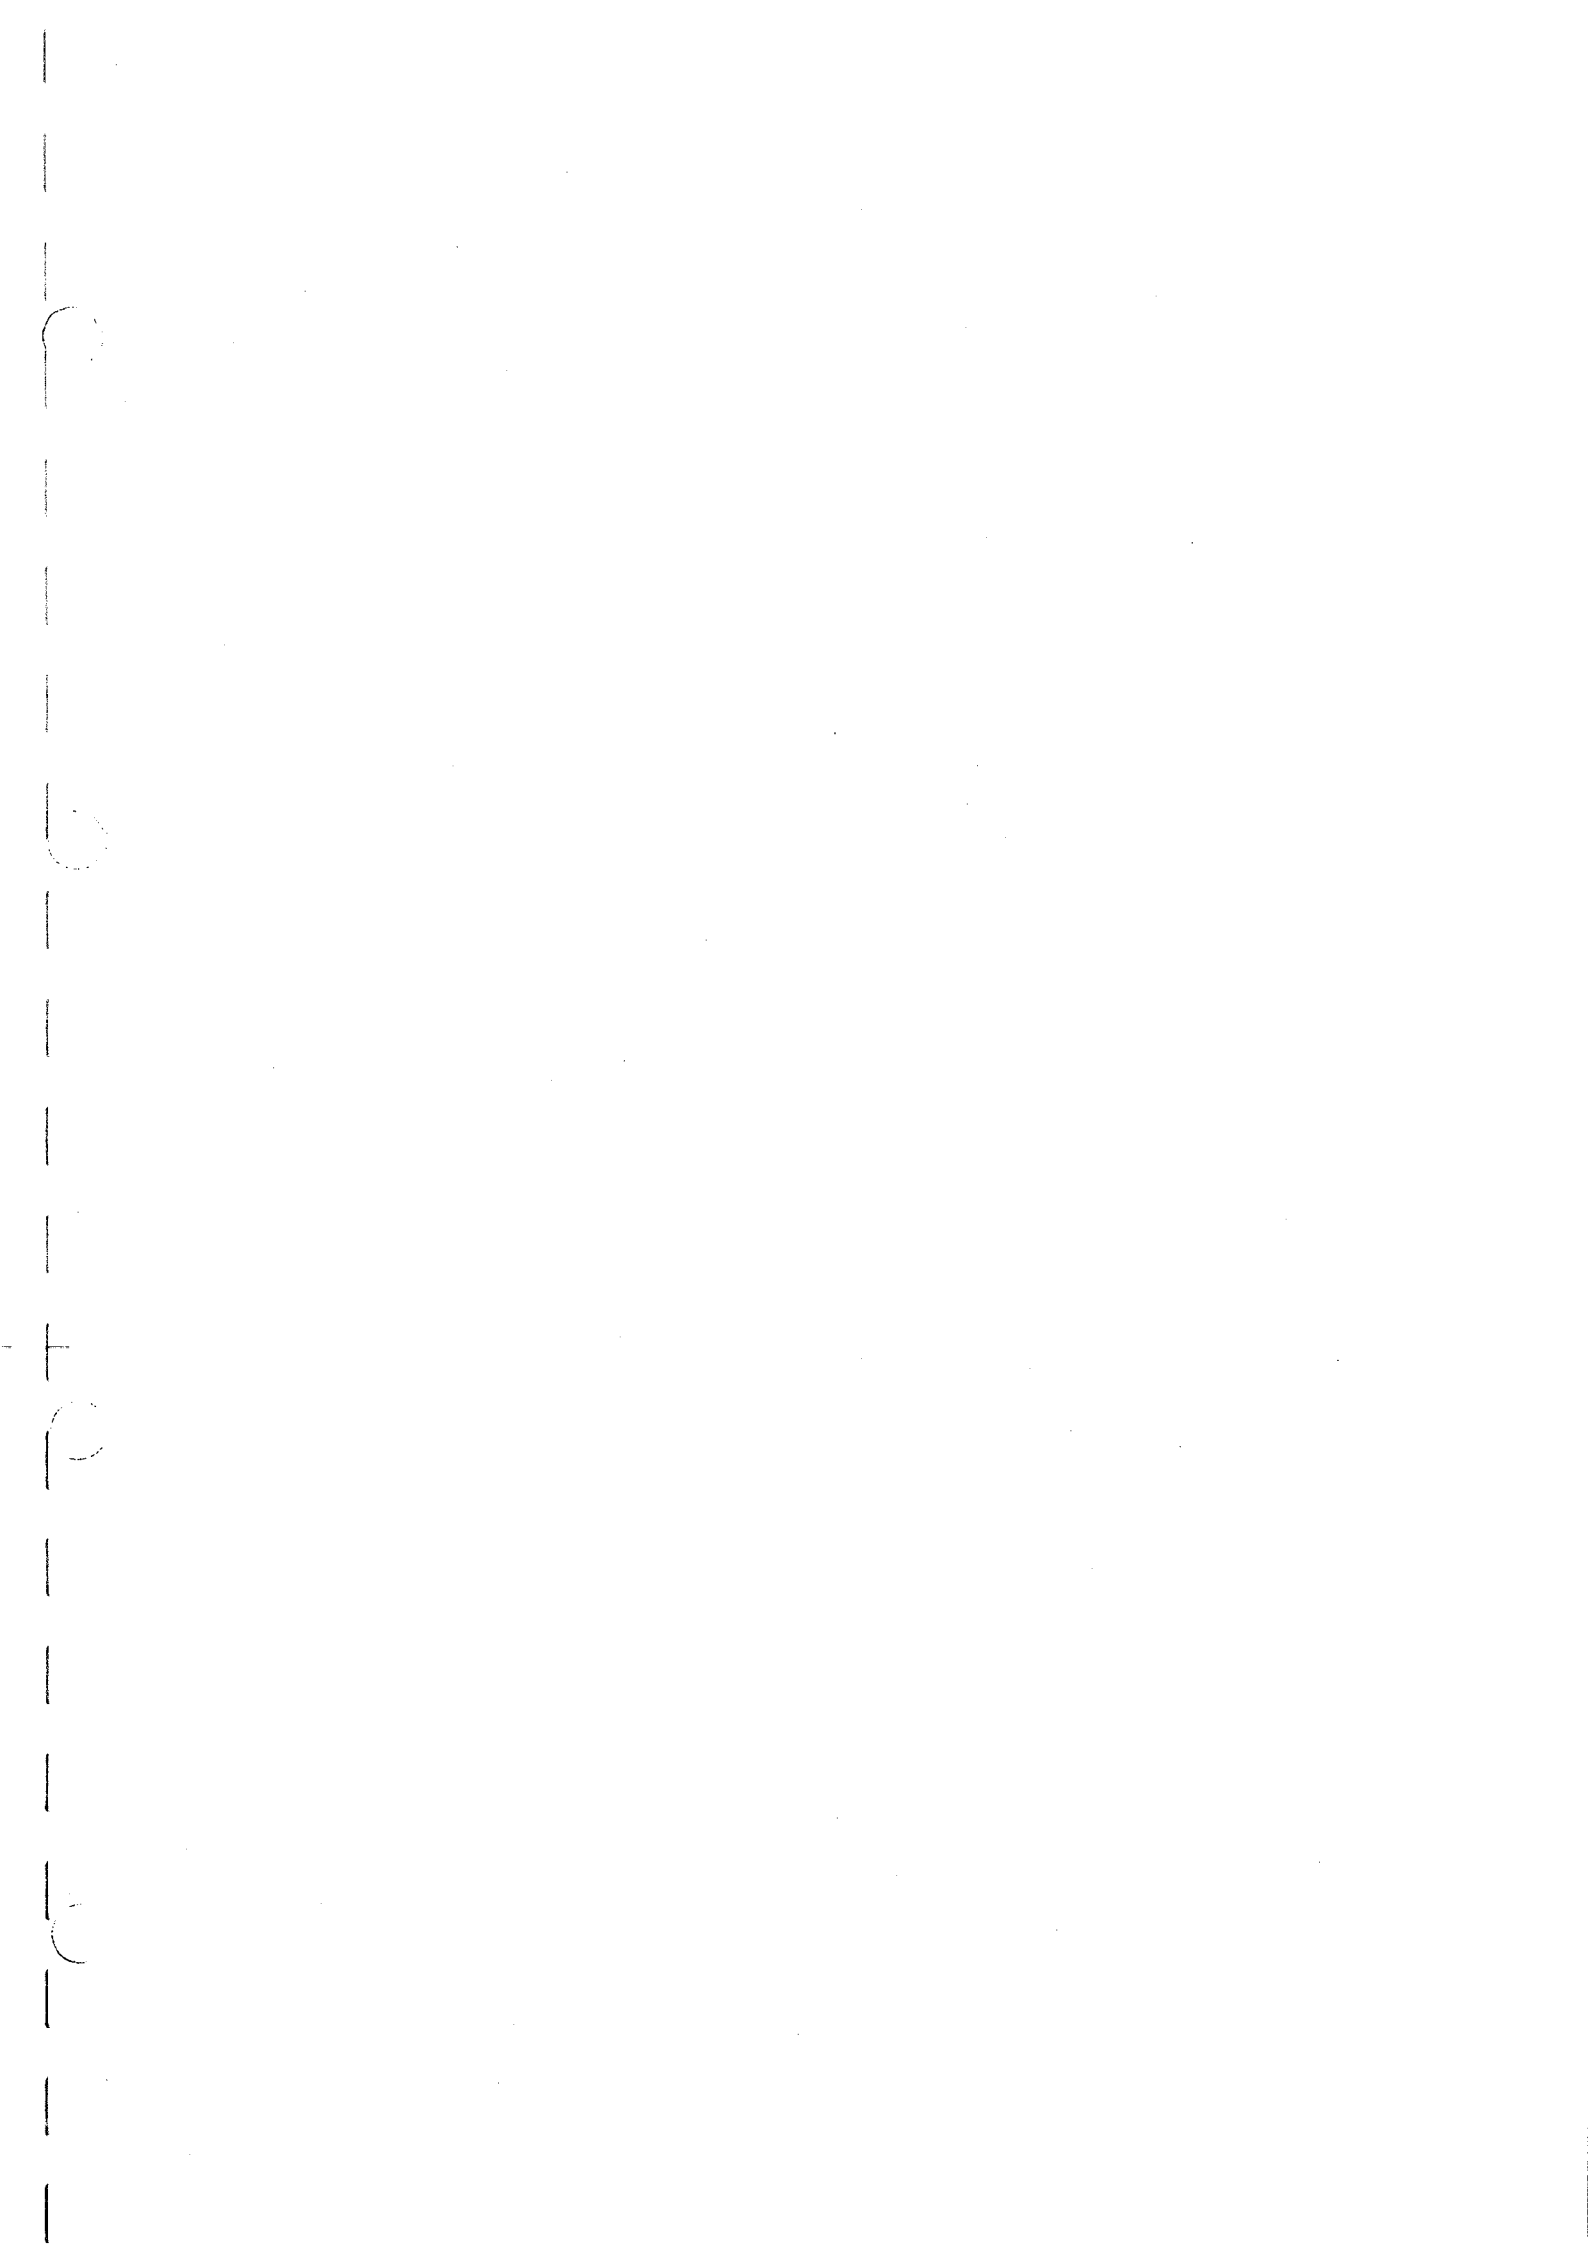


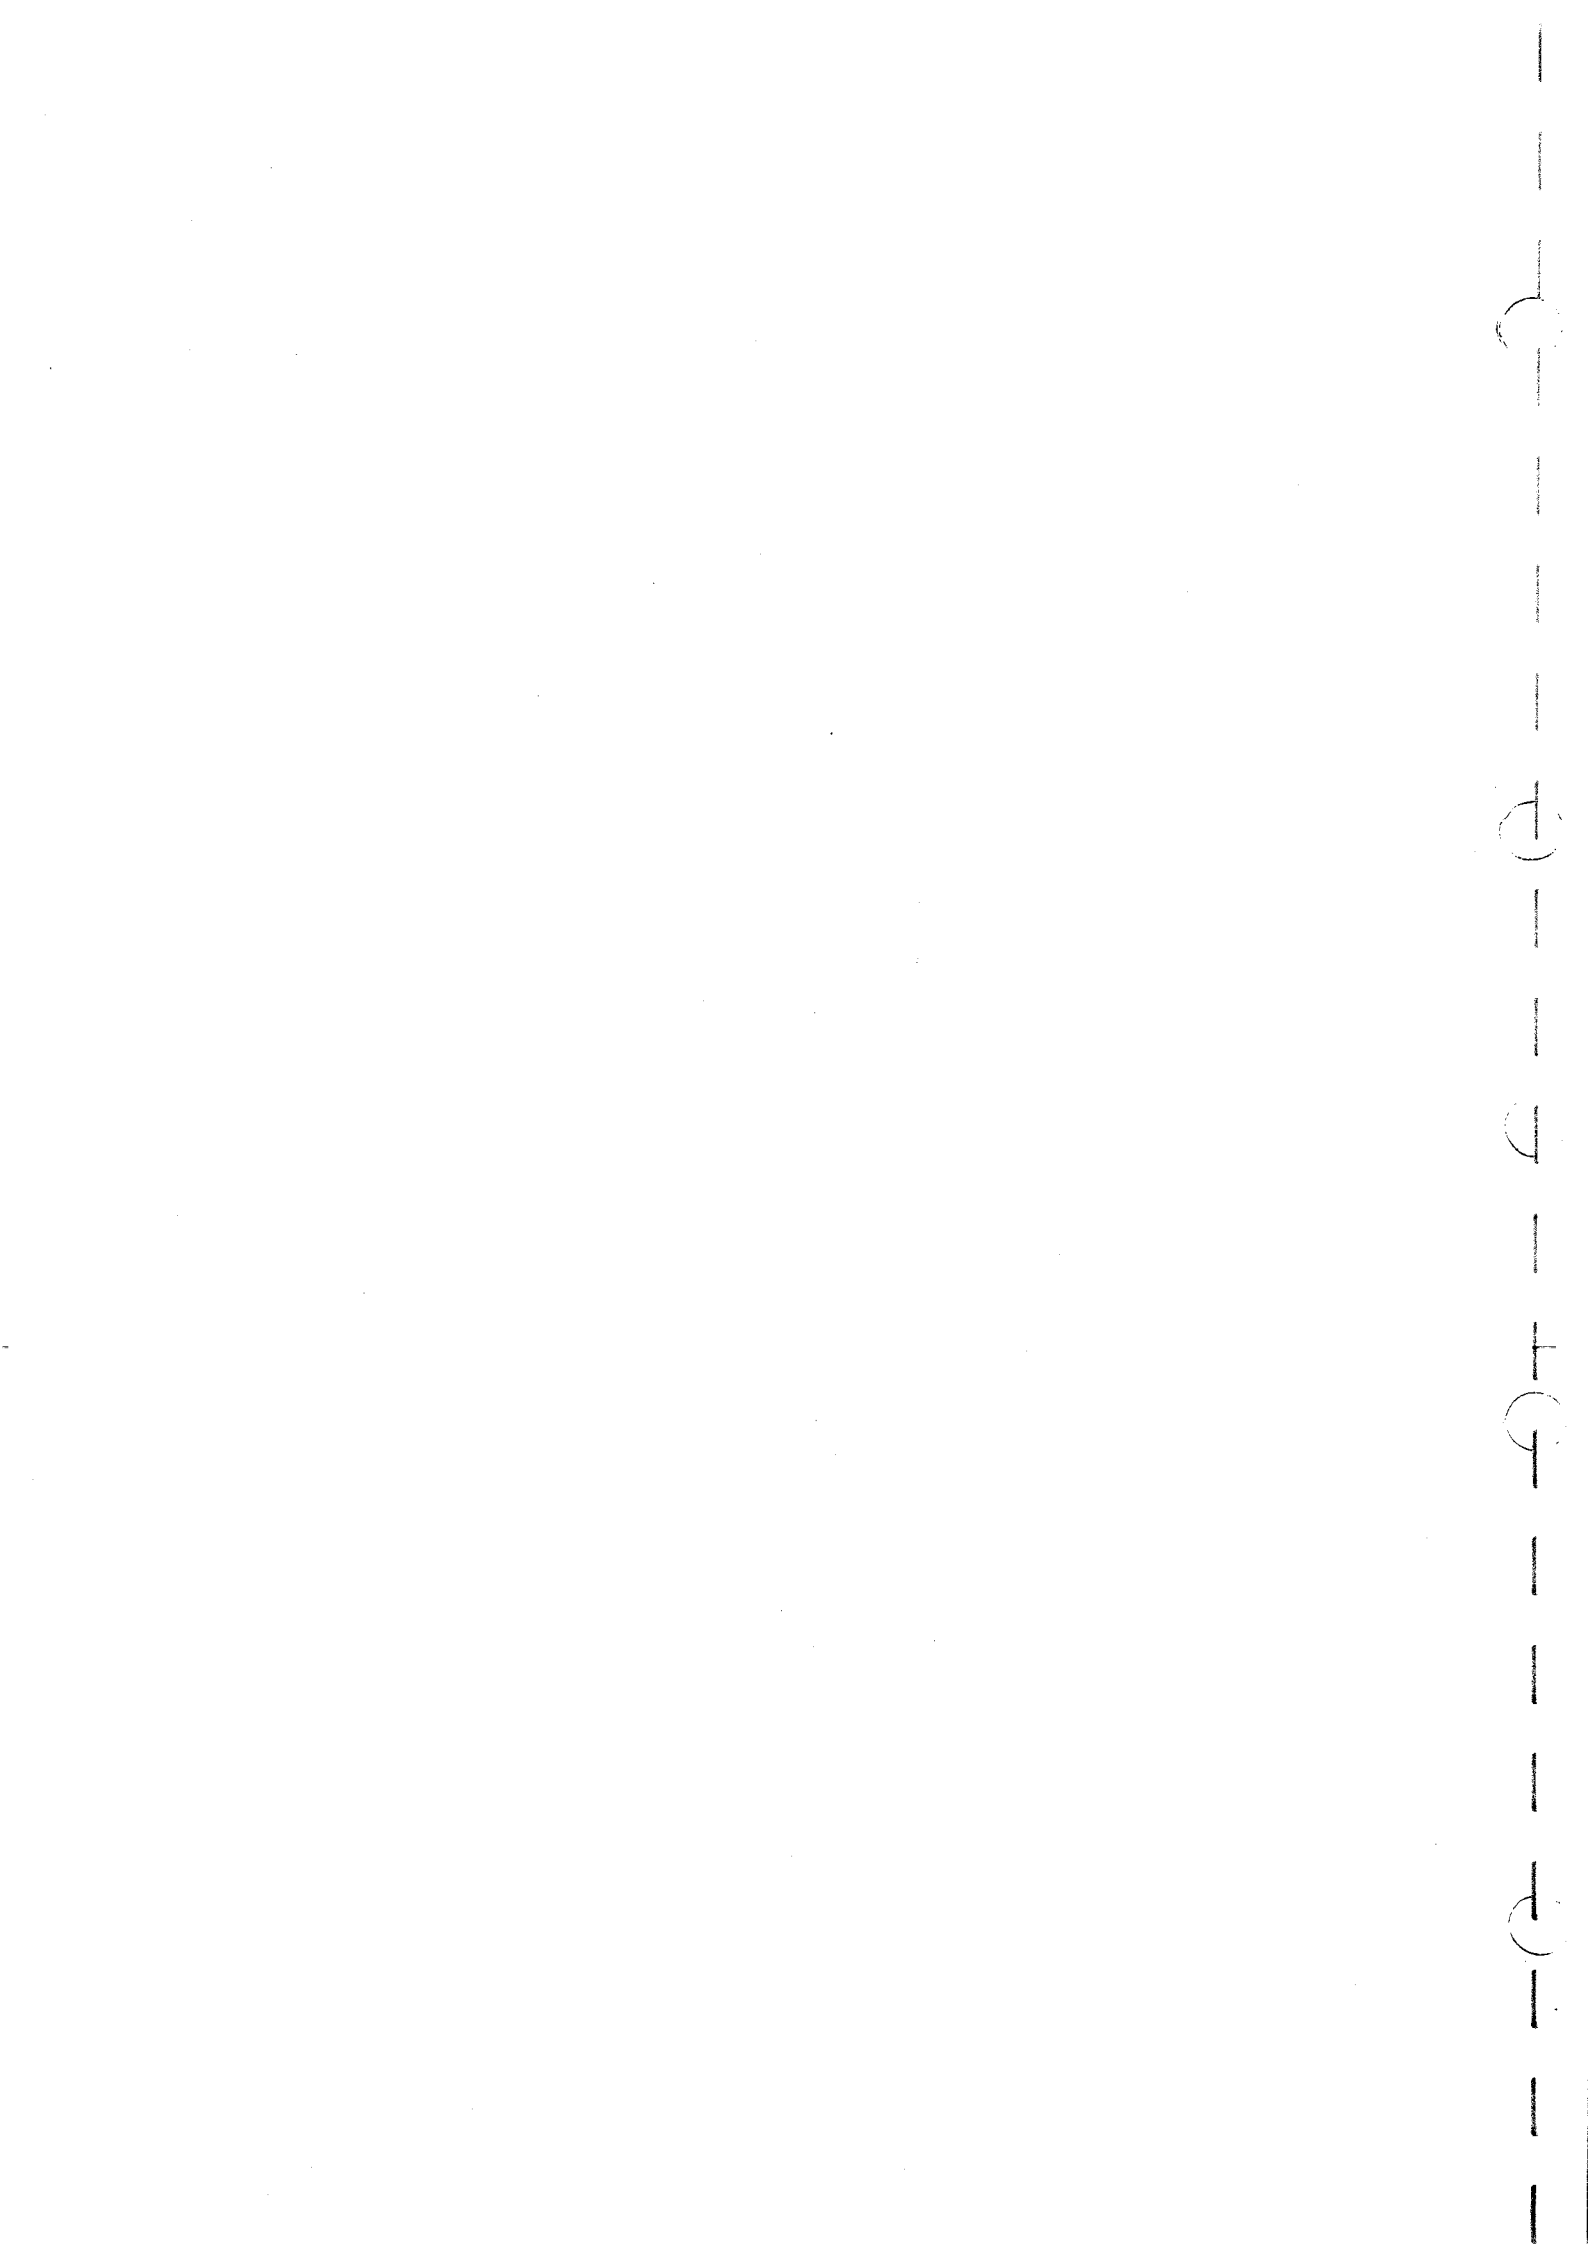

CIRCUIT FUNCTION

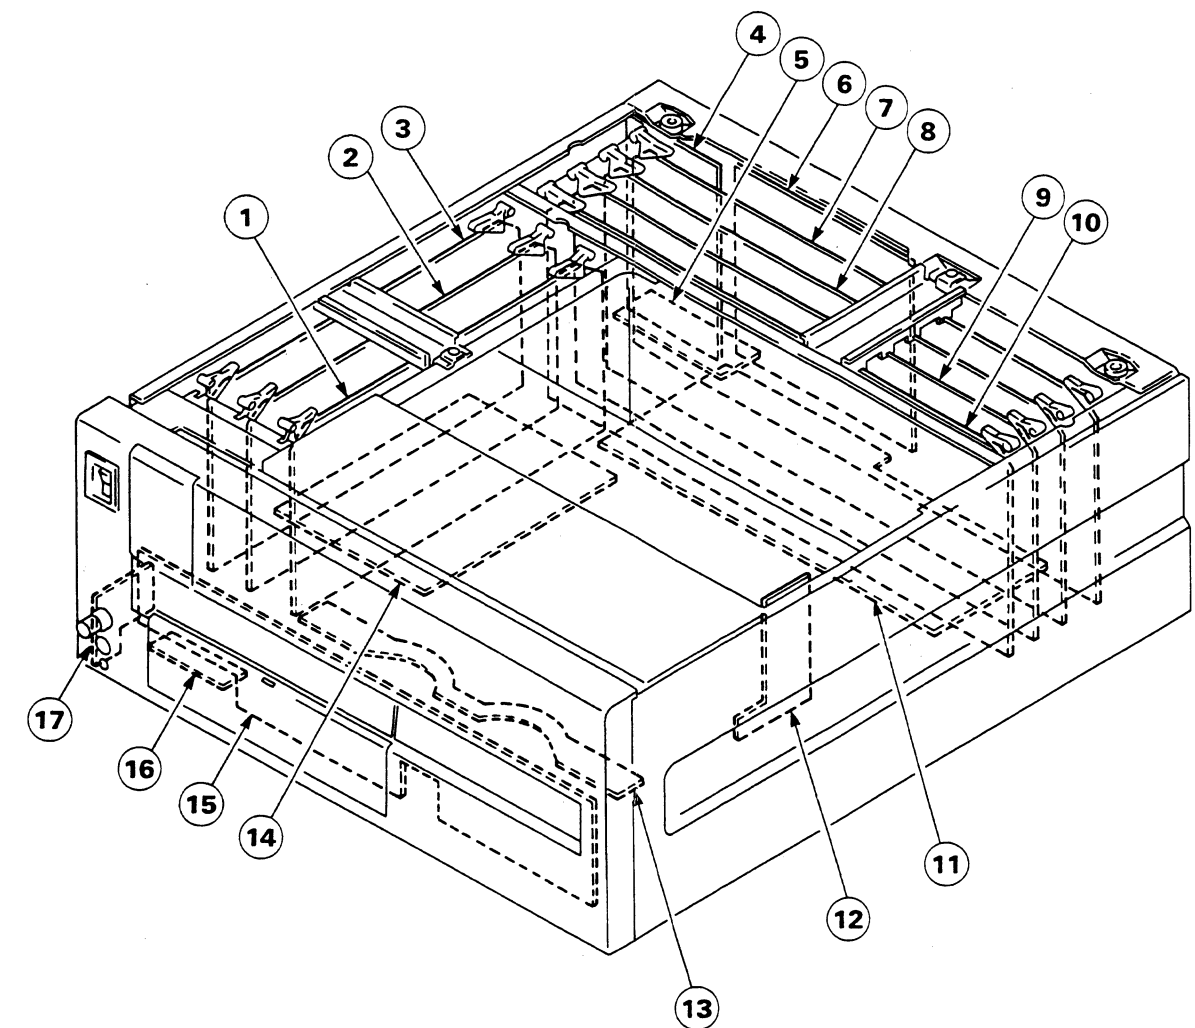



- | | |
|-----------------------------------|---|
| ① RP-70 BOARD(UVW-1800) | ; RF REC/PB AMP.,ROTARY ERASE OSC.,FULL ERASE OSC. |
| RP-70A BOARD(UVW-1600) | ; RF PB AMP. |
| ② AP-31 BOARD(UVW-1800) | ; AUDIO/TC PB AMP.,METER DRIVER |
| AP-31A BOARD(UVW-1600) | ; AUDIO/TC PB AMP.,METER DRIVER |
| ③ AR-14 BOARD(UVW-1800) | ; AUDIO/TC REC AMP.,AUDIO/TC ERASE OSC.,AUDIO BIAS DRIVER |
| ④ CP-226 BOARD(UVW-1800 : FOR UC) | ; AUDIO INPUT/OUTPUT CONNECTOR, OUTPUT TRANSFORMER |
| CP-226J BOARD(UVW-1800 : FOR J) | ; AUDIO INPUT/OUTPUT CONNECTOR, OUTPUT TRANSFORMER |
| CP-226A BOARD(UVW-1600 : FOR UC) | ; AUDIO OUTPUT CONNECTOR,OUTPUT TRANSFORMER |
| CP-226AJ BOARD(UVW-1600 : FOR J) | ; AUDIO OUTPUT CONNECTOR,OUTPUT TRANSFORMER |
| ⑤ CP-237 BOARD(UVW-1800) | ; TBC/9P REMOTE CONNECTOR |
| CP-237A BOARD(UVW-1600) | ; TBC/9P REMOTE CONNECTOR |
| ⑥ CP-225 BOARD(UVW-1800) | ; VIDEO INPUT/OUTPUT CONNECTOR |
| CP-225A BOARD(UVW-1600) | ; VIDEO OUTPUT CONNECTOR |
| ⑦ VRA-5 BOARD(UVW-1800) | ; Y/C REC PROCESS(DECODE,MOD),CTDM(COMPAND) |

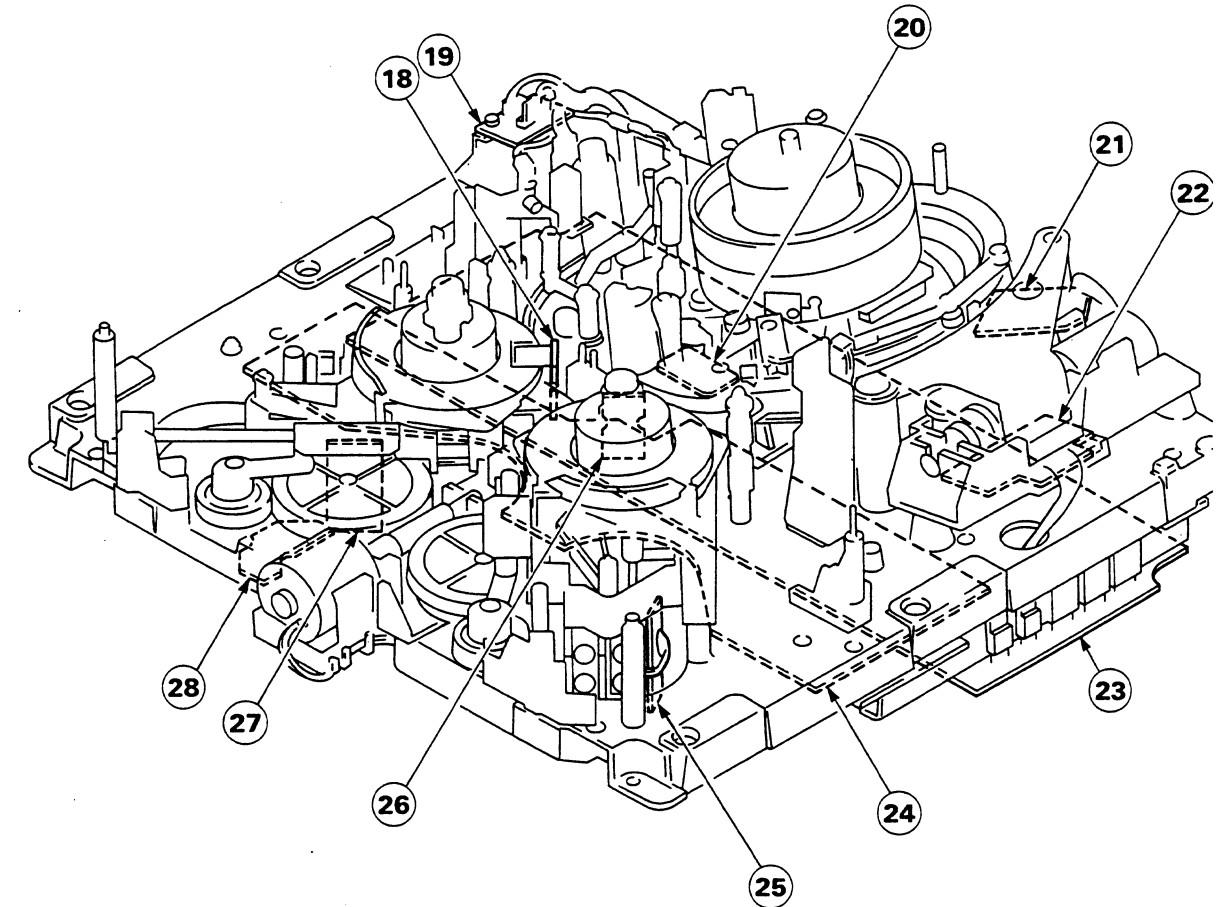

- | | |
|--------------------------------------|--|
| ⑧ VP-43 BOARD(UVW-1800) | ; Y/C PB PROCESS(PB RF EQ, DEMOD., Y-RF ENVELOPE DET), VIDEO OUTPUT DRIVER, ENCODE, SYNC/CHARA MIX |
| VP-43A BOARD(UVW-1600) | ; Y/C PB PROCESS(PB RF EQ, DEMOD., Y-RF ENVELOPE DET), VIDEO OUTPUT DRIVER, ENCODE, SYNC/CHARA MIX |
| ⑨ TBC-25 BOARD | ; TIME BASE CORRECTOR, CTDM(EXPAND) |
| ⑩ SS-53 BOARD | ; SYSTEM CONTROL, SERVO SYSTEM MAIN, TIME CODE GENERATOR/READER, CHARACTER GENERATOR |
| ⑪ MB-470 BOARD(UVW-1800) | ; MOTHER BOARD |
| MB-470A BOARD(UVW-1600) | ; MOTHER BOARD |
| ⑫ CL-25 BOARD (CASSETTE COMPARTMENT) | ; CASSETTE LOADING BEGIN/NEAR-END SENSOR |
| ⑬ PC-62 BOARD(UVW-1800) | ; CASSETTE IN/LARGE CASSETTE SENSOR |
| ⑭ MB-471 BOARD(UVW-1800) | ; MOTHER BOARD |
| MB-471A BOARD(UVW-1600) | ; MOTHER BOARD |
| ⑮ KY-249 BOARD(UVW-1800) | ; FUNCTION KEY |
| KY-249A BOARD(UVW-1600) | ; FUNCTION KEY |
| ⑯ VR-155 BOARD (UVW-1800) | ; AUDIO REC LEVEL |
| ⑰ HP-61 BOARD(UVW-1800) | ; HEADPHONES JACK/VOLUME CONTROL |
| HP-61A BOARD(UVW-1600) | ; HEADPHONES JACK/VOLUME CONTROL |


- | | |
|-------------------------|---|
| ⑱ SE-207 BOARD(S SIDE) | ; REEL FG |
| ⑲ PD-35 BOARD | ; PINCH SOLENOID |
| ⑳ TR-84 BOARD | ; S-TENSION SENSOR |
| ㉑ PTC-68 BOARD | ; THREAD END/UNTHREAD END SENSOR |
| ㉒ PTC-67 BOARD | ; THREADING FG/MOTOR |
| ㉓ DR-214 BOARD | ; MOTOR DRIVER, TENSION SENS. AMP., DRUM FG/PG AMP., CAPSTAN FG AMP., C REC/PB AMP. |
| ㉔ MS-39 BOARD(UVW-1800) | ; CASSETTE INFORMATION, SOLENOID DRIVER, MECHA. CONTROL MPU, DATA STORAGE |
| MS-39A BOARD(UVW-1600) | ; CASSETTE INFORMATION, SOLENOID DRIVER, MECHA. CONTROL MPU, DATA STORAGE |
| ㉕ RM-127 BOARD | ; T-REEL MOTOR |
| ㉖ SE-207 BOARD(T SIDE) | ; REEL FG |
| ㉗ RM-126 BOARD | ; S-REEL MOTOR |
| ㉘ PTC-66 BOARD | ; REEL POSITION SENSOR |

AP-31 ; AUDIO/TC PB AMP., METER DRIVER

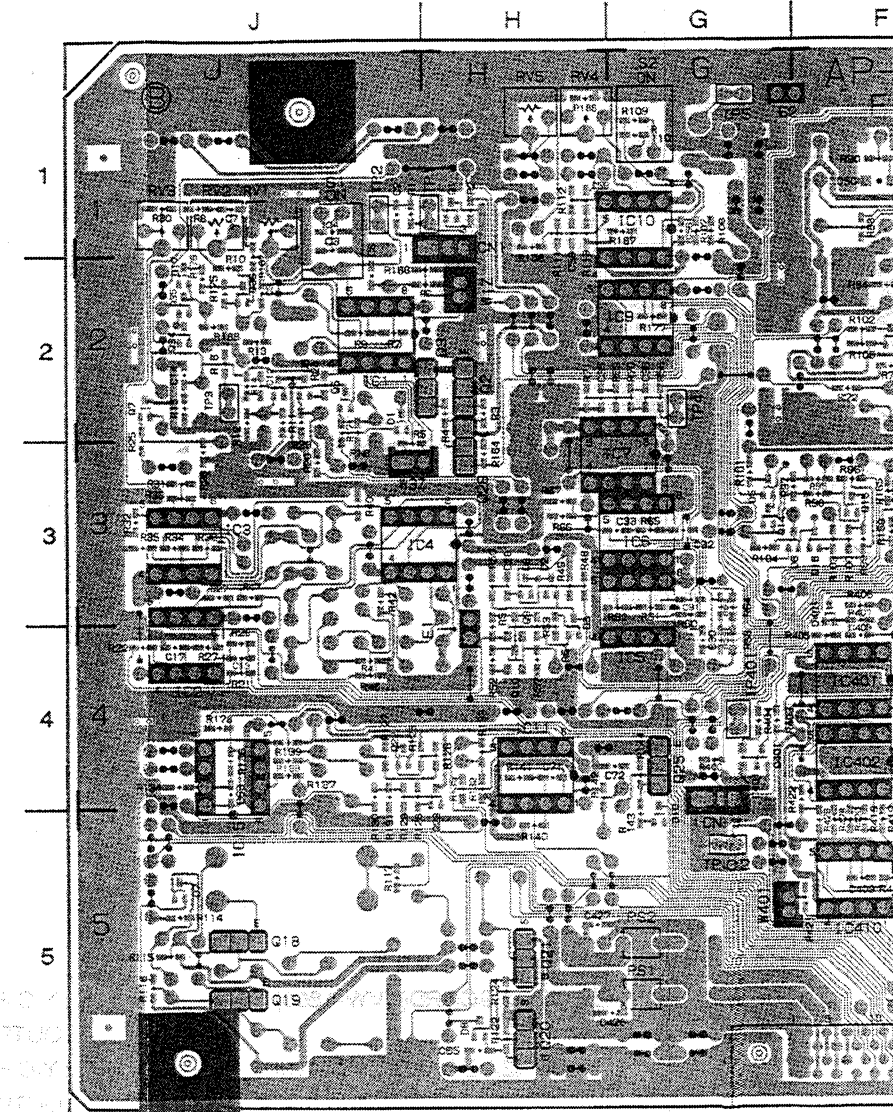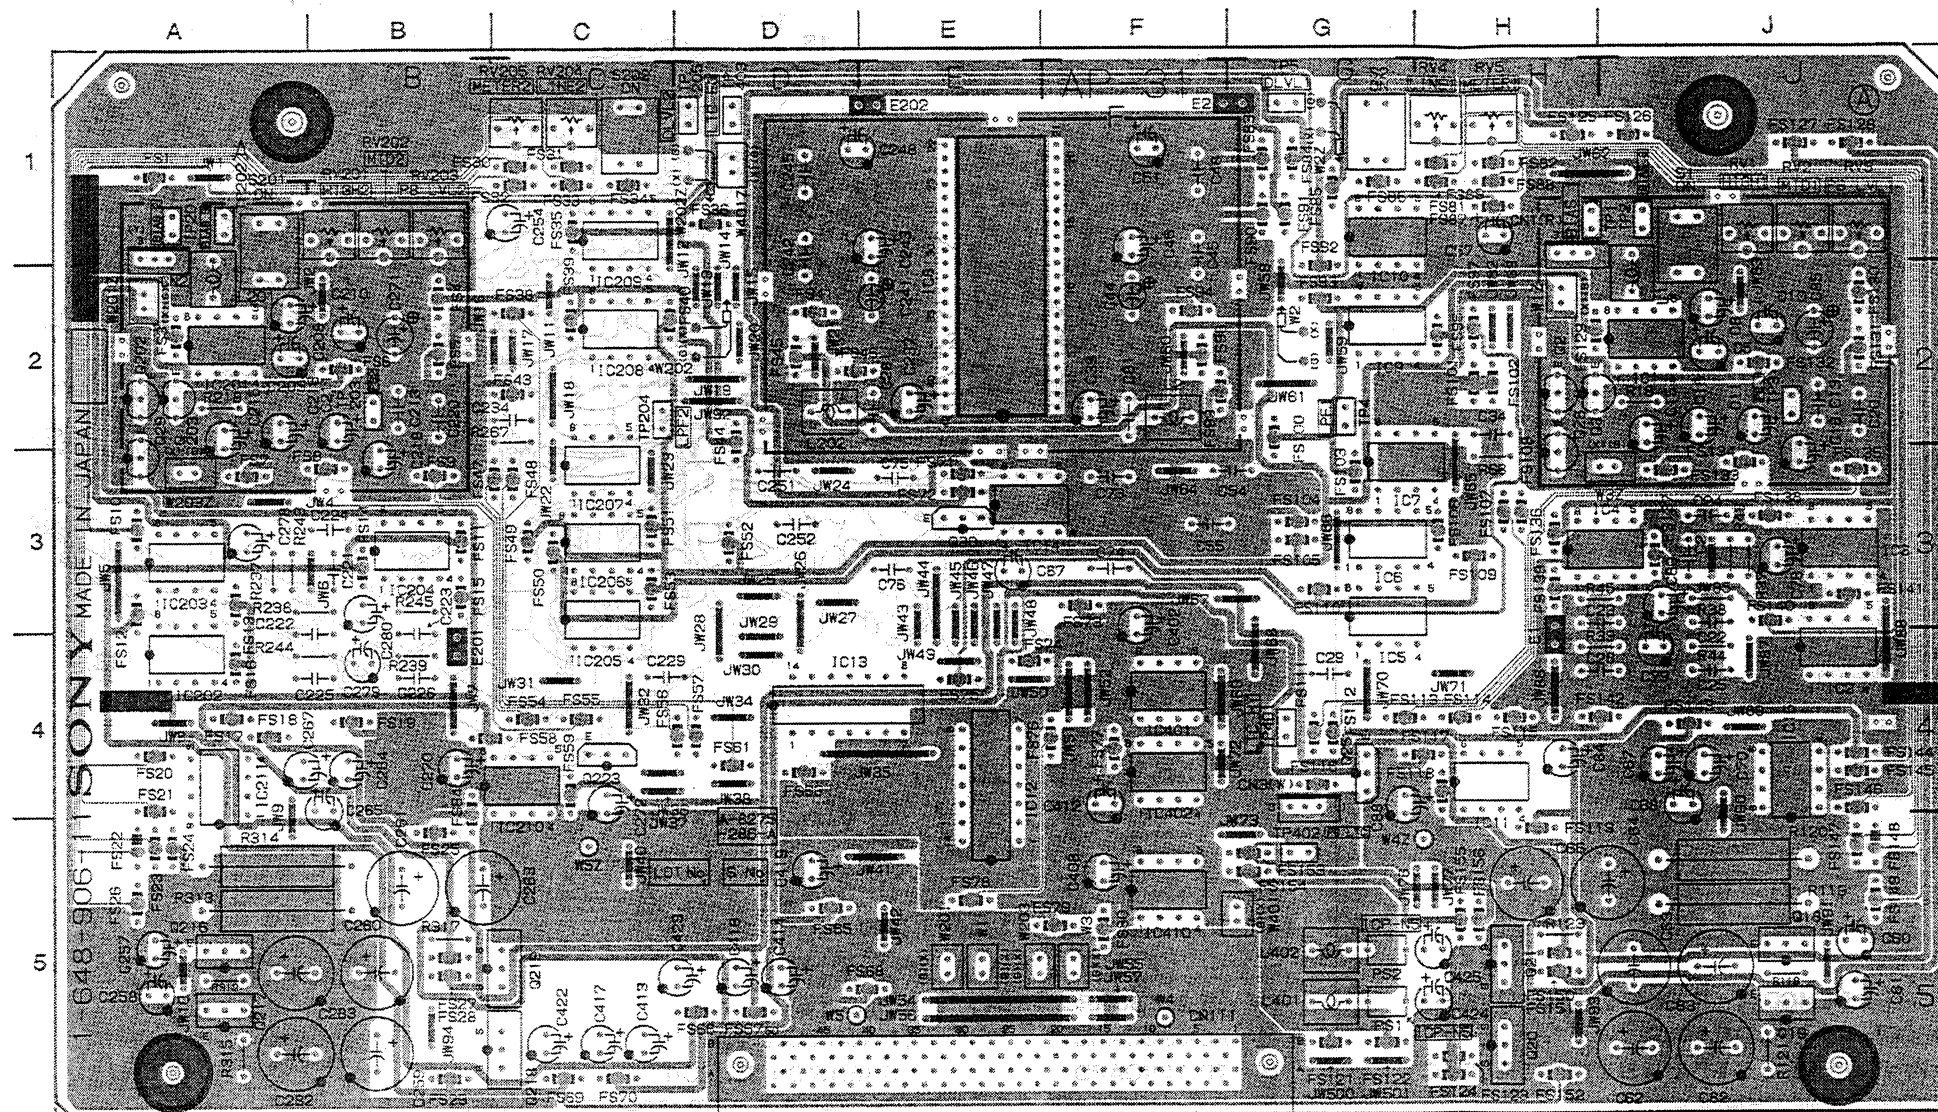

AP-31 1-648-906-11 A SIDE

AP-31 1-648-906-11 B SIDE

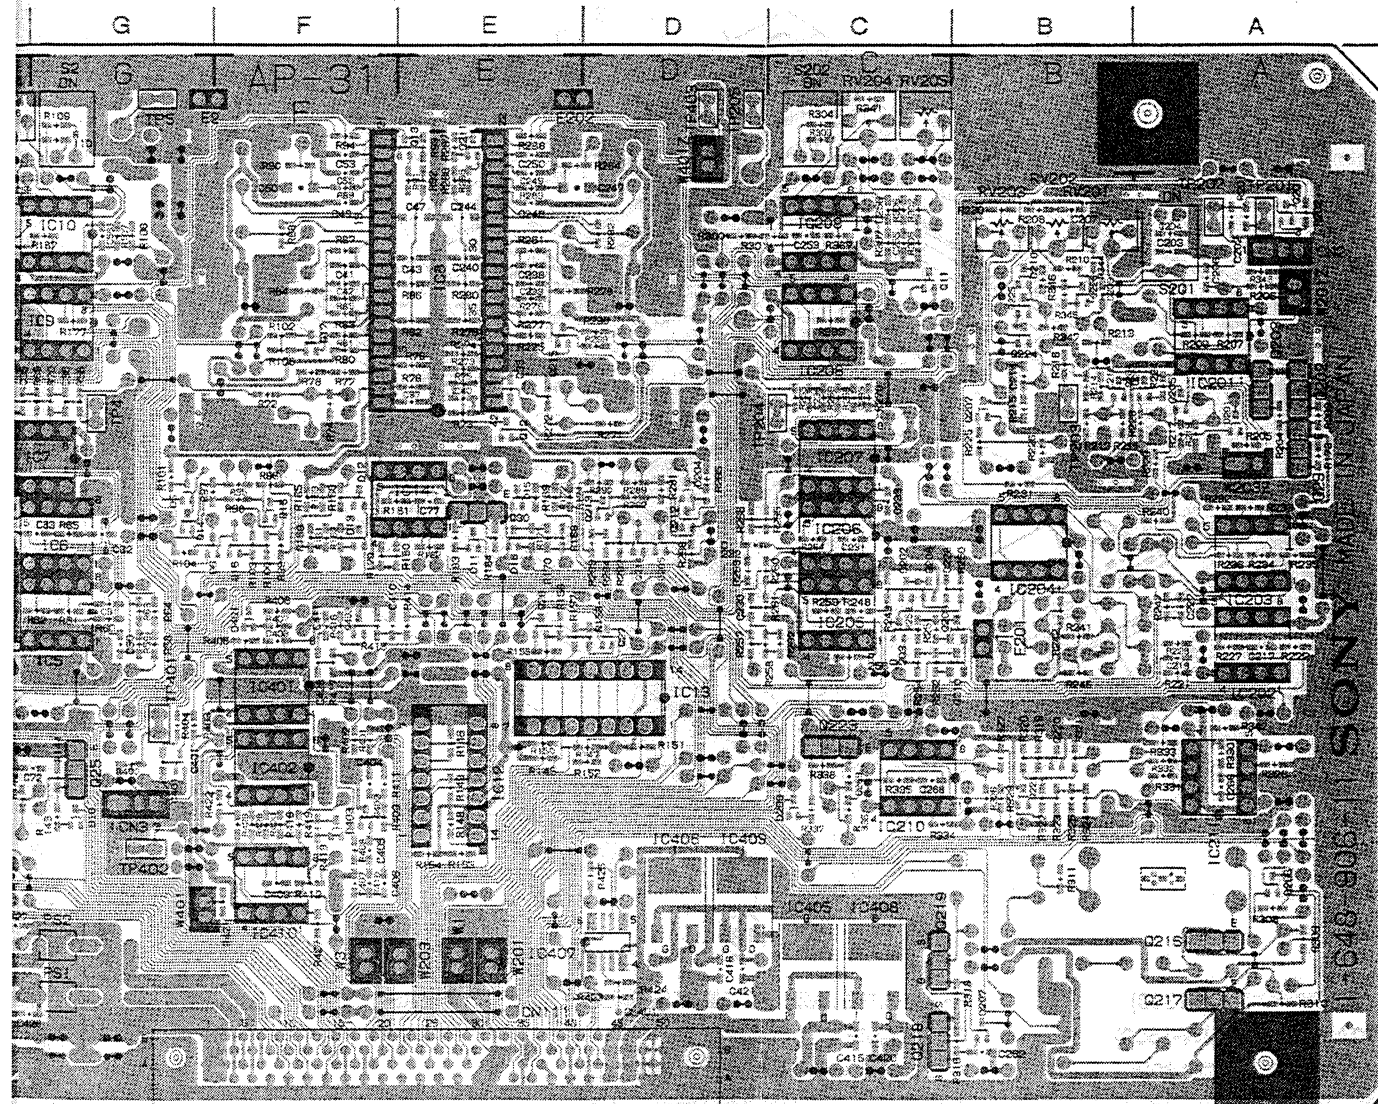


AP-31 1-648-906-11 B SIDE

AP-31(1-648-906-11)


CN1	H-1	FS84	B-4	FS149	J-5	RV1	J-1
CN2	A-1	FS65	D-5	FS150	H-5	RV2	J-1
CN3	G-4	FS66	D-5	FS151	H-5	RV3	J-1
CN111	E-5	FS67	D-5	FS152	H-5	RV4	H-1
		FS68	E-5	FS153	G-5	RV5	H-1
*D1	J-2	FS69	C-5	FS154	G-5	RV201	B-1
*D7	J-5	FS70	C-5	FS155	H-5	RV202	B-1
*D8	H-5	FS71	E-3	FS156	H-5	RV203	B-1
*D10	G-5	FS72	E-3			RV204	C-1
*D11	E-3	FS73	F-3	IC1	J-2	RV205	C-1
*D201	A-2	FS74	E-4	IC2	J-4		
*D206	A-5	FS75	E-4	IC3	J-3	S1	J-1
*D207	B-5	FS77	F-4	IC4	H-3	S2	G-1
*D209	C-4	FS79	F-5	IC5	G-4	S201	A-1
*D401	F-3	FS80	F-5	IC6	G-3	S202	C-1
*D403	F-5	FS81	H-1	IC7	G-3		
		FS82	H-1	IC8	F-2	*TH1	J-2
E1	H-4	FS83	G-1	IC9	G-2	*TH2	B-2
E2	G-1	FS84	G-1	IC10	G-2		
E201	B-4	FS85	G-1	IC11	H-4	TP3	J-2
E202	E-1	FS86	G-1	IC12	E-5	TP4	G-2
		FS87	H-1	IC13	D-4	TP5	G-1
FS1	A-1	FS88	H-1	IC14	E-3	TP203	B-2
FS3	A-2	FS89	H-1	IC15	J-4	TP204	C-2
FS5	B-2	FS90	G-1	IC201	A-2	TP205	D-1
FS6	B-2	FS91	G-1	IC202	A-4	TP402	G-5
FS7	A-3	FS92	G-2	IC203	A-3	TP403	D-1
FS9	B-3	FS93	G-2	IC204	B-3		
FS10	A-3	FS94	F-2	IC205	C-4		
FS11	B-3	FS96	H-2	IC206	C-3		
FS12	A-3	FS97	H-2	IC207	C-3		
FS13	A-3	FS98	F-2	IC208	C-2		
FS14	B-3	FS99	F-2	IC209	C-2		
FS15	B-3	FS100	G-2	IC210	C-4		
FS16	A-4	FS101	H-2	IC211	A-4		
FS17	A-4	FS102	H-2	IC401	F-4		
FS18	A-4	FS103	G-3	IC402	F-4		
FS19	B-4	FS106	H-3	*IC405	C-5		
FS20	A-4	FS107	H-3	*IC406	D-5		
FS21	A-4	FS108	H-3	*IC407	D-5		
FS22	A-5	FS109	H-3	*IC408	C-5		
FS23	A-5	FS110	G-3	*IC409	D-5		
FS24	A-5	FS111	G-4	IC410	F-5		
FS25	B-5	FS112	G-4				
FS26	A-5	FS114	H-4	PS1	G-5		
FS27	B-5	FS115	H-4	PS2	G-5		
FS28	B-5	FS116	G-4				
FS29	B-5	FS117	H-4	*Q5	J-2		
FS30	C-1	FS118	H-4	*Q6	J-2		
FS31	C-1	FS119	H-5	*Q7	J-2		
FS32	C-1	FS121	G-5	*Q9	H-4		
FS33	C-1	FS122	G-5	*Q11	C-2		
FS34	C-1	FS123	H-5	*Q12	E-2		
FS35	C-1	FS124	H-5	*Q13	E-1		
FS36	D-1	FS125	H-1	Q18	J-5		
FS38	C-2	FS126	J-1	Q19	J-5		
FS39	C-2	FS127	J-1	Q20	H-5		
FS40	C-2	FS128	J-1	Q21	H-5		
FS41	D-2	FS129	H-2	*Q22	J-4		
FS43	C-2	FS131	J-2	*Q23	H-4		
FS44	D-2	FS132	J-2	Q25	G-4		
FS45	D-2	FS133	J-3	Q30	E-3		
FS46	D-2	FS135	J-3	*Q205	A-2		
FS47	C-3	FS136	H-3	*Q206	A-2		
FS48	C-3	FS137	J-3	*Q207	B-2		
FS49	C-3	FS138	J-3	*Q209	B-4		
FS50	C-3	FS139	H-3	*Q211	E-1		
FS51	C-3	FS140	J-3	Q216	A-5		
FS53	C-3	FS141	J-3	Q217	A-5		
FS54	C-4	FS142	J-4	Q218	C-5		
FS56	D-4	FS143	J-4	Q219	C-5		
FS57	D-4	FS144	J-4	*Q220	B-4		
FS58	C-4	FS145	J-4	*Q221	B-4		
FS59	C-4	FS146	J-4	Q223	C-4		
FS61	D-4	FS147	J-5	*Q403	F-3		
FS63	D-4	FS148	J-5				


*: B SIDE

AP-31A; AUDIO/TC PB AMP., METER DRIVER

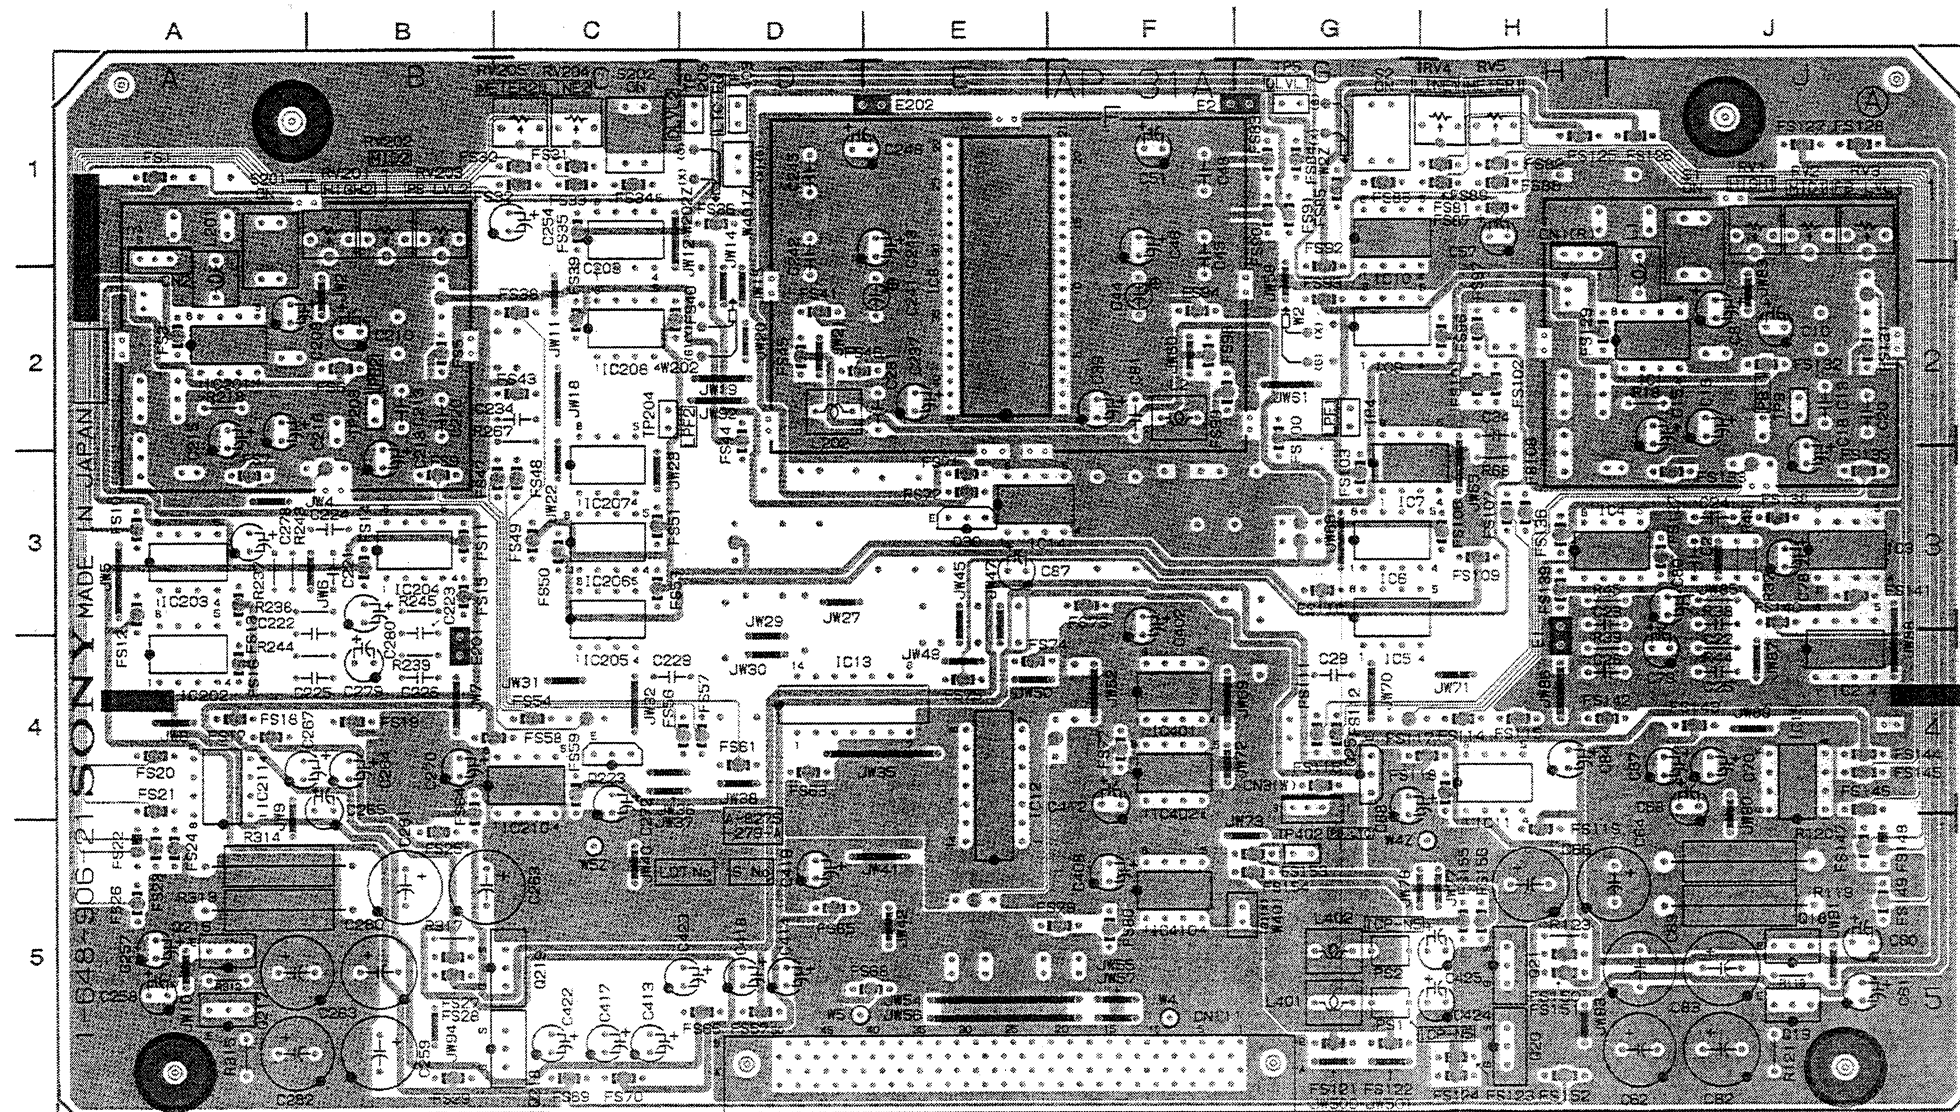

AP-31A 1-648-906-21 A SIDE

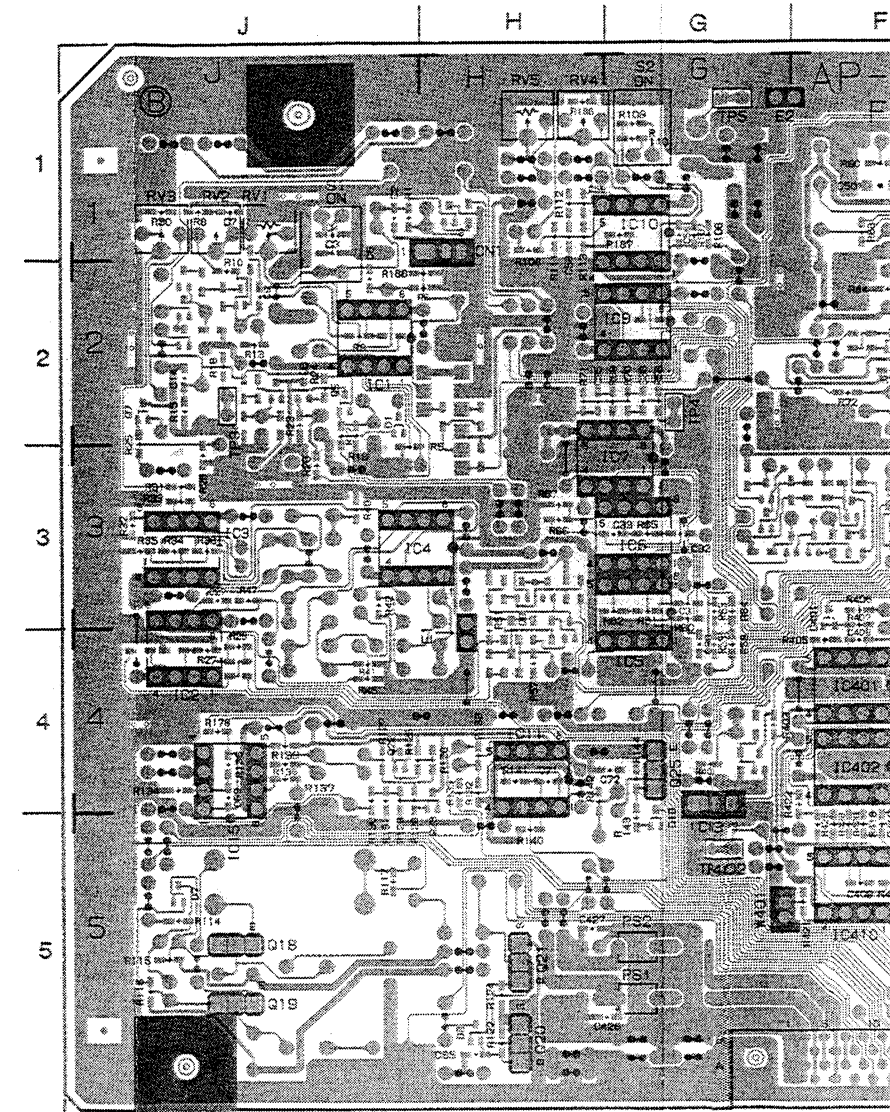

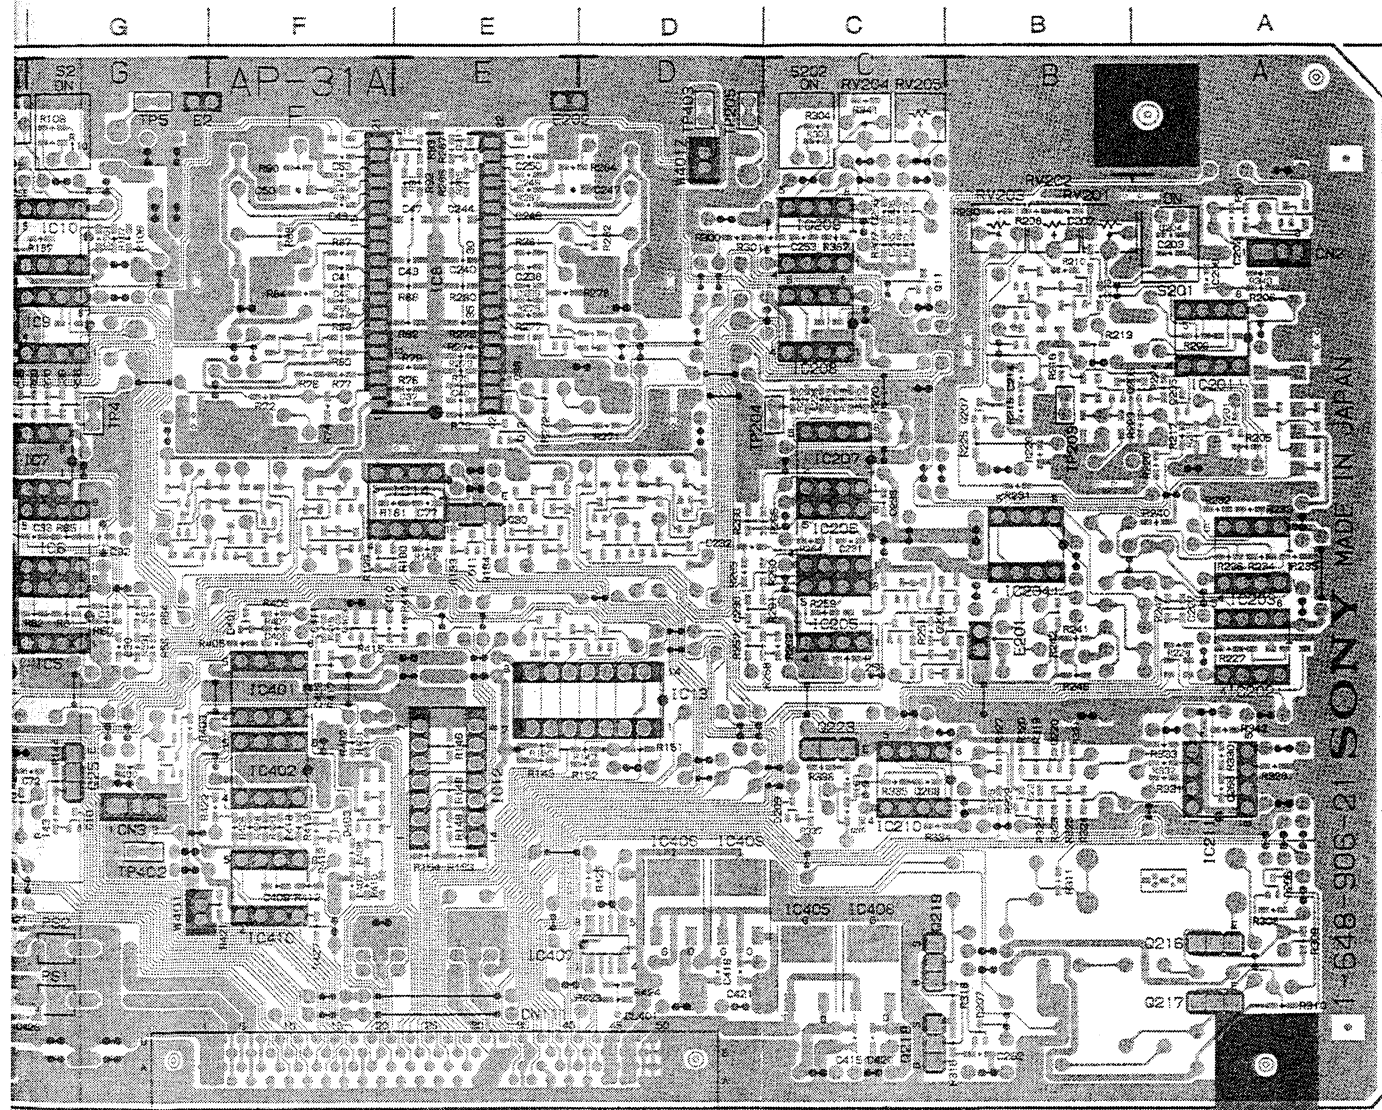


AP-31A 1-648-906-21 B SIDE

AP-31A(1-648-906-21)


CN1	H-1	FS64	B-4	FS149	J-5	RV2	J-1
CN2	A-1	FS65	D-5	FS150	H-5	RV3	J-1
CN3	G-4	FS66	D-5	FS151	H-5	RV4	H-1
CN111	E-5	FS67	D-5	FS152	H-5	RV5	H-1
		FS68	E-5	FS153	G-5	RV201	B-1
*D1	J-2	FS69	C-5	FS154	G-5	RV202	B-1
*D7	J-5	FS70	C-5	FS155	H-5	RV203	B-1
*D8	H-5	FS71	E-3	FS156	H-5	RV204	C-1
*D10	G-5	FS72	E-3			RV205	C-1
*D11	E-3	FS73	F-3	IC1	J-2		
*D201	A-2	FS74	E-4	IC2	J-4	S1	J-1
*D206	A-5	FS75	E-4	IC3	J-3	S2	G-1
*D207	B-5	FS77	F-4	IC4	H-3	S201	A-1
*D209	C-4	FS79	F-5	IC5	G-4	S202	C-1
*D401	F-3	FS80	F-5	IC6	G-3		
*D403	F-5	FS81	H-1	IC7	G-3	*TH1	J-2
		FS82	H-1	IC8	F-2	*TH2	B-2
E1	H-4	FS83	G-1	IC9	G-2		
E2	G-1	FS84	G-1	IC10	G-2	TP3	J-2
E201	B-4	FS85	G-1	IC11	H-4	TP4	G-2
E202	E-1	FS86	G-1	IC12	E-5	TP5	G-1
		FS87	H-1	IC13	D-4	TP203	B-2
FS1	A-1	FS88	H-1	IC14	E-3	TP204	C-2
FS3	A-2	FS89	H-1	IC15	J-4	TP205	D-1
FS5	B-2	FS90	G-1	IC201	A-2	TP402	G-5
FS6	B-2	FS91	G-1	IC202	A-4	TP403	D-1
FS7	A-3	FS92	G-2	IC203	A-3		
FS9	B-3	FS93	G-2	IC204	B-3		
FS10	A-3	FS94	F-2	IC205	C-4		
FS11	B-3	FS96	H-2	IC206	C-3		
FS12	A-3	FS97	H-2	IC207	C-3		
FS13	A-3	FS98	F-2	IC208	C-2		
FS14	B-3	FS99	F-2	IC209	C-2		
FS15	B-3	FS100	G-2	IC210	C-4		
FS16	A-4	FS101	H-2	IC211	A-4		
FS17	A-4	FS102	H-2	IC401	F-4		
FS18	A-4	FS103	G-3	IC402	F-4		
FS19	B-4	FS106	H-3	*IC405	C-5		
FS20	A-4	FS107	H-3	*IC406	D-5		
FS21	A-4	FS108	H-3	*IC407	D-5		
FS22	A-5	FS109	H-3	*IC408	C-5		
FS23	A-5	FS110	G-3	*IC409	D-5		
FS24	A-5	FS111	G-4	IC410	F-5		
FS25	B-5	FS112	G-4				
FS26	A-5	FS114	H-4	PS1	G-5		
FS27	B-5	FS115	H-4	PS2	G-5		
FS28	B-5	FS116	G-4				
FS29	B-5	FS117	H-4	*Q5	J-2		
FS30	C-1	FS118	H-4	*Q6	J-2		
FS31	C-1	FS119	H-5	*Q7	J-2		
FS32	C-1	FS121	G-5	*Q9	H-4		
FS33	C-1	FS122	G-5	*Q11	C-2		
FS34	C-1	FS123	H-5	*Q12	E-2		
FS35	C-1	FS124	H-5	*Q13	E-1		
FS36	D-1	FS125	H-1	Q18	J-5		
FS38	C-2	FS126	J-1	Q19	J-5		
FS39	C-2	FS127	J-1	Q20	H-5		
FS40	C-2	FS128	J-1	Q21	H-5		
FS41	D-2	FS129	H-2	*Q22	J-4		
FS43	C-2	FS131	J-2	*Q23	H-4		
FS44	D-2	FS132	J-2	Q25	G-4		
FS45	D-2	FS133	J-3	Q30	E-3		
FS46	D-2	FS135	J-3	*Q205	A-2		
FS47	C-3	FS136	H-3	*Q206	A-2		
FS48	C-3	FS137	J-3	*Q207	B-2		
FS49	C-3	FS138	J-3	*Q209	B-4		
FS50	C-3	FS139	H-3	*Q211	E-1		
FS51	C-3	FS140	J-3	Q216	A-5		
FS53	C-3	FS141	J-3	Q217	A-5		
FS54	C-4	FS142	J-4	Q218	C-5		
FS56	D-4	FS143	J-4	Q219	C-5		
FS57	D-4	FS144	J-4	*Q220	B-4		
FS58	C-4	FS145	J-4	*Q221	B-4		
FS59	C-4	FS146	J-4	Q223	C-4		
FS61	D-4	FS147	J-5	*Q403	F-3		
FS63	D-4	FS148	J-5	RV1	J-1		

*: B SIDE

AR-14; AUDIO/TC REC AMP., AUDIO/TC ERASE OSC., AUDIO BIAS DRIVER

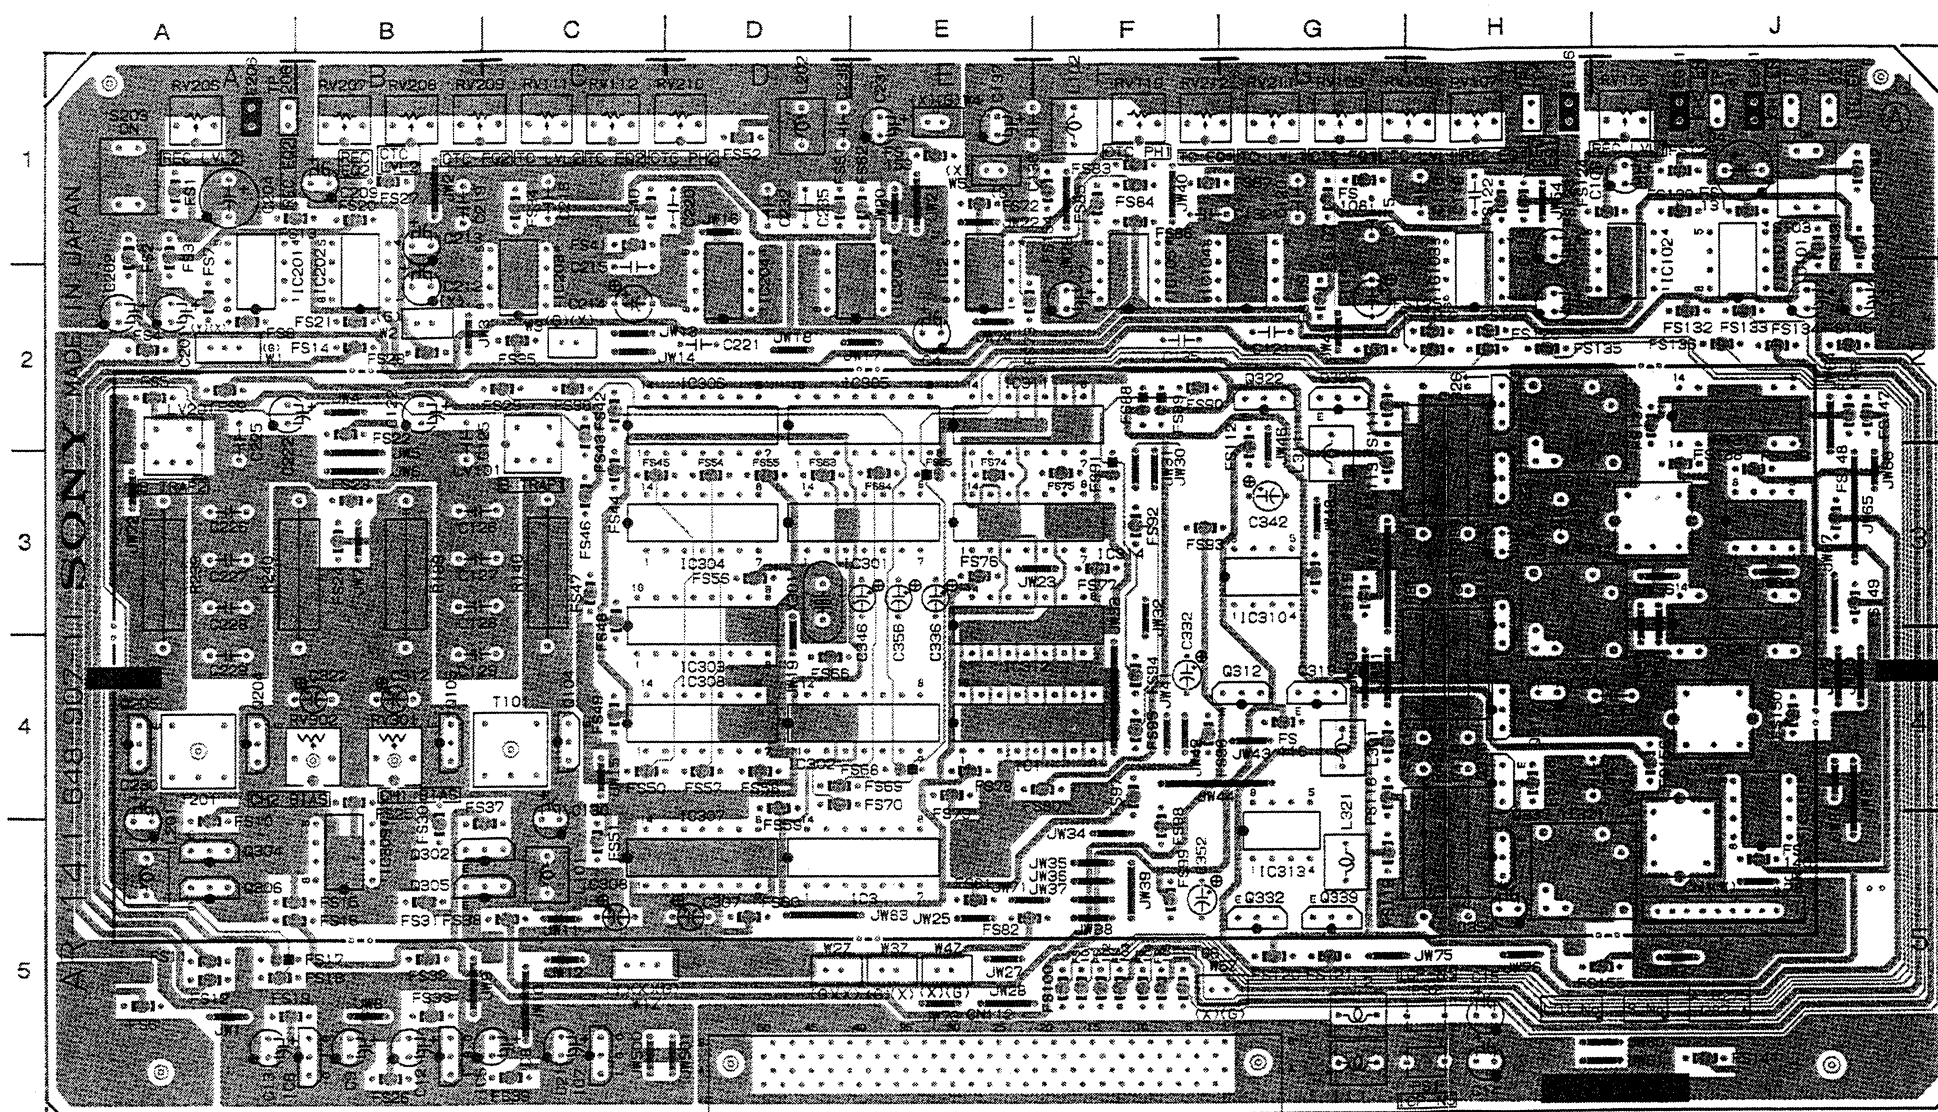

AR-14 1-648-907-11 A SIDE

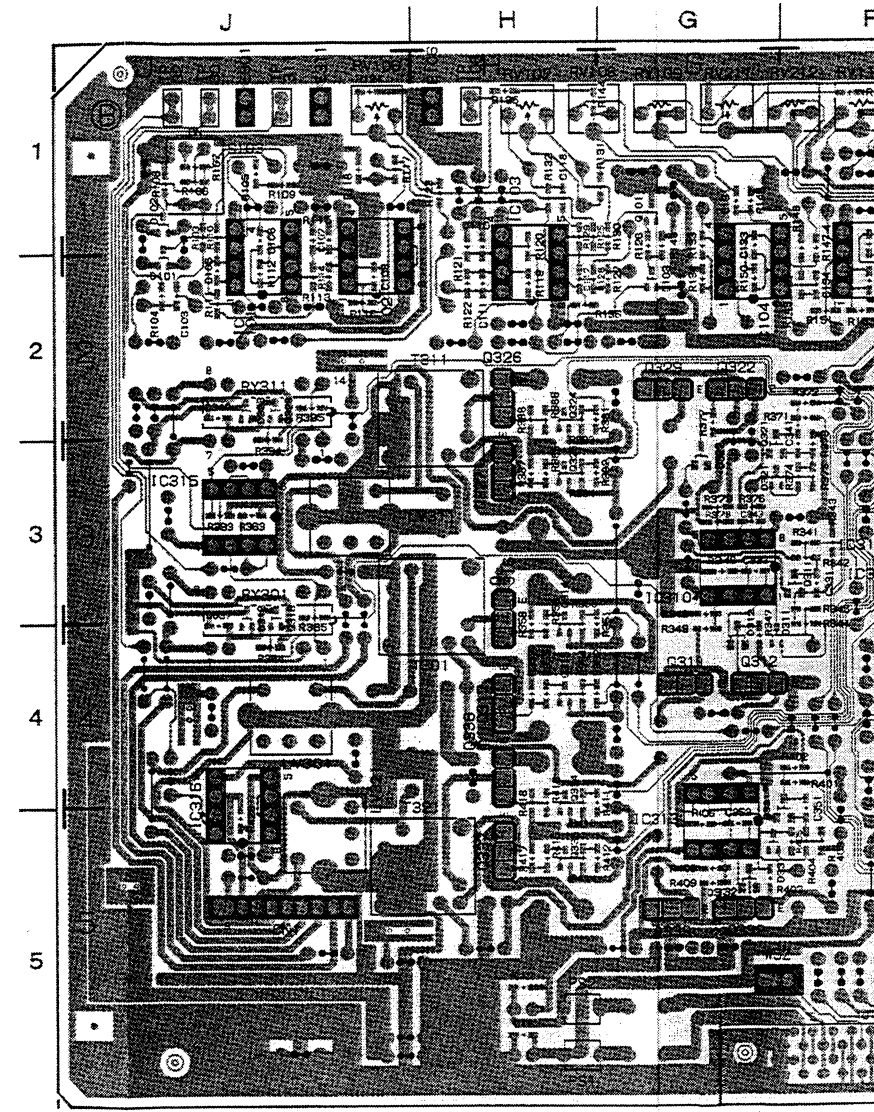





AR-14(1-648-907-11)

*: B SIDE

CP-225; VIDEO INPUT/OUTPUT CONNECTOR

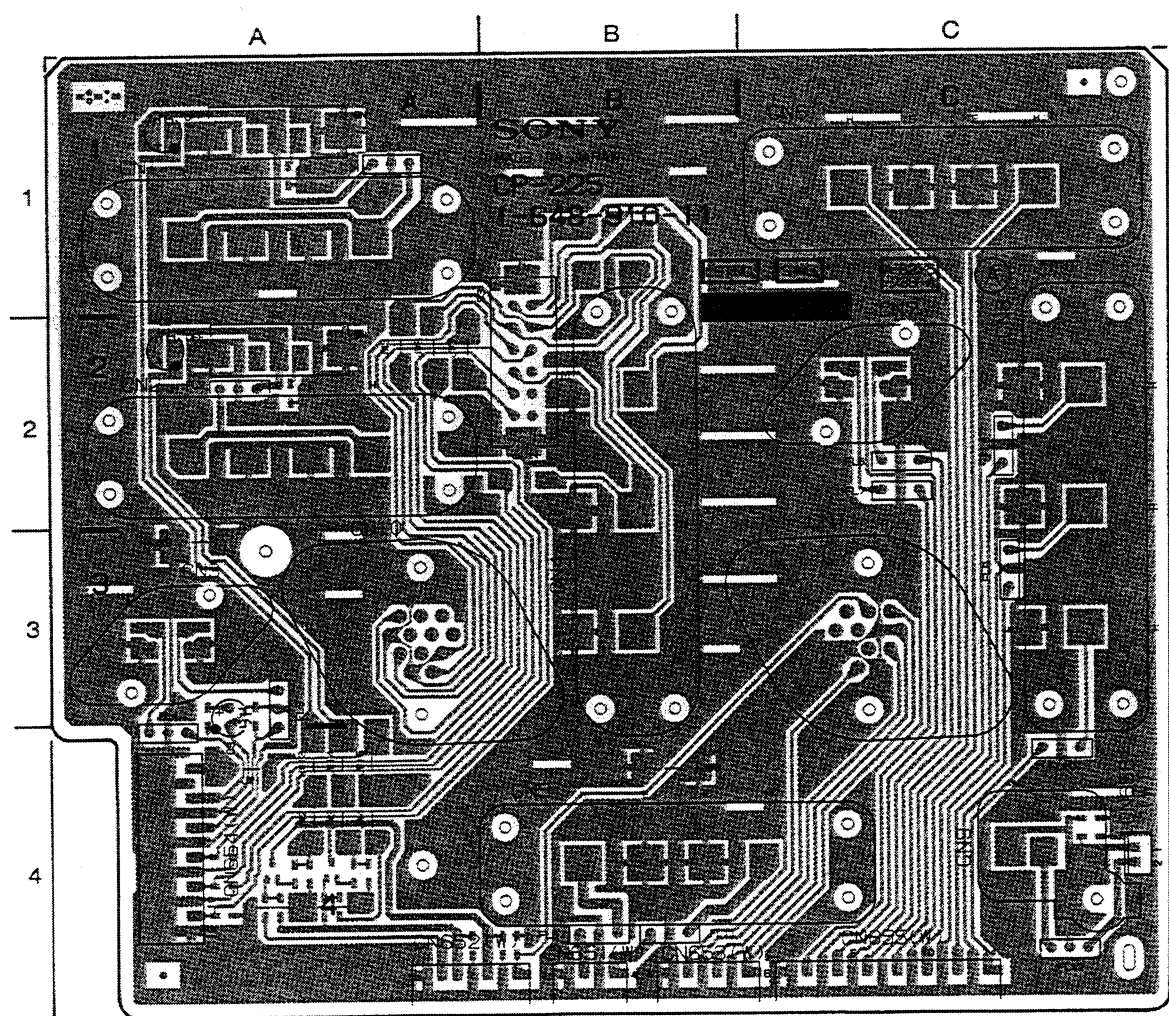


CP-225 1-648-910-11 A SIDE

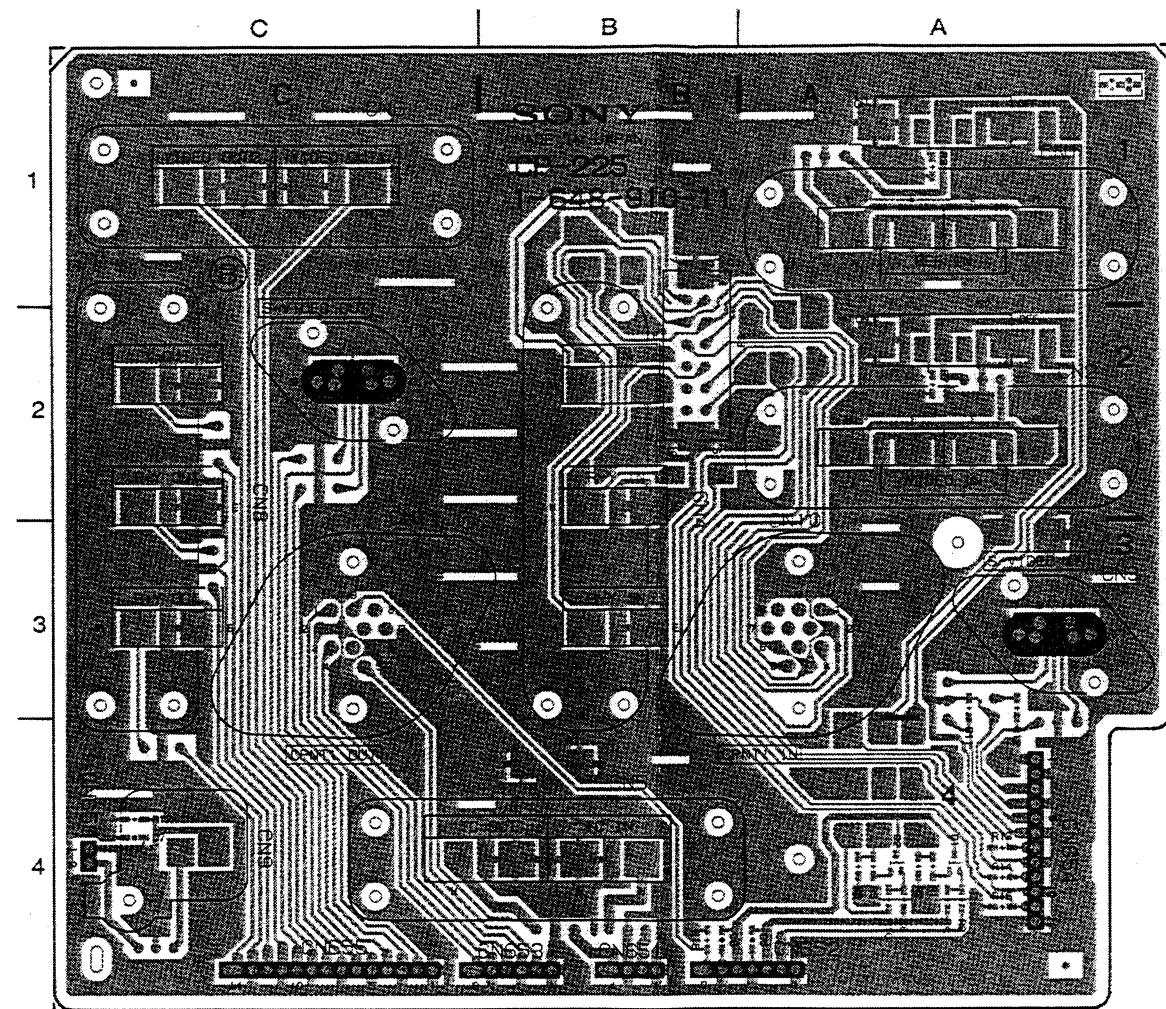


CP-225 1-648-910-11 B SIDE

CP-225A; VIDEO OUTPUT CONNECTOR

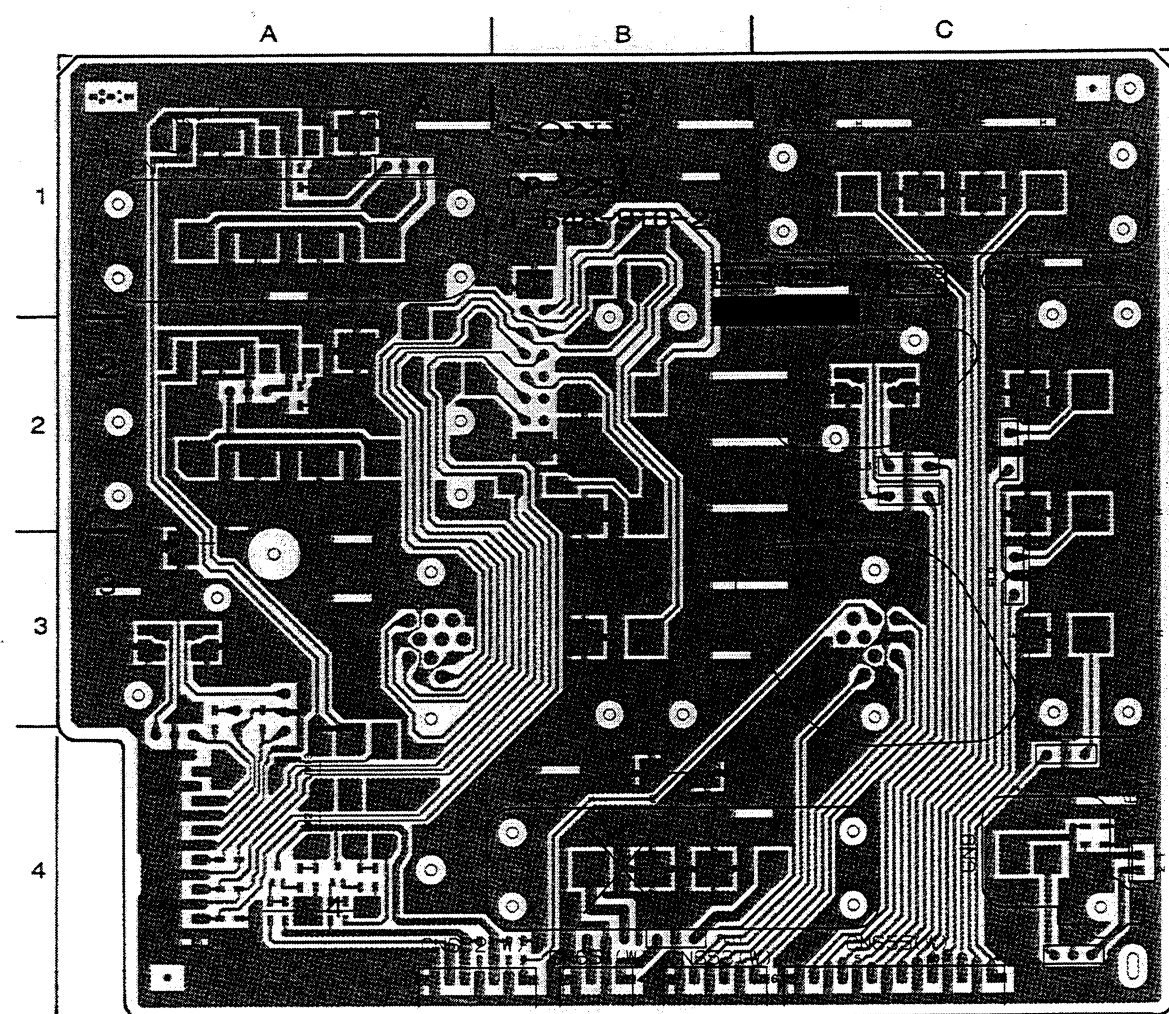


CP-225A 1-648-910-21 A SIDE

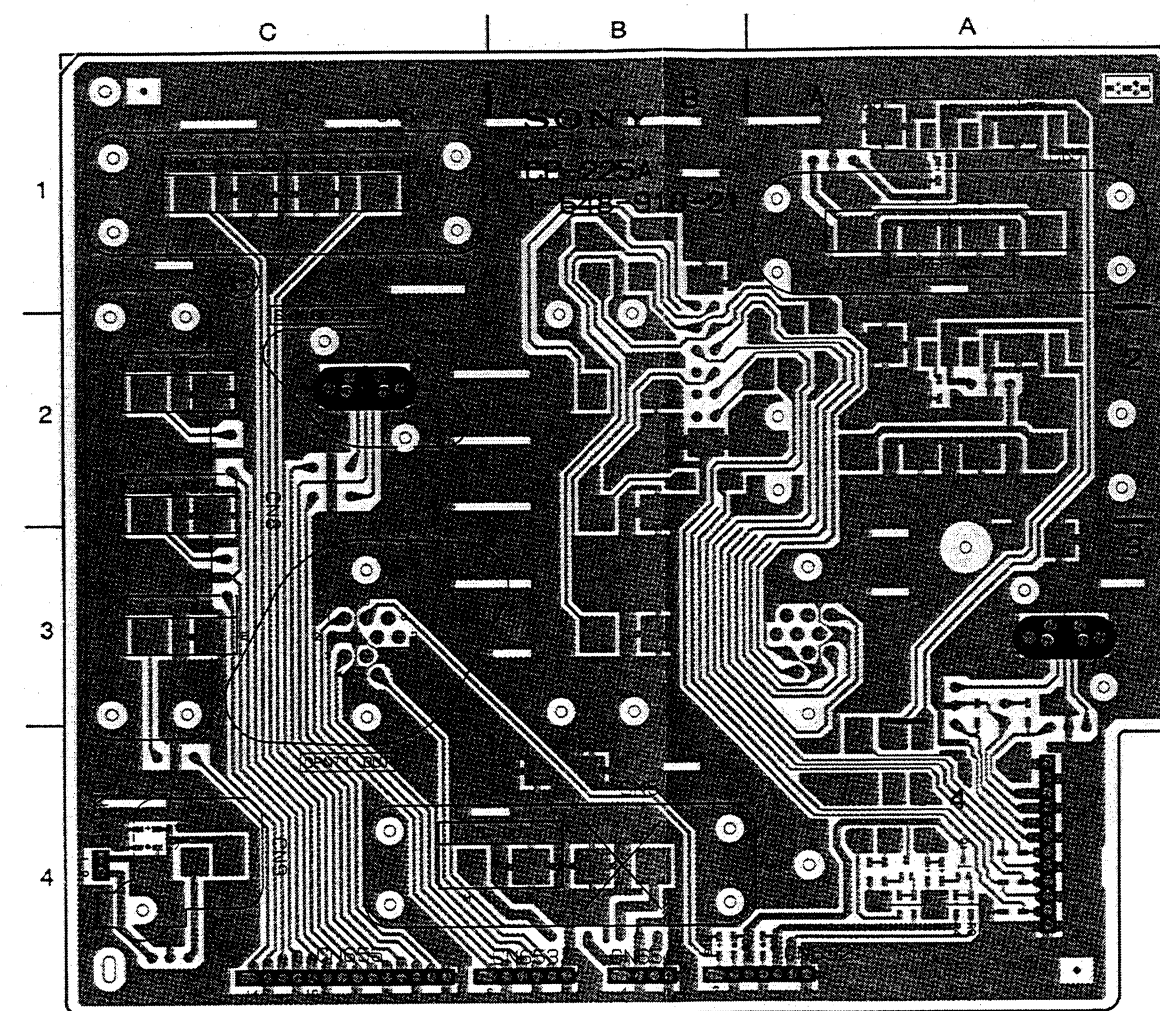


CP-225A 1-648-910-21 B SIDE


CP-226 : AUDIO INPUT/OUTPUT CONNECTOR, OUTPUT TRANSFORMER(FOR UC)
 CP-226J : AUDIO INPUT/OUTPUT CONNECTOR, OUTPUT TRANSFORMER(FOR J)
 CP-226A : AUDIO OUTPUT CONNECTOR, OUTPUT TRANSFORMER(FOR UC)
 CP-226AJ : AUDIO OUTPUT CONNECTOR, OUTPUT TRANSFORMER(FOR J)

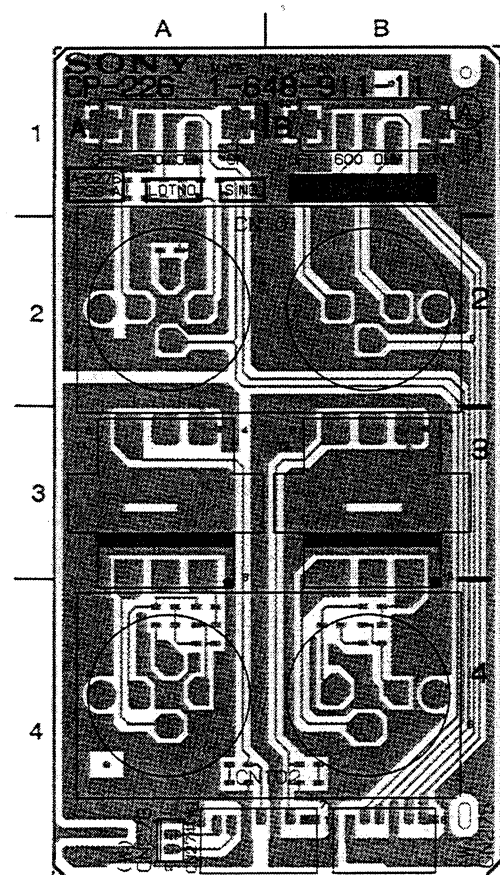


CP-226/226J 1-648-911-11 A SIDE

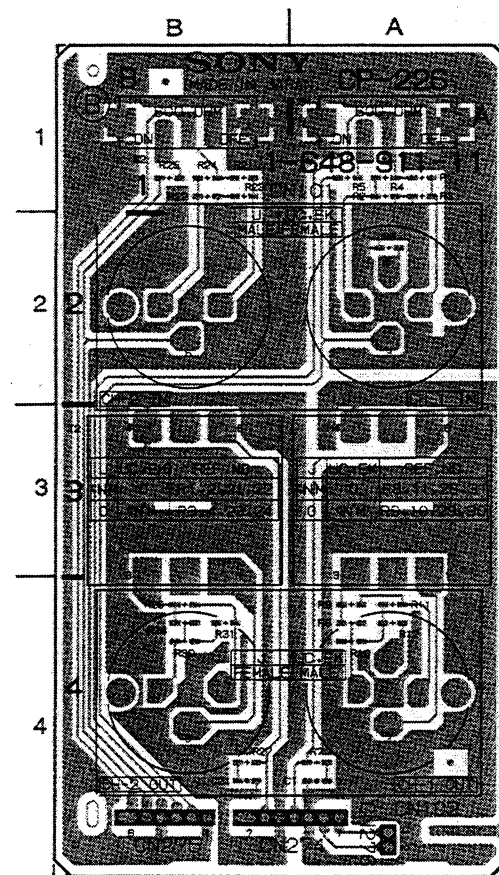

CP-226/226J 1-648-911-11 B SIDE

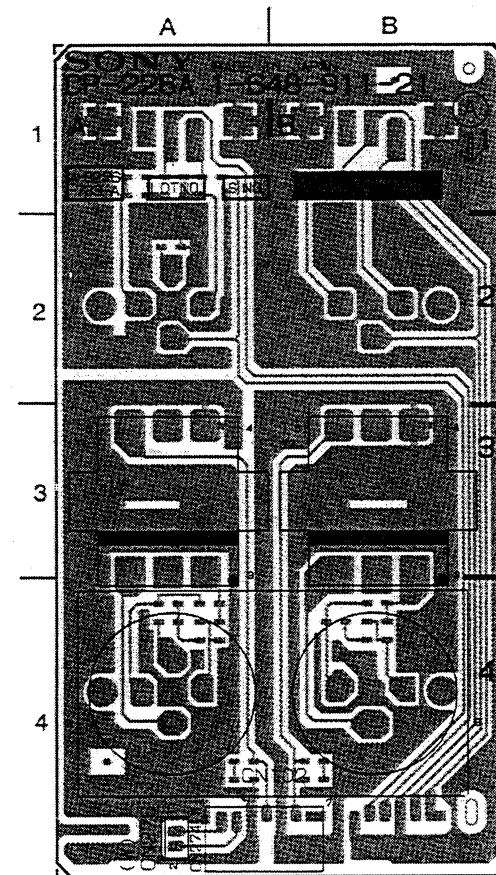


CP-226A/226AJ 1-648-911-21 A SIDE

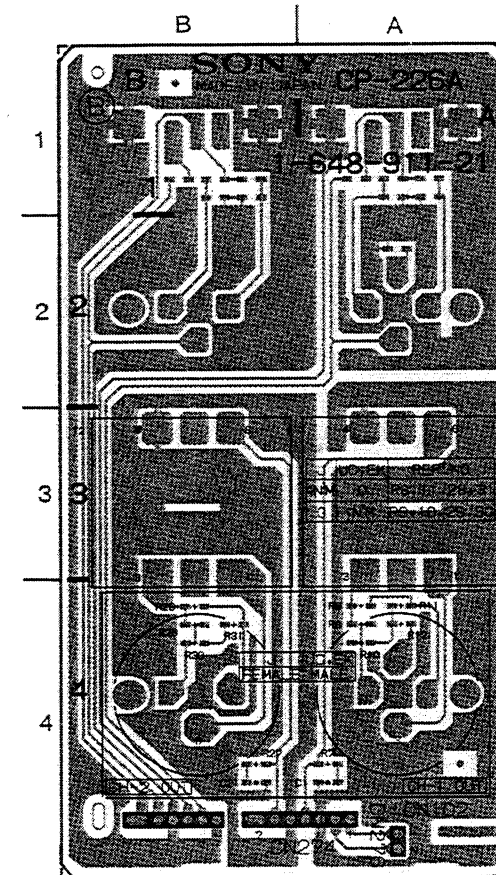


CP-226A/226AJ 1-648-911-21 B SIDE


CP-237 ; TBC/9P REMOTE CONNECTOR
CP-237A ; TBC/9P REMOTE CONNECTOR

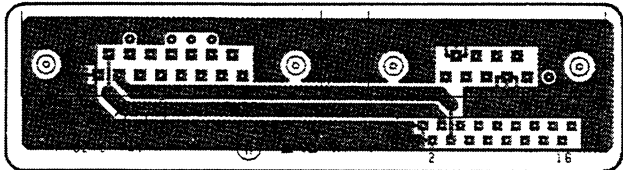


CP-237 1-648-912-11 A SIDE

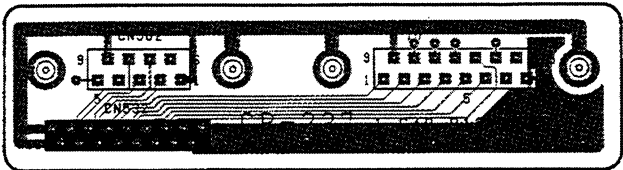

CP-237 1-648-912-11 B SIDE

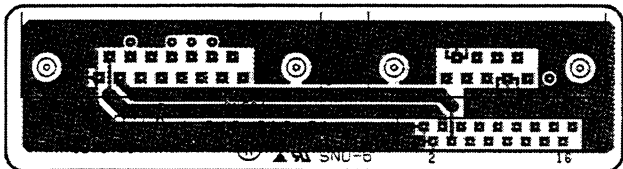


CP-237A 1-648-912-21 A SIDE

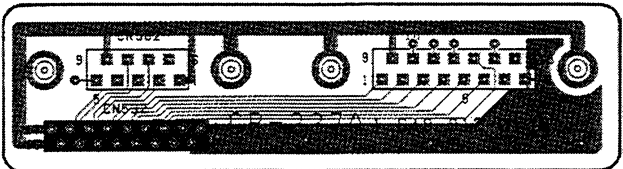



CP-237A 1-648-912-21 B SIDE

DR-214; MOTOR DRIVER, TENSION SENS. AMP., DRUM FG/PG AMP., CAPSTAN FG AMP., CTL REC/PB AMP.

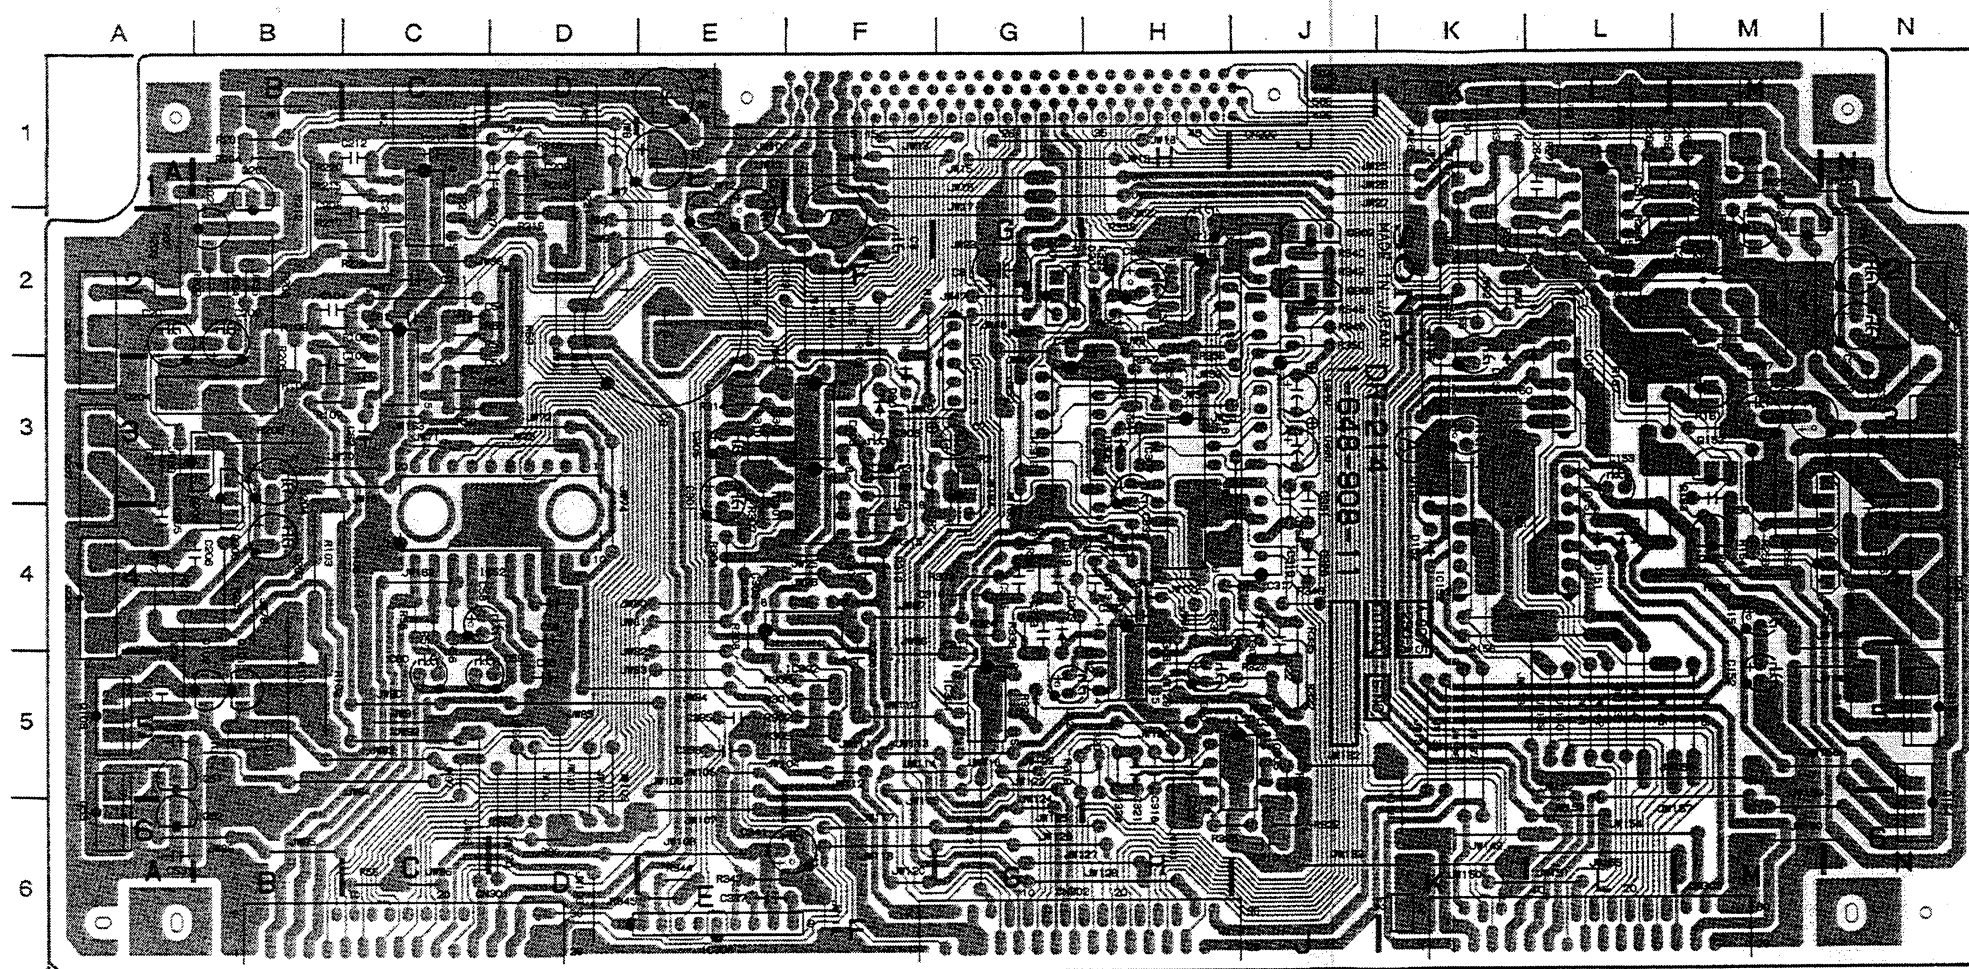

DR-214 1-648-908-11 A SIDE

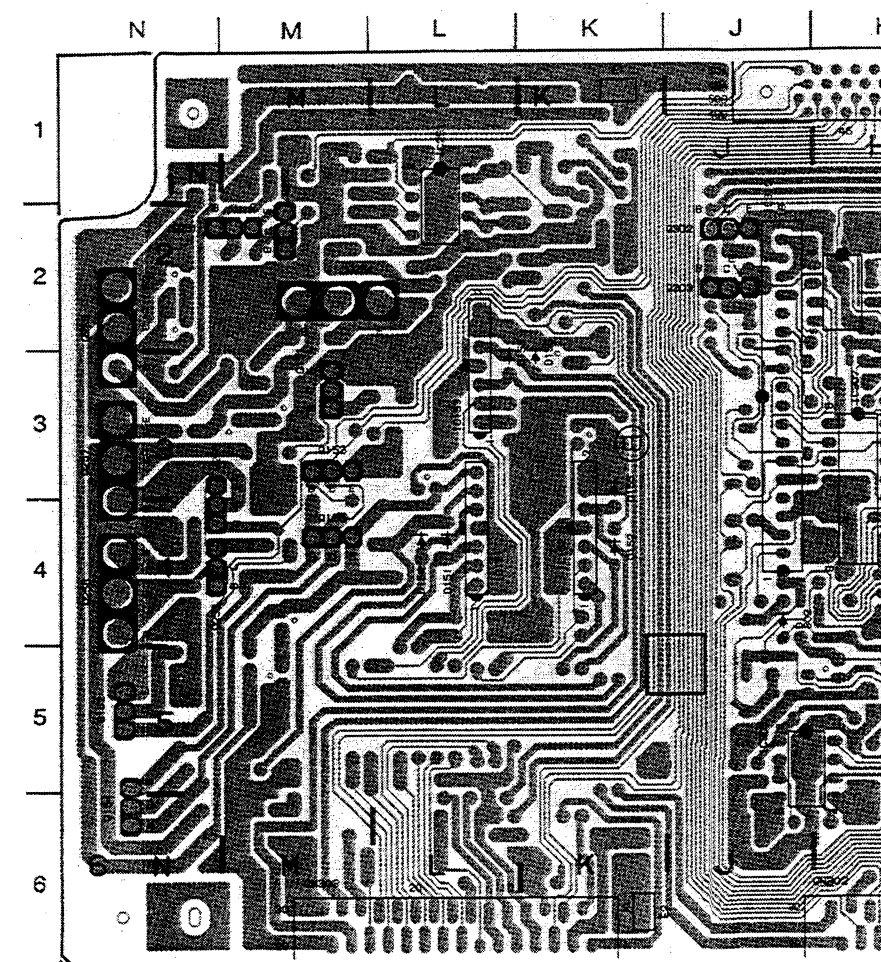

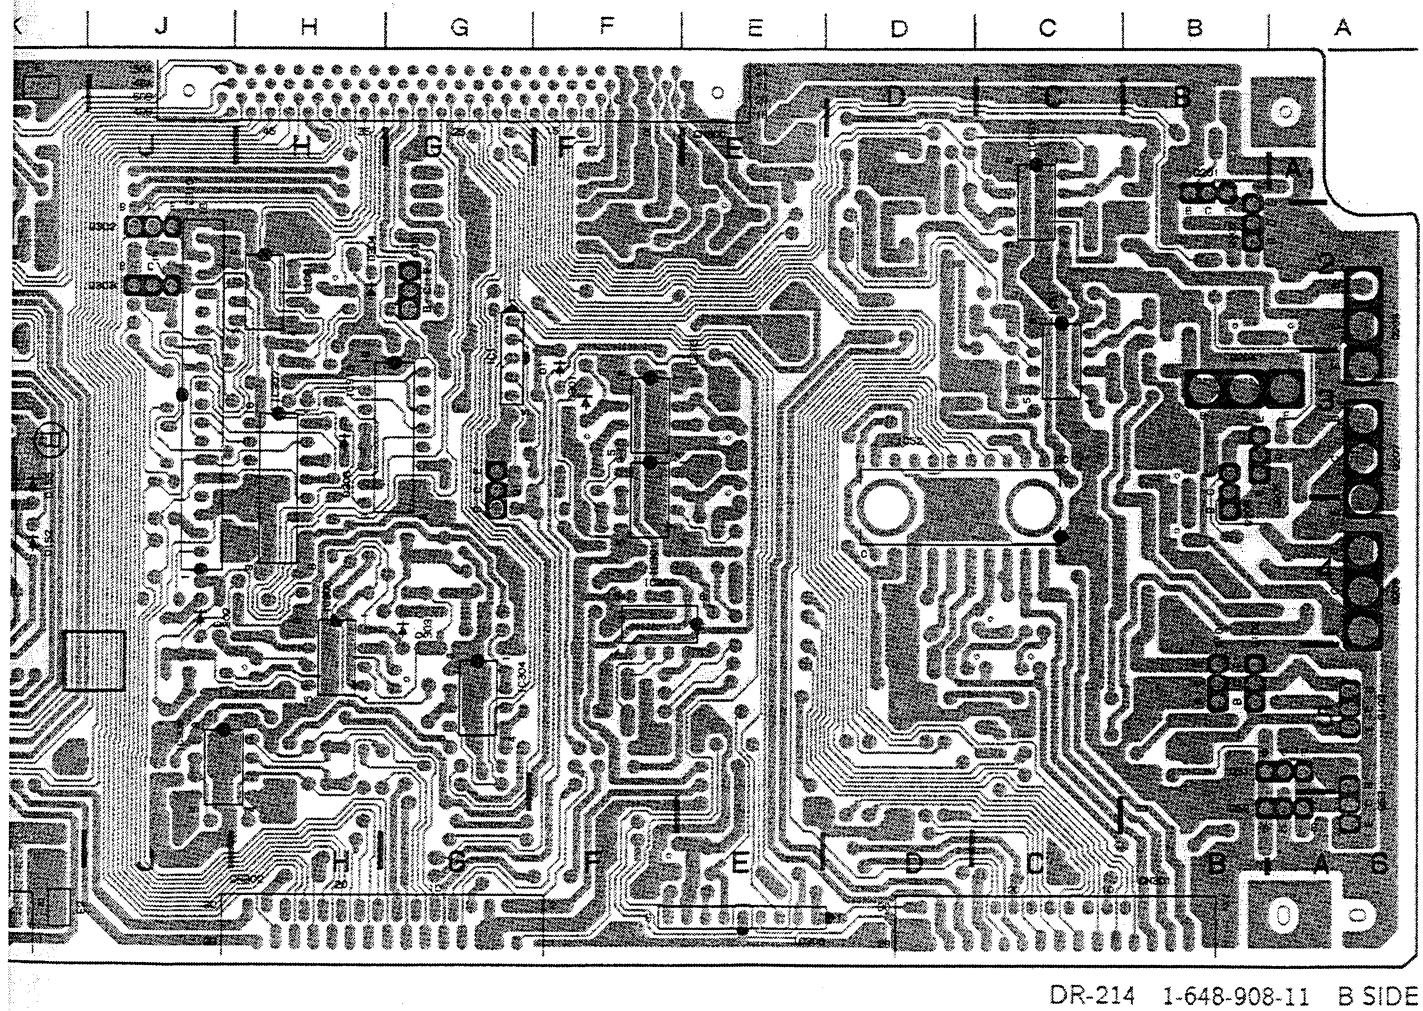


DR-214(1-648-908-11)


CN300	H-1
CN301	C-5
CN302	H-5
CN303	L-5
D1	G-2
D151	L-3
D152	K-3
D153	L-2
D154	M-3
D155	K-3
D156	L-2
D301	G-2
D302	J-4
D303	H-4
D304	H-2
D306	H-3
E1	K-1
E2	K-5
IC1	G-2
IC51	C-2
IC52	D-3
IC151	L-4
IC152	L-4
IC153	L-2
IC201	C-1
IC251	L-1
IC301	F-3
IC302	F-4
IC303	F-2
IC304	G-4
IC305	J-5
IC306	H-4
IC307	J-2
IC308	E-5
IC310	J-3
IC311	J-1
IC313	H-2
Q1	G-3
Q51	B-5
Q52	B-5
Q53	B-5
Q101	B-4
Q102	B-4
Q103	B-4
Q151	M-2
Q152	N-4
Q153	M-3
Q154	N-5
Q155	M-3
Q201	B-1
Q202	B-1
Q203	B-2
Q204	B-2
Q205	B-3
Q206	B-3
Q207	B-3
Q208	B-4
Q251	N-1
Q252	N-1
Q253	N-2
Q254	M-2
Q255	N-3
Q256	N-3
Q257	N-3
Q258	N-4
Q301	H-2
Q302	K-1
Q303	K-2

*: B SIDE

KY-249; FUNCTION KEY

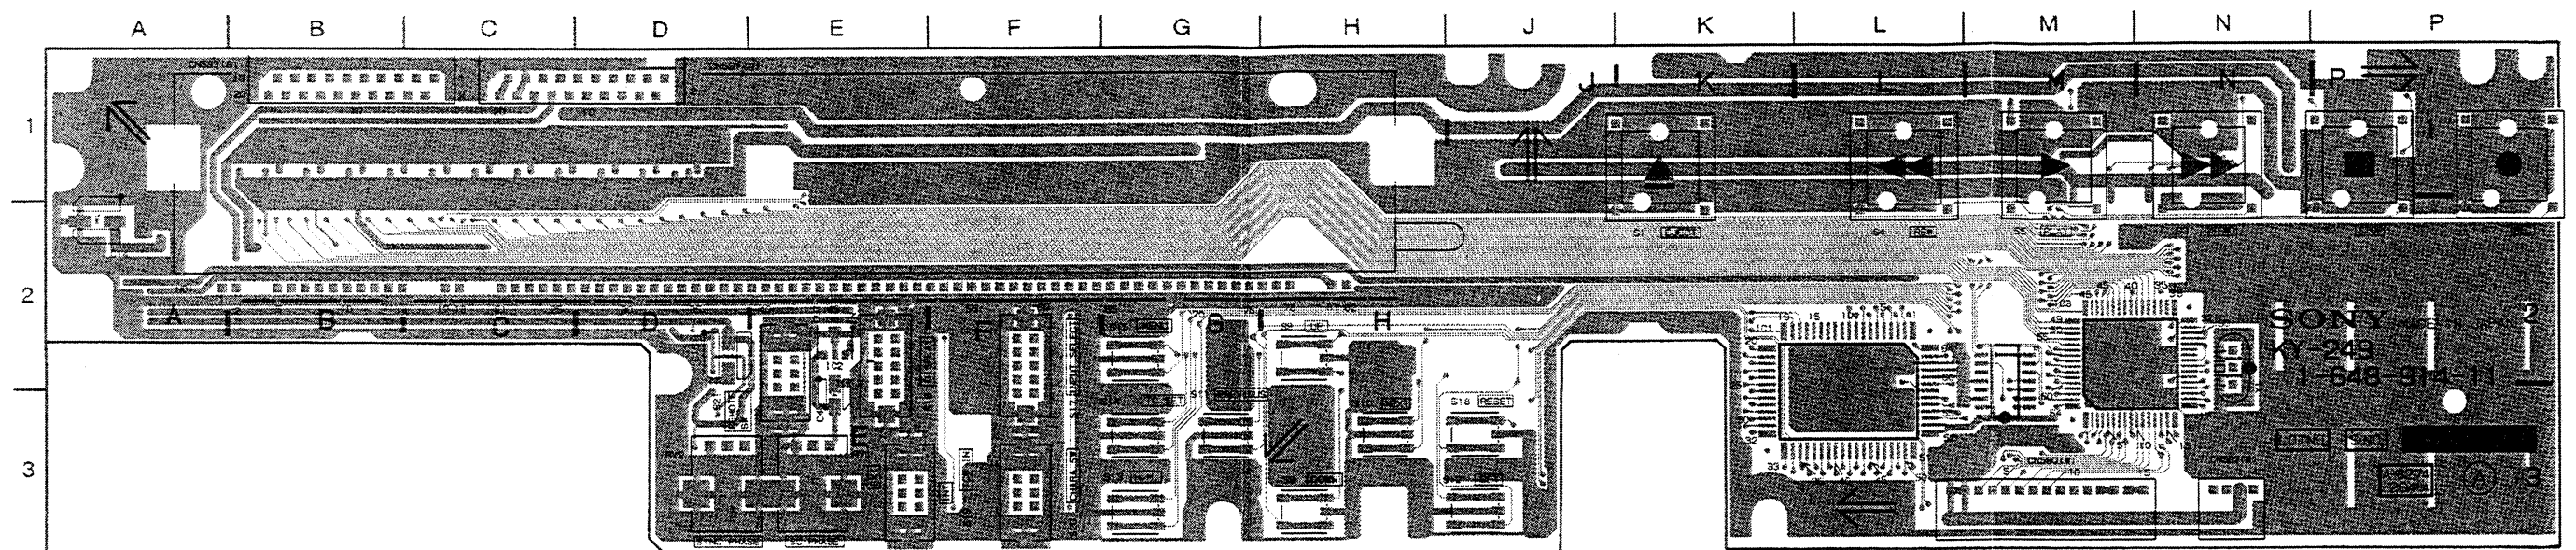

KY-249 1-648-914-11 A SIDE

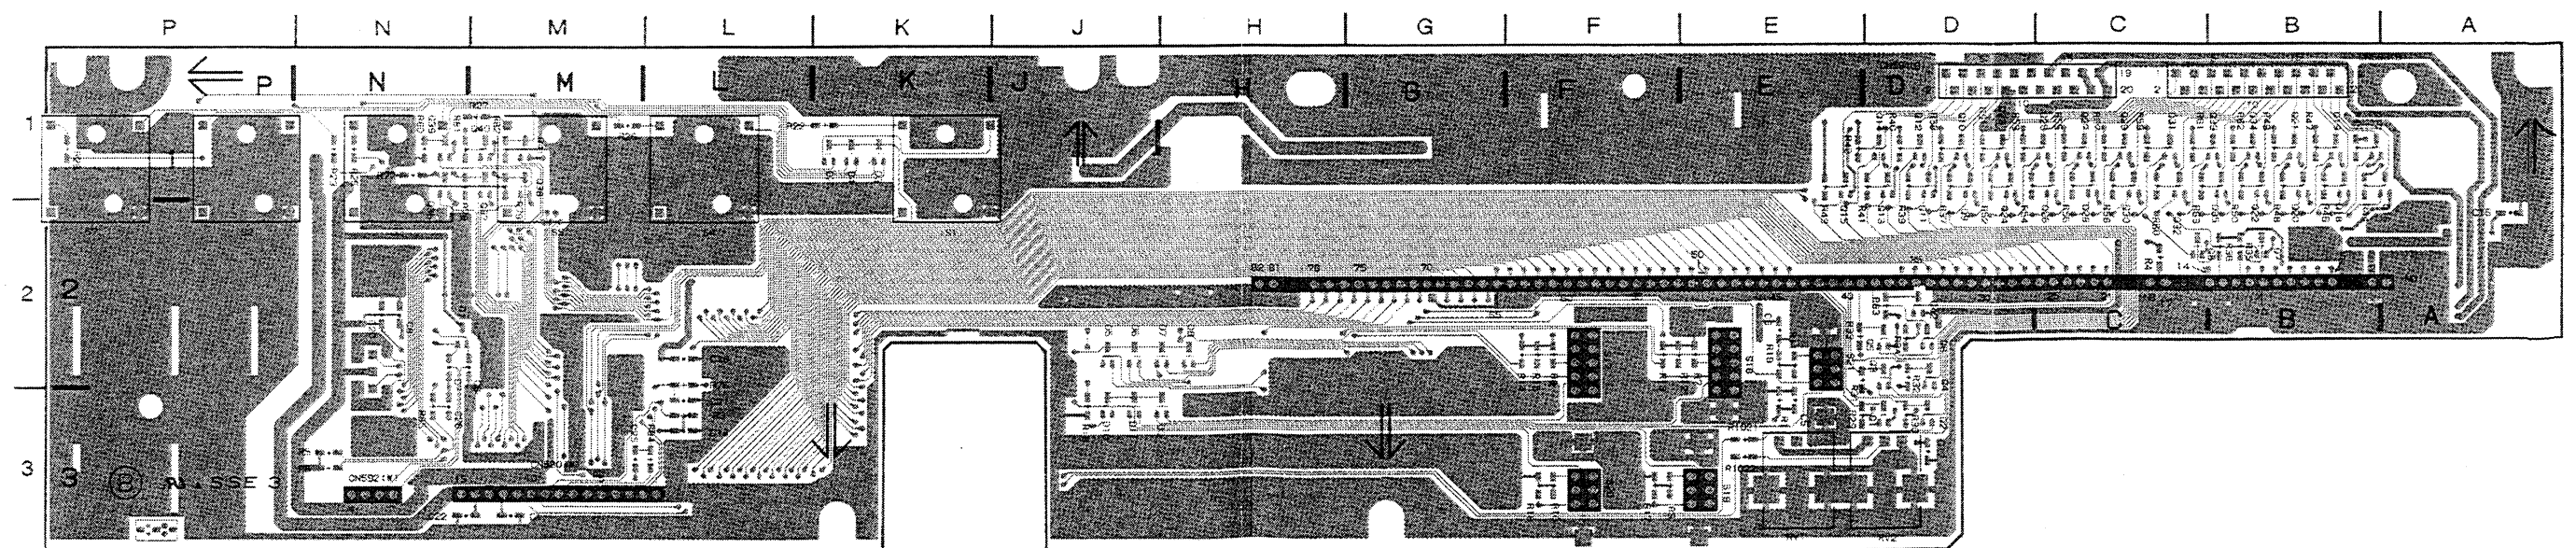


KY-249 1-648-914-11 B SIDE

KY-249(1-648-914-11)


CN590	M-3	S8	H-2
CN591	D-1	S9	H-3
CN592	N-3	S10	H-3
CN593	B-1	S11	G-3
		S12	J-3
*D1	N-2	S13	G-3
*D2	K-1	S14	G-3
*D3	K-1	S15	G-2
*D4	K-1	S16	E-2
*D5	J-2	S17	F-2
*D6	J-2	S18	J-3
*D7	H-2	S19	E-3
*D8	H-2	S20	F-3
*D9	H-3	S21	E-2
*D10	J-3		
*D11	J-3	X1	N-2
IC1	L-3		
IC2	E-2		
IC3	M-2		
IC6	M-3		
ND1	E-2		
*Q1	D-3		
*Q2	D-3		
*Q3	D-2		
*Q4	D-2		
*Q5	D-2		
*Q6	D-2		
*Q7	B-2		
*Q8	C-2		
*Q9	D-1		
*Q10	D-1		
*Q11	D-1		
*Q12	D-1		
*Q13	D-1		
*Q14	D-1		
*Q15	E-1		
*Q16	A-1		
*Q17	B-1		
*Q18	B-1		
*Q19	B-1		
*Q20	B-1		
*Q21	B-1		
*Q22	B-1		
*Q23	D-1		
*Q24	D-1		
*Q25	C-1		
*Q26	C-1		
*Q27	C-1		
*Q28	C-1		
*Q29	C-1		
*Q30	C-1		
*Q31	C-1		
*Q32	C-1		
*Q33	B-1		
*Q34	B-1		
*Q35	B-1		
*Q36	N-1		
*Q37	M-1		
*Q38	M-1		
*Q39	N-1		
*Q40	M-1		
*Q41	M-1		
*Q42	D-2		
RV1	E-3		
RV2	D-3		
S1	K-1		
S2	P-1		
S3	N-1		
S4	L-1		
S5	M-1		
S7	P-1		

*: B SIDE

KY-249A; FUNCTION KEY

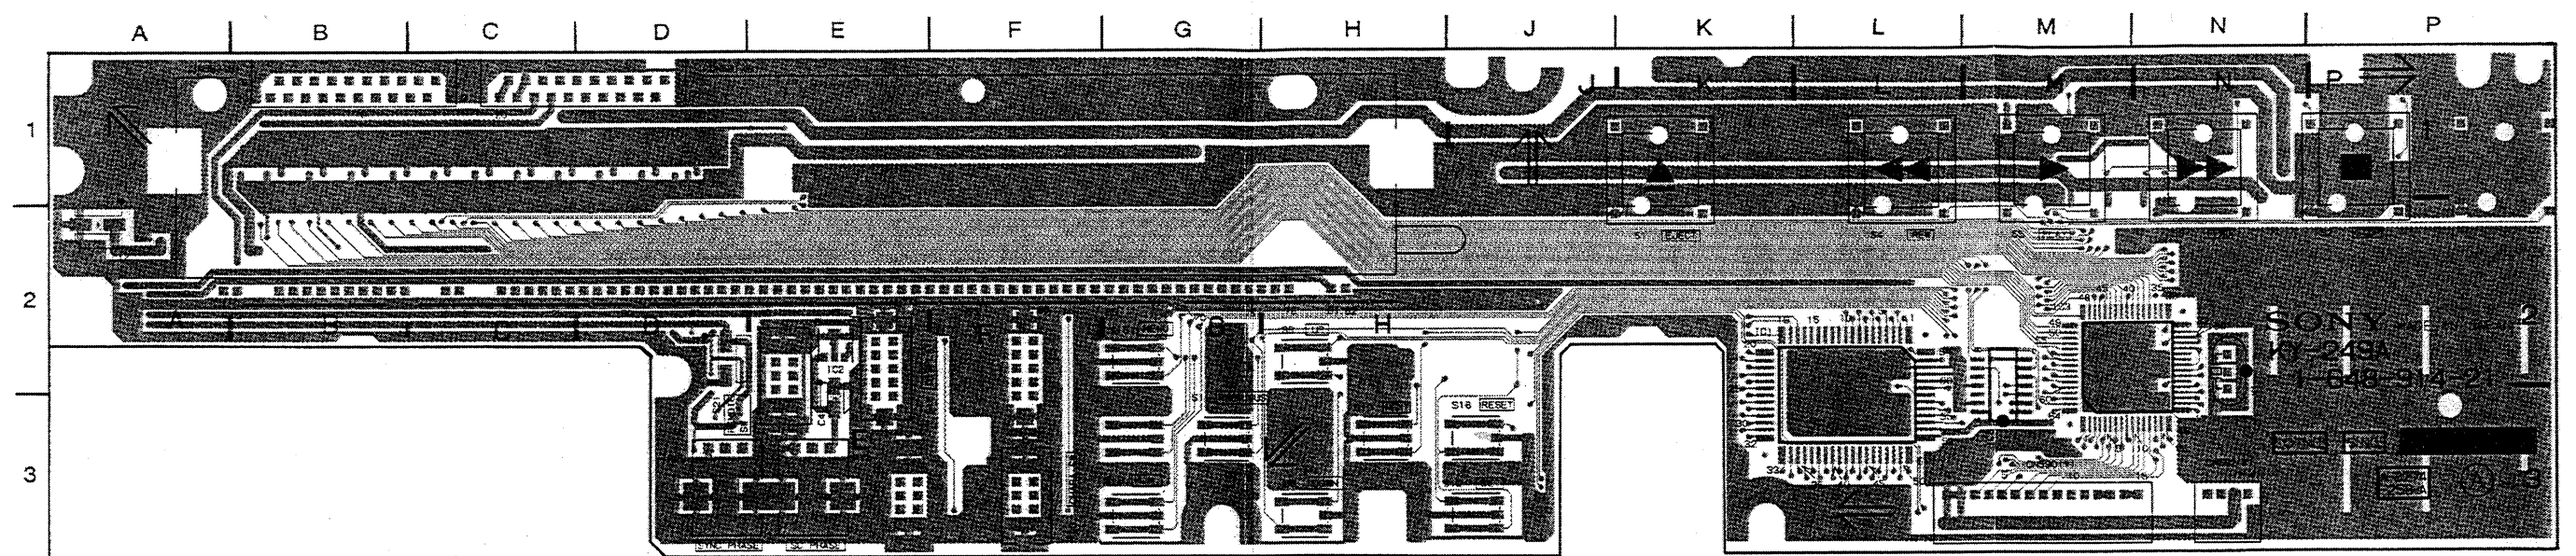

KY-249A 1-648-914-21 A SIDE

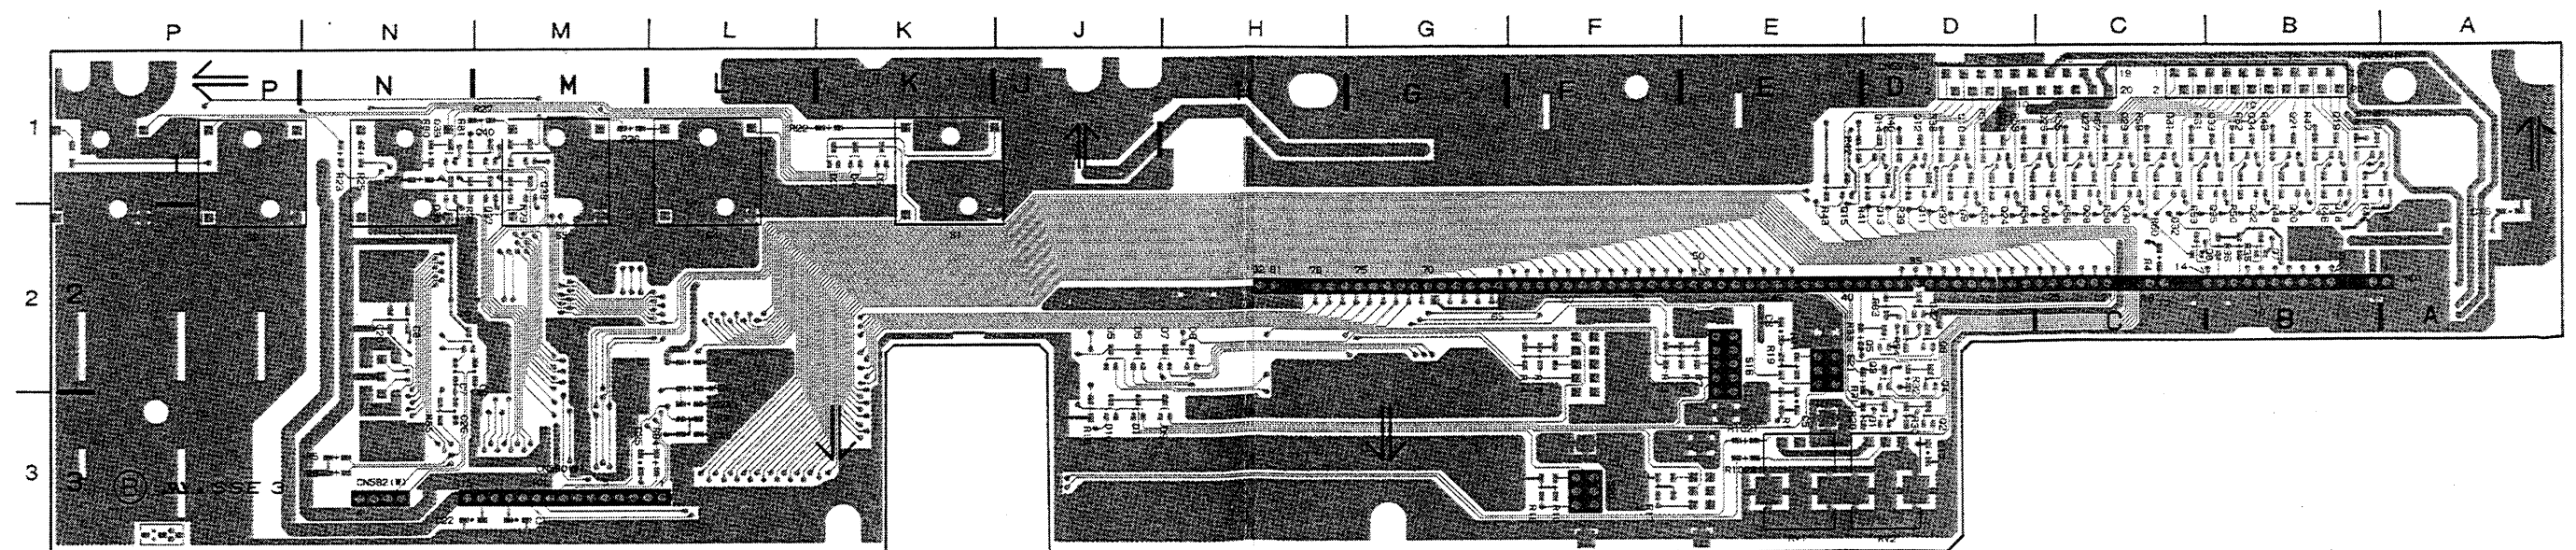


KY-249A 1-648-914-21 B SIDE

KY-249A(1-648-914-21)


CN590	M-3	S10	H-3
CN591	D-1	S11	G-3
CN592	N-3	S12	J-3
CN593	B-1	S13	G-3
		S15	G-2
*D1	N-2	S16	E-2
*D2	K-1	S18	J-3
*D3	K-1	S20	F-3
*D4	K-1	S21	E-2
*D5	J-2		
*D6	J-2	X1	N-2
*D7	H-2		
*D8	H-2		
*D9	H-3		
*D10	J-3		
*D11	J-3		
IC1	L-3		
IC2	E-2		
IC3	M-2		
IC6	M-3		
ND1	E-2		
*Q1	D-3		
*Q2	D-3		
*Q3	D-2		
Q4	D-2		
*Q5	D-2		
*Q6	D-2		
*Q7	B-2		
*Q8	C-2		
*Q9	D-1		
*Q10	D-1		
*Q11	D-1		
*Q12	D-1		
*Q13	D-1		
*Q14	D-1		
*Q15	E-1		
*Q16	A-1		
*Q17	B-1		
*Q18	B-1		
*Q19	B-1		
*Q20	B-1		
*Q21	B-1		
*Q22	B-1		
*Q23	D-1		
*Q24	D-1		
*Q25	C-1		
*Q26	C-1		
*Q27	C-1		
*Q28	C-1		
*Q29	C-1		
*Q30	C-1		
*Q31	C-1		
*Q32	C-1		
*Q33	B-1		
*Q34	B-1		
*Q35	B-1		
*Q36	N-1		
*Q37	M-1		
*Q38	M-1		
*Q39	N-1		
*Q40	M-1		
*Q42	D-2		
RV1	E-3		
RV2	D-3		
S1	K-1		
S2	P-1		
S3	N-1		
S4	L-1		
S5	M-1		
S8	H-2		
S9	H-3		

*: B SIDE

MS-39/39A ; CASSETTE INFORMATION, SOLENOID DRIVER, MECHA. CONTROL MPU, DATA STORAGE

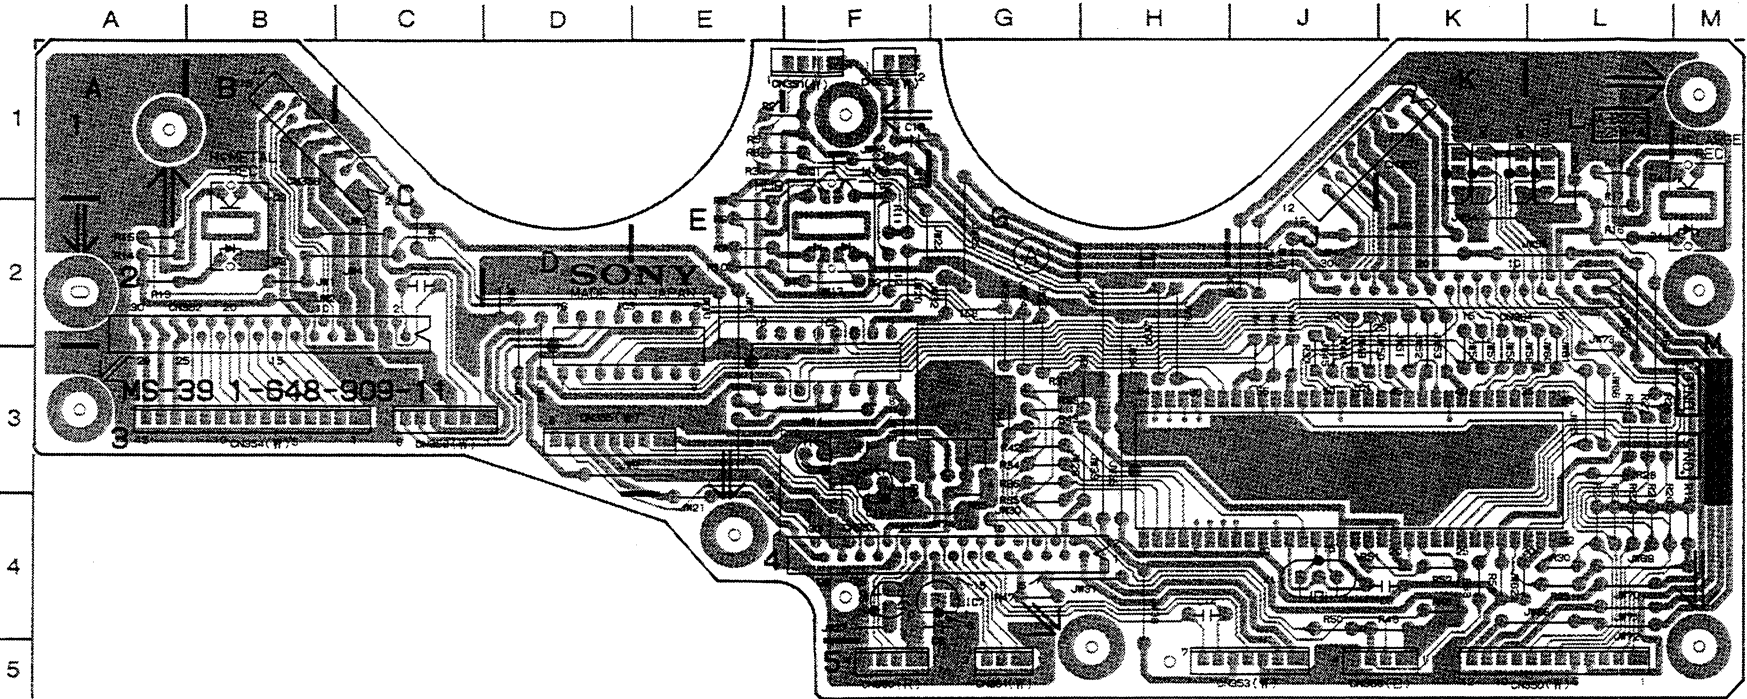

MS-39/39A 1-648-909-11 A SIDE

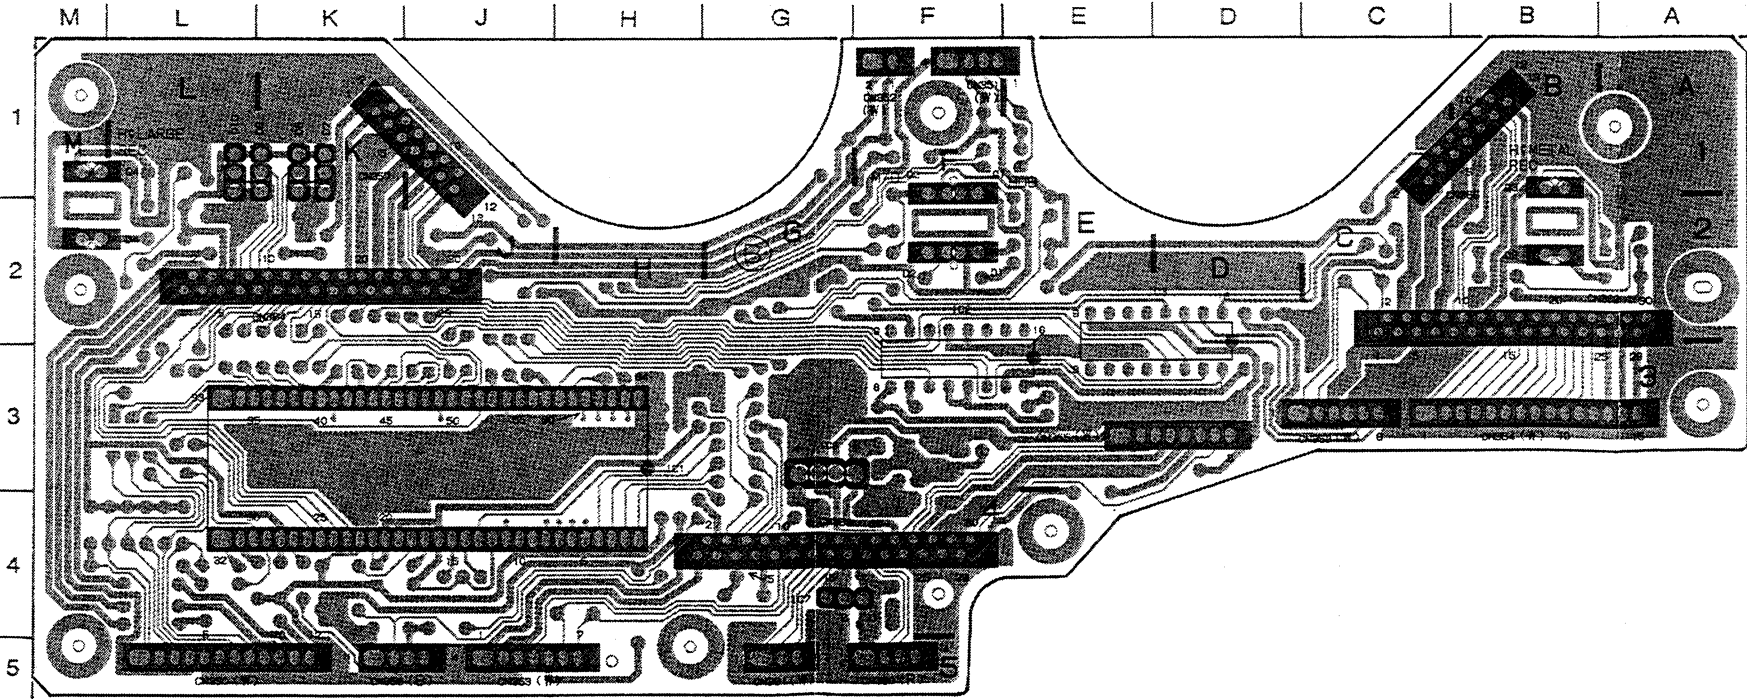

MS-39/39A 1-648-909-11 B SIDE

MS-39/39A(1-648-909-11)


CN350	L-5
CN351	F-1
CN352	F-1
CN353	J-5
CN354	B-3
CN355	D-3
CN356	B-1
CN357	J-1
CN358	C-3
CN359	K-5
CN360	F-5
CN361	G-5
CN362	B-2
CN363	G-4
CN364	K-2
D1	F-2
D2	F-2
D3	B-2
D4	M-2
D7	K-1
D8	K-1
D9	K-1
D10	L-1
IC1	H-4
IC2	E-3
IC3	D-3
IC7	G-4
IC8	G-3
Q1	F-1
Q2	F-1
Q3	B-1
Q4	M-1
X1	J-4

*: B SIDE
_: UVW-1800 ONLY


RP-70


RP-70

RP-70 ; RF REC/PB AMP., ROTARY ERASE OSC., FULL ERASE OSC.

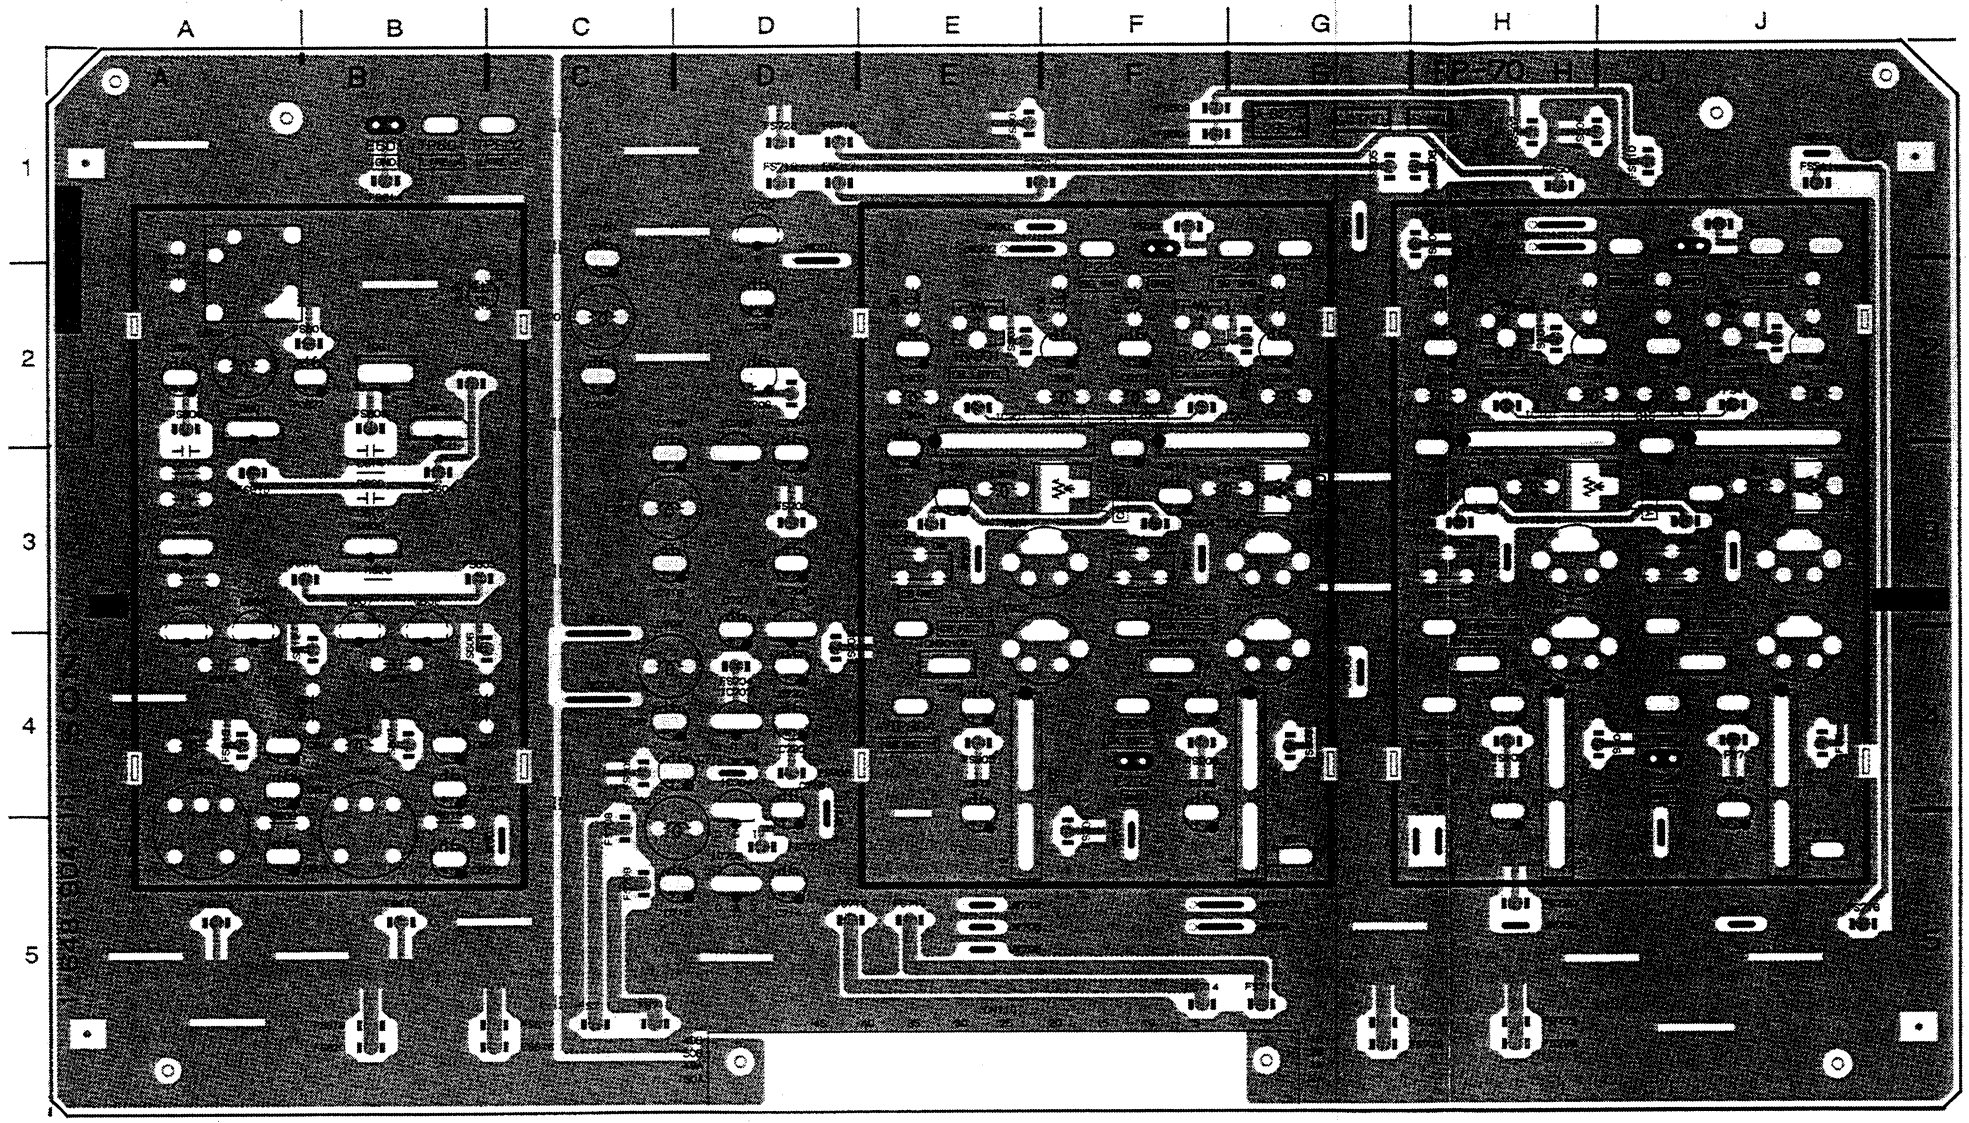

RP-70 1-648-904-11 A SIDE

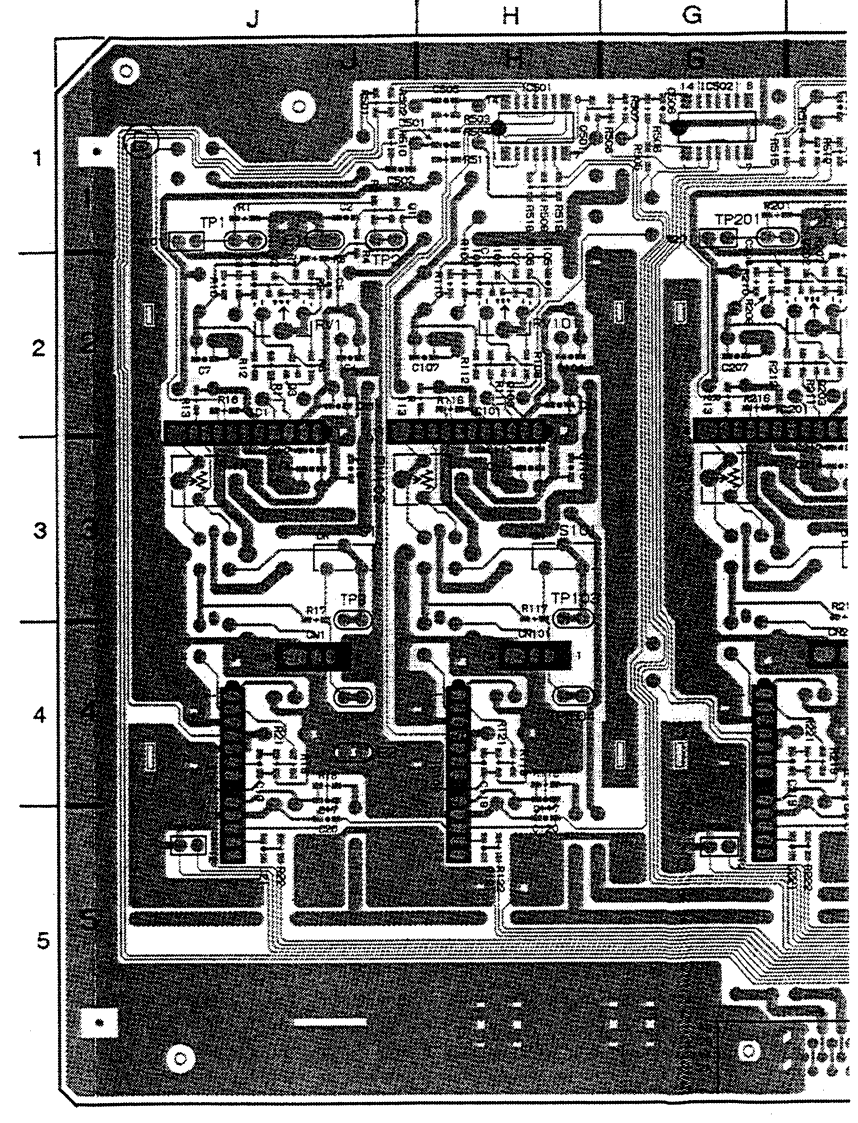

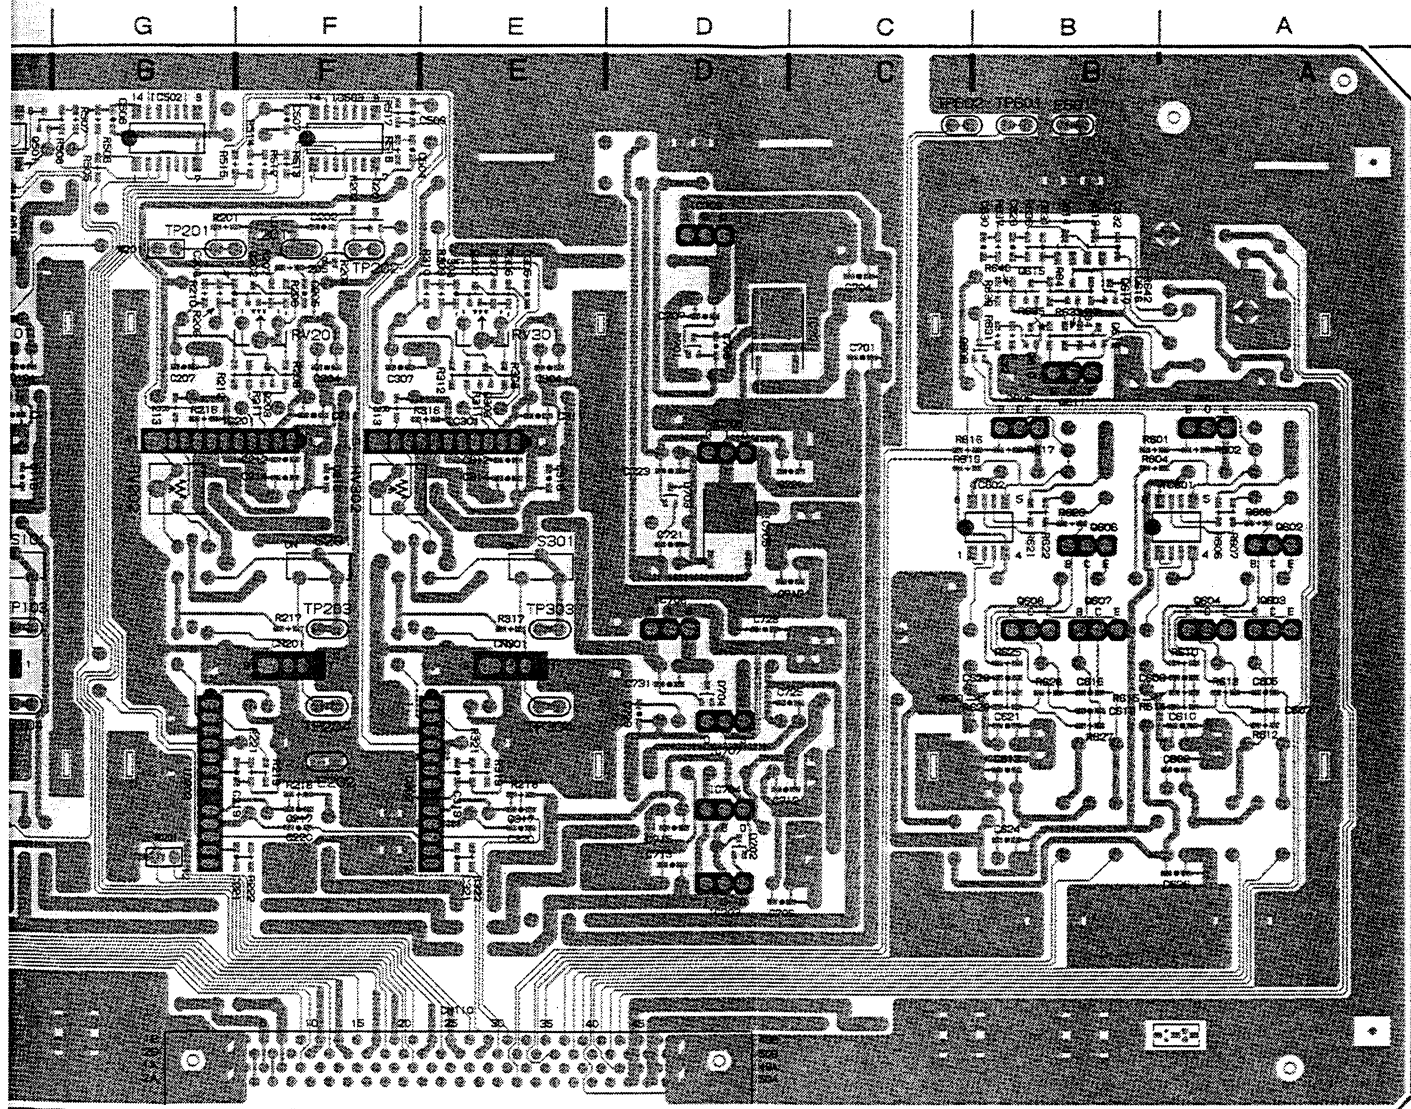

RP-70 1-648-904-11 B SIDE

RP-70(1-648-904-11)


CN1	J-4	FS708	C-5	RV202	G-3
CN101	H-4	FS709	C-5	RV301	E-2
CN110	E-5	FS710	C-5	RV302	F-3
CN201	F-4	FS711	C-5		
CN301	E-4	FS712	D-5	S1	J-3
		FS713	E-5	S101	H-3
*D701	D-2	FS714	F-5	S201	F-3
*D702	D-5	FS715	G-5	S301	E-3
*D703	D-3	FS716	J-5		
*D704	D-4	FS717	D-1	TP1	J-1
		FS718	D-1	TP2	J-1
E1	J-1	FS719	D-1	TP3	J-3
E2	J-4	FS720	H-5	TP4	J-4
E201	F-1	FS721	G-5	TP103	H-3
E202	F-4	FS722	G-5	TP104	H-4
E601	B-1	FS723	D-1	TP201	G-1
		FS724	E-1	TP202	F-1
		FS725	H-5	TP203	F-3
FS2	J-1	FS726	H-5	TP204	F-4
FS3	J-2			TP303	E-3
FS4	J-2			TP304	E-4
FS5	J-3	IC1	J-2	TP601	B-1
FS6	J-4	IC2	J-4	TP602	C-1
FS7	J-4	IC101	H-2		
FS101	H-2	IC102	H-4		
FS102	H-2	IC201	F-2		
FS103	H-3	IC202	G-4		
FS104	H-4	IC301	E-2		
FS105	H-4	IC302	E-4		
FS106	H-1	*IC501	H-1		
FS201	F-1	*IC502	G-1		
FS202	G-2	*IC503	F-1		
FS203	F-2	*IC601	A-3		
FS204	F-3	*IC602	B-3		
FS205	G-4	*IC701	D-2		
FS206	F-4	IC702	D-1		
FS301	E-2	IC703	D-5		
FS302	E-2	IC704	D-4		
FS303	E-3	*IC705	D-3		
FS304	F-5	IC706	D-3		
FS305	E-4	IC707	D-4		
FS501	E-1	IC708	D-3		
FS503	F-1				
FS504	F-1	*Q1	J-1		
FS505	G-1	*Q2	J-2		
FS506	H-1	*Q3	J-2		
FS507	H-1	*Q102	H-2		
FS508	H-1	*Q103	H-2		
FS509	H-1	*Q201	F-1		
FS510	J-1	*Q202	F-2		
FS511	J-1	*Q203	F-2		
FS601	B-2	*Q302	E-2		
FS602	B-2	*Q303	E-2		
FS603	B-2	*Q501	H-1		
FS604	B-3	Q601	A-2		
FS605	B-3	Q602	A-3		
FS606	B-4	Q603	A-3		
FS607	B-4	Q604	A-3		
FS609	A-2	Q605	B-2		
FS610	A-3	Q606	B-3		
FS611	B-3	Q607	B-3		
FS612	B-4	Q608	B-3		
FS613	A-4	*Q609	B-2		
FS614	B-1	*Q610	B-2		
FS615	A-5	Q611	B-2		
FS616	B-5	*Q612	B-2		
FS617	C-5	*Q613	B-1		
FS618	C-5	*Q614	B-1		
FS619	B-5	*Q615	B-2		
FS620	B-5	*Q616	B-2		
FS701	D-2	*Q617	B-2		
FS702	D-3				
FS703	D-4	RV1	J-2		
FS704	D-4	RV2	J-3		
FS705	C-4	RV101	H-2		
FS706	D-4	RV102	H-3		
FS707	D-5	RV201	F-2		

*: B SIDE


RP-70A


RP-70A

RP-70A ; RF PB AMP.

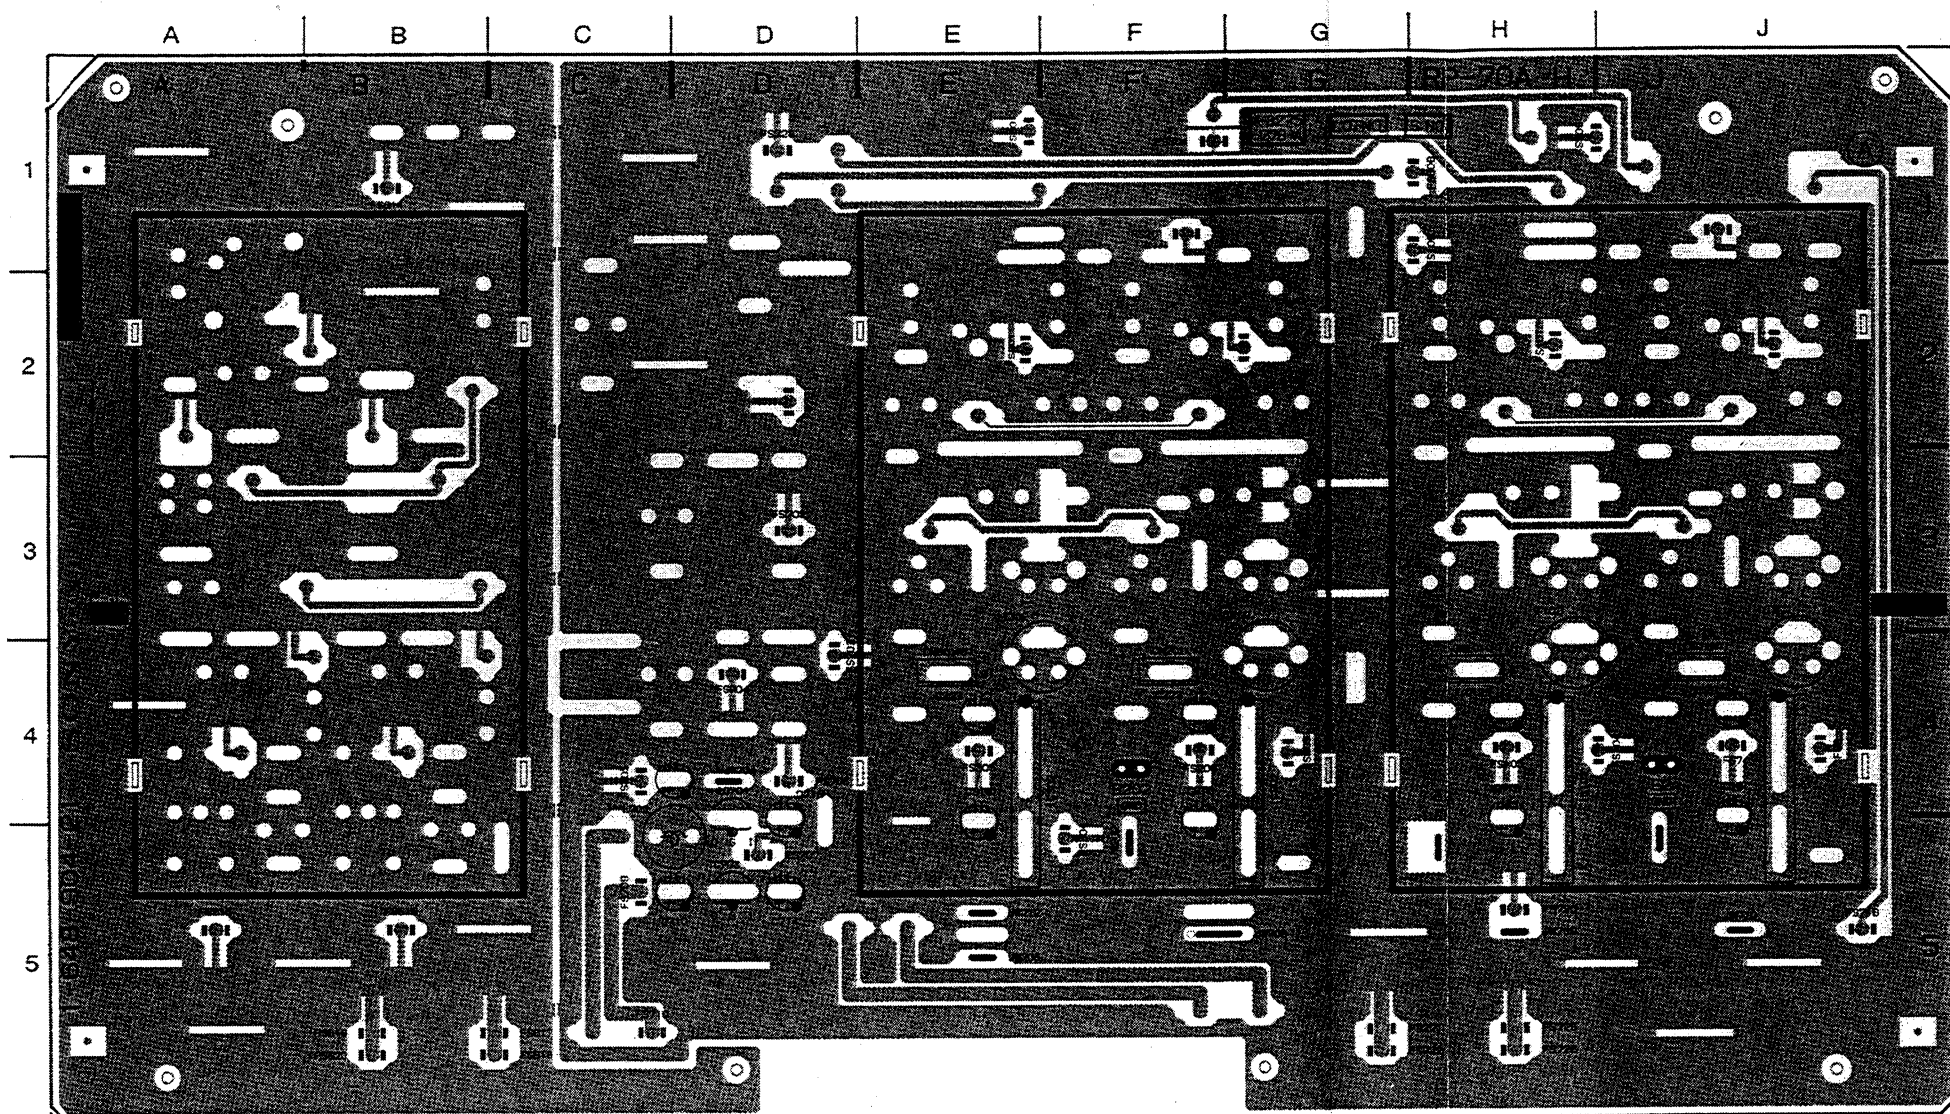

RP-70A 1-648-904-21 A SIDE

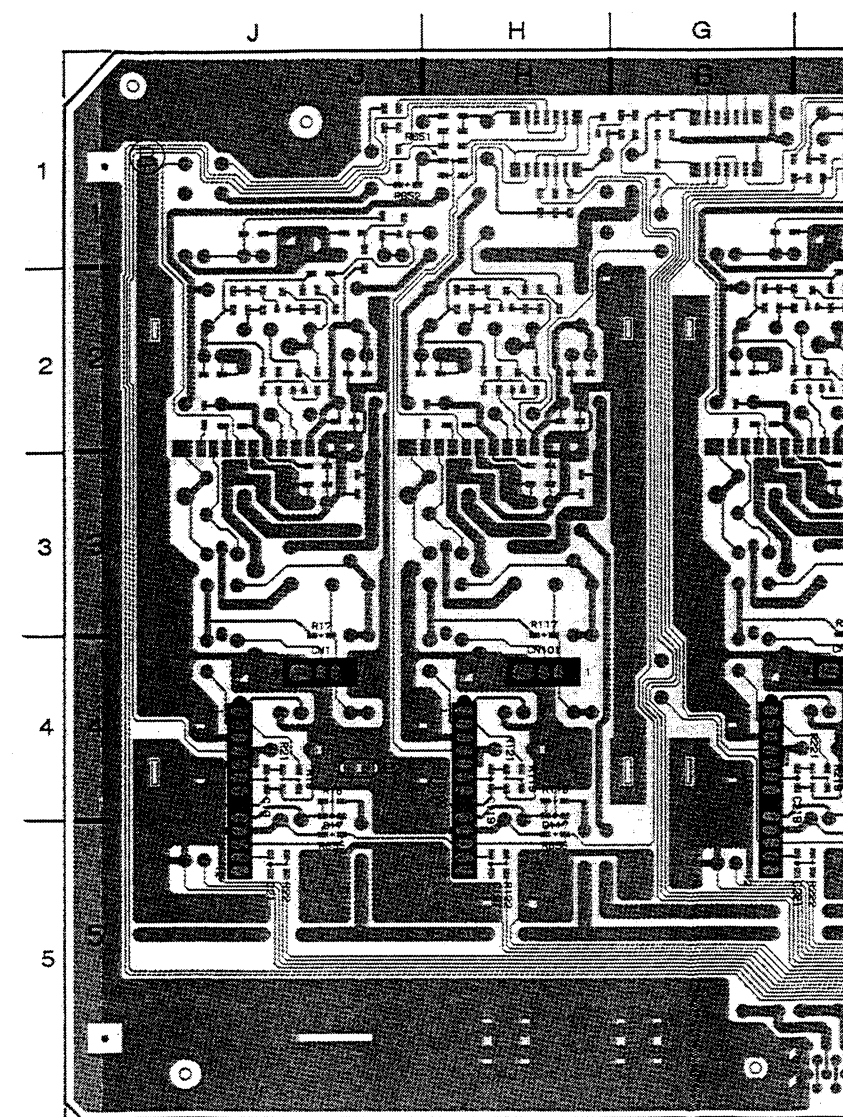

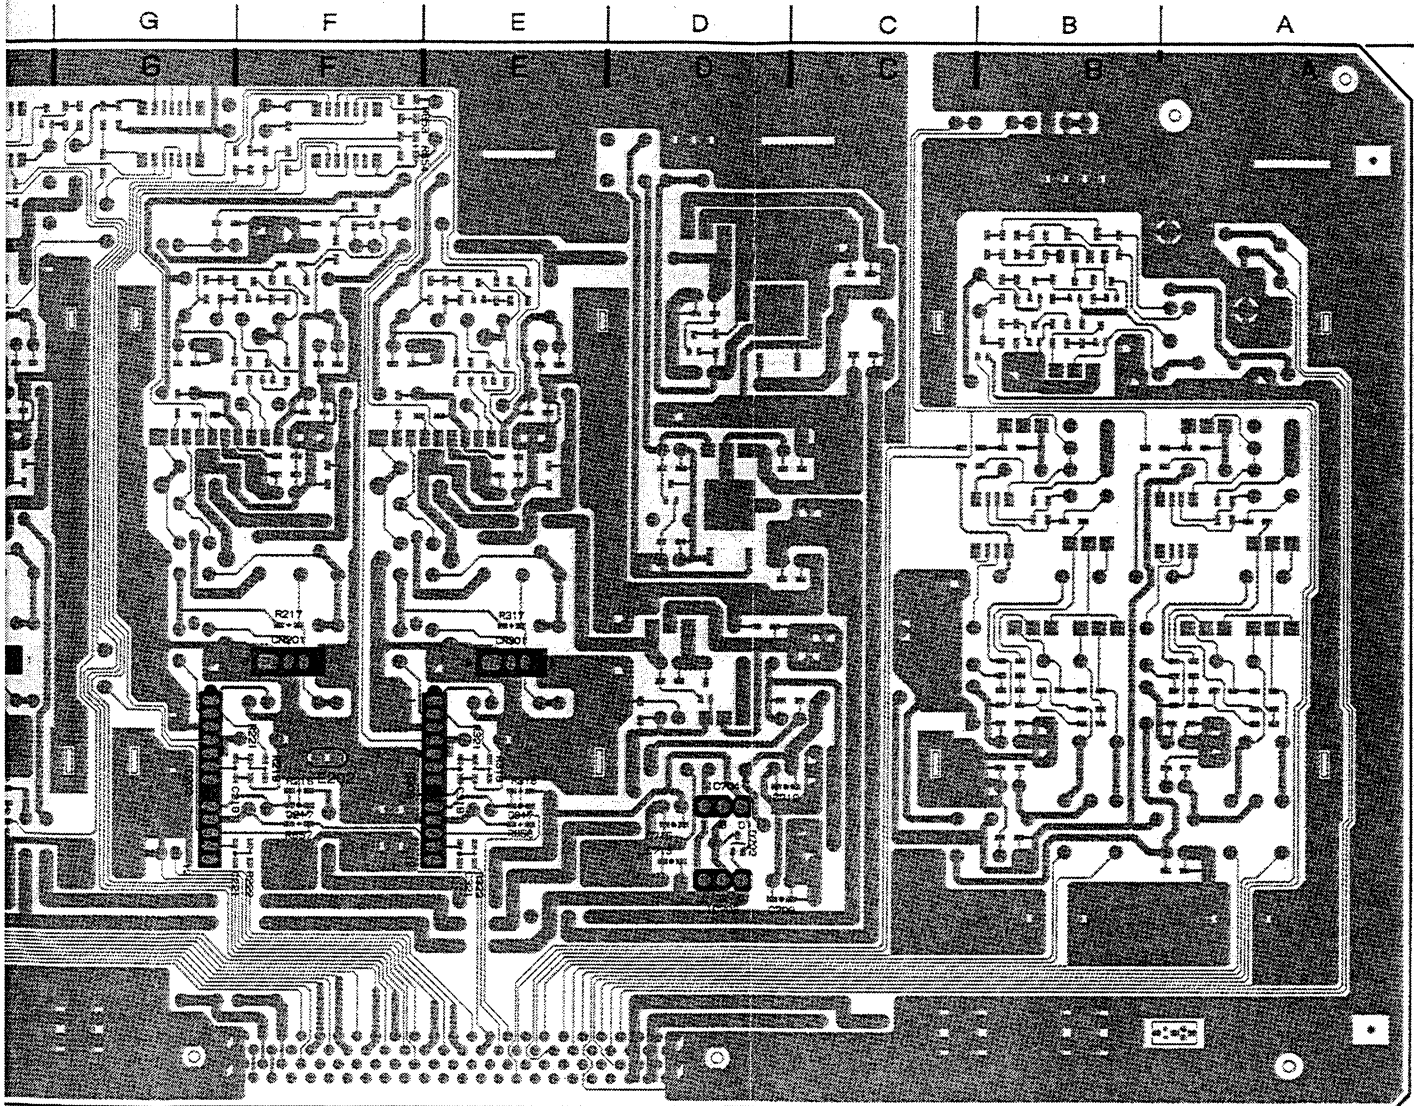


RP-70A 1-648-904-21 B SIDE

RP-70A(1-648-904-21)


- | | |
|-------|-----|
| CN1 | J-4 |
| CN101 | H-4 |
| CN110 | E-5 |
| CN201 | F-4 |
| CN301 | E-4 |
| | |
| *D702 | D-5 |
| | |
| E2 | J-4 |
| E202 | F-4 |
| | |
| FS2 | J-1 |
| FS3 | J-2 |
| FS6 | J-4 |
| FS7 | J-4 |
| FS101 | H-2 |
| FS104 | H-4 |
| FS105 | H-4 |
| FS106 | H-1 |
| FS201 | F-1 |
| FS202 | G-2 |
| FS205 | G-4 |
| FS206 | F-4 |
| FS301 | E-2 |
| FS304 | F-5 |
| FS305 | E-4 |
| FS501 | E-1 |
| FS504 | F-1 |
| FS506 | H-1 |
| FS509 | H-1 |
| FS614 | B-1 |
| FS615 | A-5 |
| FS616 | B-5 |
| FS617 | C-5 |
| FS618 | C-5 |
| FS619 | B-5 |
| FS620 | B-5 |
| FS701 | D-2 |
| FS702 | D-3 |
| FS703 | D-4 |
| FS704 | D-4 |
| FS705 | C-4 |
| FS706 | D-4 |
| FS707 | D-5 |
| FS709 | C-5 |
| FS710 | C-5 |
| FS716 | J-5 |
| FS720 | H-5 |
| FS721 | G-5 |
| FS722 | G-5 |
| FS723 | D-1 |
| FS725 | H-5 |
| FS726 | H-5 |
| | |
| IC2 | J-4 |
| IC102 | H-4 |
| IC202 | G-4 |
| IC302 | E-4 |
| IC703 | D-5 |
| IC704 | D-4 |
| | |
| T2 | J-4 |
| T102 | H-4 |
| T202 | G-4 |
| T302 | F-4 |

*: B SIDE

SS-53 1-648-903-11 A SIDE

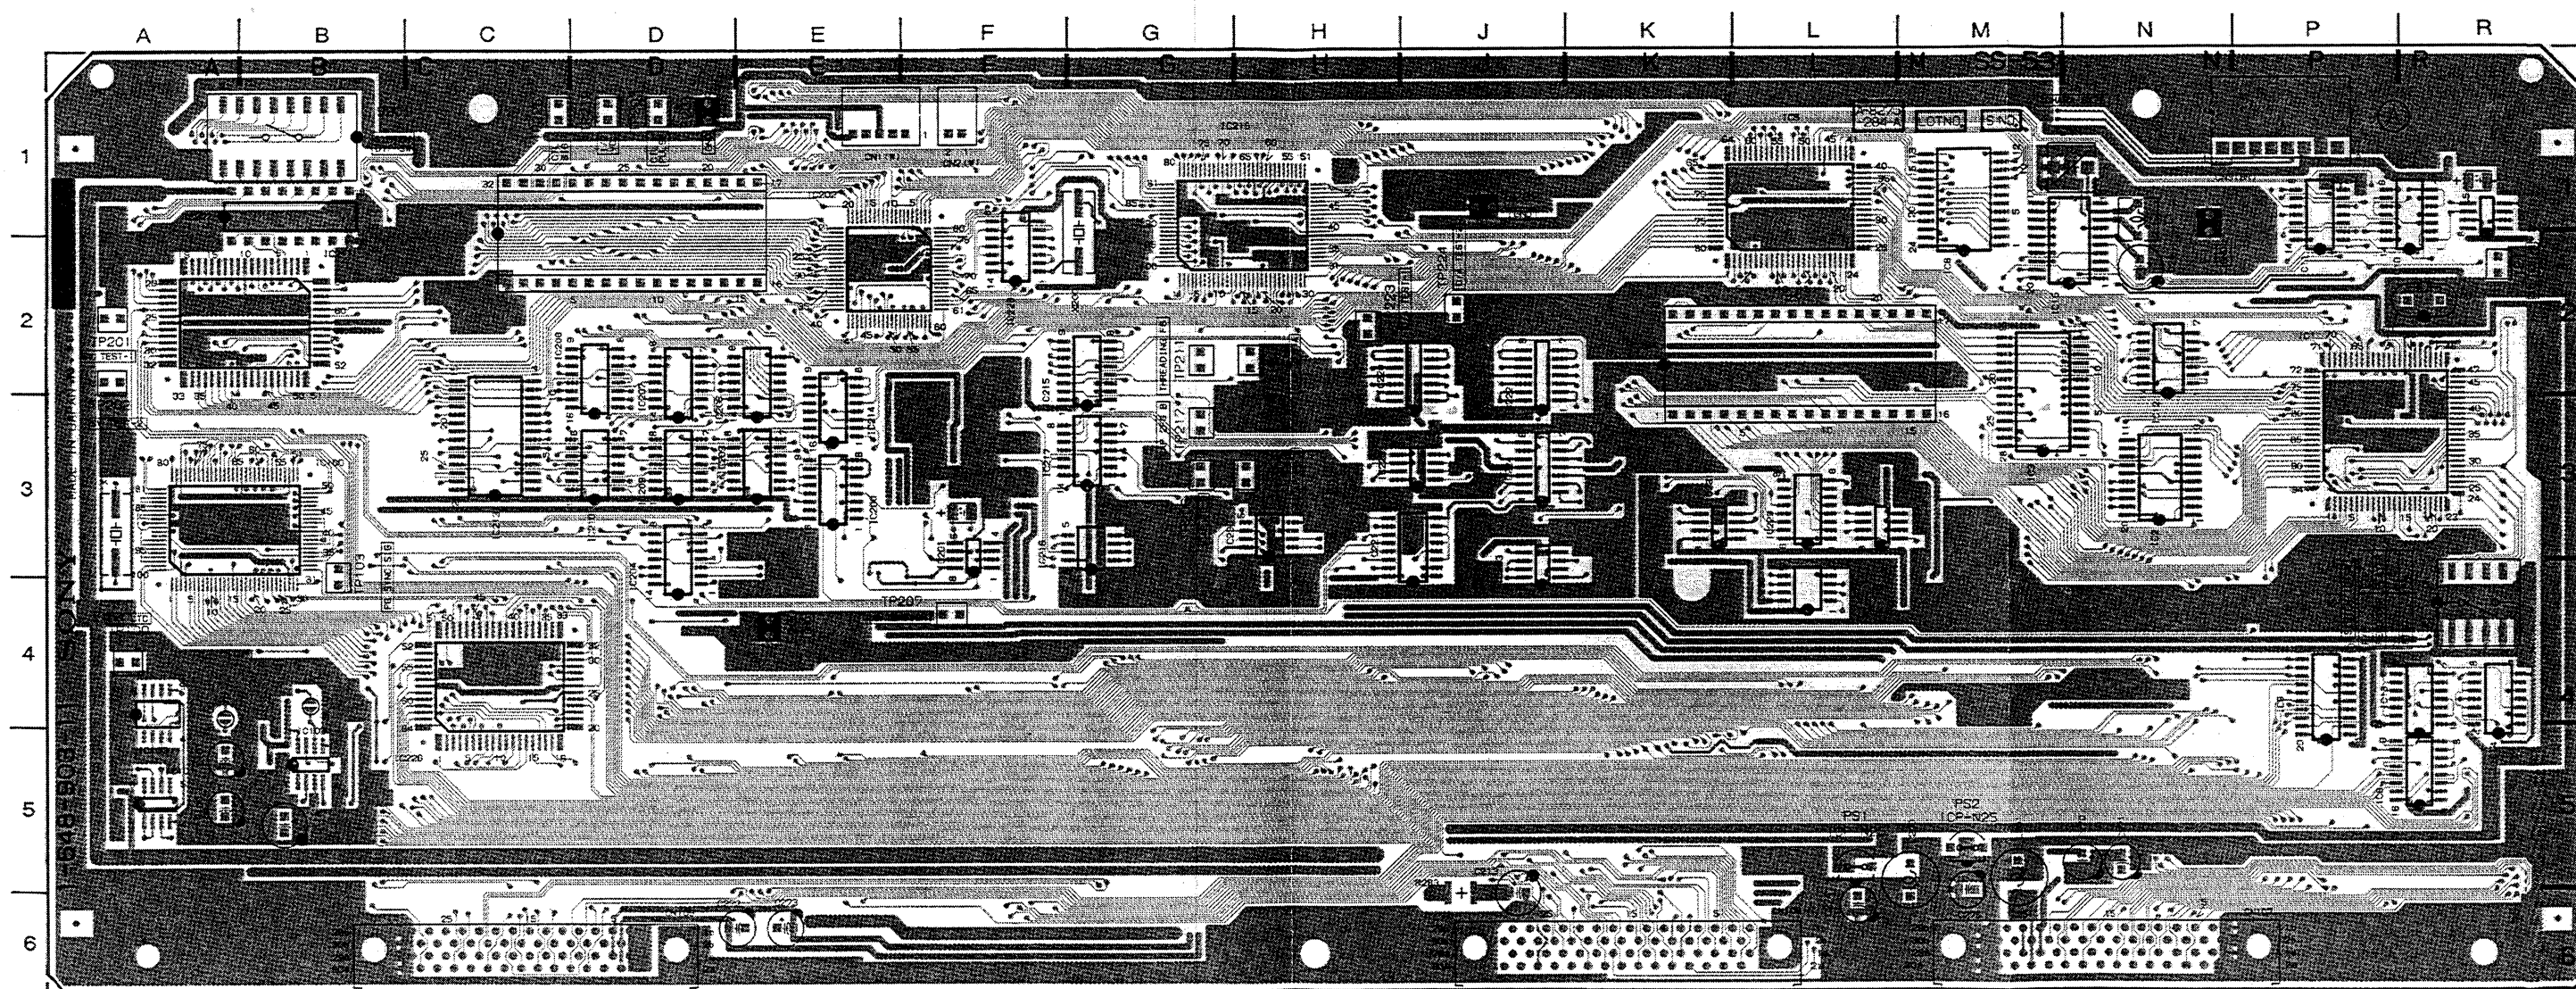

ACTER GENERATOR

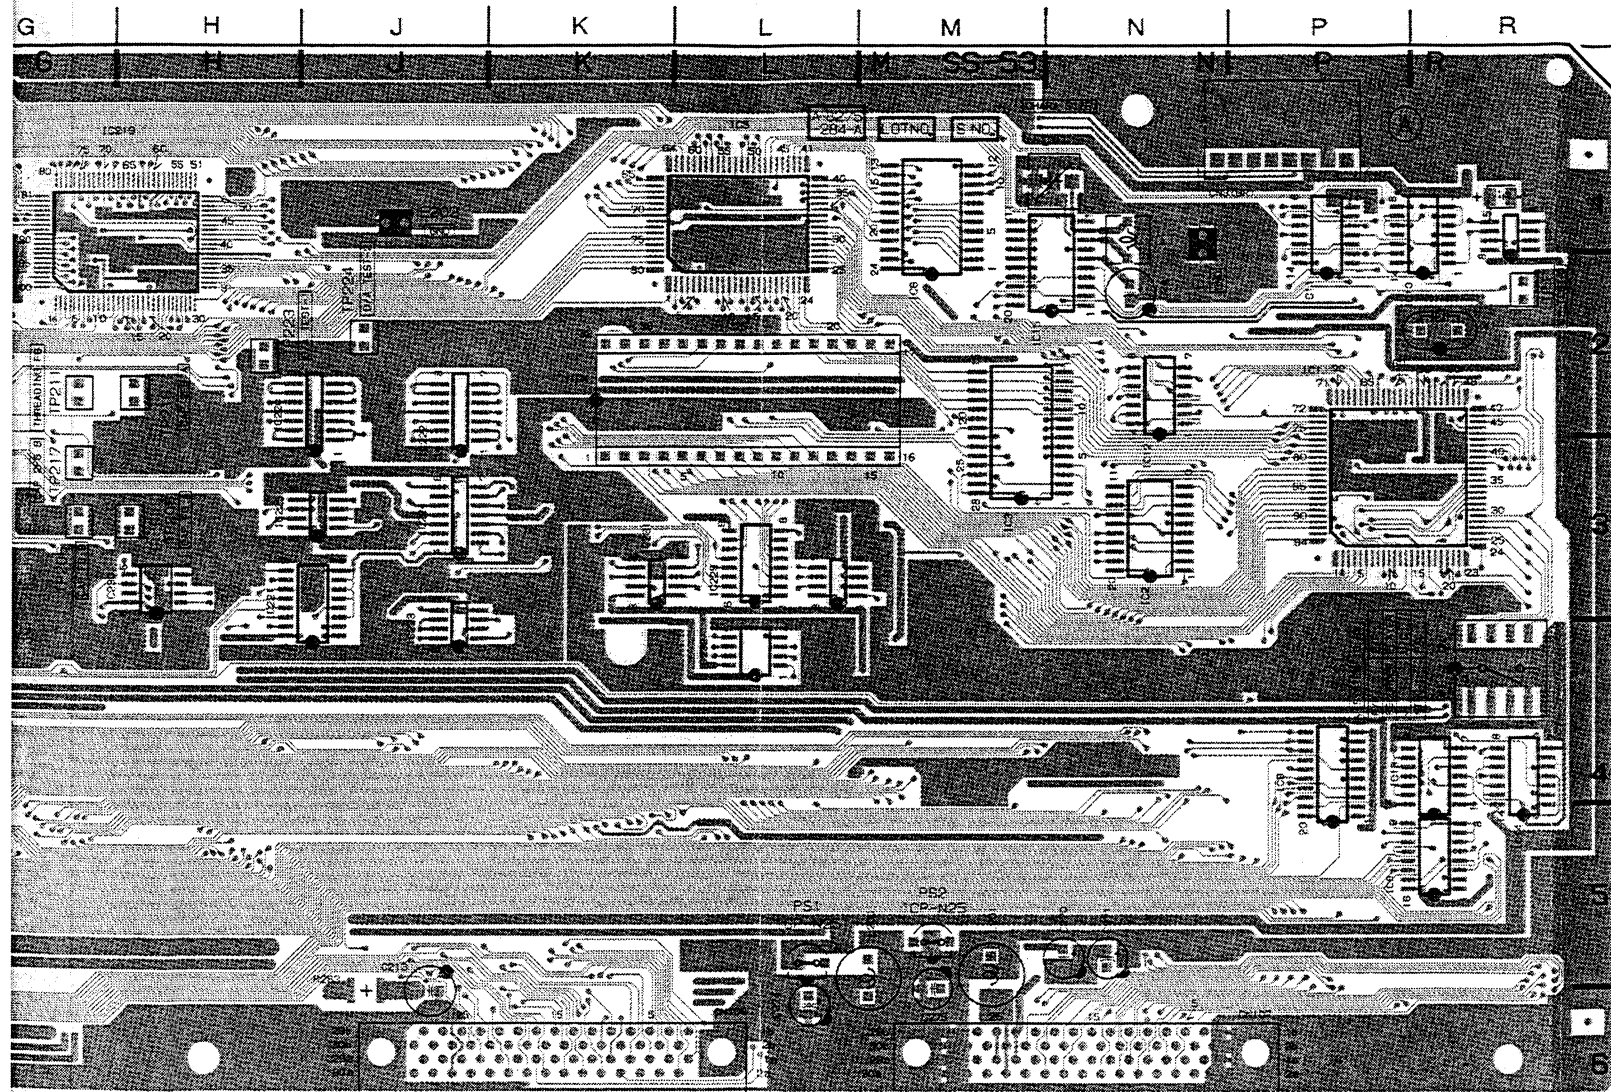


SS-53 1-648-903-11 A SIDE

SS-53(1-648-903-11)

CN14	K-3	IC223	J-4
CN1212	C-2	IC224	J-3
		IC225	J-3
CN1	E-1	IC226	C-4
CN2	F-1	IC227	A-2
CN3	P-1	IC228	F-2
CN107	N-6	IC229	L-3
CN108	K-6	IC230	H-3
CN109	C-6	IC231	L-3
		IC232	L-4
CV1	N-1	IC233	M-3
*D100	A-5	PS1	L-5
*D101	A-5	PS2	M-5
*D102	A-5		
*D103	A-5	*Q105	B-5
*D104	A-5	*Q106	B-5
*D105	B-4	*Q107	B-4
*D200	E-3	*Q108	B-5
*D201	E-3	*Q204	D-5
*D202	E-3	*Q205	D-5
*D203	E-3	*Q206	D-5
*D204	E-3	*Q207	D-5
*D205	E-2	*Q208	D-5
*D206	F-3	*Q209	D-5
*D207	F-3	*Q210	J-3
*D208	E-3	*Q211	J-3
*D210	G-4		
*D211	E-2	*RB1	P-3
*D213	E-3	*RB2	R-2
*D214	J-6	*RB201	E-1
*D215	J-5	*RB202	B-1
		*RB203	K-4
E1	N-1		
E200	E-4	S1	R-4
E201	D-1	S201	B-1
E202	J-1		
IC1	P-3	TP1	R-2
IC2	N-3	TP100	A-4
IC3	N-3	TP103	B-4
IC4	K-3	TP201	A-2
IC5	L-1	TP202	A-2
IC6	M-2	TP203	D-1
IC7	R-1	TP205	H-3
IC8	R-5	TP206	G-3
IC9	P-5	TP207	F-4
IC10	R-2	TP211	G-2
IC11	P-2	TP216	H-2
IC12	N-2	TP217	G-3
IC15	N-2	TP219	D-1
IC100	A-3	TP223	H-2
IC101	A-5	TP224	J-2
IC102	A-5	TP225	C-1
IC103	B-5		
IC200	E-3	X1	R-2
IC201	F-4	X101	A-3
IC202	E-2	X200	G-1
IC203	E-3		
IC204	D-4		
IC206	E-3		
IC207	D-3		
IC208	D-3		
IC209	D-3		
IC210	D-3		
IC211	B-2		
IC212	C-2		
IC213	C-3		
IC214	E-3		
IC215	G-3		
IC216	G-3		
IC217	G-3		
IC219	H-1		
IC220	J-3		
IC221	J-4		
IC222	J-3		


*: B SIDE

SS-53 ; SYSTEM CONTROL, SERVO SYSTEM MAIN, TIME CODE GENERATOR/READER, CHARACTER GENERATOR

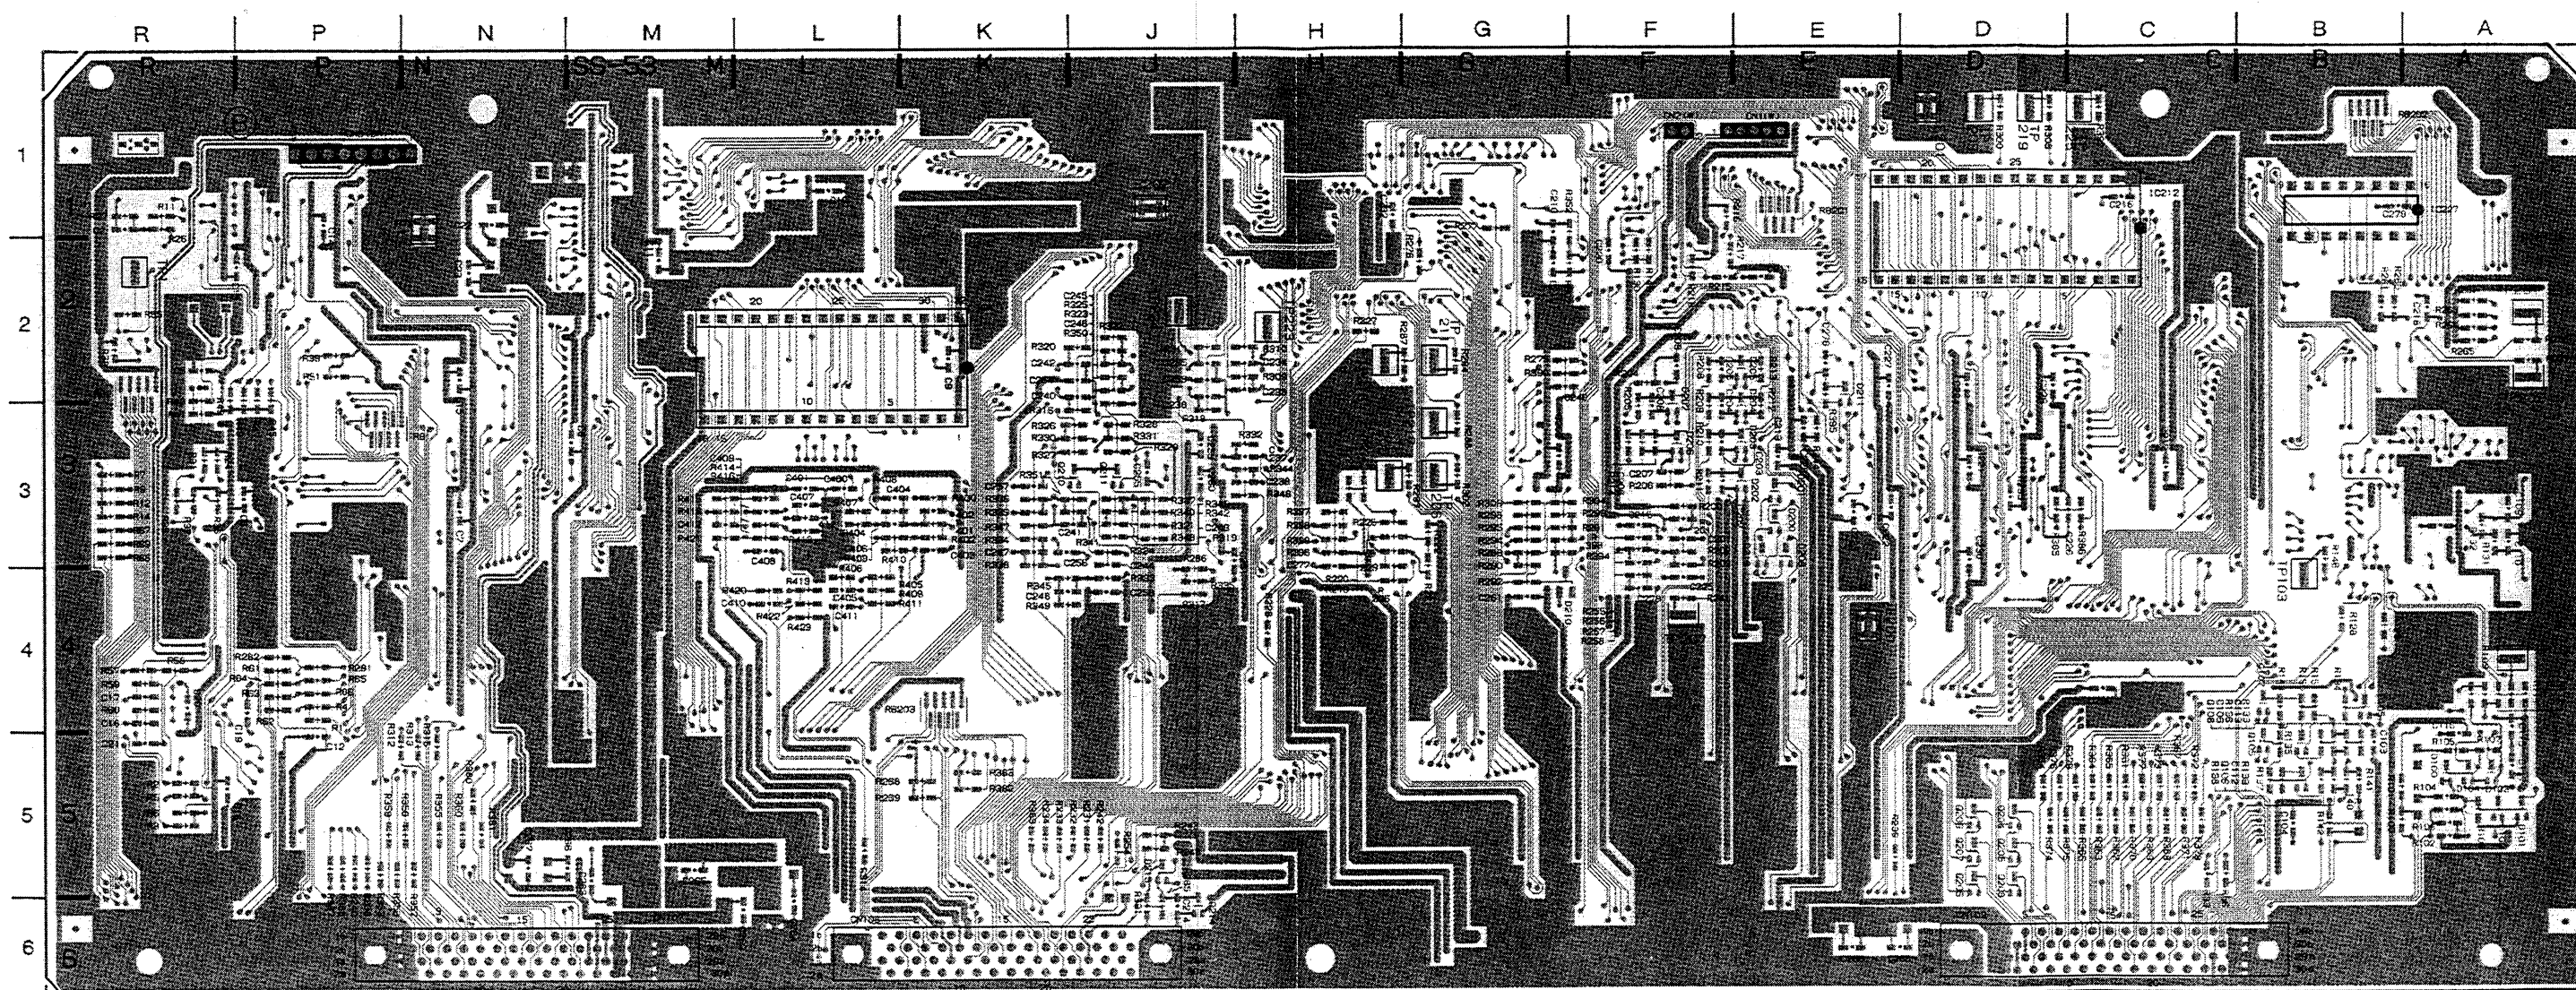

SS-53 1-648-903-11 B SIDE

ACTER GENERATOR

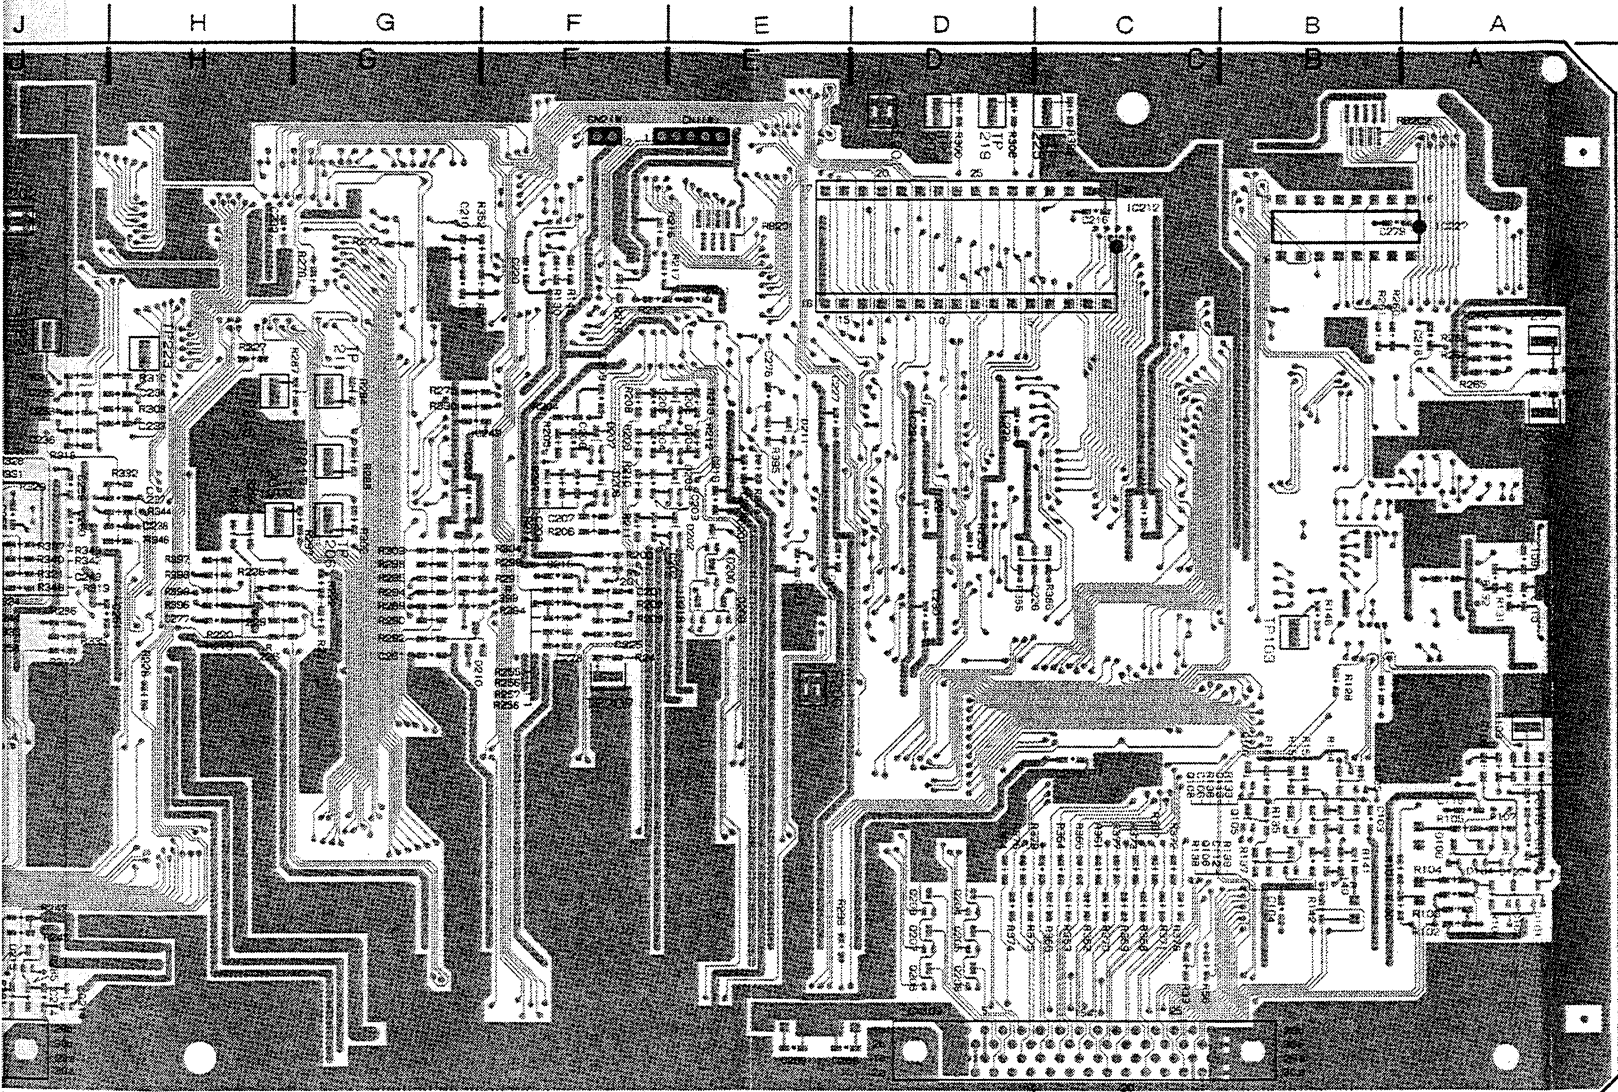


SS-53 1-648-903-11 B SIDE

SS-53(1-648-903-11)


CN14	K-3	IC223	J-4
CN1212	C-2	IC224	J-3
		IC225	J-3
CN1	E-1	IC226	C-4
CN2	F-1	IC227	A-2
CN3	P-1	IC228	F-2
CN107	N-6	IC229	L-3
CN108	K-6	IC230	H-3
CN109	C-6	IC231	L-3
		IC232	L-4
CV1	N-1	IC233	M-3
*D100	A-5	PS1	L-5
*D101	A-5	PS2	M-5
*D102	A-5		
*D103	A-5	*Q105	B-5
*D104	A-5	*Q106	B-5
*D105	B-4	*Q107	B-4
*D200	E-3	*Q108	B-5
*D201	E-3	*Q204	D-5
*D202	E-3	*Q205	D-5
*D203	E-3	*Q206	D-5
*D204	E-3	*Q207	D-5
*D205	E-2	*Q208	D-5
*D206	F-3	*Q209	D-5
*D207	F-3	*Q210	J-3
*D208	E-3	*Q211	J-3
*D210	G-4		
*D211	E-2	*RB1	P-3
*D213	F-3	*RB2	R-2
*D214	J-6	*RB201	E-1
*D215	J-5	*RB202	B-1
		*RB203	K-4
E1	N-1		
E200	E-4	S1	R-4
E201	D-1	S201	B-1
E202	J-1		
IC1	P-3	TP1	R-2
IC2	N-3	TP100	A-4
IC3	N-3	TP103	B-4
IC4	K-3	TP201	A-2
IC5	L-1	TP202	A-2
IC6	M-2	TP203	D-1
IC7	R-1	TP205	H-3
IC8	R-5	TP206	G-3
IC9	P-5	TP207	F-4
IC10	R-2	TP211	G-2
IC11	P-2	TP216	H-2
IC12	N-2	TP217	G-3
IC15	N-2	TP219	D-1
IC100	A-3	TP223	H-2
IC101	A-5	TP224	J-2
IC102	A-5	TP225	C-1
IC103	B-5		
IC200	E-3	X1	R-2
IC201	F-4	X101	A-3
IC202	E-2	X200	G-1
IC203	E-3		
IC204	D-4		
IC206	E-3		
IC207	D-3		
IC208	D-3		
IC209	D-3		
IC210	D-3		
IC211	B-2		
IC212	C-2		
IC213	C-3		
IC214	E-3		
IC215	G-3		
IC216	G-3		
IC217	G-3		
IC219	H-1		
IC220	J-3		
IC221	J-4		
IC222	J-3		

*: B SIDE

TBC-25 ; TIME BASE CORRECTOR, CTDM(EXPAND)

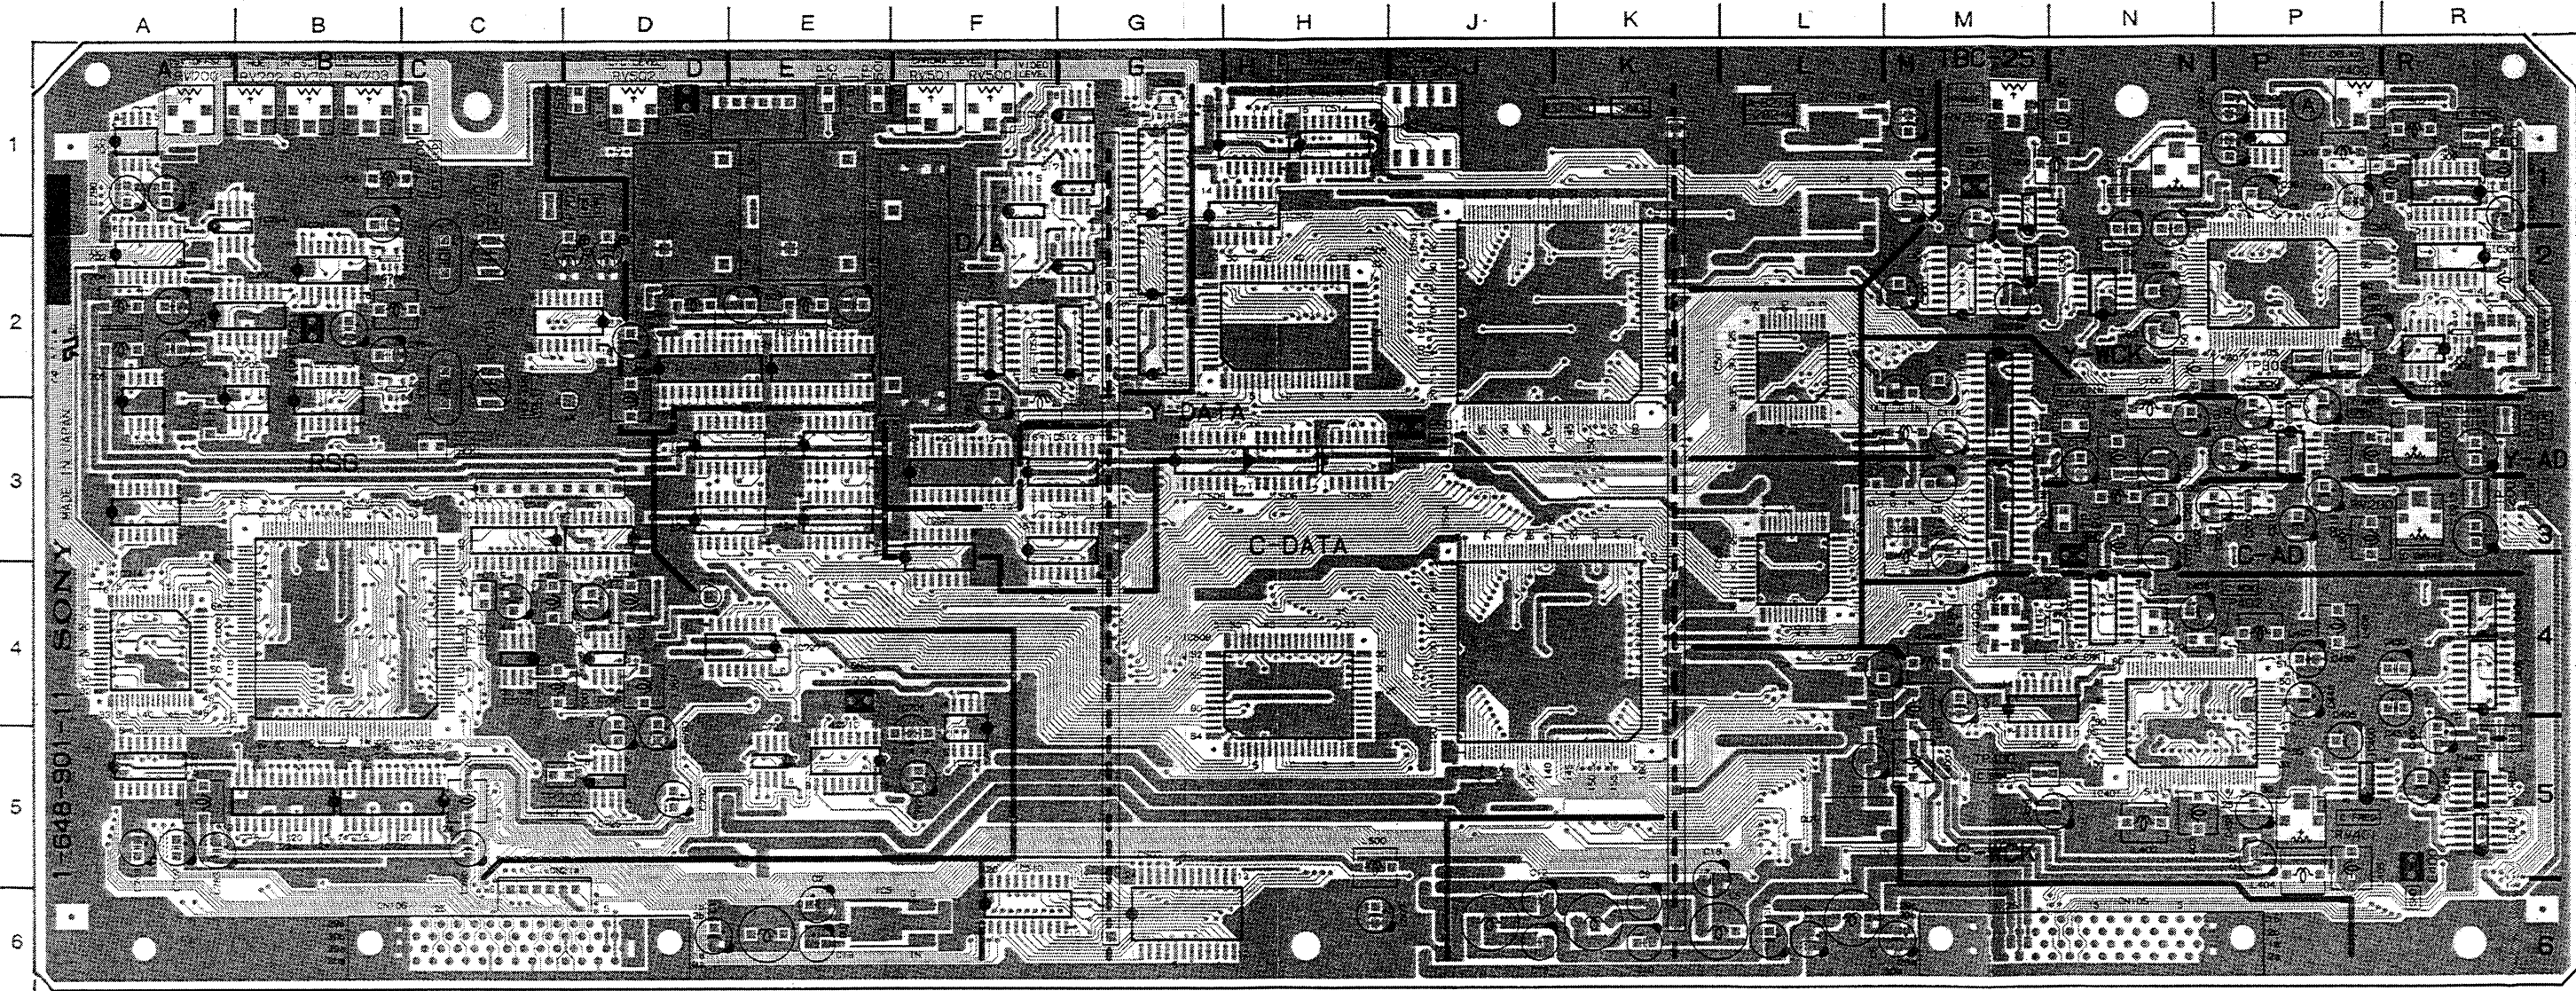

TBC-25 1-648-901-11 A SIDE

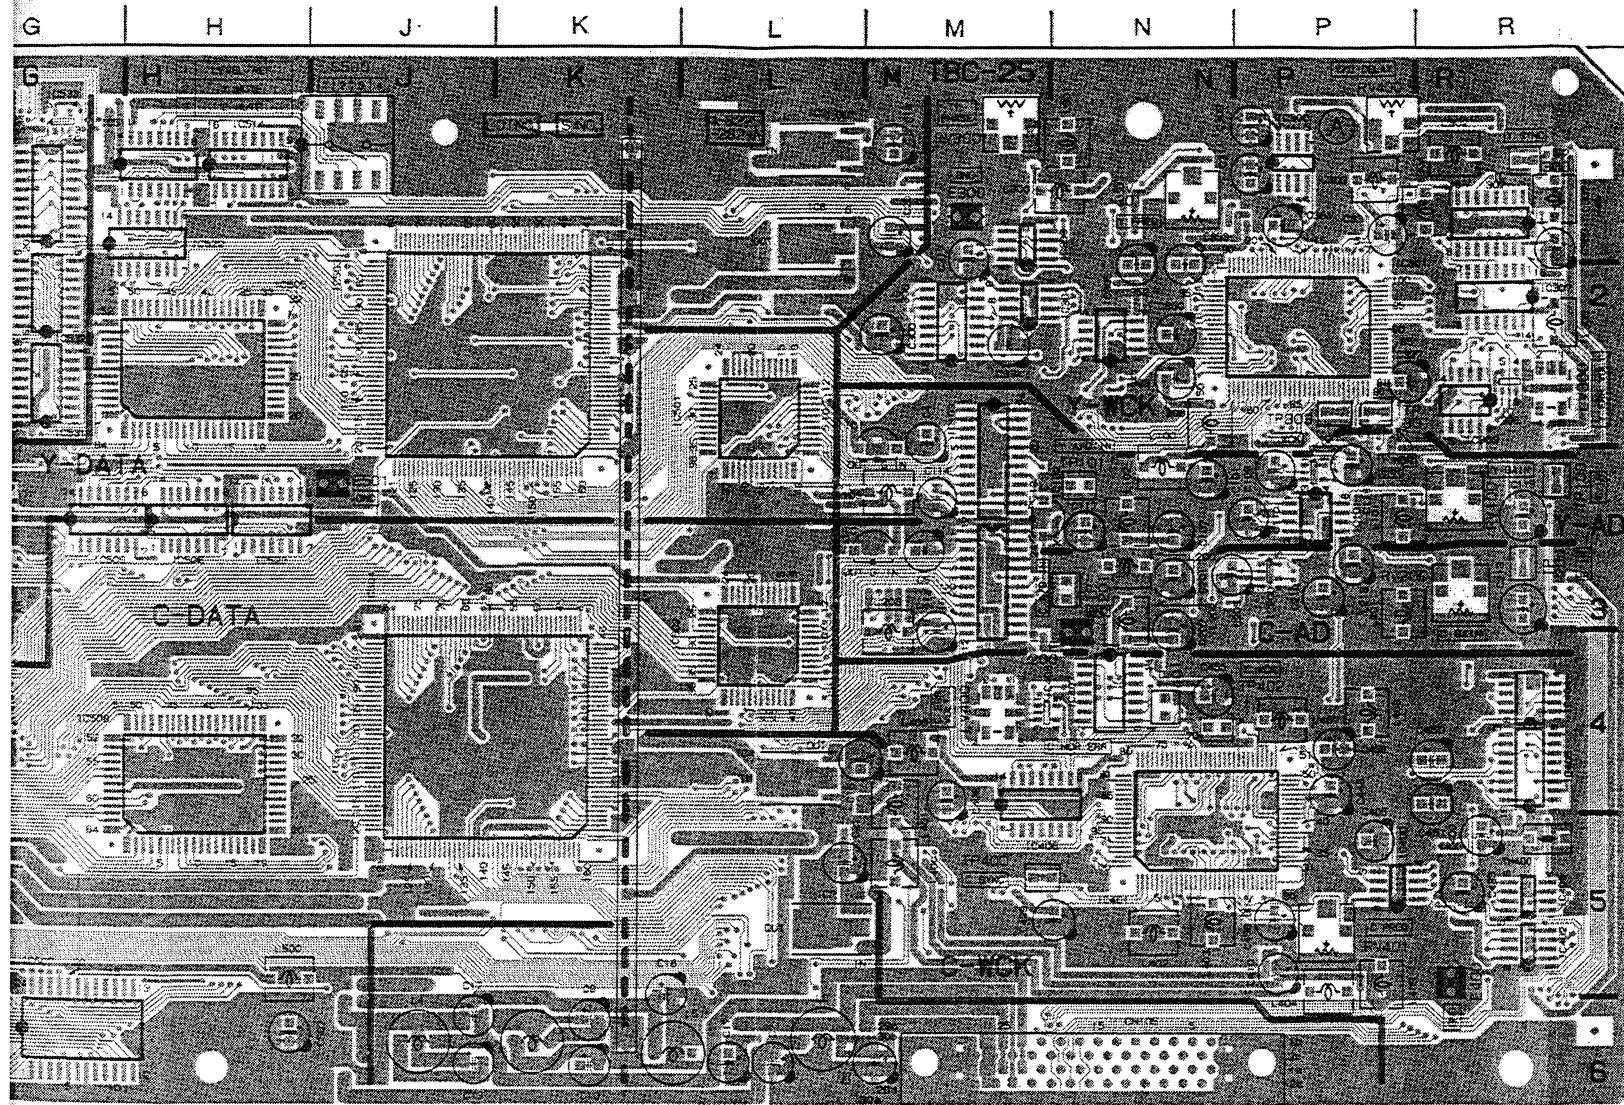


TBC-25 1-648-901-11 A SIDE

TBC-25(1-648-901-11)


CN1	E-1	IC503	J-2	*Q303	P-1
CN2	C-6	IC504	J-4	*Q304	N-2
CN105	N-6	IC505	H-2	*Q305	N-2
CN106	C-6	IC506	H-3	*Q306	R-2
		IC507	G-6	*Q400	P-5
CV700	C-2	IC508	H-4	*Q401	P-5
CV701	C-2	IC509	G-3	*Q402	P-5
		IC510	F-6	*Q403	P-5
*D1	M-2	IC511	H-1	*Q404	M-4
*D2	M-3	IC512	F-3	*Q405	R-4
*D100	M-3	IC513	F-4	*Q406	R-5
*D101	N-3	IC514	H-1	*Q407	N-4
*D102	R-3	IC515	G-2	*Q500	F-2
*D200	M-3	IC516	F-1	*Q501	F-1
*D301	N-2	IC517	G-1	*Q502	E-1
*D302	R-2	IC518	F-3	*Q503	D-1
*D303	R-2	IC519	E-2	*Q700	C-5
*D304	R-2	IC520	D-2	*Q701	C-4
*D401	P-4	IC521	G-1	*Q702	A-2
*D402	N-4	IC522	G-2	*Q703	C-1
*D403	M-4	IC523	F-4	*Q704	C-2
*D404	M-4	IC524	E-3	*Q705	C-2
*D502	K-2	IC525	E-3	*Q706	C-2
*D503	K-2	IC526	D-3	*Q707	C-5
*D504	G-1	IF527	D-3	*Q708	B-5
*D505	G-1	IC528	H-3	*Q709	D-5
*D506	M-5	IC529	F-2	*Q710	D-5
*D701	A-2	IC530	G-2	*Q711	D-5
*D702	C-2	IC531	G-2		
*D703	C-2	IC532	G-2	RV100	R-3
		IC533	G-1	RV200	R-3
E200	N-3	IC534	G-1	RV300	M-1
E300	M-1	IC700	A-2	RV301	N-1
E400	R-5	IC701	A-1	RV400	P-1
E500	D-1	IC702	A-2	RV401	P-5
E501	J-3	IC703	C-4	RV500	F-1
E700	E-4	IC704	A-2	RV501	F-1
E701	B-2	IC705	A-3	RV502	D-1
		IC706	D-4	RV700	A-1
FL500	F-2	IC707	E-5	RV701	B-1
FL501	E-1	IC708	F-5	RV702	B-1
FL502	D-1	IC709	A-3	RV703	B-1
		IC710	E-5		
IC1	M-2	IC711	D-3	S500	J-1
IC2	M-3	IC712	C-3		
IC3	L-1	IC713	C-3	TH400	R-5
IC4	L-4	IC714	A-4		
IC5	E-6	IC715	D-2	TP100	R-3
IC6	L-1	IC716	A-3	TP101	N-3
IC7	L-5	IC717	A-5	TP200	R-3
IC100	P-3	IC718	B-2	TP201	N-3
IC101	P-3	IC719	B-2	TP300	R-1
IC102	M-3	IC720	B-3	TP301	P-2
IC103	M-2	IC721	B-2	TP303	P-2
IC200	P-3	IC722	B-4	TP400	M-5
IC203	M-3	IC723	C-5	TP401	N-4
IC300	P-1	IC724	B-5	TP402	N-4
IC301	P-2	IC725	D-5	TP500	E-1
IC302	R-1	IC726	F-4	TP501	E-1
IC303	M-1	IC727	E-4	TP502	D-1
IC304	M-2			TP700	C-5
IC305	N-2	LV300	R-2	TP701	C-4
IC306	M-2	LV400	M-4	TP702	C-1
IC307	R-2			TP703	C-3
IC308	R-2	*Q100	R-3	TP704	C-1
IC400	R-5	*Q101	R-3		
IC401	N-5	*Q102	P-3	X700	C-2
IC402	R-5	*Q103	P-3	X701	C-2
IC403	R-5	*Q104	R-3		
IC404	R-4	*Q200	R-3		
IC405	R-4	*Q201	R-3		
IC406	M-5	*Q202	P-3		
IC407	N-4	*Q203	P-3		
IC408	M-4	*Q300	P-1		
IC501	L-2	*Q301	P-1		
IC502	L-4	*Q302	P-1		

*: B SIDE

TBC-25 ; TIME BASE CORRECTOR, CTDM(EXPAND)

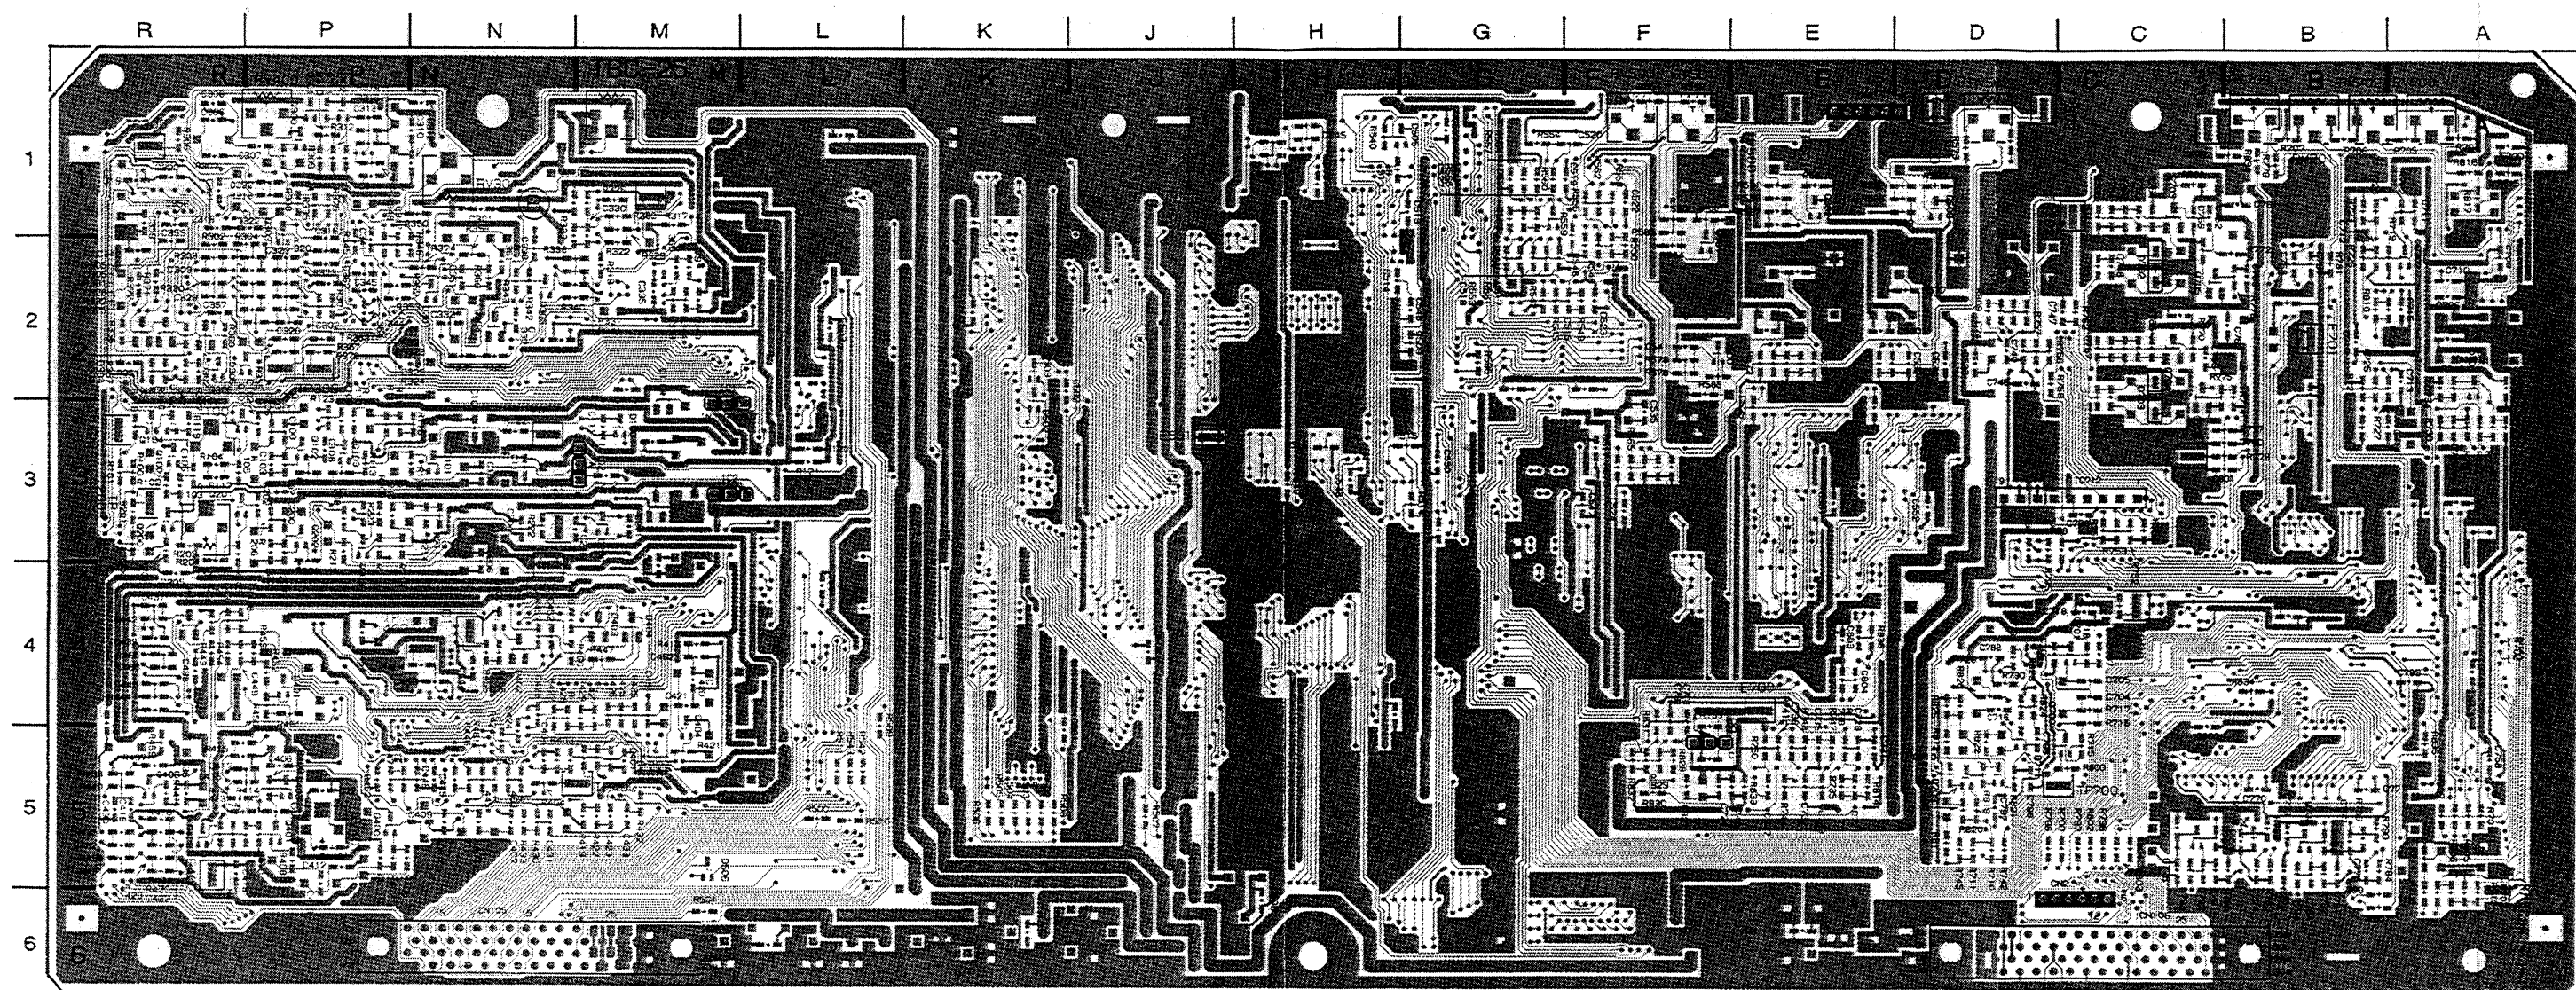

TBC-25 1-648-901-11 B SIDE

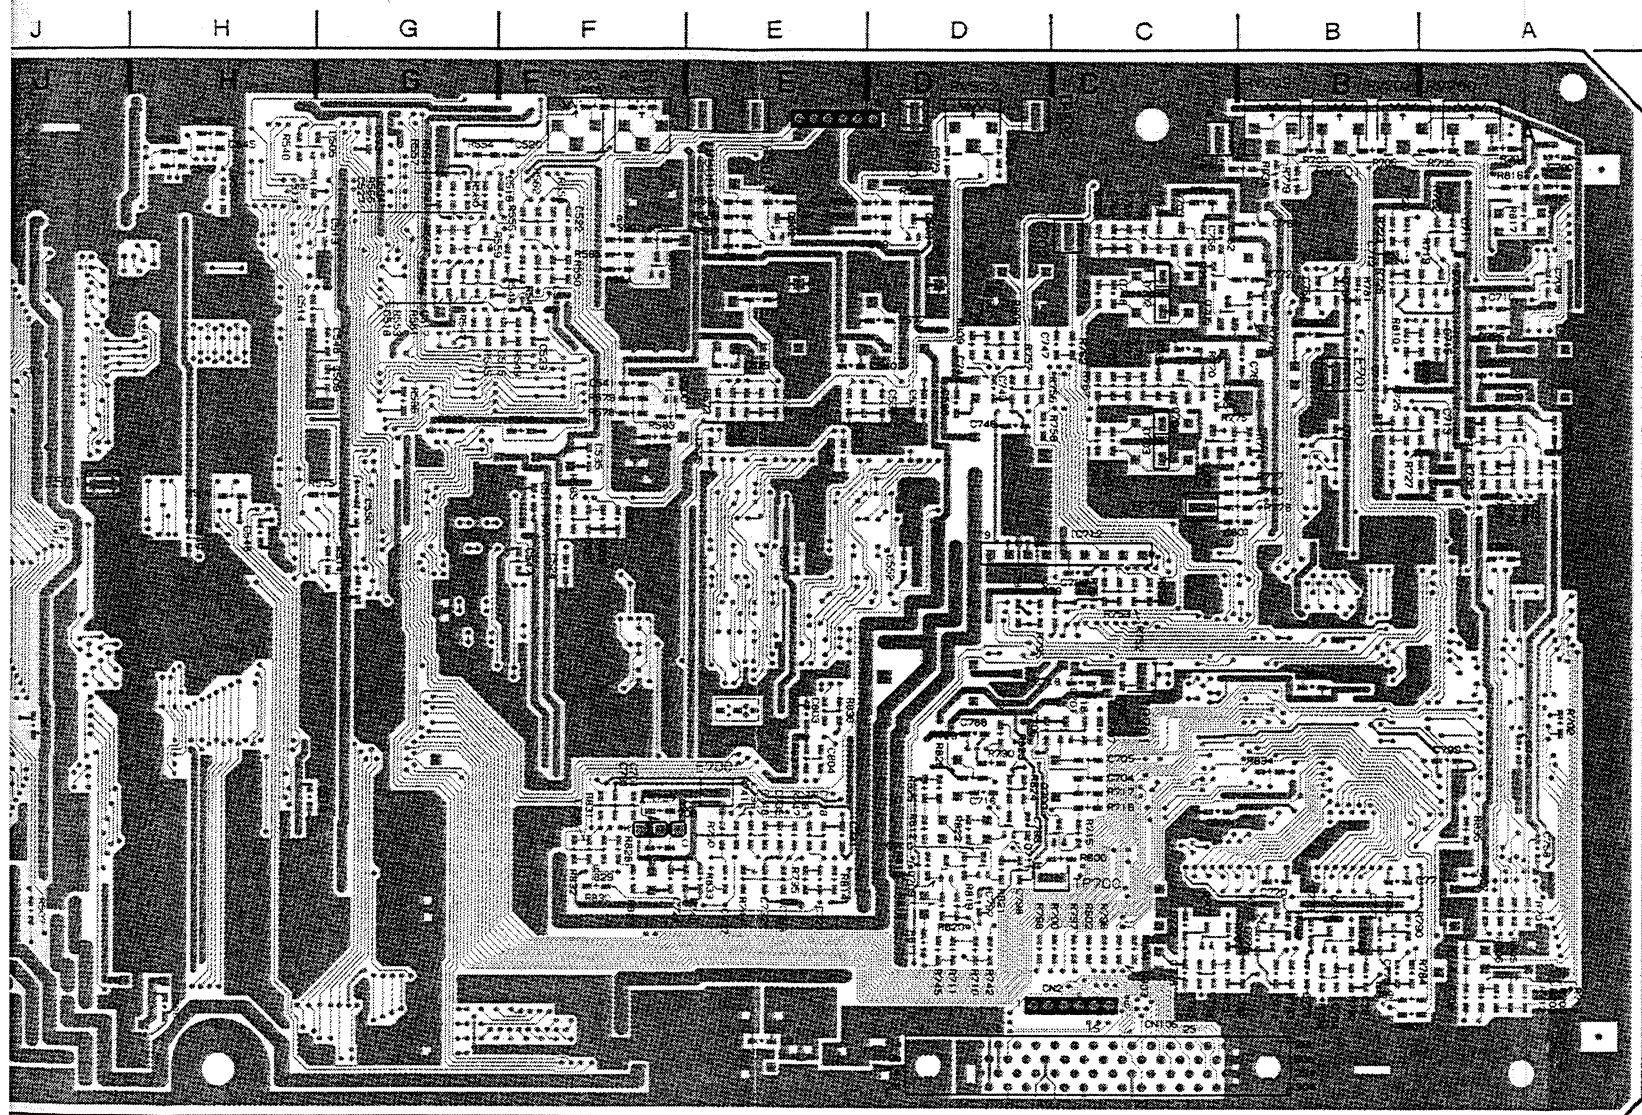


TBC-25 1-648-901-11 B SIDE

TBC-25(1-648-901-11)

CN1	E-1	IC503	J-2	*Q303	P-1
CN2	C-6	IC504	J-4	*Q304	N-2
CN105	N-6	IC505	H-2	*Q305	N-2
CN106	C-6	IC506	H-3	*Q306	R-2
		IC507	G-6	*Q400	P-5
CV700	C-2	IC508	H-4	*Q401	P-5
CV701	C-2	IC509	G-3	*Q402	R-5
		IC510	F-6	*Q403	P-5
*D1	M-2	IC511	H-1	*Q404	M-4
*D2	M-3	IC512	F-3	*Q405	R-4
*D100	M-3	IC513	F-4	*Q406	R-5
*D101	N-3	IC514	H-1	*Q407	N-4
*D102	R-3	IC515	G-2	*Q500	F-2
*D200	M-3	IC516	F-1	*Q501	F-1
*D301	N-2	IC517	G-1	*Q502	E-1
*D302	R-2	IC518	F-3	*Q503	D-1
*D303	R-2	IC519	E-2	*Q700	C-5
*D304	R-2	IC520	D-2	*Q701	C-4
*D401	P-4	IC521	G-1	*Q702	A-2
*D402	N-4	IC522	G-2	*Q703	C-1
*D403	M-4	IC523	F-4	*Q704	C-2
*D404	M-4	IC524	E-3	*Q705	C-2
*D502	K-2	IC525	E-3	*Q706	C-2
*D503	K-2	IC526	D-3	*Q707	C-5
*D504	G-1	IF527	D-3	*Q708	B-5
*D505	G-1	IC528	H-3	*Q709	D-5
*D506	M-5	IC529	F-2	*Q710	D-5
*D701	A-2	IC530	G-2	*Q711	D-5
*D702	C-2	IC531	G-2		
*D703	C-2	IC532	G-2	RV100	R-3
		IC533	G-1	RV200	R-3
E200	N-3	IC534	G-1	RV300	M-1
E300	M-1	IC700	A-2	RV301	N-1
E400	R-5	IC701	A-1	RV400	P-1
E500	D-1	IC702	A-2	RV401	P-5
E501	J-3	IC703	C-4	RV500	F-1
E700	E-4	IC704	A-2	RV501	F-1
E701	B-2	IC705	A-3	RV502	D-1
		IC706	D-4	RV700	A-1
FL500	F-2	IC707	E-5	RV701	B-1
FL501	E-1	IC708	F-5	RV702	B-1
FL502	D-1	IC709	A-3	RV703	B-1
		IC710	E-5		
IC1	M-2	IC711	D-3	S500	J-1
IC2	M-3	IC712	C-3	TH400	R-5
IC3	L-1	IC713	C-3		
IC4	L-4	IC714	A-4	TP100	R-3
IC5	E-6	IC715	D-2	TP101	N-3
IC6	L-1	IC716	A-3	TP200	R-3
IC7	L-5	IC717	A-5	TP201	N-3
IC100	P-3	IC718	B-2	TP300	R-1
IC101	P-3	IC719	B-2	TP301	P-2
IC102	M-3	IC720	B-3	TP303	P-2
IC103	M-2	IC721	B-2	TP400	M-5
IC200	P-3	IC722	B-4	TP401	N-4
IC203	M-3	IC723	C-5	TP402	N-4
IC300	P-1	IC724	B-5	TP500	E-1
IC301	P-2	IC725	D-5	TP501	E-1
IC302	R-1	IC726	F-4	TP502	D-1
IC303	M-1	IC727	E-4	TP700	C-5
IC304	M-2			TP701	C-4
IC305	N-2	LV300	R-2	TP702	C-1
IC306	M-2	LV400	M-4	TP703	C-3
IC307	R-2			TP704	C-1
IC308	R-2	*Q100	R-3		
IC400	R-5	*Q101	R-3	X700	C-2
IC401	N-5	*Q102	P-3	X701	C-2
IC402	R-5	*Q103	P-3		
IC403	R-5	*Q104	R-3		
IC404	R-4	*Q200	R-3		
IC405	R-4	*Q201	R-3		
IC406	M-5	*Q202	P-3		
IC407	N-4	*Q203	P-3		
IC408	M-4	*Q300	P-1		
IC501	L-2	*Q301	P-1		
IC502	L-4	*Q302	P-1		


*: B SIDE

VP-43/43A ; Y/C PB PROCESS(PB RF EQ, DEMOD., Y-RF ENVELOPE DET), VIDEO OUTPUT DRIVER, ENCODE, SYNC/CHARA MIX

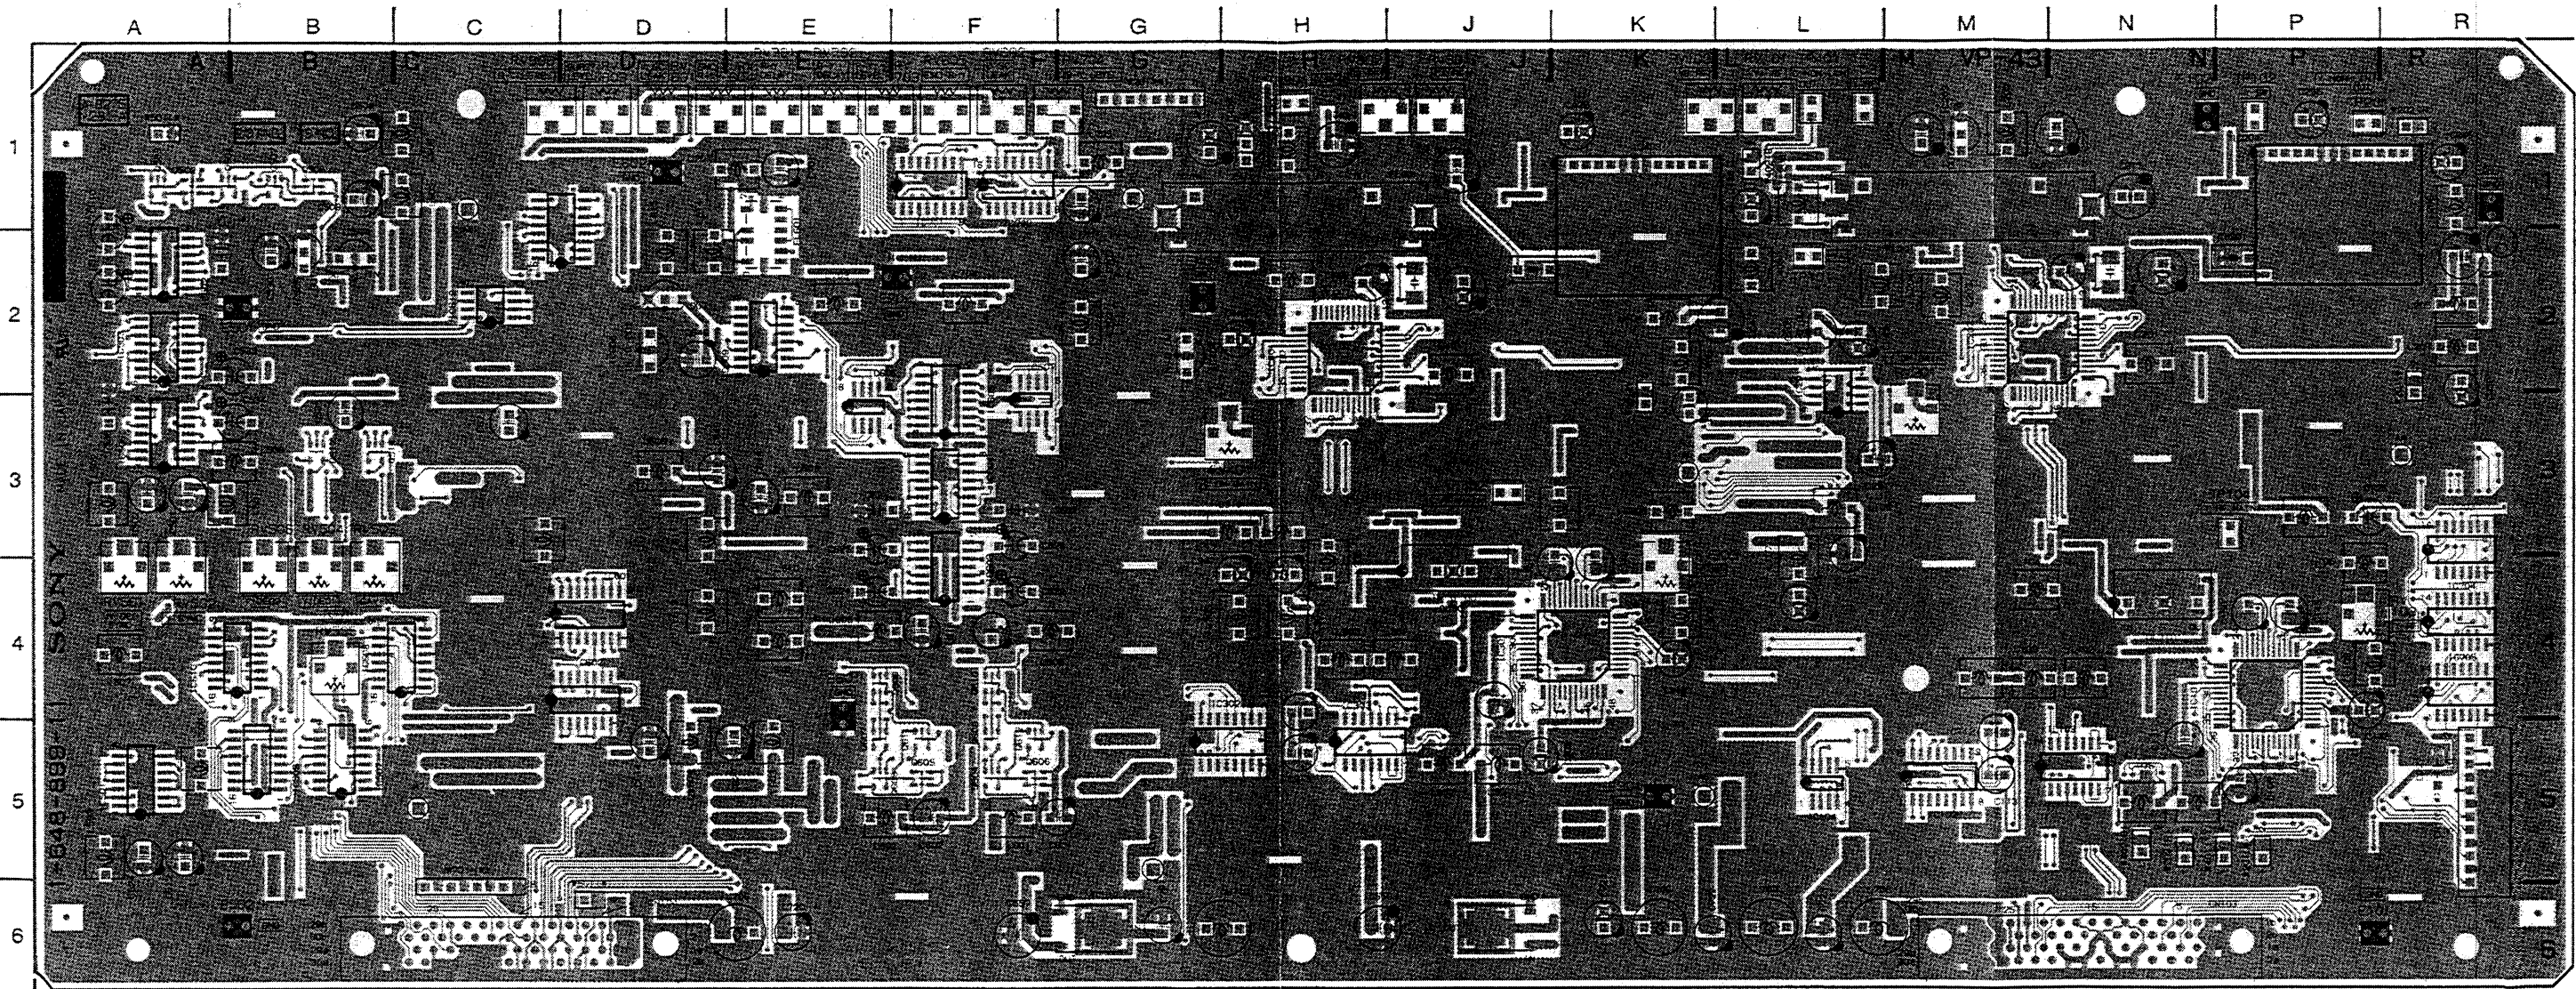

VP-43/43A 1-648-899-11 A SIDE

VER, ENCODE, SYNC/CHARA MIX

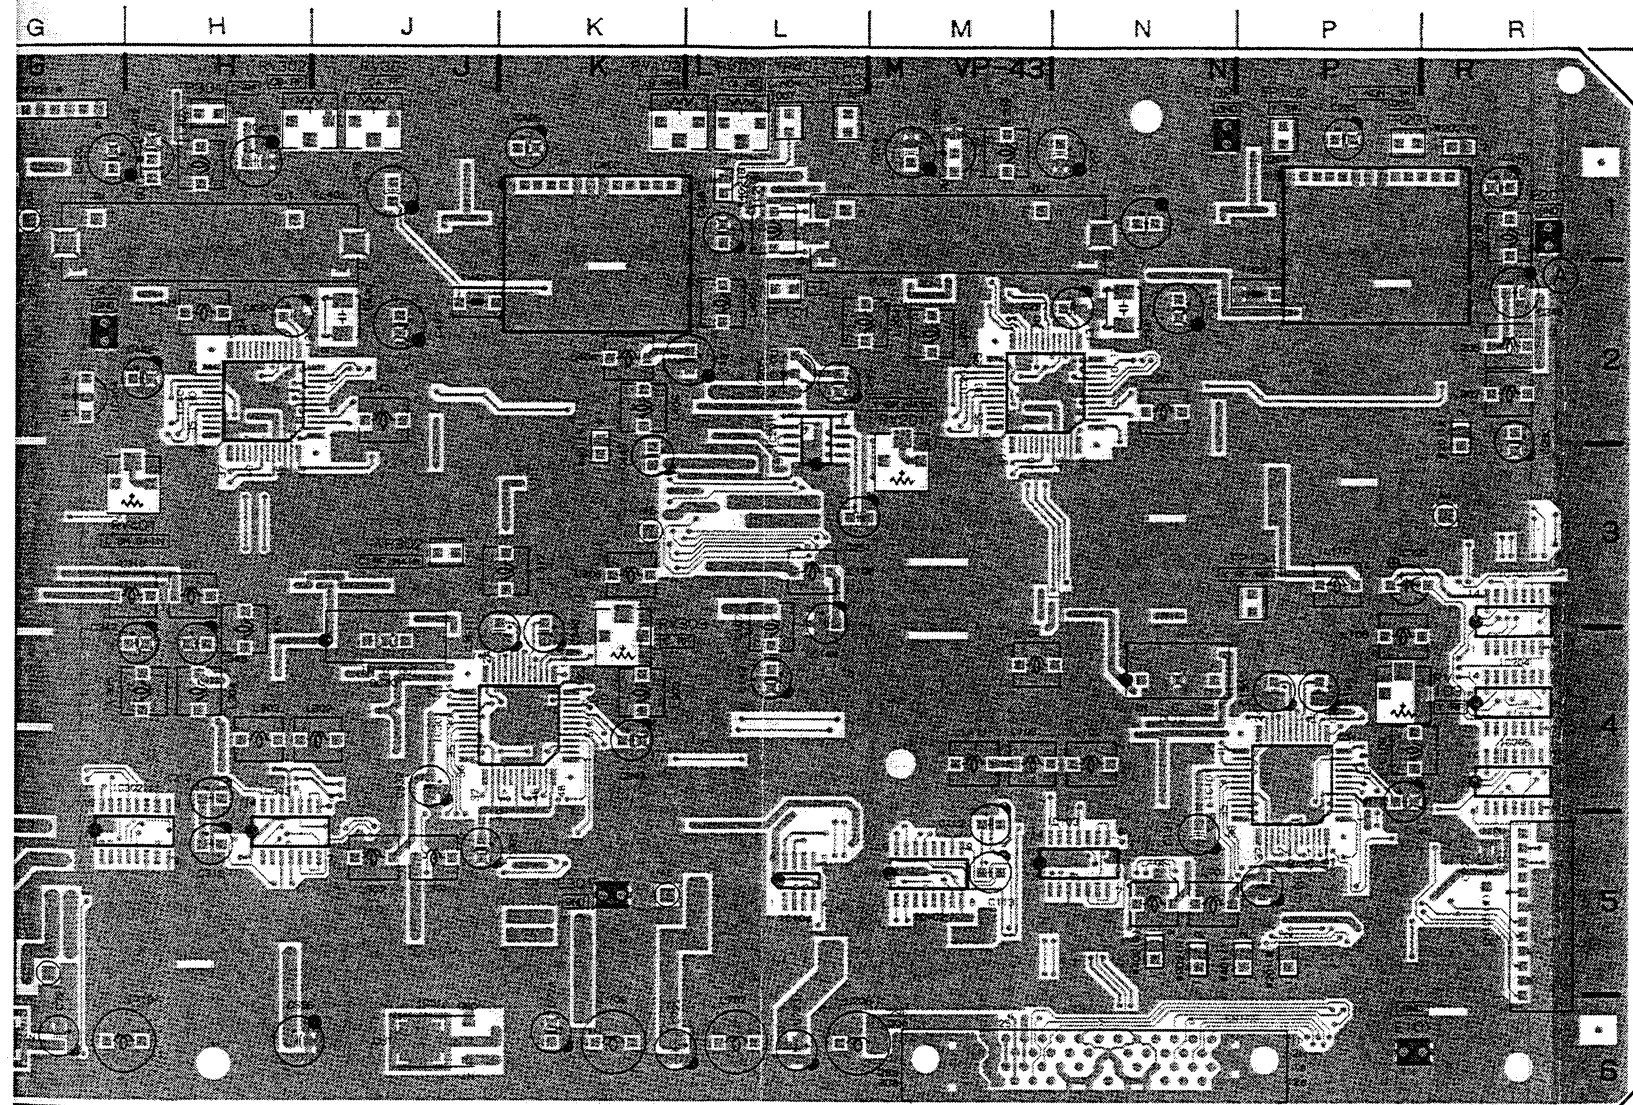


VP-43/43A 1-648-899-11 A SIDE

VP-43/43A(1-648-899-11)

CN103	N-6	IC705	R-4	Q514	B-3	TP102	P-1
CN104	C-6			*Q515	B-2	TP103	L-1
CN105	R-5	*Q101	N-5	*Q516	B-2	TP104	P-3
		*Q102	N-4	Q517	B-3	TP201	P-1
DL101	N-4	*Q103	N-5	*Q601	F-5	TP301	H-1
DL301	J-4	*Q104	N-4	*Q602	F-5	TP302	J-3
		*Q105	N-4	Q603	E-5	TP401	L-1
*D201	N-2	*Q106	N-3	Q604	F-5		
*D401	J-2	*Q107	N-3	Q605	F-5		
*D501	A-2	*Q108	N-4	Q606	F-5		
*D502	B-2	*Q109	N-4	Q607	E-5		
*D503	B-3	*Q110	P-4	Q608	F-5		
*D504	B-4	*Q111	P-5	Q609	E-4		
*D601	D-2	*Q112	P-5	Q610	F-4		
*D602	E-2	*Q201	M-2	Q611	F-5		
*D701	R-4	*Q202	N-1	Q612	F-5		
		*Q203	P-2	*Q613	D-4		
E101	P-6	*Q204	N-2	*Q614	D-3		
E102	N-1	*Q205	P-2	*Q615	D-3		
E201	R-1	*Q206	P-2	*Q616	C-3		
E301	K-5	*Q207	N-2	*Q617	C-3		
E401	G-2	*Q208	N-1	*Q618	F-2		
E501	B-2	*Q209	N-1	*Q619	F-2		
E502	B-6	*Q210	N-1	*Q620	F-3		
E601	E-4	*Q211	P-2	*Q621	F-3		
E602	D-1	*Q212	P-1	*Q622	E-3		
E701	F-2	*Q213	R-2	*Q623	D-3		
		*Q214	R-2	*Q624	D-1		
FL201	M-1	*Q215	P-1	*Q625	E-4		
FL401	H-1	*Q216	N-2	*Q626	D-4		
FL601	E-2	*Q217	M-2	*Q627	D-1		
		*Q218	M-2	*Q628	D-1		
IC101	P-4	*Q219	M-2	*Q701	E-2		
IC102	M-5	*Q220	M-2	*Q702	F-2		
IC103	N-5	*Q301	J-4	*Q703	E-2		
IC104	L-5	*Q302	J-4	*Q704	F-2		
IC201	L-3	*Q303	H-4	*Q705	E-2		
IC202	M-2	*Q304	H-5	*Q706	F-2		
IC203	M-1	*Q305	H-4	*Q707	E-1		
IC204	P-1	*Q306	H-3	*Q708	F-1		
IC205	L-2	*Q307	J-3	*Q709	F-2		
IC301	K-4	*Q308	J-4	*Q710	F-1		
IC302	G-5	*Q309	J-4	*Q711	F-2		
IC303	H-5	*Q310	K-3	*Q712	F-2		
IC401	H-2	*Q311	K-5	*Q713	F-1		
IC402	H-1	*Q401	H-2	*Q714	E-1		
IC403	K-1	*Q402	J-1				
IC404	G-2	*Q403	J-1	RV101	L-1		
IC501	A-5	*Q404	J-2	RV102	K-1		
IC502	A-2	*Q405	J-1	RV103	P-4		
IC503	A-2	*Q406	J-1	RV201	M-3		
IC504	B-2	*Q407	J-1	RV301	J-1		
IC505	B-2	*Q408	J-1	RV302	H-1		
IC506	A-3	*Q409	J-2	RV303	K-4		
IC507	B-5	*Q410	J-1	RV401	H-3		
IC508	C-4	*Q411	J-2	RV501	A-4		
IC509	B-5	*Q412	J-2	RV502	A-4		
IC510	B-4	*Q413	K-2	RV503	B-4		
IC511	J-6	*Q414	K-2	RV504	B-4		
IC512	G-6	*Q415	K-2	RV505	B-4		
IC601	D-4	*Q416	J-2	RV506	B-4		
IC602	D-4	*Q417	H-2	RV601	D-1		
IC603	F-4	*Q418	H-2	RV602	F-1		
IC604	F-3	*Q501	A-1	RV603	D-1		
IC605	F-3	Q502	A-1	RV604	D-1		
IC606	E-3	Q503	A-1	RV605	F-1		
IC607	F-3	Q504	A-1	RV606	C-1		
IC608	D-2	*Q505	A-5	RV701	E-1		
IC609	E-2	*Q506	A-4	RV702	E-1		
IC610	D-2	Q507	B-1	RV703	E-1		
IC611	D-2	Q508	B-1	RV704	G-1		
IC612	C-2	*Q509	A-4				
IC701	F-1	*Q510	A-4	TH201	P-2		
IC702	F-1	*Q511	A-4	TH401	J-2		
IC703	R-4	*Q512	A-4				
IC704	R-4	*Q513	B-2	TP101	L-2		


*: B SIDE
_: UVW-1800 ONLY

VP-43/43A ; Y/C PB PROCESS(PB RF EQ, DEMOD., Y-RF ENVELOPE DET), VIDEO OUTPUT DRIVER, ENCODE, SYNC/CHARA MIX

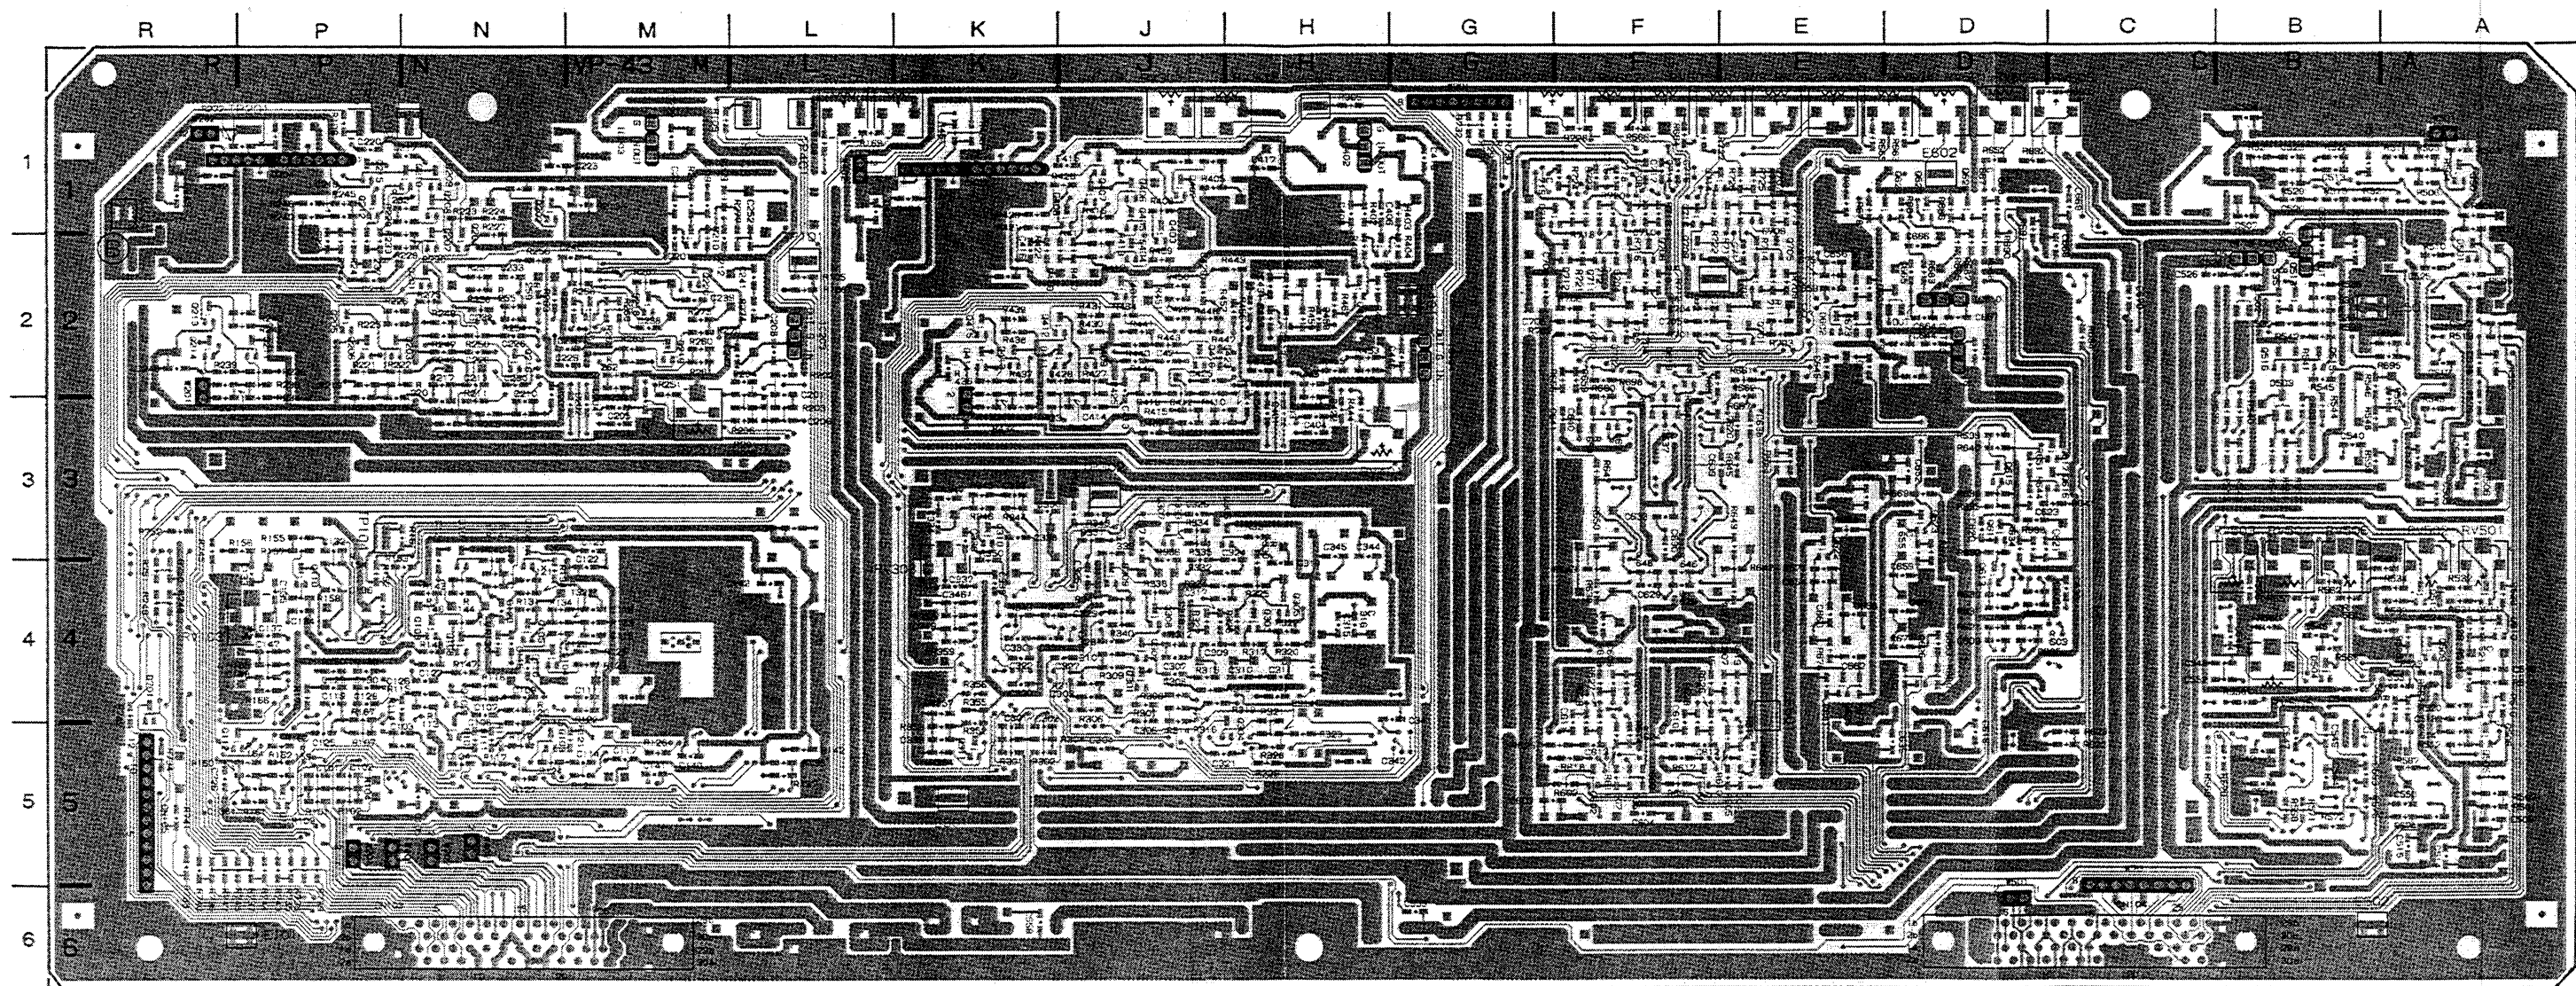

VP-43/43A 1-648-899-11 B SIDE

ER, ENCODE, SYNC/CHARA MIX

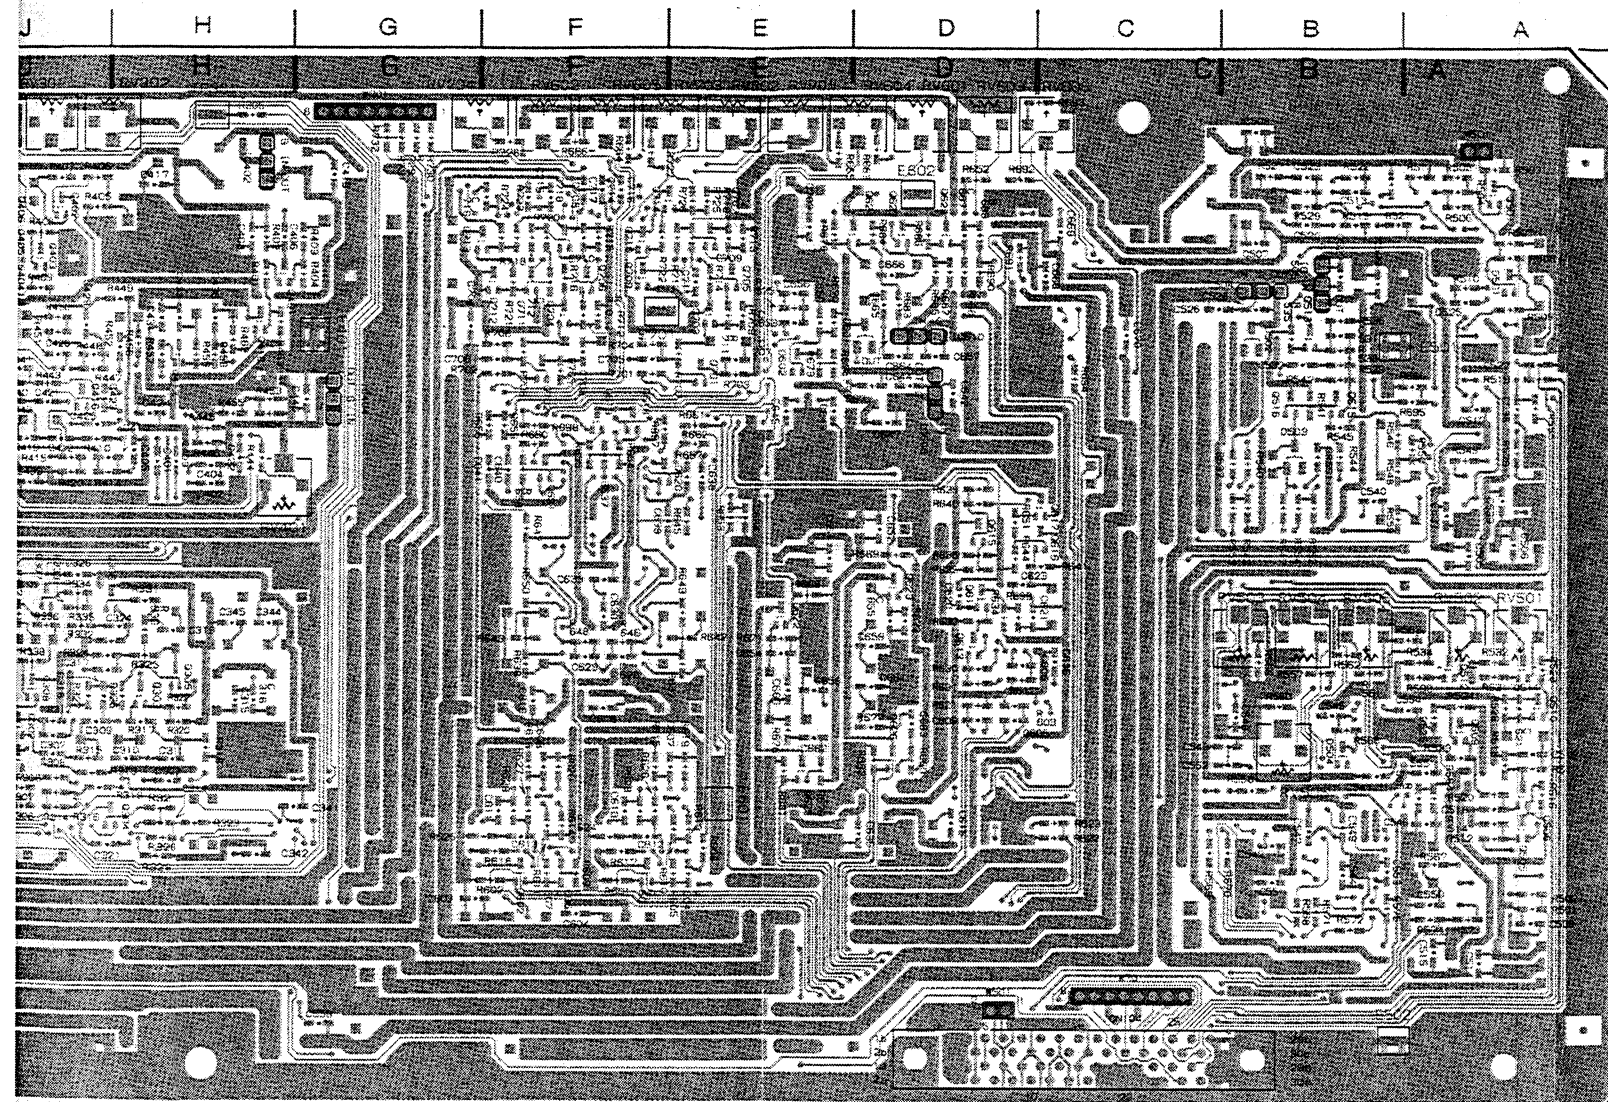


VP-43/43A 1-648-899-11 B SIDE

VP-43/43A(1-648-899-11)


CN103	N-6	IC705	R-4	Q514	B-3	TP102	P-1
CN104	C-6			*Q515	B-2	TP103	L-1
CN105	R-5	*Q101	N-5	*Q516	B-2	TP104	P-3
		*Q102	N-4	Q517	B-3	TP201	P-1
DL101	N-4	*Q103	N-5	*Q601	F-5	TP301	H-1
DL301	J-4	*Q104	N-4	*Q602	F-5	TP302	J-3
		*Q105	N-4	Q603	E-5	TP401	L-1
*D201	N-2	*Q106	N-3	Q604	F-5		
*D401	J-2	*Q107	N-3	Q605	F-5		
*D501	A-2	*Q108	N-4	Q606	F-5		
*D502	B-2	*Q109	N-4	Q607	E-5		
*D503	B-3	*Q110	P-4	Q608	F-5		
*D504	B-4	*Q111	P-5	Q609	E-4		
*D601	D-2	*Q112	P-5	Q610	F-4		
*D602	E-2	*Q201	M-2	Q611	F-5		
*D701	R-4	*Q202	N-1	Q612	F-5		
		*Q203	P-2	*Q613	D-4		
E101	P-6	*Q204	N-2	*Q614	D-3		
E102	N-1	*Q205	P-2	*Q615	D-3		
E201	R-1	*Q206	P-2	*Q616	C-3		
E301	K-5	*Q207	N-2	*Q617	C-3		
E401	G-2	*Q208	N-1	*Q618	F-2		
E501	B-2	*Q209	N-1	*Q619	F-2		
E502	B-6	*Q210	N-1	*Q620	F-3		
E601	E-4	*Q211	P-2	*Q621	F-3		
E602	D-1	*Q212	P-1	*Q622	E-3		
E701	F-2	*Q213	R-2	*Q623	D-3		
		*Q214	R-2	*Q624	D-1		
FL201	M-1	*Q215	P-1	*Q625	E-4		
FL401	H-1	*Q216	N-2	*Q626	D-4		
FL601	E-2	*Q217	M-2	*Q627	D-1		
		*Q218	M-2	*Q628	D-1		
IC101	P-4	*Q219	M-2	*Q701	E-2		
IC102	M-5	*Q220	M-2	*Q702	F-2		
IC103	N-5	*Q301	J-4	*Q703	E-2		
IC104	L-5	*Q302	J-4	*Q704	F-2		
IC201	L-3	*Q303	H-4	*Q705	E-2		
IC202	M-2	*Q304	H-5	*Q706	F-2		
IC203	M-1	*Q305	H-4	*Q707	E-1		
IC204	P-1	*Q306	H-3	*Q708	F-1		
IC205	L-2	*Q307	J-3	*Q709	F-2		
IC301	K-4	*Q308	J-4	*Q710	F-1		
IC302	G-5	*Q309	J-4	*Q711	F-2		
IC303	H-5	*Q310	K-3	*Q712	F-2		
IC401	H-2	*Q311	K-5	*Q713	F-1		
IC402	H-1	*Q401	H-2	*Q714	E-1		
IC403	K-1	*Q402	J-1				
IC404	G-2	*Q403	J-1	RV101	L-1		
IC501	A-5	*Q404	J-2	RV102	K-1		
IC502	A-2	*Q405	J-1	RV103	P-4		
IC503	A-2	*Q406	J-1	RV201	M-3		
IC504	B-2	*Q407	J-1	RV301	J-1		
IC505	B-2	*Q408	J-1	RV302	H-1		
IC506	A-3	*Q409	J-2	RV303	K-4		
IC507	B-5	*Q410	J-1	RV401	H-3		
IC508	C-4	*Q411	J-2	RV501	A-4		
IC509	B-5	*Q412	J-2	RV502	A-4		
IC510	B-4	*Q413	K-2	RV503	B-4		
IC511	J-6	*Q414	K-2	RV504	B-4		
IC512	G-6	*Q415	K-2	RV505	B-4		
IC601	D-4	*Q416	J-2	RV506	B-4		
IC602	D-4	*Q417	H-2	RV601	D-1		
IC603	F-4	*Q418	H-2	RV602	F-1		
IC604	F-3	*Q501	A-1	RV603	D-1		
IC605	F-3	Q502	A-1	RV604	D-1		
IC606	E-3	Q503	A-1	RV605	F-1		
IC607	F-3	Q504	A-1	RV606	C-1		
IC608	D-2	*Q505	A-5	RV701	E-1		
IC609	E-2	*Q506	A-4	RV702	E-1		
IC610	D-2	Q507	B-1	RV703	E-1		
IC611	D-2	Q508	B-1	RV704	G-1		
IC612	C-2	*Q509	A-4				
IC701	F-1	*Q510	A-4	TH201	P-2		
IC702	F-1	*Q511	A-4	TH401	J-2		
IC703	R-4	*Q512	A-4				
IC704	R-4	*Q513	B-2	TP101	L-2		

*: B SIDE
_: UVW-1800 ONLY

VRA-5; Y/C REC PROCESS(DECODE, MOD), CTDM(COMPAND)

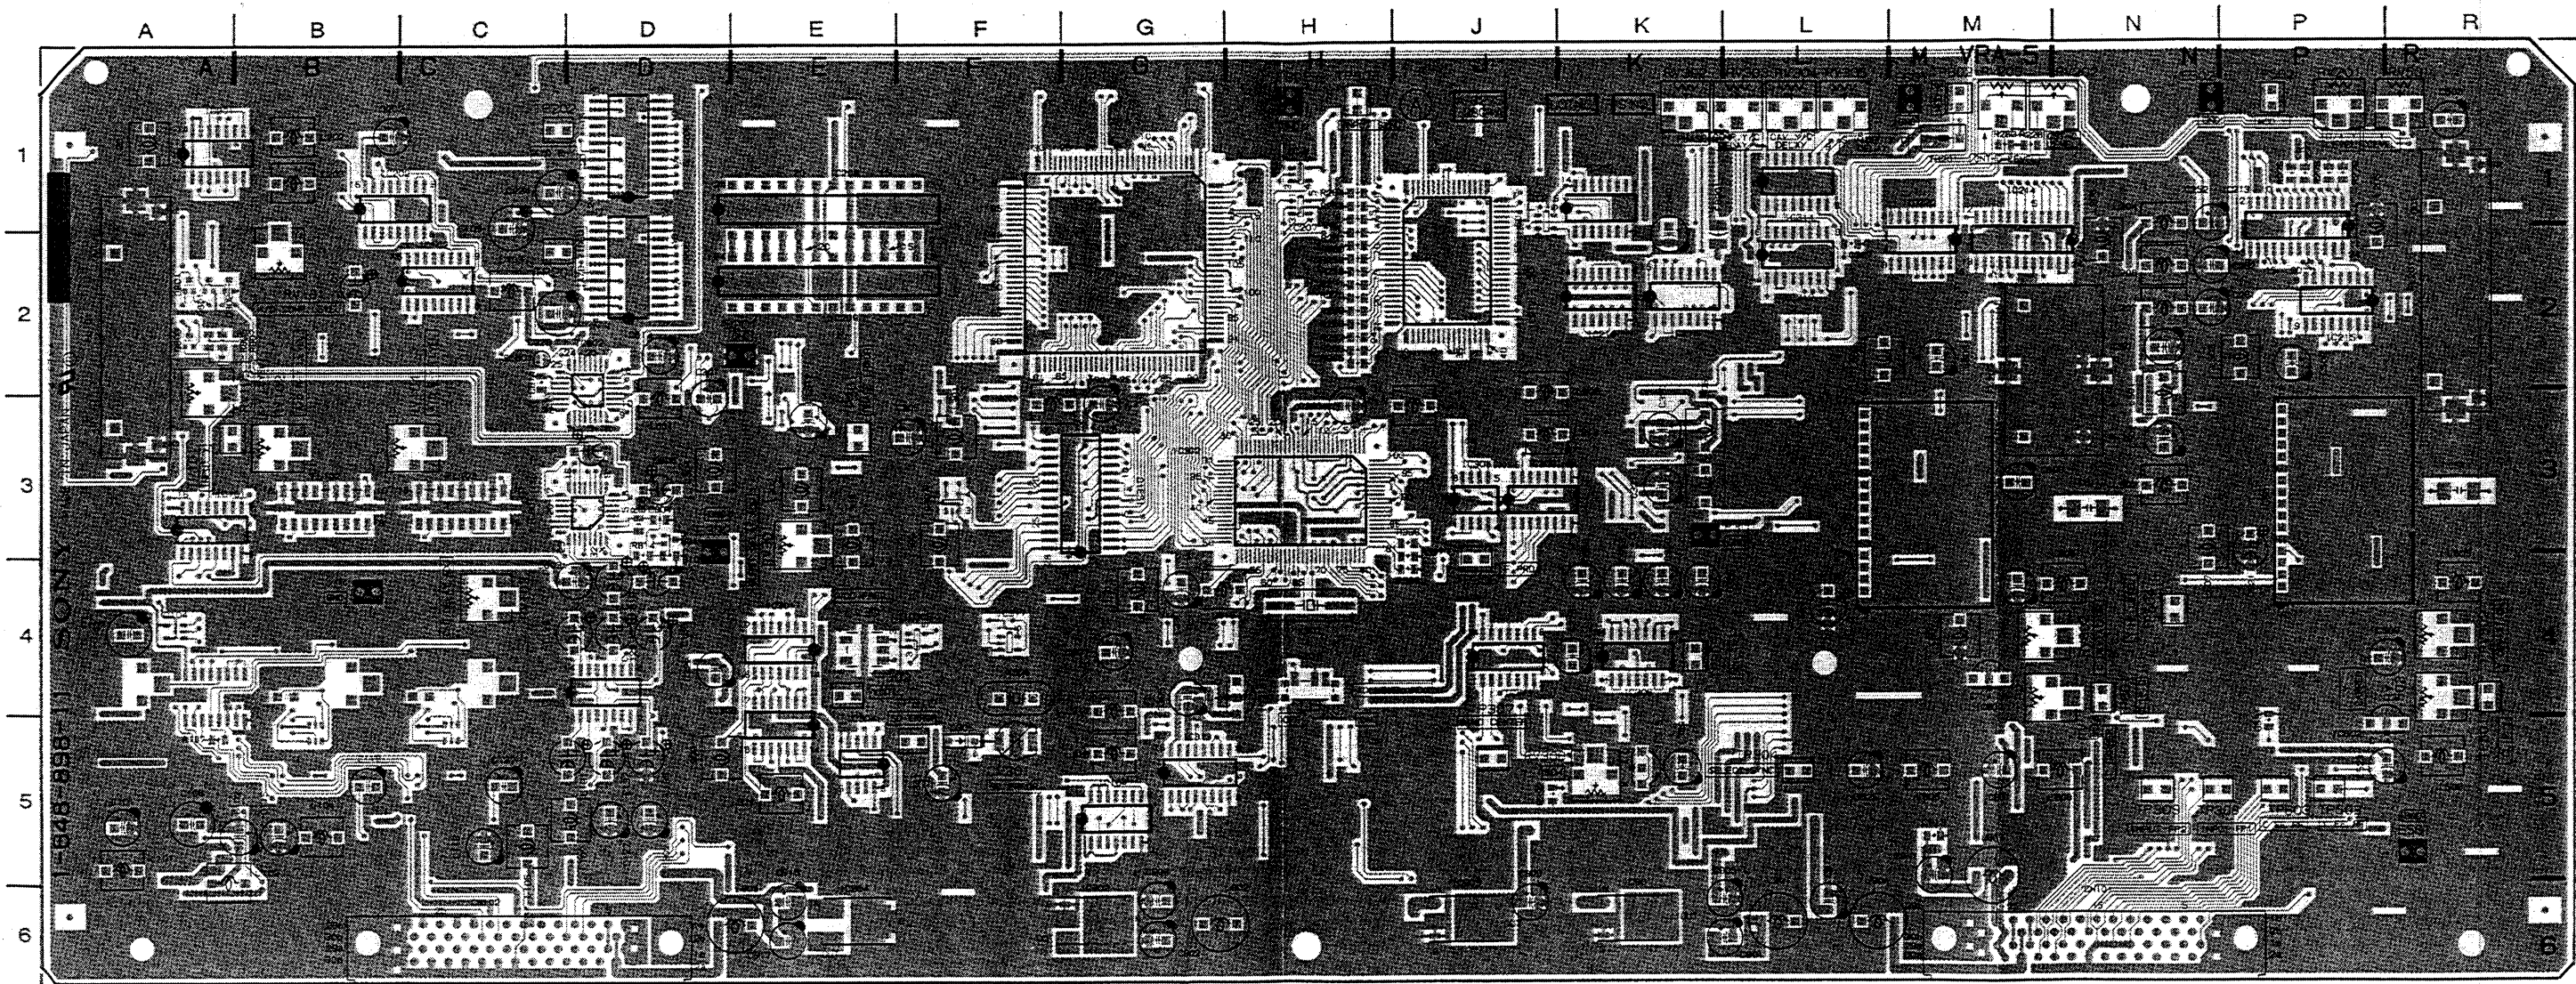

VRA-5 1-648-898-11 A SIDE

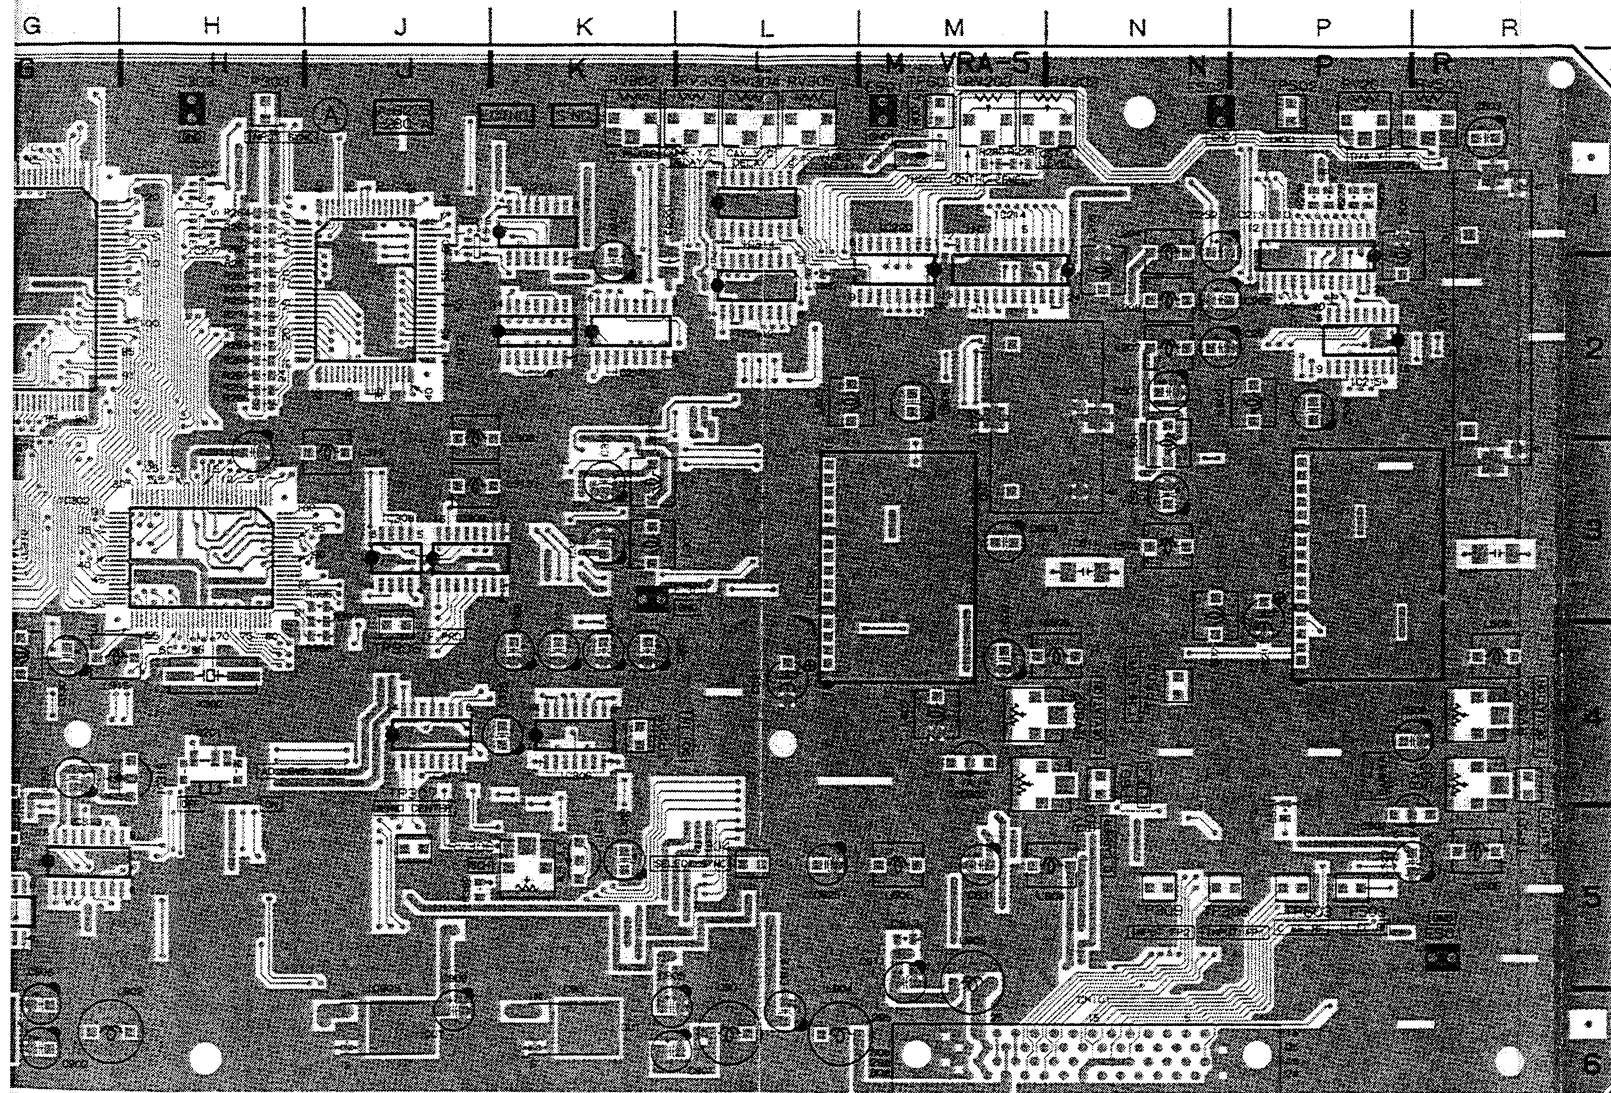


VRA-5 1-648-898-11 A SIDE

VRA-5(1-648-898-11)


CN101	N-6	IC901	K-6	*Q511	N-3
CN102	C-6	IC902	G-6	*Q512	P-4
		IC903	J-6	*Q513	P-4
CV301	F-5	IC904	E-6	*Q514	P-4
				*Q515	P-4
*D101	B-3	LV301	E-4	*Q516	N-4
*D102	C-3			*Q517	N-4
*D109	D-4	*Q101	A-3	*Q518	P-4
*D202	H-4	*Q102	A-5	*Q519	P-5
*D301	E-3	*Q103	A-3	*Q520	P-5
*D303	F-4	Q104	A-4	*Q601	L-2
D305	F-5	*Q105	A-4	*Q602	M-2
D801	A-2	*Q106	A-3	*Q603	N-4
		*Q107	A-3	*Q604	M-4
E101	B-4	*Q108	A-1	*Q605	M-4
E201	E-2	*Q109	B-2	*Q606	L-4
E301	K-3	*Q110	B-2	*Q607	M-4
E302	D-3	*Q111	B-1	*Q608	L-4
E303	H-1	*Q112	C-1	*Q609	M-5
E501	R-5	*Q113	C-2	*Q610	M-5
E502	N-1	*Q114	B-4	Q801	A-2
E601	M-1	*Q115	B-4	Q802	A-2
		*Q116	B-3	Q803	A-2
FB201	K-2	*Q117	B-3	Q804	D-3
		*Q118	B-3		
FL101	A-2	*Q119	B-3	RV101	B-2
FL102	B-3	*Q120	B-2	RV102	B-3
FL103	C-3	*Q121	C-4	RV103	C-4
FL201	R-2	*Q122	C-4	RV104	C-3
FL202	N-2	*Q123	C-4	RV105	A-2
		*Q124	C-3	RV201	P-1
IC101	A-3	*Q125	C-3	RV202	N-1
IC102	C-2	*Q126	C-3	RV203	M-1
IC103	D-4	*Q127	C-3	RV301	E-3
IC104	G-5	*Q128	C-3	RV302	K-1
IC201	A-1	*Q129	C-2	RV303	L-1
IC202	B-1	*Q130	C-2	RV304	L-1
IC205	D-2	*Q131	B-5	RV305	L-1
IC206	D-1	*Q132	C-5	RV306	K-5
IC207	H-1	*Q133	A-2	RV501	R-1
IC208	E-2	*Q201	C-1	RV502	R-4
IC209	E-2	*Q202	H-1	RV503	R-4
IC210	G-2	*Q203	H-4	RV602	M-4
IC211	H-1	*Q204	P-2	RV603	M-4
IC212	J-2	*Q207	R-2		
IC213	P-1	*Q209	N-2	S201	H-4
IC214	N-1	*Q210	R-2		
IC215	P-2	*Q211	K-2	TH201	M-1
IC216	K-2	*Q212	R-1		
IC217	K-2	*Q213	M-3	TP101	A-3
IC218	K-2	*Q301	D-3	TP201	C-2
IC219	J-1	*Q303	E-3	TP202	C-1
IC220	M-1	*Q305	E-3	TP301	E-3
IC301	E-4	*Q306	E-3	TP302	E-4
IC302	H-3	*Q307	E-3	TP303	H-1
IC303	E-4	*Q308	J-4	TP304	L-5
IC304	E-5	*Q309	J-4	TP305	K-4
IC305	F-4	*Q310	F-3	TP306	J-4
IC306	K-4	*Q311	F-3	TP307	J-5
IC307	F-3	*Q312	K-3	TP308	N-5
IC308	J-3	*Q313	E-4	TP309	N-5
IC309	J-3	*Q314	E-4	TP310	F-5
IC310	G-3	*Q315	J-3	TP501	R-4
IC311	J-4	*Q316	F-5	TP502	P-1
IC312	L-2	*Q317	F-5	TP503	P-5
IC313	G-5	*Q318	E-5	TP504	N-4
IC314	L-1	*Q319	K-3	TP601	N-4
IC315	K-5	*Q320	J-3	TP602	M-1
IC316	H-4	*Q321	J-4	TP603	P-5
IC317	F-4	*Q322	J-4		
IC501	P-4	*Q323	J-4	X301	F-4
IC502	R-5	*Q324	F-4	X302	H-4
IC601	L-4	*Q325	F-4		
IC602	M-4	*Q508	N-2		
IC801	D-3	*Q509	P-2		
IC802	D-2	*Q510	R-4		

*: B SIDE

VRA-5; Y/C REC PROCESS(DECODE, MOD), CTDM(COMPAND)

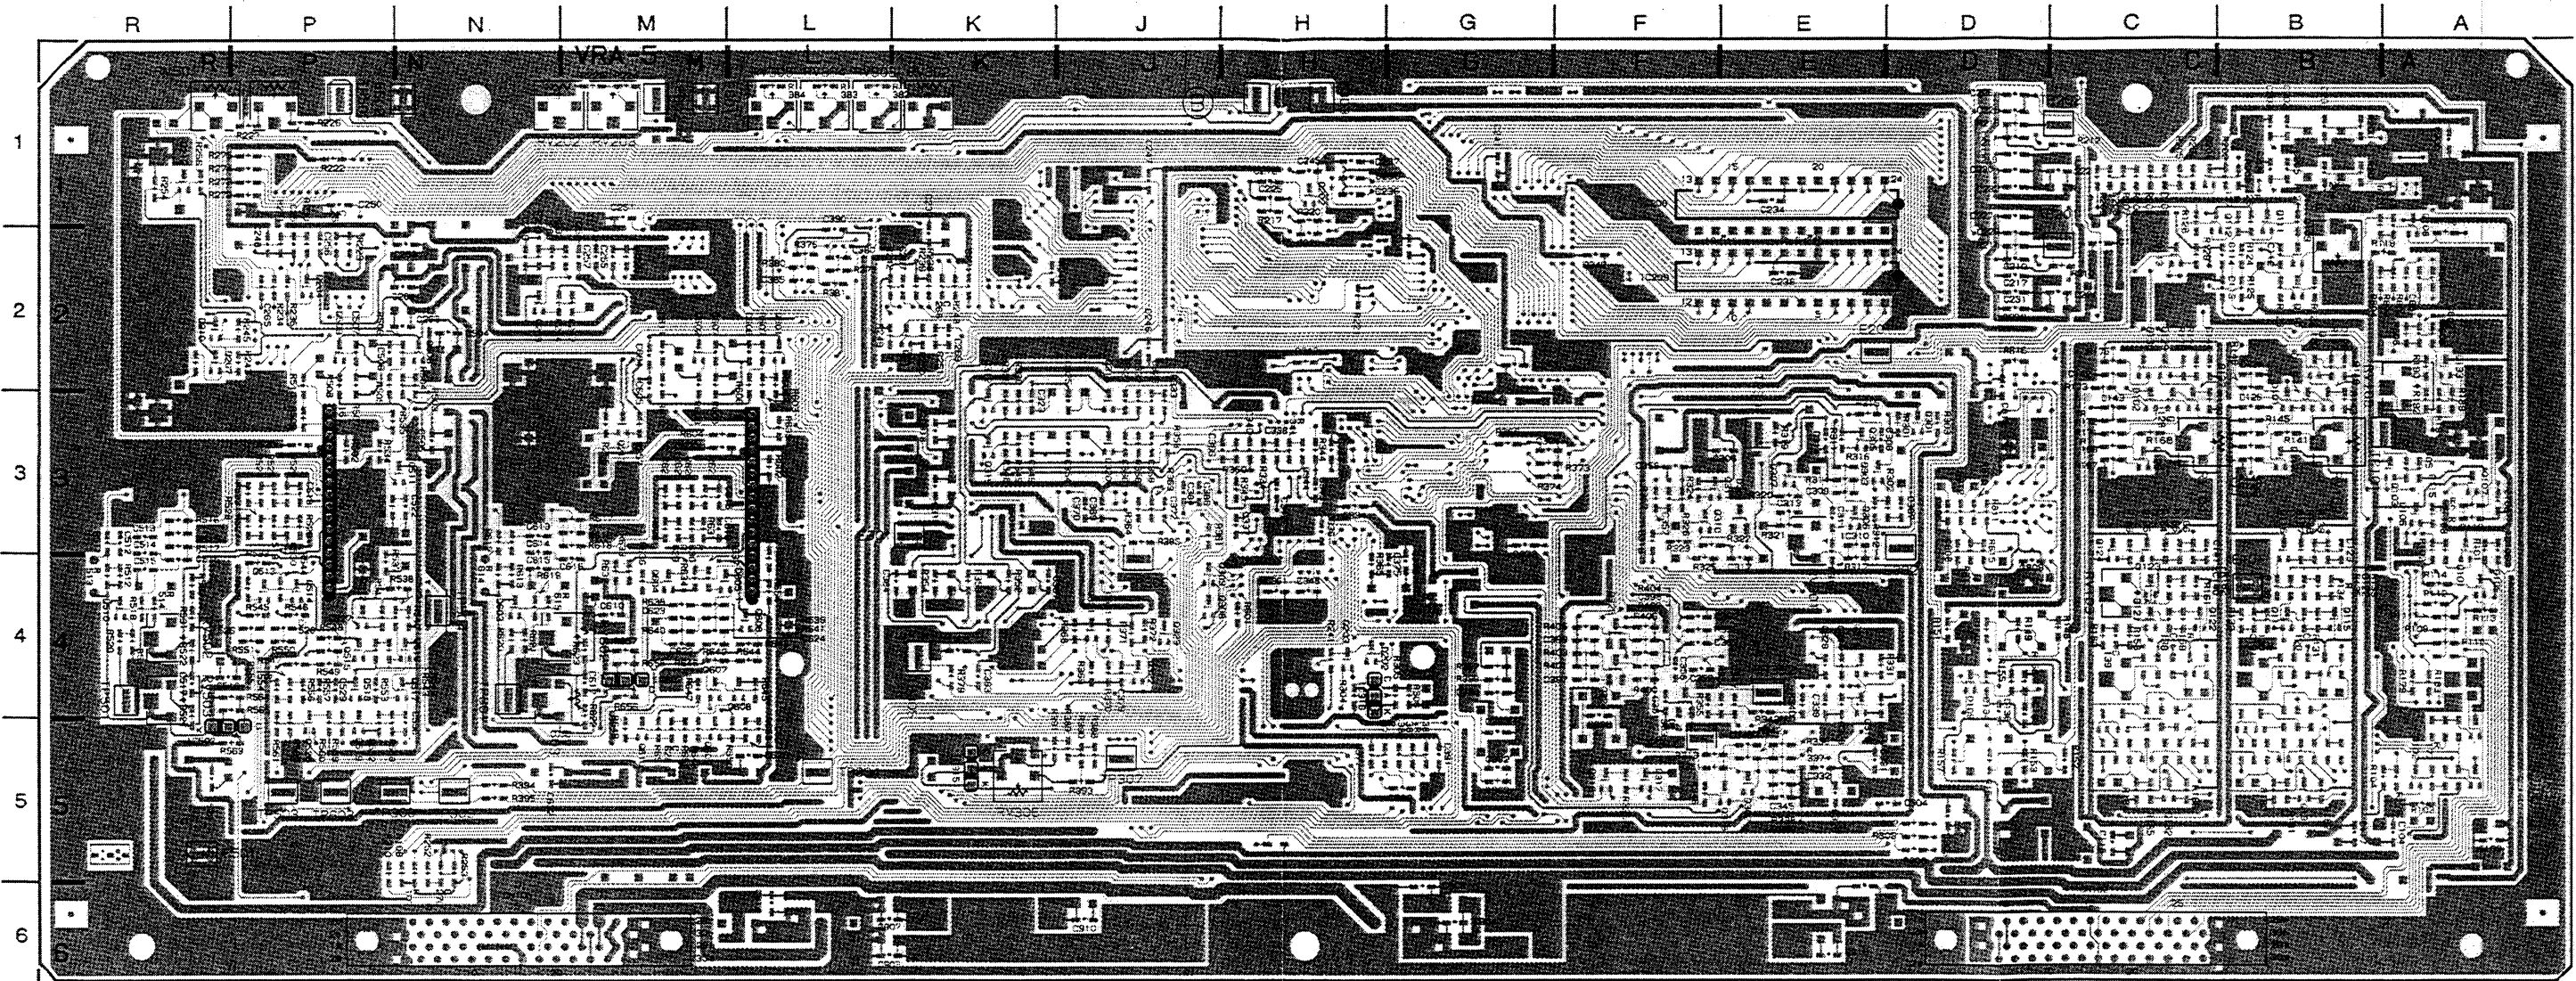

VRA-5 1-648-898-11 B SIDE

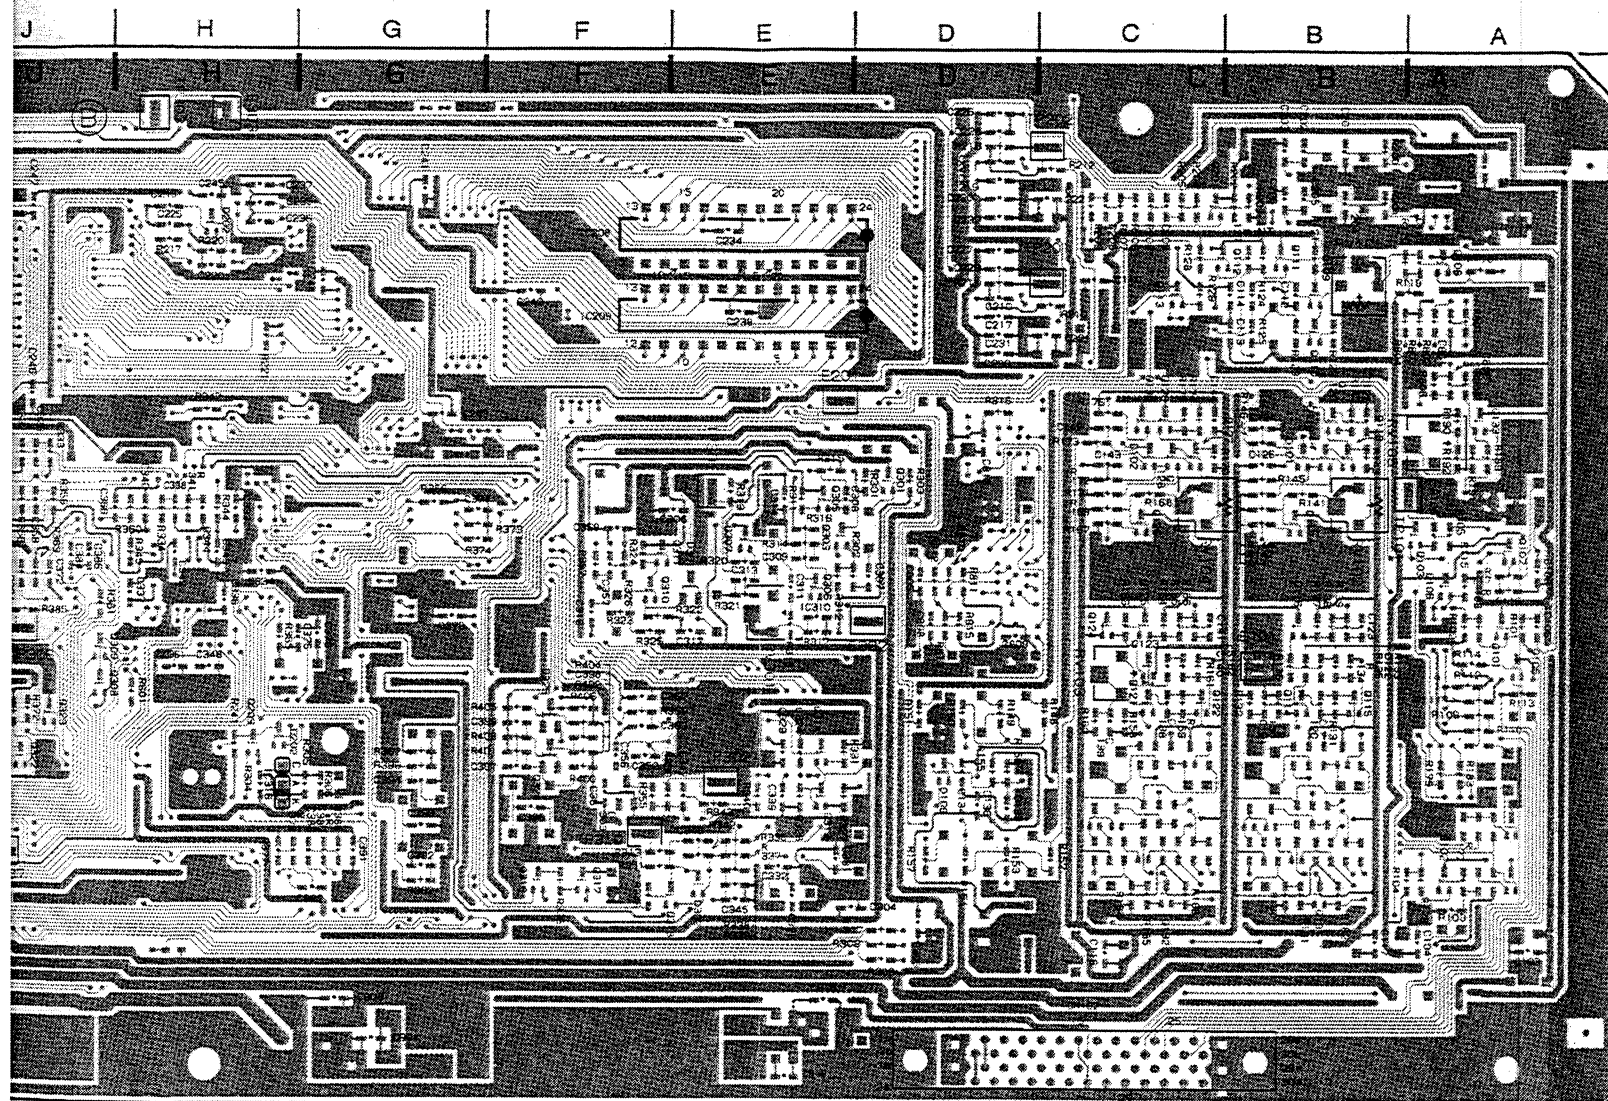


VRA-5 1-648-898-11 B SIDE

VRA-5(1-648-898-11)


CN101	N-6	IC901	K-6	*Q511	N-3
CN102	C-6	IC902	G-6	*Q512	P-4
		IC903	J-6	*Q513	P-4
CV301	F-5	IC904	E-6	*Q514	P-4
				*Q515	P-4
*D101	B-3	LV301	E-4	*Q516	N-4
*D102	C-3			*Q517	N-4
*D109	D-4	*Q101	A-3	*Q518	P-4
*D202	H-4	*Q102	A-5	*Q519	P-5
*D301	E-3	*Q103	A-3	*Q520	P-5
*D303	F-4	Q104	A-4	*Q601	L-2
D305	F-5	*Q105	A-4	*Q602	M-2
D801	A-2	*Q106	A-3	*Q603	N-4
		*Q107	A-3	*Q604	M-4
E101	B-4	*Q108	A-1	*Q605	M-4
E201	E-2	*Q109	B-2	*Q606	L-4
E301	K-3	*Q110	B-2	*Q607	M-4
E302	D-3	*Q111	B-1	*Q608	L-4
E303	H-1	*Q112	C-1	*Q609	M-5
E501	R-5	*Q113	C-2	*Q610	M-5
E502	N-1	*Q114	B-4	Q801	A-2
E601	M-1	*Q115	B-4	Q802	A-2
		*Q116	B-3	Q803	A-2
FB201	K-2	*Q117	B-3	Q804	D-3
		*Q118	B-3		
FL101	A-2	*Q119	B-3	RV101	B-2
FL102	B-3	*Q120	B-2	RV102	B-3
FL103	C-3	*Q121	C-4	RV103	C-4
FL201	R-2	*Q122	C-4	RV104	C-3
FL202	N-2	*Q123	C-4	RV105	A-2
		*Q124	C-3	RV201	P-1
IC101	A-3	*Q125	C-3	RV202	N-1
IC102	C-2	*Q126	C-3	RV203	M-1
IC103	D-4	*Q127	C-3	RV301	E-3
IC104	G-5	*Q128	C-3	RV302	K-1
IC201	A-1	*Q129	C-2	RV303	L-1
IC202	B-1	*Q130	C-2	RV304	L-1
IC205	D-2	*Q131	B-5	RV305	L-1
IC206	D-1	*Q132	C-5	RV306	K-5
IC207	H-1	*Q133	A-2	RV501	R-1
IC208	E-2	*Q201	C-1	RV502	R-4
IC209	E-2	*Q202	H-1	RV503	R-4
IC210	G-2	*Q203	H-4	RV602	M-4
IC211	H-1	*Q204	P-2	RV603	M-4
IC212	J-2	*Q207	R-2		
IC213	P-1	*Q209	N-2	S201	H-4
IC214	N-1	*Q210	R-2		
IC215	P-2	*Q211	K-2	TH201	M-1
IC216	K-2	*Q212	R-1		
IC217	K-2	*Q213	M-3	TP101	A-3
IC218	K-2	*Q301	D-3	TP201	C-2
IC219	J-1	*Q303	E-3	TP202	C-1
IC220	M-1	*Q305	E-3	TP301	E-3
IC301	E-4	*Q306	E-3	TP302	E-4
IC302	H-3	*Q307	E-3	TP303	H-1
IC303	E-4	*Q308	J-4	TP304	L-5
IC304	E-5	*Q309	J-4	TP305	K-4
IC305	F-4	*Q310	F-3	TP306	J-4
IC306	K-4	*Q311	F-3	TP307	J-5
IC307	F-3	*Q312	K-3	TP308	N-5
IC308	J-3	*Q313	E-4	TP309	N-5
IC309	J-3	*Q314	E-4	TP310	F-5
IC310	G-3	*Q315	J-3	TP501	R-4
IC311	J-4	*Q316	F-5	TP502	P-1
IC312	L-2	*Q317	F-5	TP503	P-5
IC313	G-5	*Q318	E-5	TP504	N-4
IC314	L-1	*Q319	K-3	TP601	N-4
IC315	K-5	*Q320	J-3	TP602	M-1
IC316	H-4	*Q321	J-4	TP603	P-5
IC317	F-4	*Q322	J-4		
IC501	P-4	*Q323	J-4	X301	F-4
IC502	R-5	*Q324	F-4	X302	H-4
IC601	L-4	*Q325	F-4		
IC602	M-4	*Q508	N-2		
IC801	D-3	*Q509	P-2		
IC802	D-2	*Q510	R-4		

*: B SIDE


CL-25 ; CASSETTE LOADING BEGIN/NEAR-END SENSOR
 HP-61 ; HEADPHONES JACK/VOLUME CONTROL
 HP-61A ; HEADPHONES JACK/VOLUME CONTROL
 PC-62 ; CASSETTE IN/LARGE CASSETTE SENSOR
 PD-35 ; PINCH SOLENOID

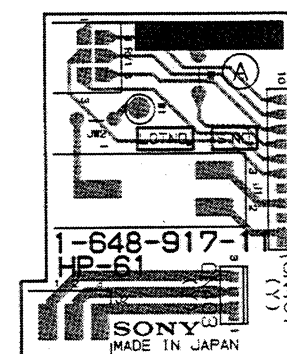


HP-61 1-648-917-11 A SIDE

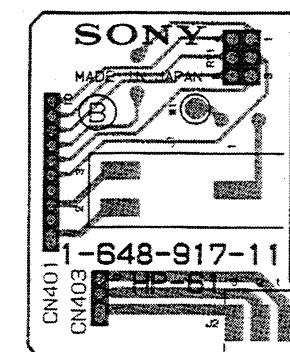


HP-61 1-648-917-11 B SIDE

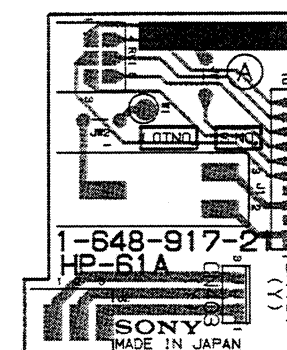


HP-61A 1-648-917-21 A SIDE

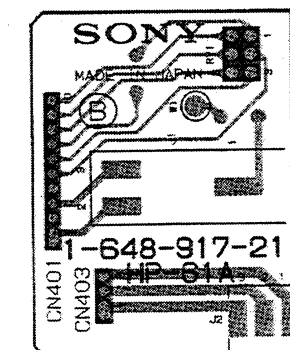


HP-61A 1-648-917-21 B SIDE



PD-35 1-622-596-11 A SIDE

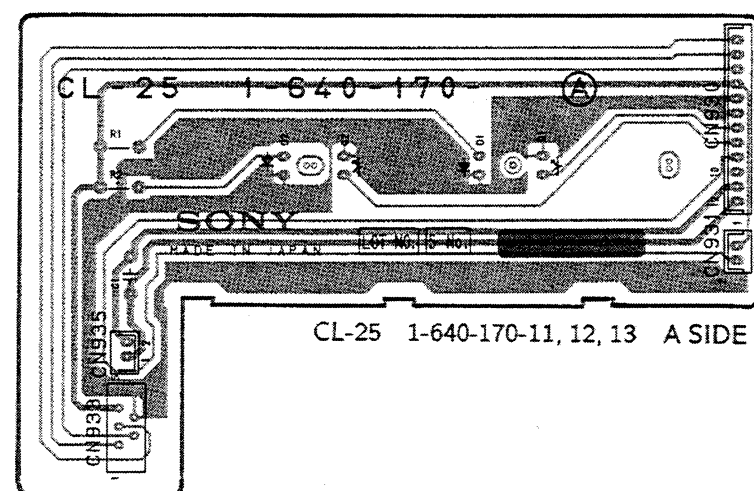


CL-25 1-640-170-11, 12, 13 A SIDE

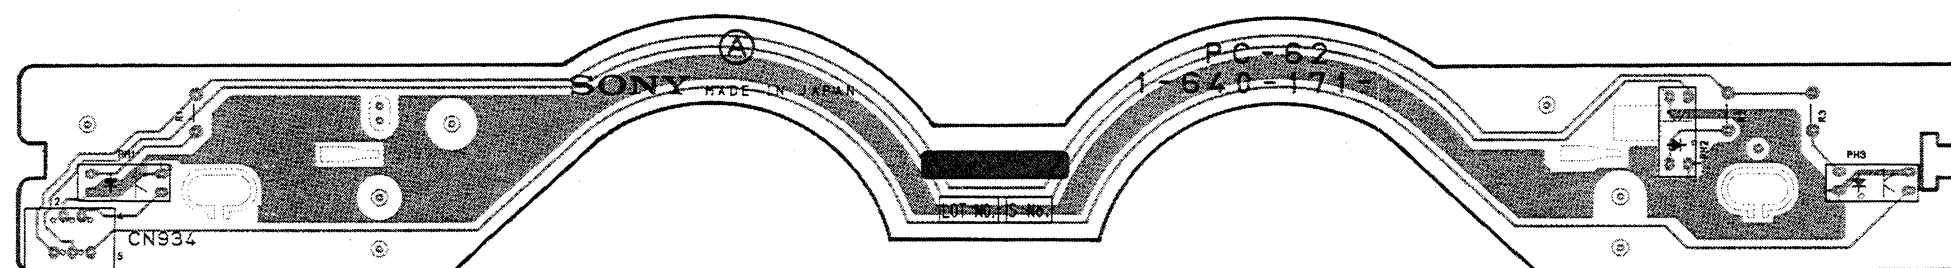


PC-62 1-640-171-11, 12 A SIDE


PTC-66 ; REEL POSITION
 PTC-67 ; THREADING FG/MOTOR
 PTC-68 ; THREAD END/UNTHREAD END SENSOR
 RM-126 ; S-REEL MOTOR
 RM-127 ; T-REEL MOTOR
 SE-207 ; REEL FG
 TR-84 ; S-TENSION SENSOR
 VR-155 ; AUDIO REC LEVEL




PTC-66 1-648-926-11 A SIDE




PTC-66 1-648-926-11 B SIDE

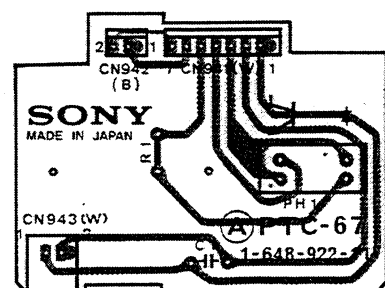


PTC-67 1-648-922-11 A SIDE

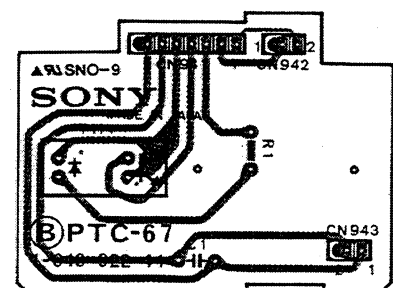


PTC-67 1-648-922-11 B SIDE




PTC-68 1-648-927-11 A SIDE




PTC-68 1-648-927-11 B SIDE




RM-126 1-648-924-11 A SIDE




RM-126 1-648-924-11 B SIDE




RM-127 1-648-925-11 A SIDE




RM-127 1-648-925-11 B SIDE




SE-207 1-648-923-11 A SIDE




SE-207 1-648-923-11 B SIDE




TR-84 1-648-921-11 A SIDE



TR-84 1-648-921-11 B SIDE




VR-155 1-648-916-11 A SIDE

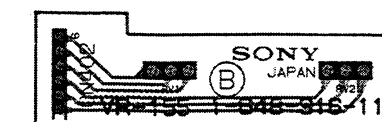


VR-155 1-648-916-11 B SIDE


SOPS-1045AC ; POWER SUPPLY(SWITCHING REGULATOR)
SOPS-1045M ; POWER SUPPLY(SWITCHING REGULATOR)

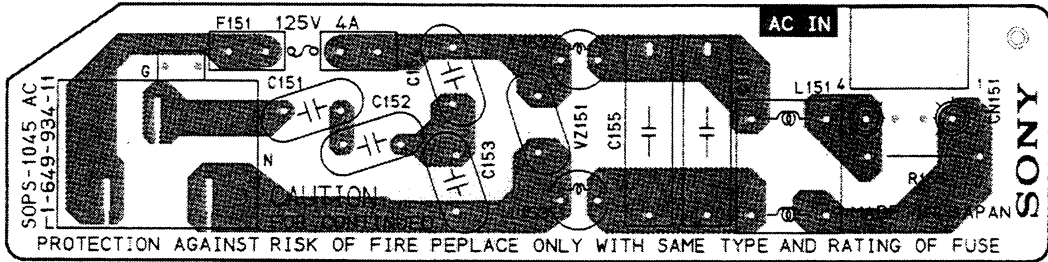

SOPS-1045 AC 1-649-934-11 A SIDE

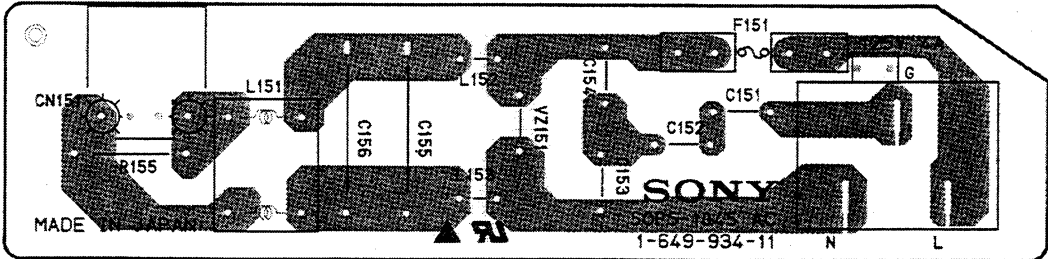


SOPS-1045 AC 1-649-934-11 B SIDE

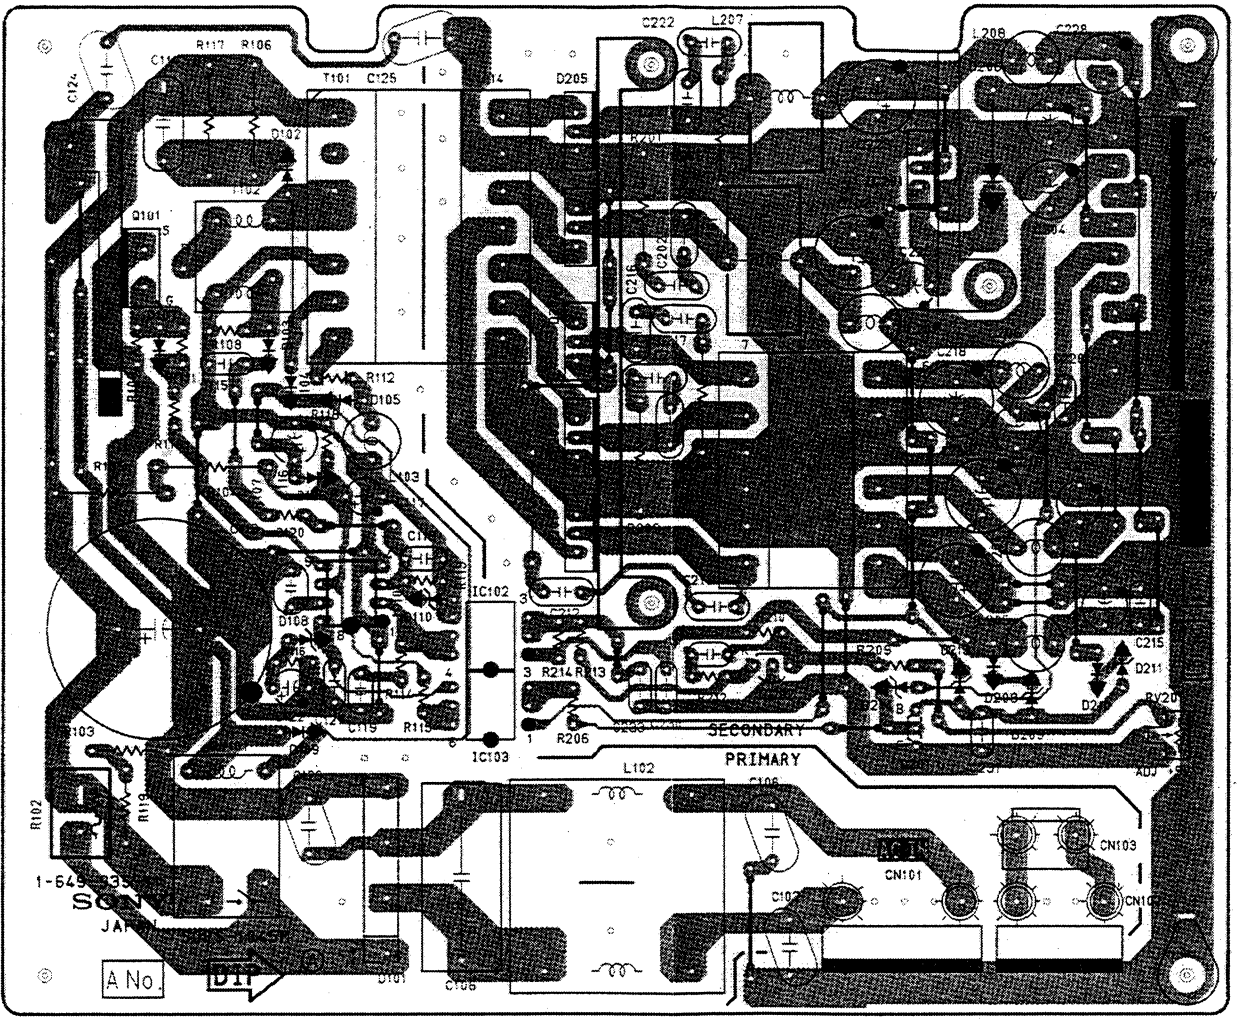

SOPS-1045 M 1-649-935-11 A SIDE

MB-470; MOTHER BOARD

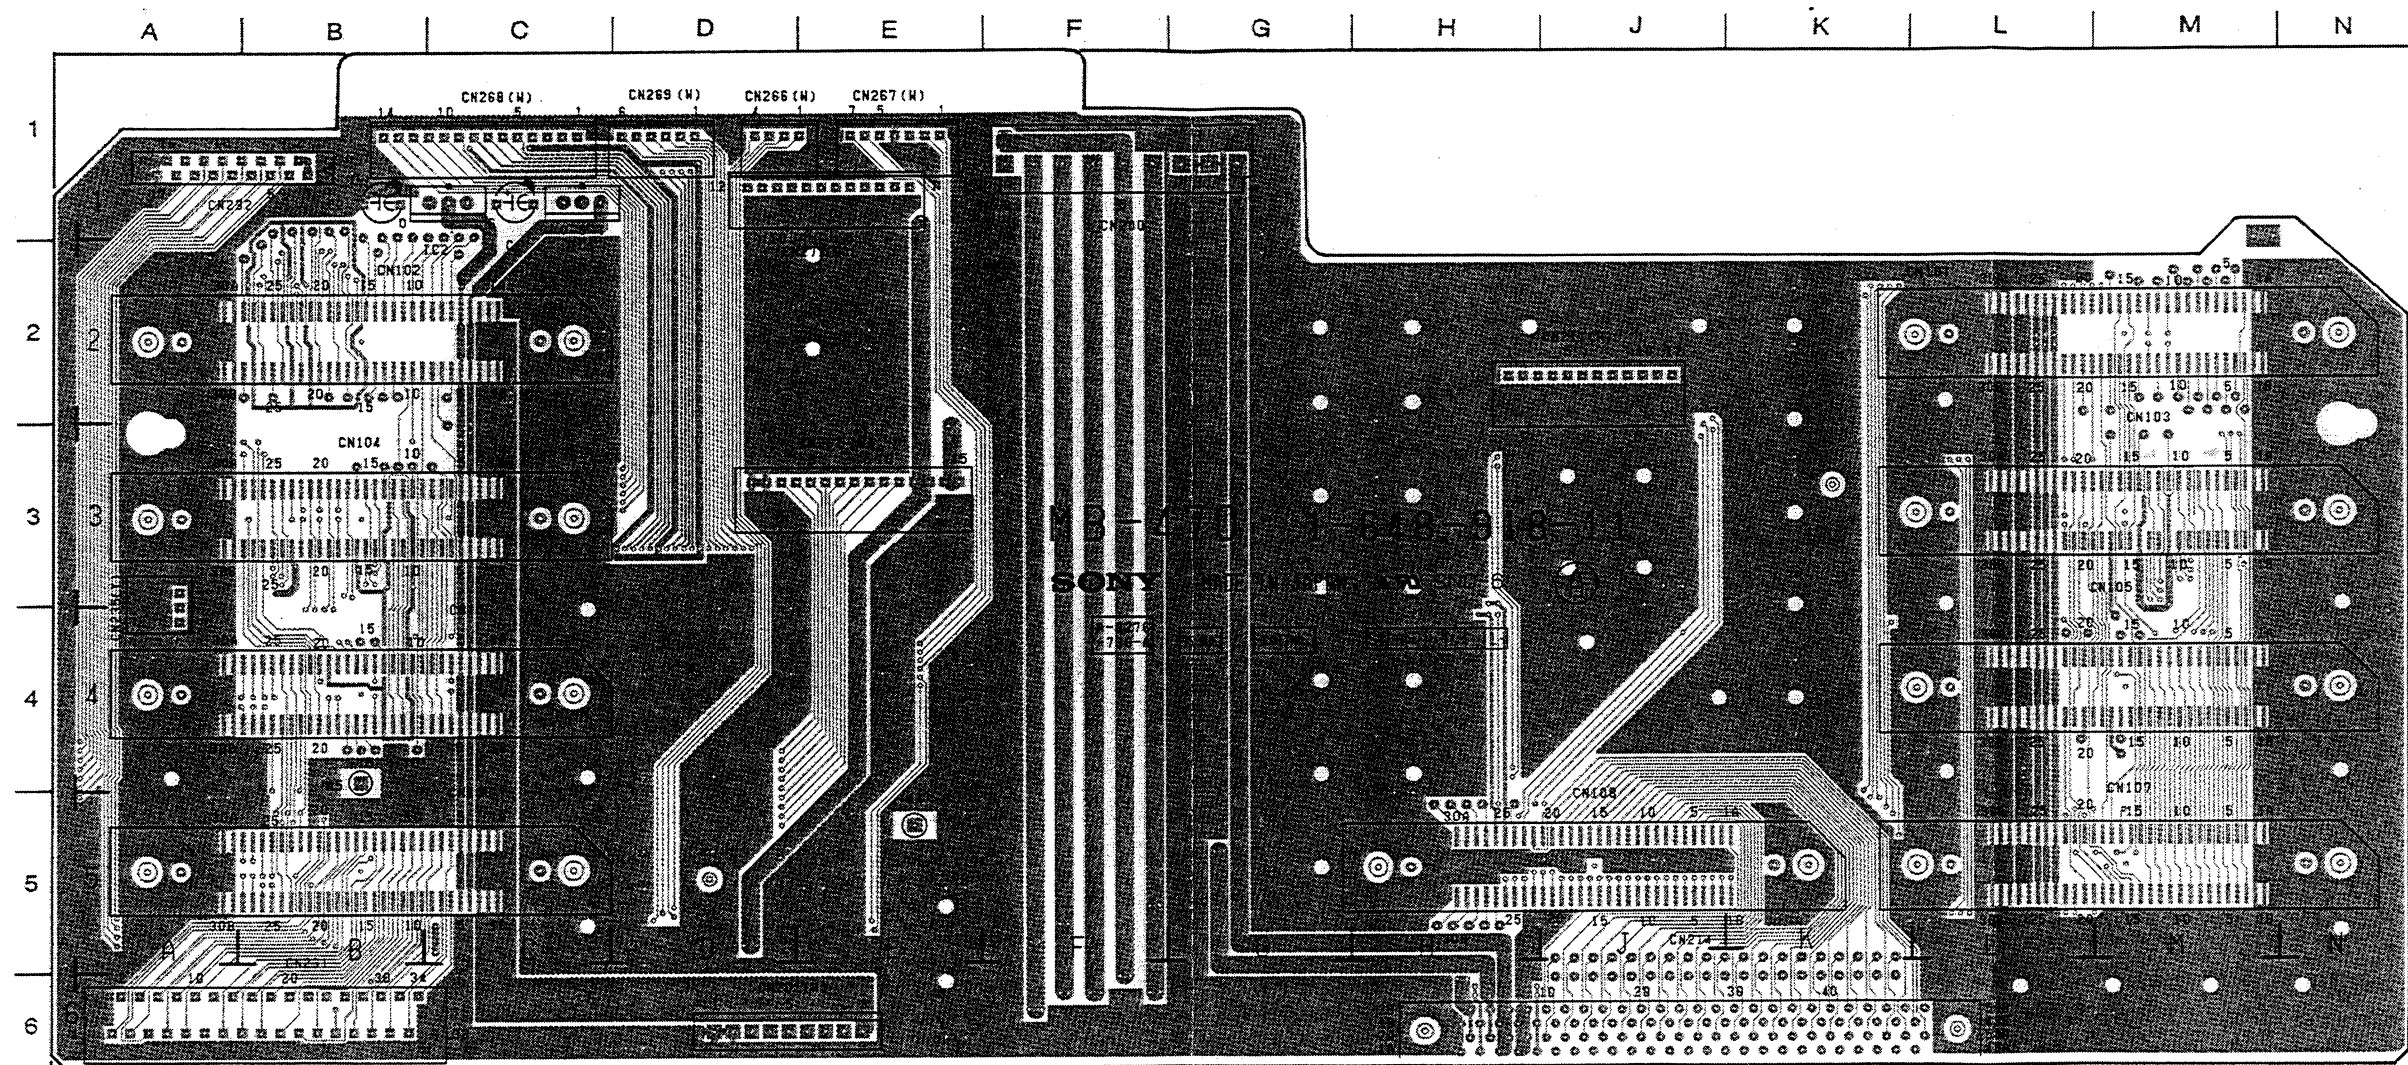


MB-470 1-648-918-11 A SIDE

MB-470(1-648-918-11)

CN101	M-2
CN102	B-2
CN103	M-3
CN104	B-3
CN105	M-4
CN106	B-4
CN107	M-5
CN108	J-5
CN109	B-5
CN200	F-1
CN201	D-6
CN211	J-2
CN214	J-6
CN231	B-6
CN232	A-1
CN235	A-3
CN262	E-3
CN266	D-1
CN267	E-1
CN268	C-1
CN269	D-1
CN271	E-1
IC1	C-1
IC2	C-1

MB-470; MOTHER BOARD

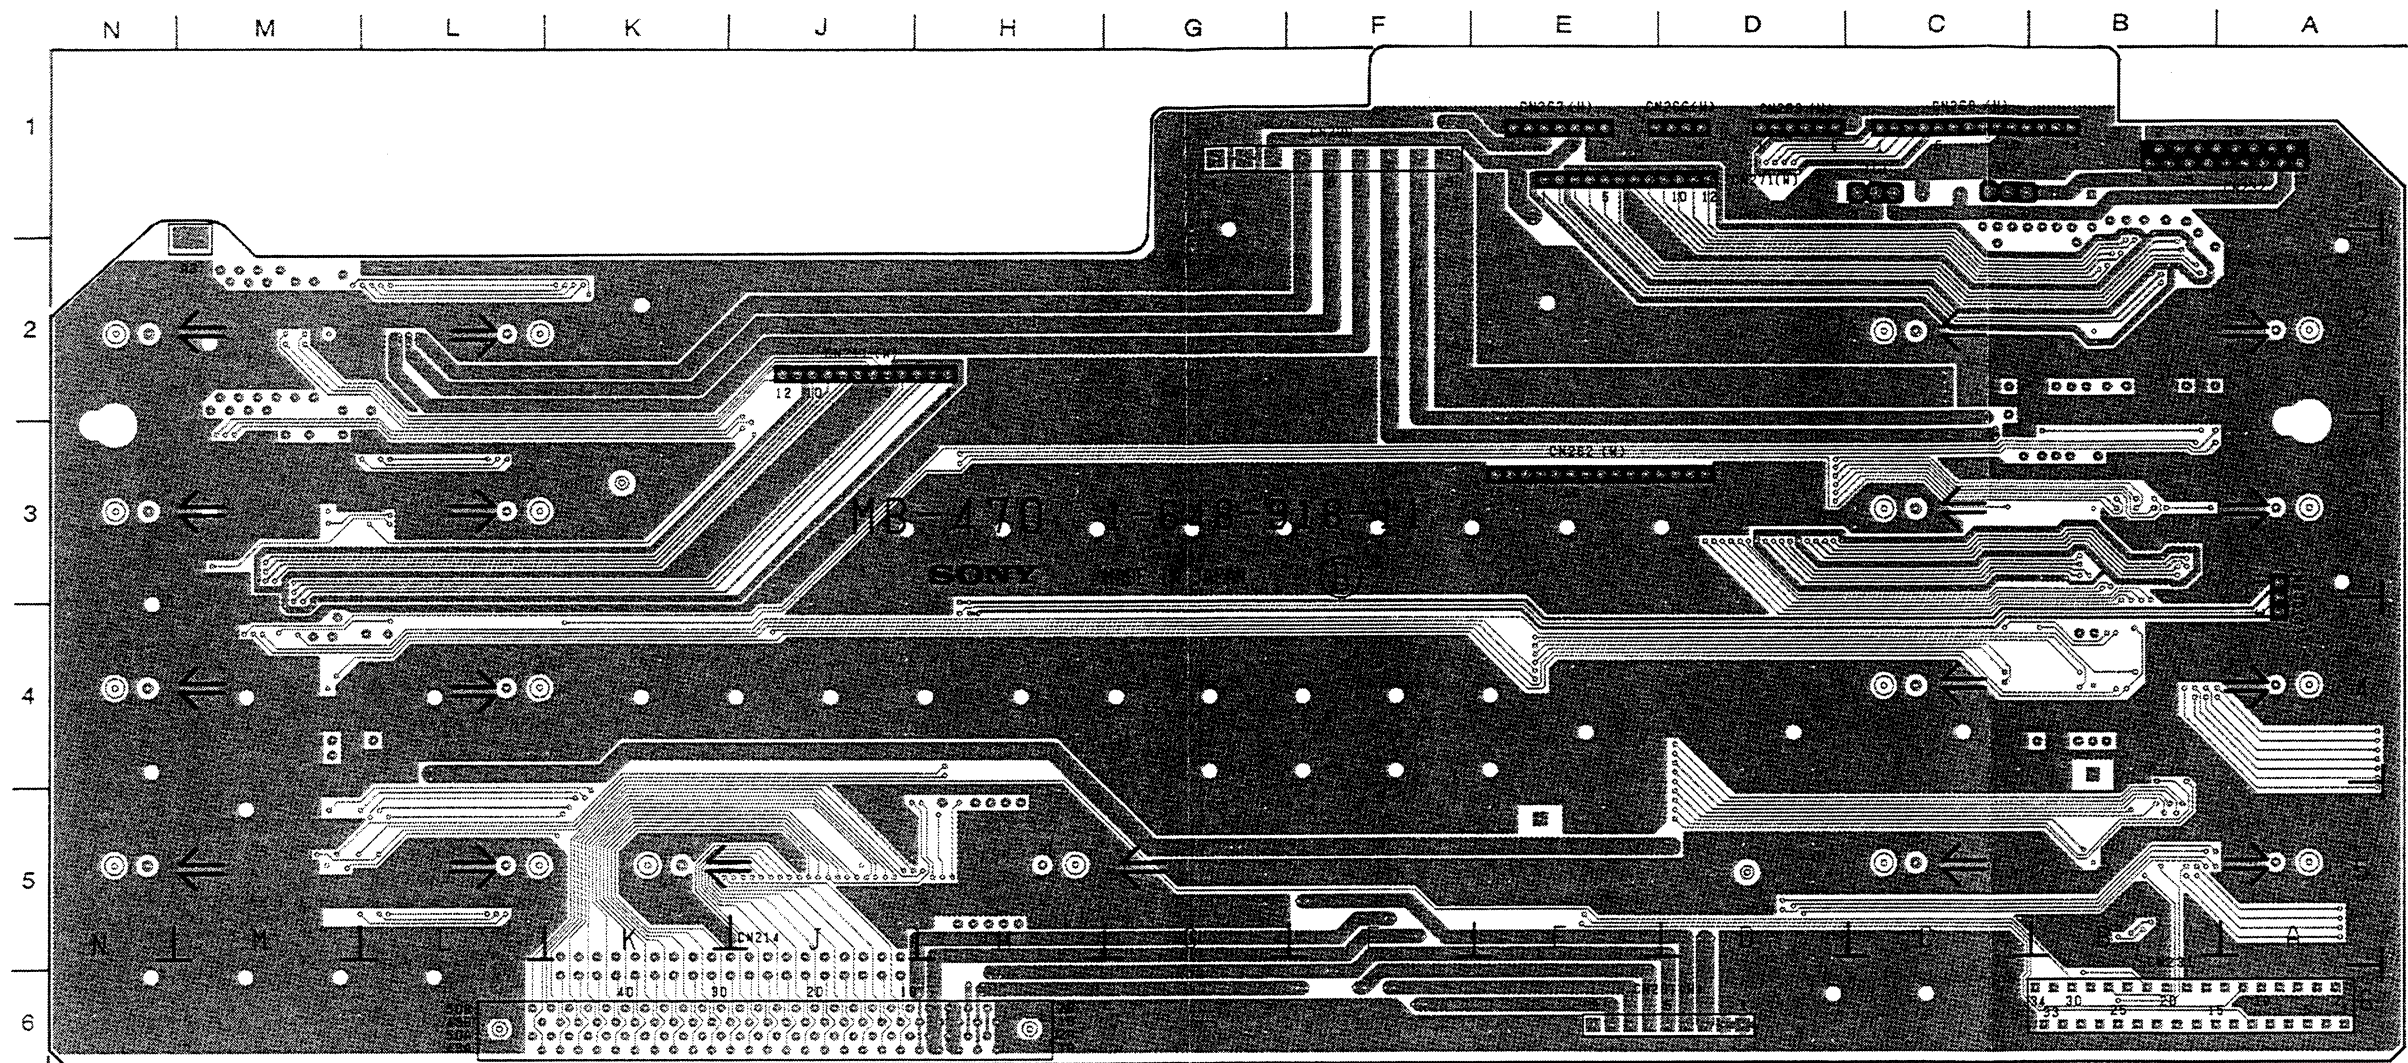


MB-470 1-648-918-11 B SIDE

MB-470(1-648-918-11)

CN101	M-2
CN102	B-2
CN103	M-3
CN104	B-3
CN105	M-4
CN106	B-4
CN107	M-5
CN108	J-5
CN109	B-5
CN200	F-1
CN201	D-6
CN211	J-2
CN214	J-6
CN231	B-6
CN232	A-1
CN235	A-3
CN262	E-3
CN266	D-1
CN267	E-1
CN268	C-1
CN269	D-1
CN271	E-1
IC1	C-1
IC2	C-1

MB-470A; MOTHER BOARD

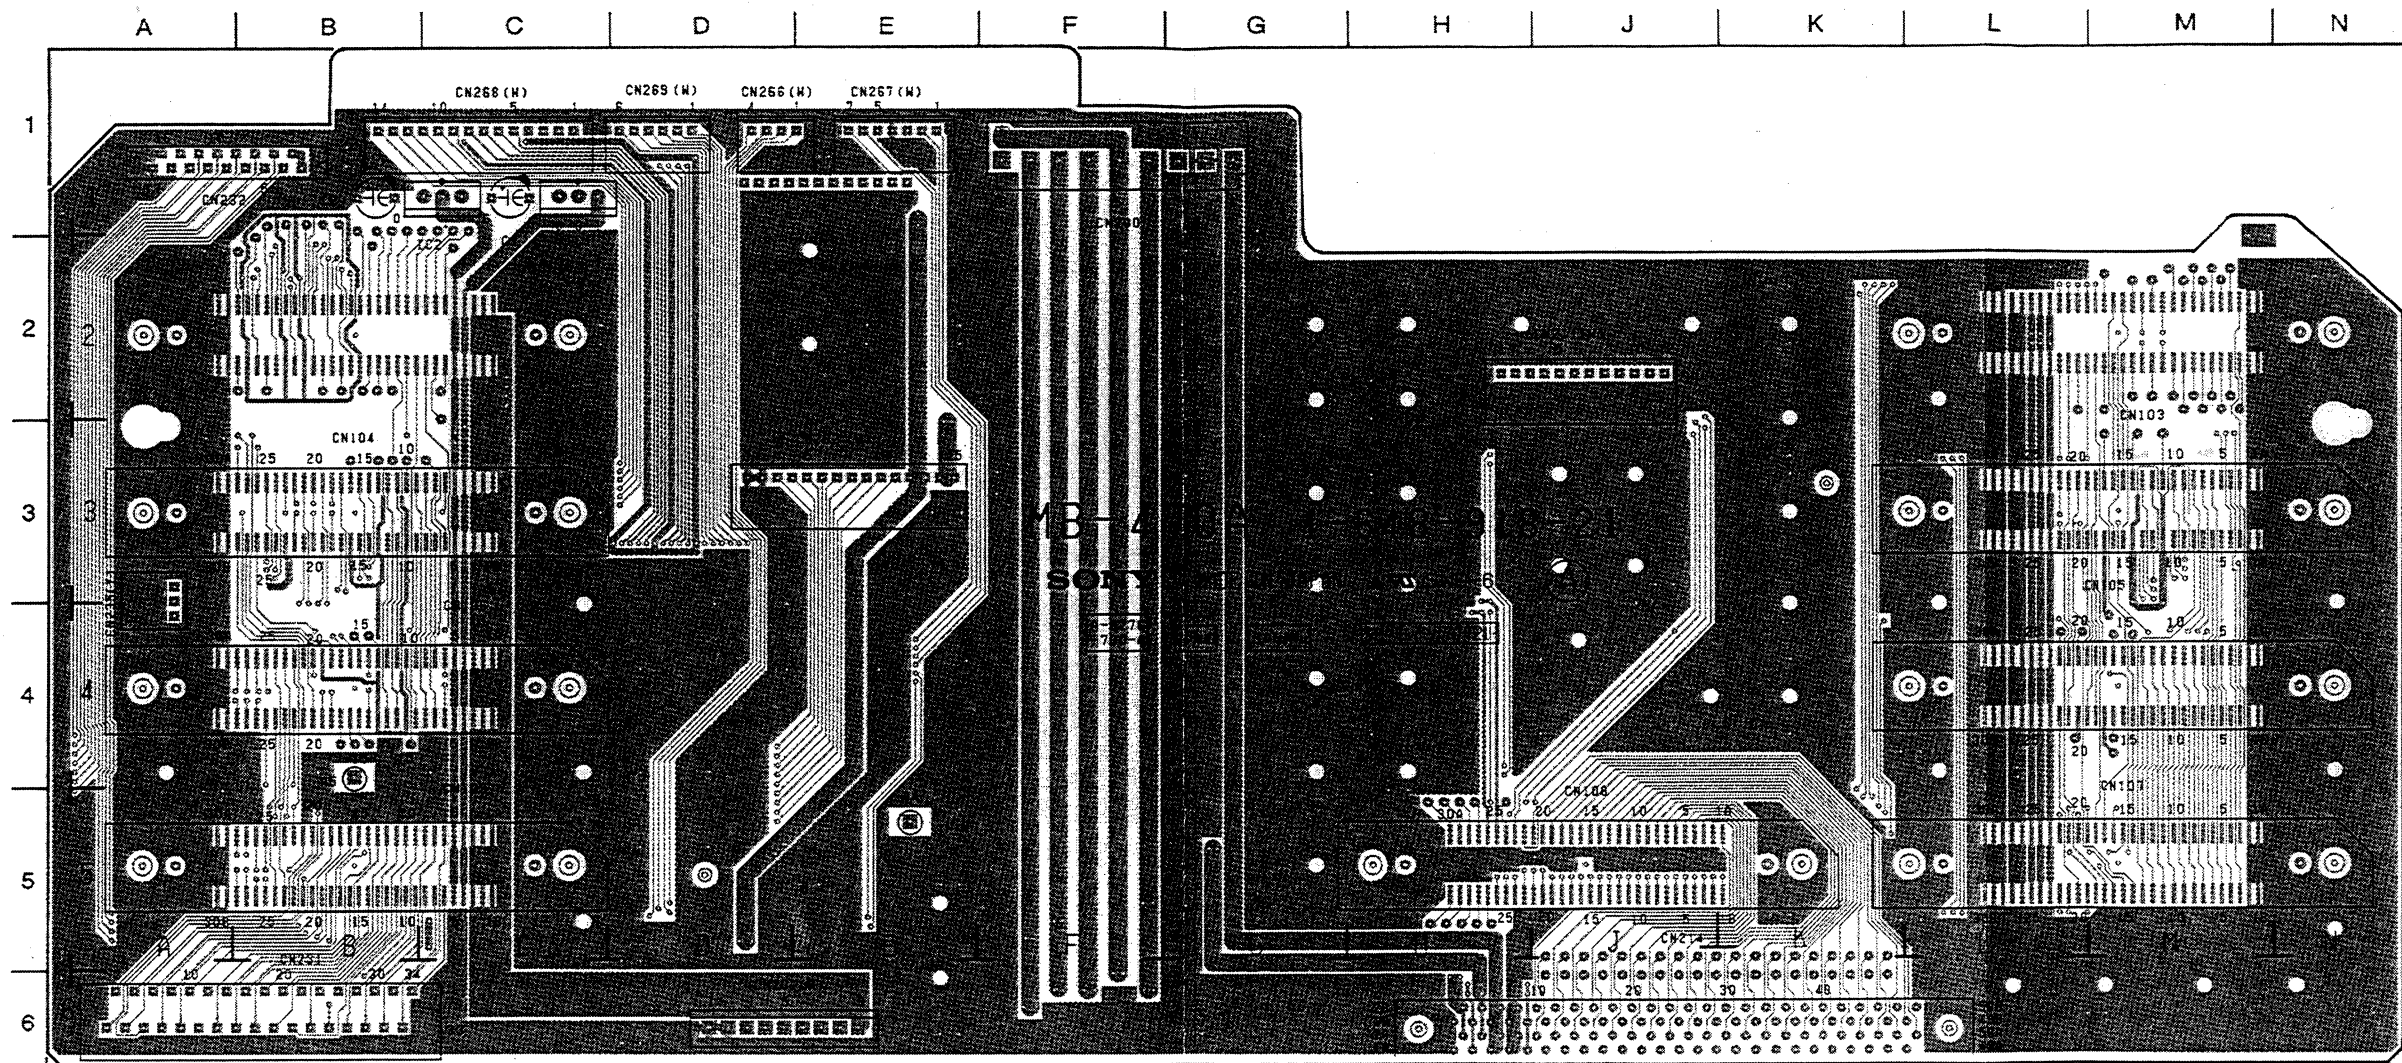


MB-470A 1-648-918-21 A SIDE

MB-470A(1-648-918-21)

CN103	M-3
CN104	B-3
CN105	M-4
CN106	B-4
CN107	M-5
CN108	J-5
CN109	B-5
CN200	F-1
CN201	D-6
CN211	J-2
CN214	J-6
CN231	B-6
CN232	A-1
CN235	A-3
CN262	E-3
CN266	D-1
CN267	E-1
CN268	C-1
CN269	D-1
IC1	C-1
IC2	C-1

MB-470A; MOTHER BOARD

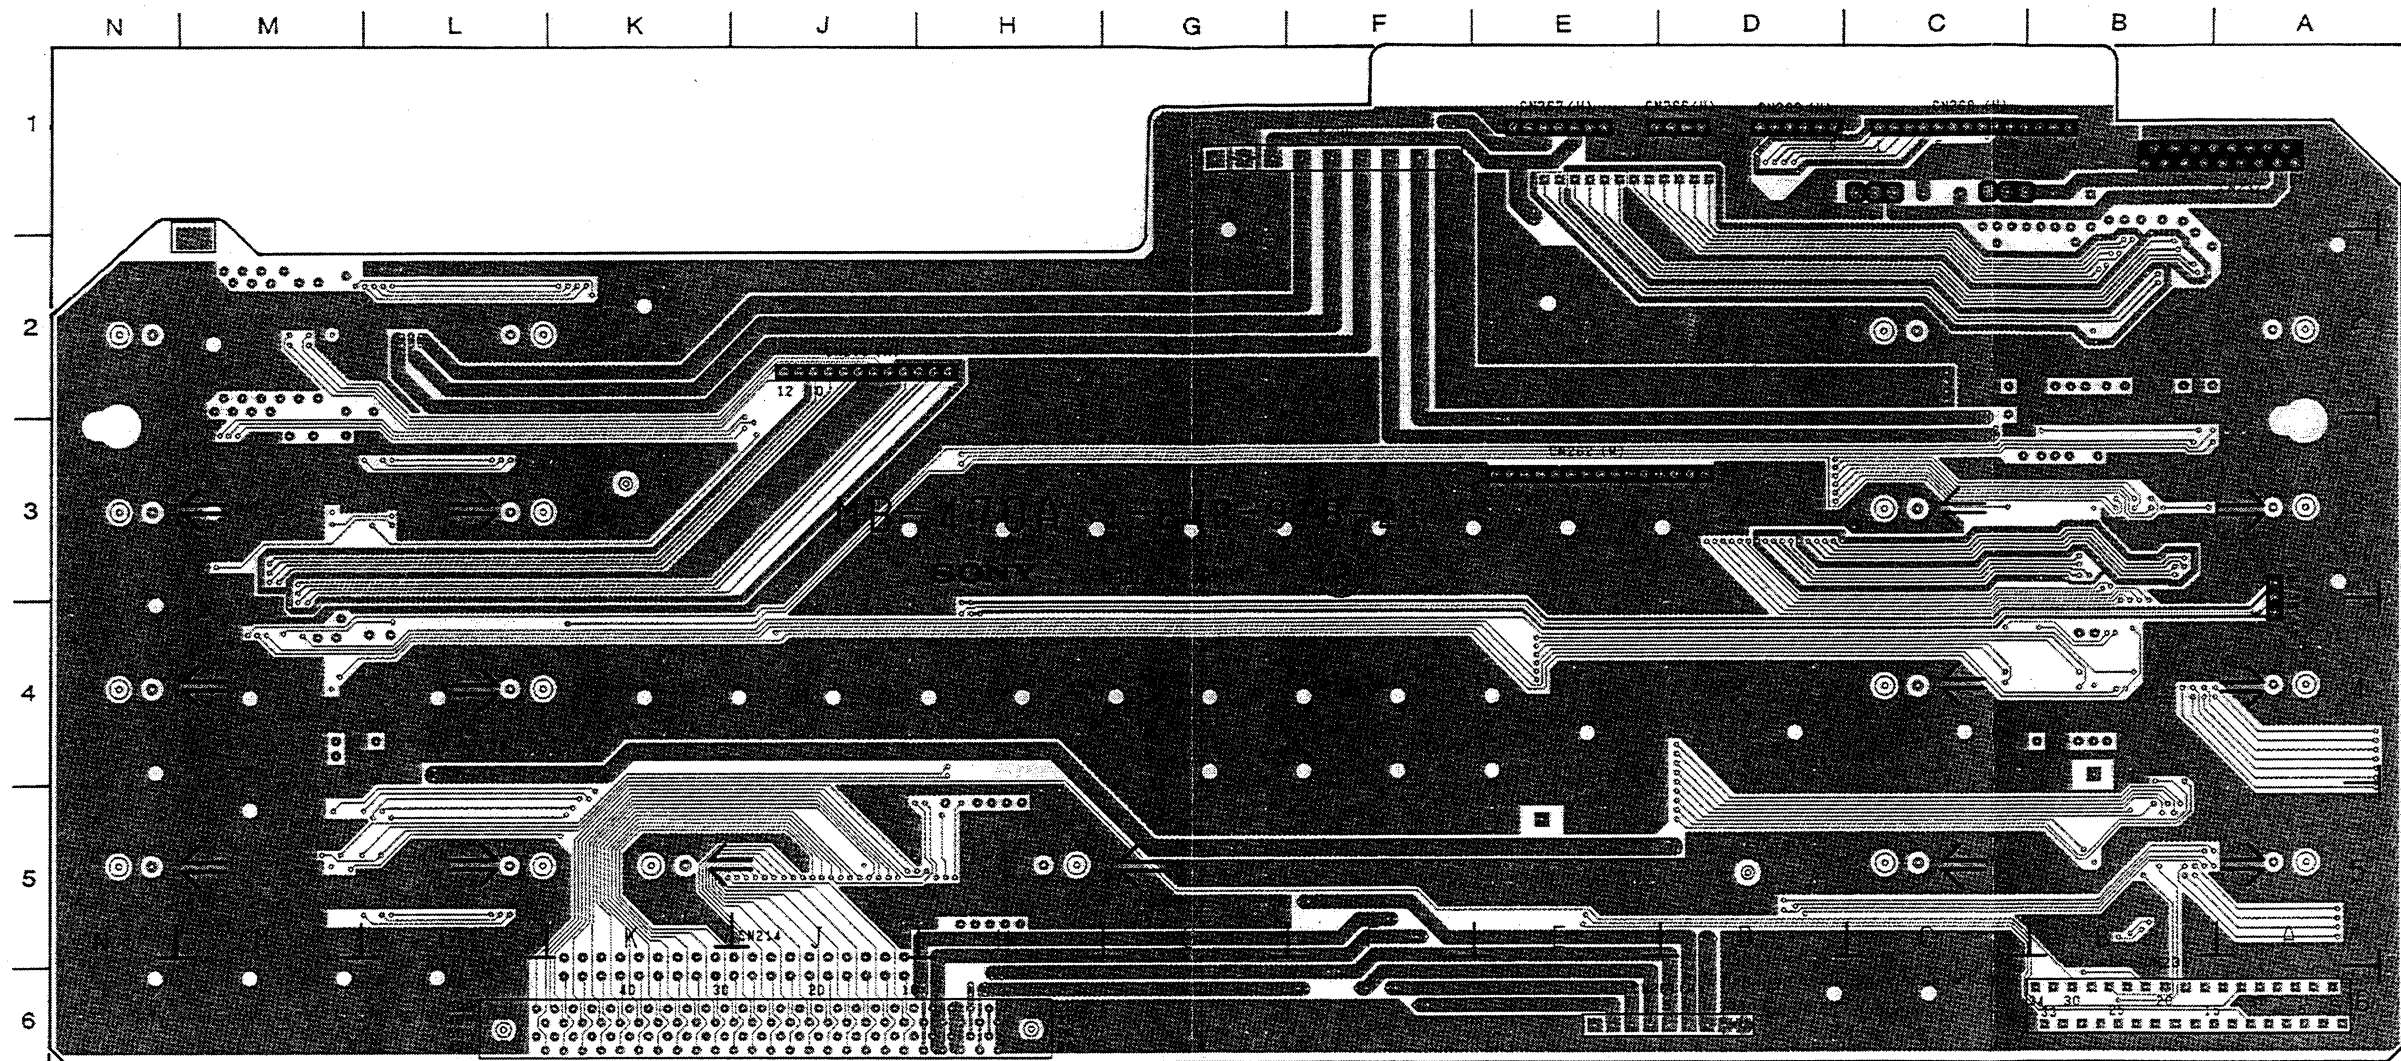


MB-470A 1-648-918-21 B SIDE


MB-470A(1-648-918-21)

CN103	M-3
CN104	B-3
CN105	M-4
CN106	B-4
CN107	M-5
CN108	J-5
CN109	B-5
CN200	F-1
CN201	D-6
CN211	J-2
CN214	J-6
CN231	B-6
CN232	A-1
CN235	A-3
CN262	E-3
CN266	D-1
CN267	E-1
CN268	C-1
CN269	D-1
IC1	C-1
IC2	C-1

MB-471; MOTHER BOARD

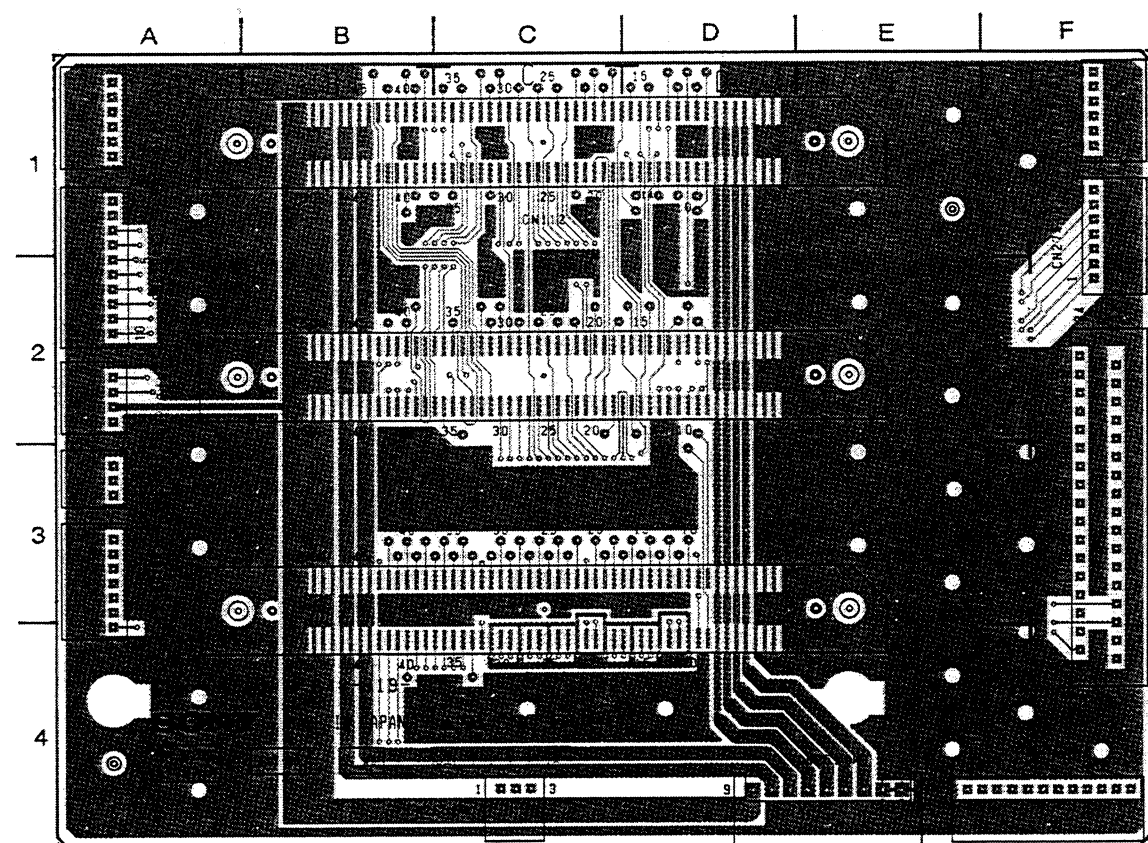

MB-471 1-648-919-11 A SIDE

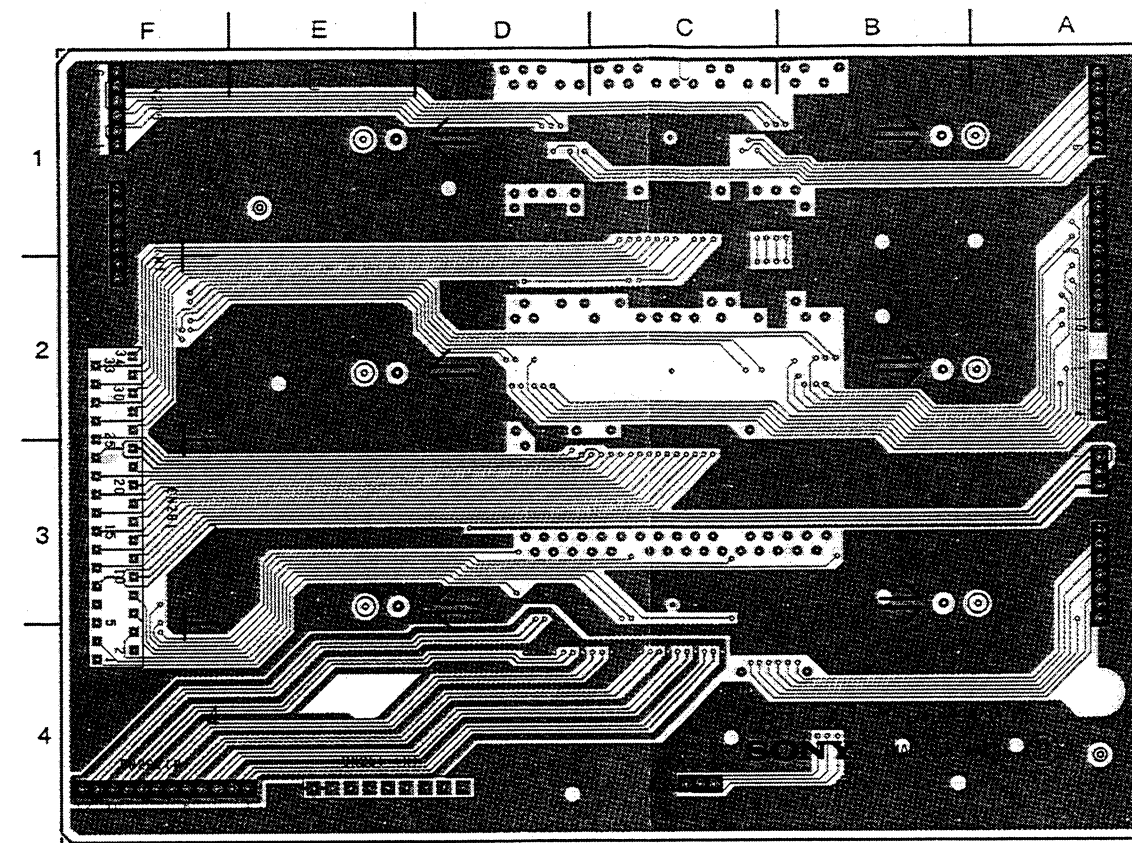


MB-471 1-648-919-11 B SIDE


MB-471(1-648-919-11)

CN110	C-4
CN111	C-3
CN112	C-1
CN251	E-4
CN261	F-4
CN263	A-3
CN264	A-3
CN265	B-4
CN274	F-1
CN275	F-1
CN276	A-1
CN277	A-2
CN278	A-2
CN281	F-3

MB-471A; MOTHER BOARD

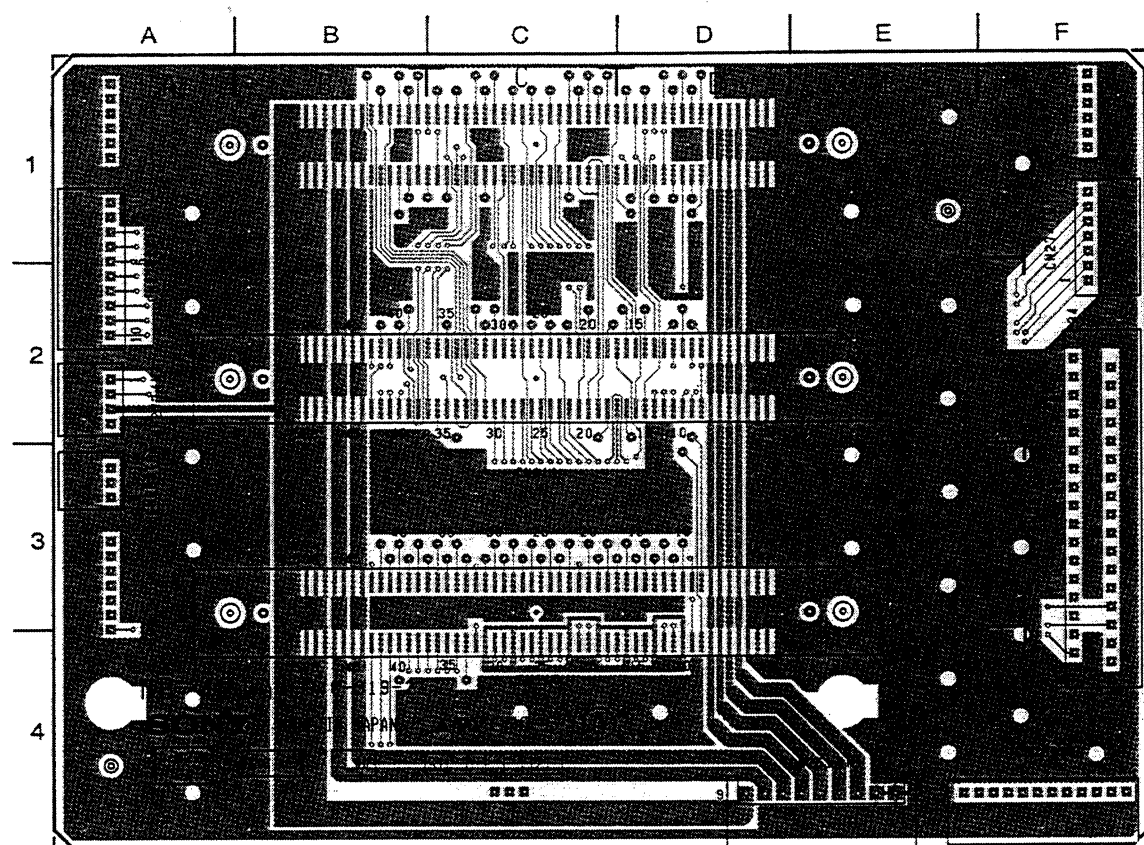

MB-471A 1-648-919-21 A SIDE

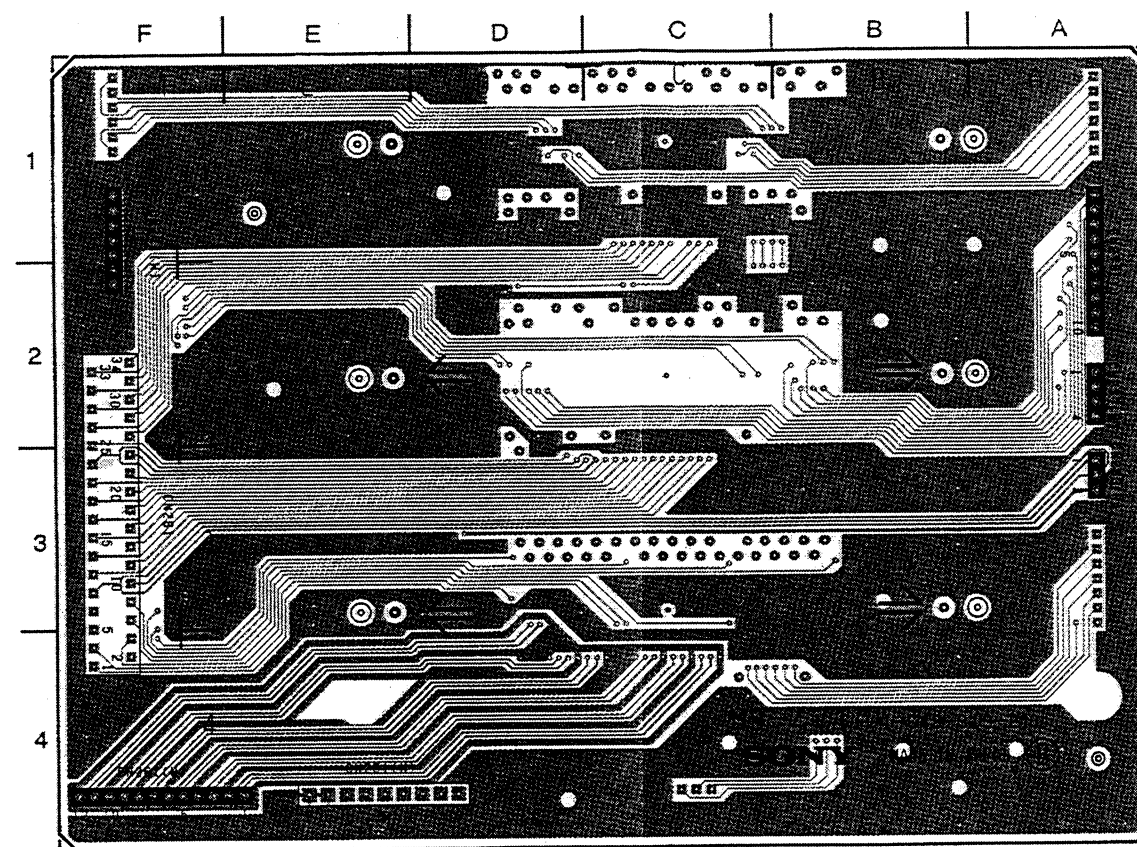

MB-471A 1-648-919-21 B SIDE

MB-471A

MB-471A(1-648-919-21)

CN110	C-4
CN111	C-3
CN251	E-4
CN261	F-4
CN263	A-3
CN274	F-1
CN277	A-2
CN278	A-2
CN281	F-3

SECTION 16


SCHEMATIC DIAGRAMS

SCHEMATIC DIAGRAM INDEX


	Board	Page
A	AP-31 (UVW-1800).....	16-4
	AP-31A (UVW-1600).....	16-16
	AR-14 (UVW-1800).....	16-28
C	CP-225/A	16-43
	CP-226/A	16-45
D	DR-214	16-48
K	KY-249 (UVW-1800).....	16-56
	KY-249A(UVW-1600).....	16-60
M	MS-39/A	16-64
	MB-470/A	16-153
	MB-471/A	16-161
R	RP-70/A	16-68
S	SS-53	16-76
	SOPS-1045AC/1045M	
T	TBC-25	16-92
V	VP-43/A	16-108
	VRA-5 (UVW-1800).....	16-136
	FRAME WIRING	16-165

NOTE: The Δ -marked components are critical to safety.
Replace only with same components as specified.

CIRCUIT FUNCTION

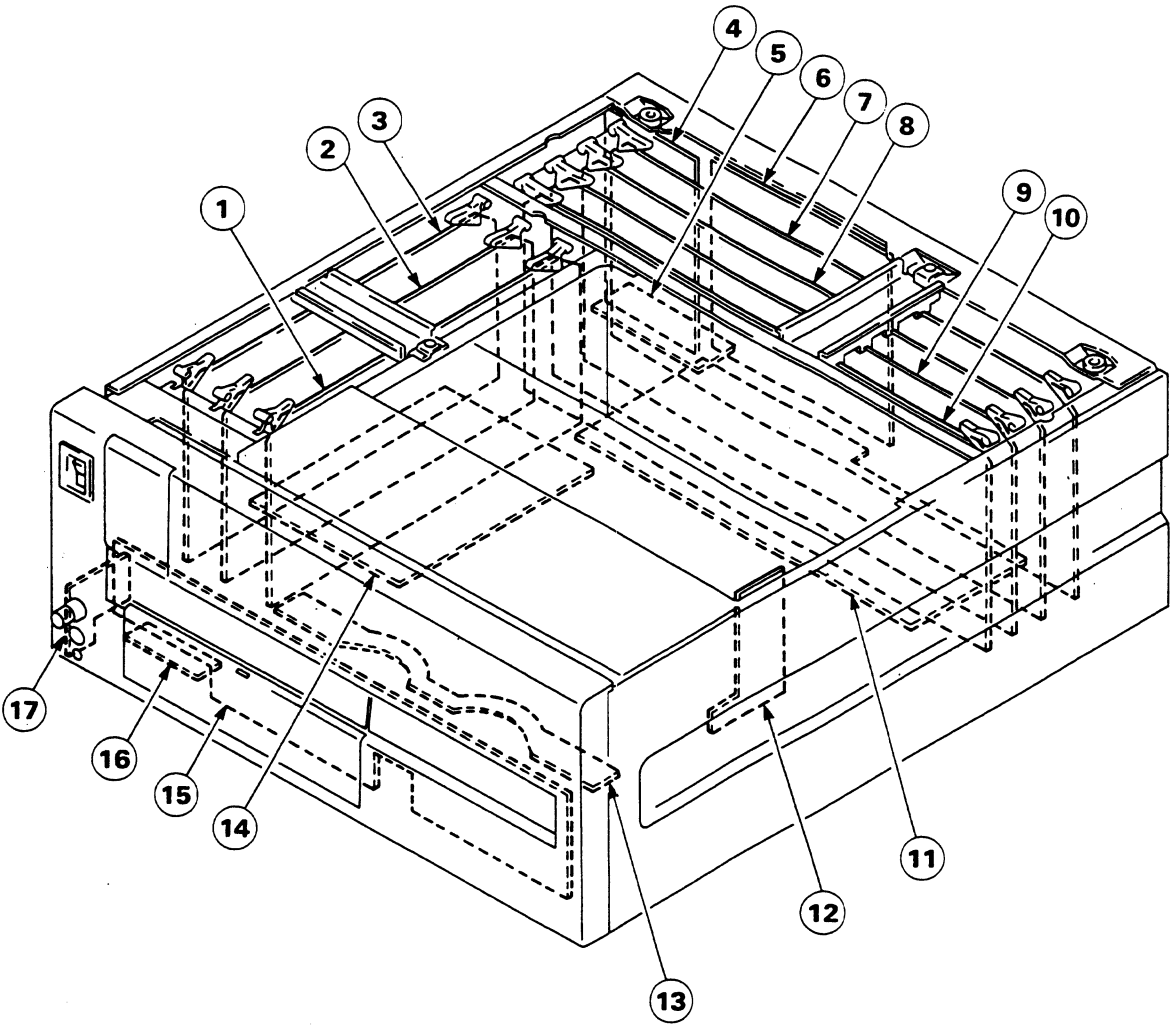

- | | |
|-----------------------------------|---|
| ① RP-70 BOARD(UVW-1800) | ; RF REC/PB AMP.,ROTARY ERASE OSC.,FULL ERASE OSC. |
| RP-70A BOARD(UVW-1600) | ; RF PB AMP. |
| ② AP-31 BOARD(UVW-1800) | ; AUDIO/TC PB AMP.,METER DRIVER |
| AP-31A BOARD(UVW-1600) | ; AUDIO/TC PB AMP.,METER DRIVER |
| ③ AR-14 BOARD(UVW-1800) | ; AUDIO/TC REC AMP.,AUDIO/TC ERASE OSC.,AUDIO BIAS DRIVER |
| ④ CP-226 BOARD(UVW-1800 : FOR UC) | ; AUDIO INPUT/OUTPUT CONNECTOR, OUTPUT TRANSFORMER |
| CP-226J BOARD(UVW-1800 : FOR J) | ; AUDIO INPUT/OUTPUT CONNECTOR, OUTPUT TRANSFORMER |
| CP-226A BOARD(UVW-1600 : FOR UC) | ; AUDIO OUTPUT CONNECTOR,OUTPUT TRANSFORMER |
| CP-226AJ BOARD(UVW-1600 : FOR J) | ; AUDIO OUTPUT CONNECTOR,OUTPUT TRANSFORMER |
| ⑤ CP-237 BOARD(UVW-1800) | ; TBC/9P REMOTE CONNECTOR |
| CP-237A BOARD(UVW-1600) | ; TBC/9P REMOTE CONNECTOR |
| ⑥ CP-225 BOARD(UVW-1800) | ; VIDEO INPUT/OUTPUT CONNECTOR |
| CP-225A BOARD(UVW-1600) | ; VIDEO OUTPUT CONNECTOR |
| ⑦ VRA-5 BOARD(UVW-1800) | ; Y/C REC PROCESS(DECODE,MOD),CTDM(COMPAND) |

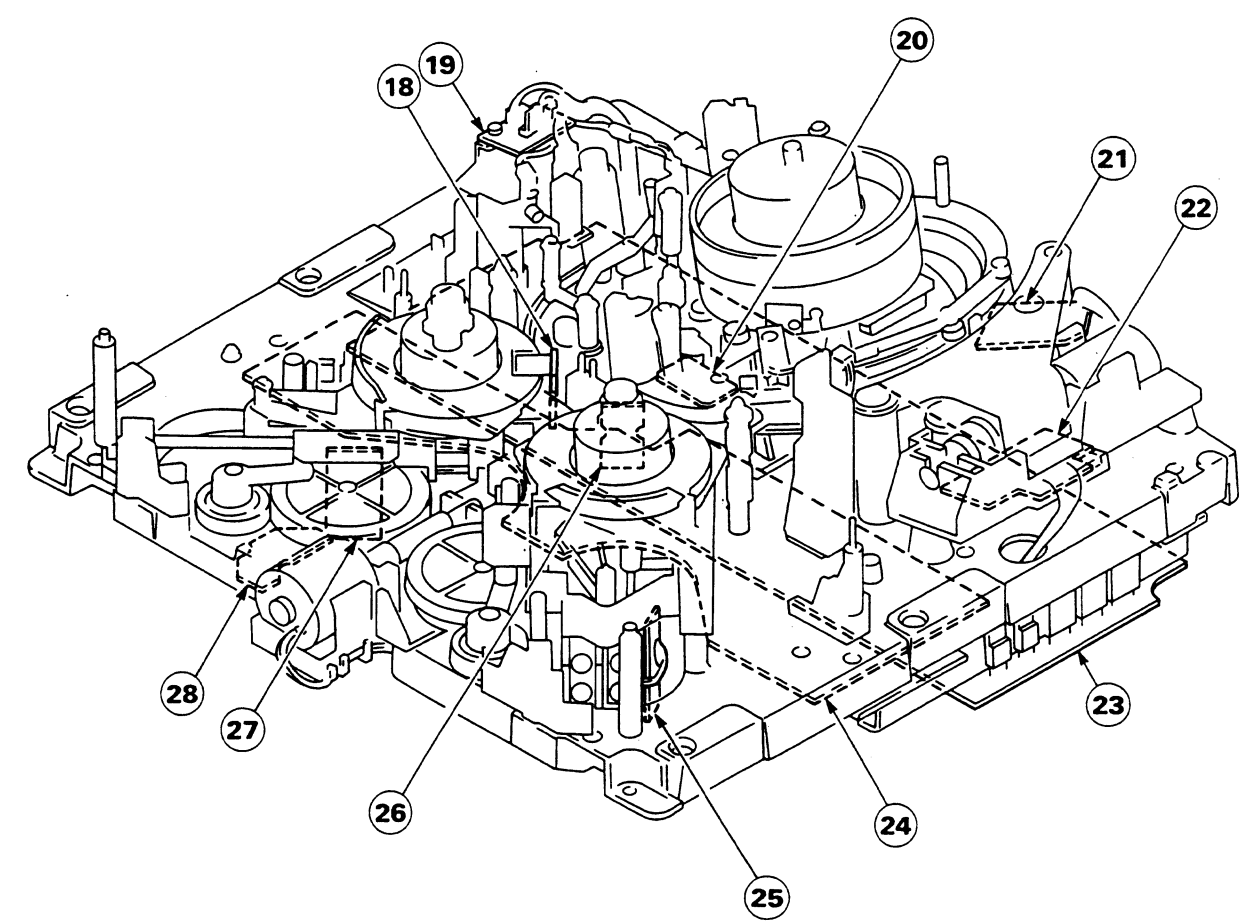

- ⑧ VP-43 BOARD(UVW-1800) ; Y/C PB PROCESS(PB RF EQ,DEMOD.,Y-RF ENVELOPE DET),VIDEO
VP-43A BOARD(UVW-1600) ; Y/C PB PROCESS(PB RF EQ,DEMOD.,Y-RF ENVELOPE DET),VIDEO
OUTPUT DRIVER, ENCODE, SYNC/CHARA MIX
- ⑨ TBC-25 BOARD ; TIME BASE CORRECTOR,CTDM(EXPAND)
- ⑩ SS-53 BOARD ; SYSTEM CONTROL,SERVO SYSTEM MAIN,TIME CODE
GENERATOR/READER, CHARACTER GENERATOR
- ⑪ MB-470 BOARD(UVW-1800) ; MOTHER BOARD
MB-470A BOARD(UVW-1600) ; MOTHER BOARD
- ⑫ CL-25 BOARD (CASSETTE COMPARTMENT) ; CASSETTE LOADING BEGIN/NEAR-END SENSOR
- ⑬ PC-62 BOARD(UVW-1800) ; CASSETTE IN/LARGE CASSETTE SENSOR
- ⑭ MB-471 BOARD(UVW-1800) ; MOTHER BOARD
MB-471A BOARD(UVW-1600) ; MOTHER BOARD
- ⑮ KY-249 BOARD(UVW-1800) ; FUNCTION KEY
KY-249A BOARD(UVW-1600) ; FUNCTION KEY
- ⑯ VR-155 BOARD (UVW-1800) ; AUDIO REC LEVEL
- ⑰ HP-61 BOARD(UVW-1800) ; HEADPHONES JACK/VOLUME CONTROL
HP-61A BOARD(UVW-1600) ; HEADPHONES JACK/VOLUME CONTROL


- ⑱ SE-207 BOARD(S SIDE) ; REEL FG
- ⑲ PD-35 BOARD ; PINCH SOLENOID
- ⑳ TR-84 BOARD ; S-TENSION SENSOR
- ㉑ PTC-68 BOARD ; THREAD END/UNTHREAD END SENSOR
- ㉒ PTC-67 BOARD ; THREADING FG/MOTOR
- ㉓ DR-214 BOARD ; MOTOR DRIVER,TENSION SENS. AMP., DRUM FG/PG AMP., CAPSTAN FG AMP., CTL
REC/PB AMP.
- ㉔ MS-39 BOARD(UVW-1800) ; CASSETTE INFORMATION,SOLENOID DRIVER,MECHA. CONTROL MPU,DATA
STORAGE
MS-39A BOARD(UVW-1600) ; CASSETTE INFORMATION,SOLENOID DRIVER,MECHA. CONTROL MPU,DATA
STORAGE
- ㉕ RM-127 BOARD ; T-REEL MOTOR
- ㉖ SE-207 BOARD(T SIDE) ; REEL FG
- ㉗ RM-126 BOARD ; S-REEL MOTOR
- ㉘ PTC-66 BOARD ; REEL POSITION SENSOR


AP-31(1-648-906-11)

CN1	H-1	FS64	B-4	FS149	J-5	RV1	J-1
CN2	A-1	FS65	D-5	FS150	H-5	RV2	J-1
CN3	G-4	FS66	D-5	FS151	H-5	RV3	J-1
CN111	E-5	FS67	D-5	FS152	H-5	RV4	H-1
		FS68	E-5	FS153	G-5	RV5	H-1
*D1	J-2	FS69	C-5	FS154	G-5	RV201	B-1
*D7	J-5	FS70	C-5	FS155	H-5	RV202	B-1
*D8	H-5	FS71	E-3	FS156	H-5	RV203	B-1
*D10	G-5	FS72	E-3			RV204	C-1
*D11	E-3	FS73	F-3	IC1	J-2	RV205	C-1
*D201	A-2	FS74	E-4	IC2	J-4		
*D206	A-5	FS75	E-4	IC3	J-3	S1	J-1
*D207	B-5	FS77	F-4	IC4	H-3	S2	G-1
*D209	C-4	FS79	F-5	IC5	G-4	S201	A-1
*D401	F-3	FS80	F-5	IC6	G-3	S202	C-1
*D403	F-5	FS81	H-1	IC7	G-3		
		FS82	H-1	IC8	F-2	*TH1	J-2
E1	H-4	FS83	G-1	IC9	G-2	*TH2	B-2
E2	G-1	FS84	G-1	IC10	G-2		
E201	B-4	FS85	G-1	IC11	H-4	TP3	J-2
E202	E-1	FS86	G-1	IC12	E-5	TP4	G-2
		FS87	H-1	IC13	D-4	TP5	G-1
FS1	A-1	FS88	H-1	IC14	E-3	TP203	B-2
FS3	A-2	FS89	H-1	IC15	J-4	TP204	C-2
FS5	B-2	FS90	G-1	IC201	A-2	TP205	D-1
FS6	B-2	FS91	G-1	IC202	A-4	TP402	G-5
FS7	A-3	FS92	G-2	IC203	A-3	TP403	D-1
FS9	B-3	FS93	G-2	IC204	B-3		
FS10	A-3	FS94	F-2	IC205	C-4		
FS11	B-3	FS96	H-2	IC206	C-3		
FS12	A-3	FS97	H-2	IC207	C-3		
FS13	A-3	FS98	F-2	IC208	C-2		
FS14	B-3	FS99	F-2	IC209	C-2		
FS15	B-3	FS100	G-2	IC210	C-4		
FS16	A-4	FS101	H-2	IC211	A-4		
FS17	A-4	FS102	H-2	IC401	F-4		
FS18	A-4	FS103	G-3	IC402	F-4		
FS19	B-4	FS106	H-3	*IC405	C-5		
FS20	A-4	FS107	H-3	*IC406	D-5		
FS21	A-4	FS108	H-3	*IC407	D-5		
FS22	A-5	FS109	H-3	*IC408	C-5		
FS23	A-5	FS110	G-3	*IC409	D-5		
FS24	A-5	FS111	G-4	IC410	F-5		
FS25	B-5	FS112	G-4				
FS26	A-5	FS114	H-4	PS1	G-5		
FS27	B-5	FS115	H-4	PS2	G-5		
FS28	B-5	FS116	G-4				
FS29	B-5	FS117	H-4	*Q5	J-2		
FS30	C-1	FS118	H-4	*Q6	J-2		
FS31	C-1	FS119	H-5	*Q7	J-2		
FS32	C-1	FS121	G-5	*Q9	H-4		
FS33	C-1	FS122	G-5	*Q11	C-2		
FS34	C-1	FS123	H-5	*Q12	E-2		
FS35	C-1	FS124	H-5	*Q13	E-1		
FS36	D-1	FS125	H-1	Q18	J-5		
FS38	C-2	FS126	J-1	Q19	J-5		
FS39	C-2	FS127	J-1	Q20	H-5		
FS40	C-2	FS128	J-1	Q21	H-5		
FS41	D-2	FS129	H-2	*Q22	J-4		
FS43	C-2	FS131	J-2	*Q23	H-4		
FS44	D-2	FS132	J-2	Q25	G-4		
FS45	D-2	FS133	J-3	Q30	E-3		
FS46	D-2	FS135	J-3	*Q205	A-2		
FS47	C-3	FS136	H-3	*Q206	A-2		
FS48	C-3	FS137	J-3	*Q207	B-2		
FS49	C-3	FS138	J-3	*Q209	B-4		
FS50	C-3	FS139	H-3	*Q211	E-1		
FS51	C-3	FS140	J-3	Q216	A-5		
FS53	C-3	FS141	J-3	Q217	A-5		
FS54	C-4	FS142	J-4	Q218	C-5		
FS56	D-4	FS143	J-4	Q219	C-5		
FS57	D-4	FS144	J-4	*Q220	B-4		
FS58	C-4	FS145	J-4	*Q221	B-4		
FS59	C-4	FS146	J-4	Q223	C-4		
FS61	D-4	FS147	J-5	*Q403	F-3		
FS63	D-4	FS148	J-5				

*: BSIDE

AP-31(1/3);CH-1 PB EQ/NR,LINE/METER/HP DRIVE

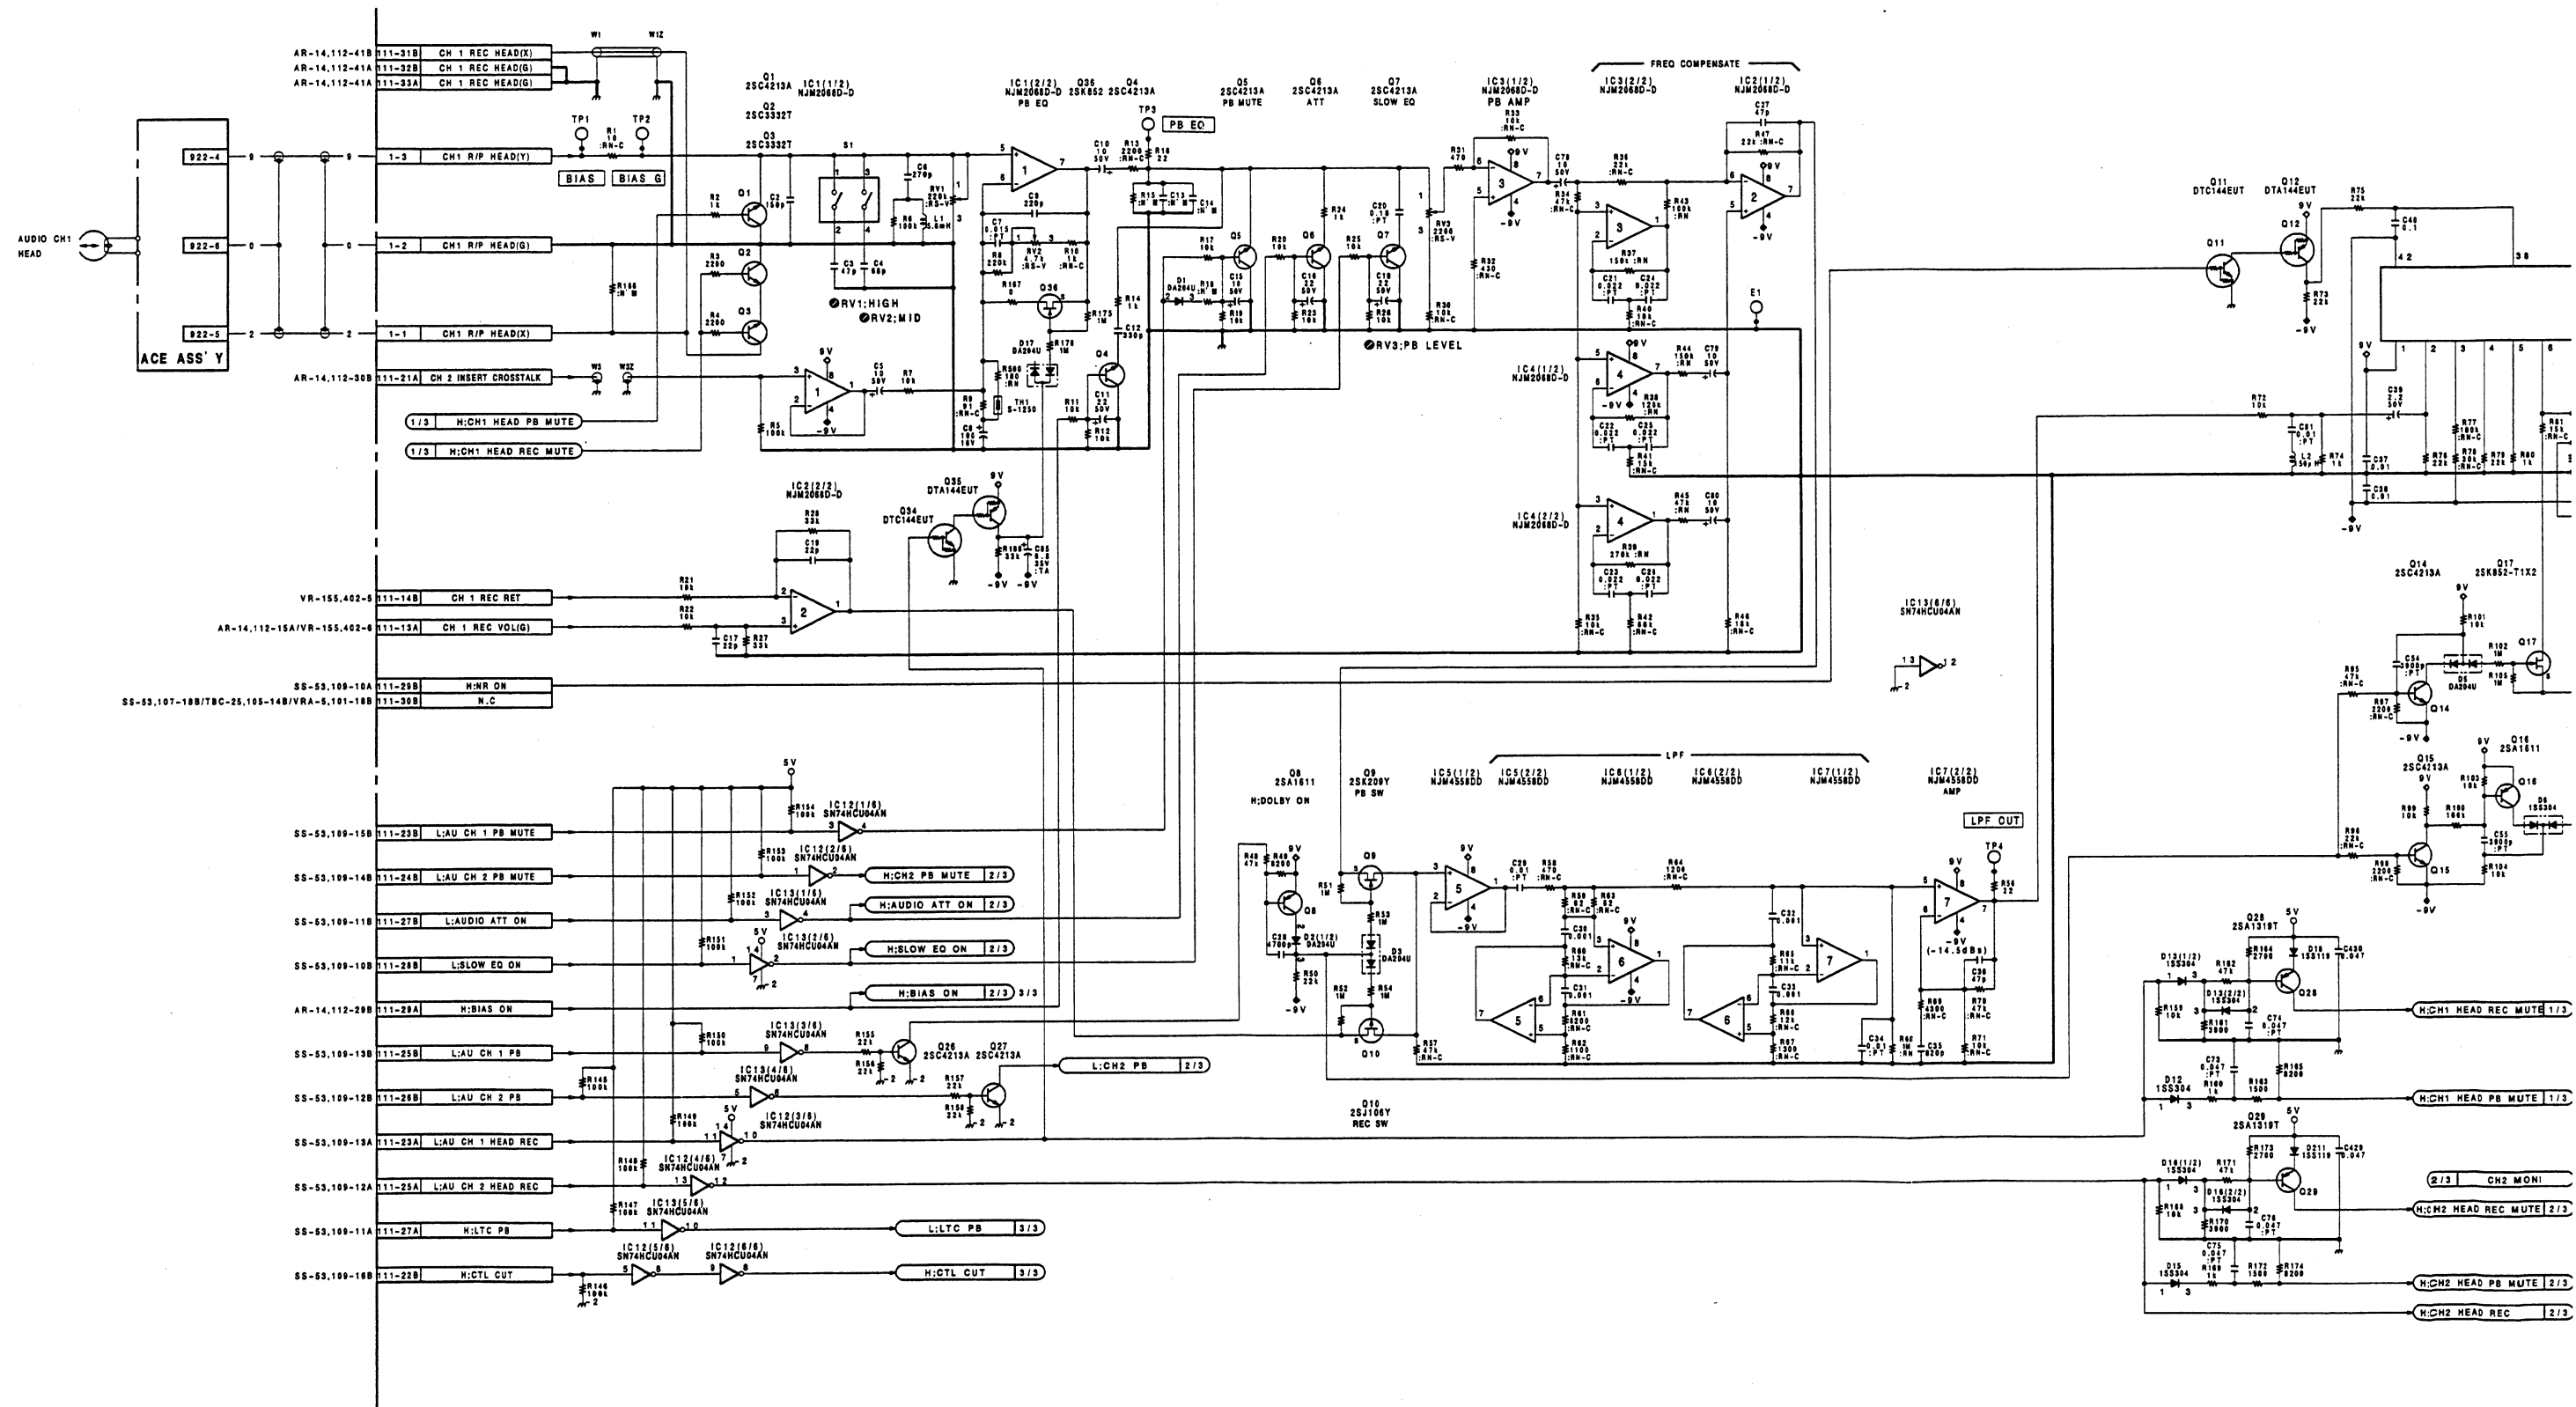

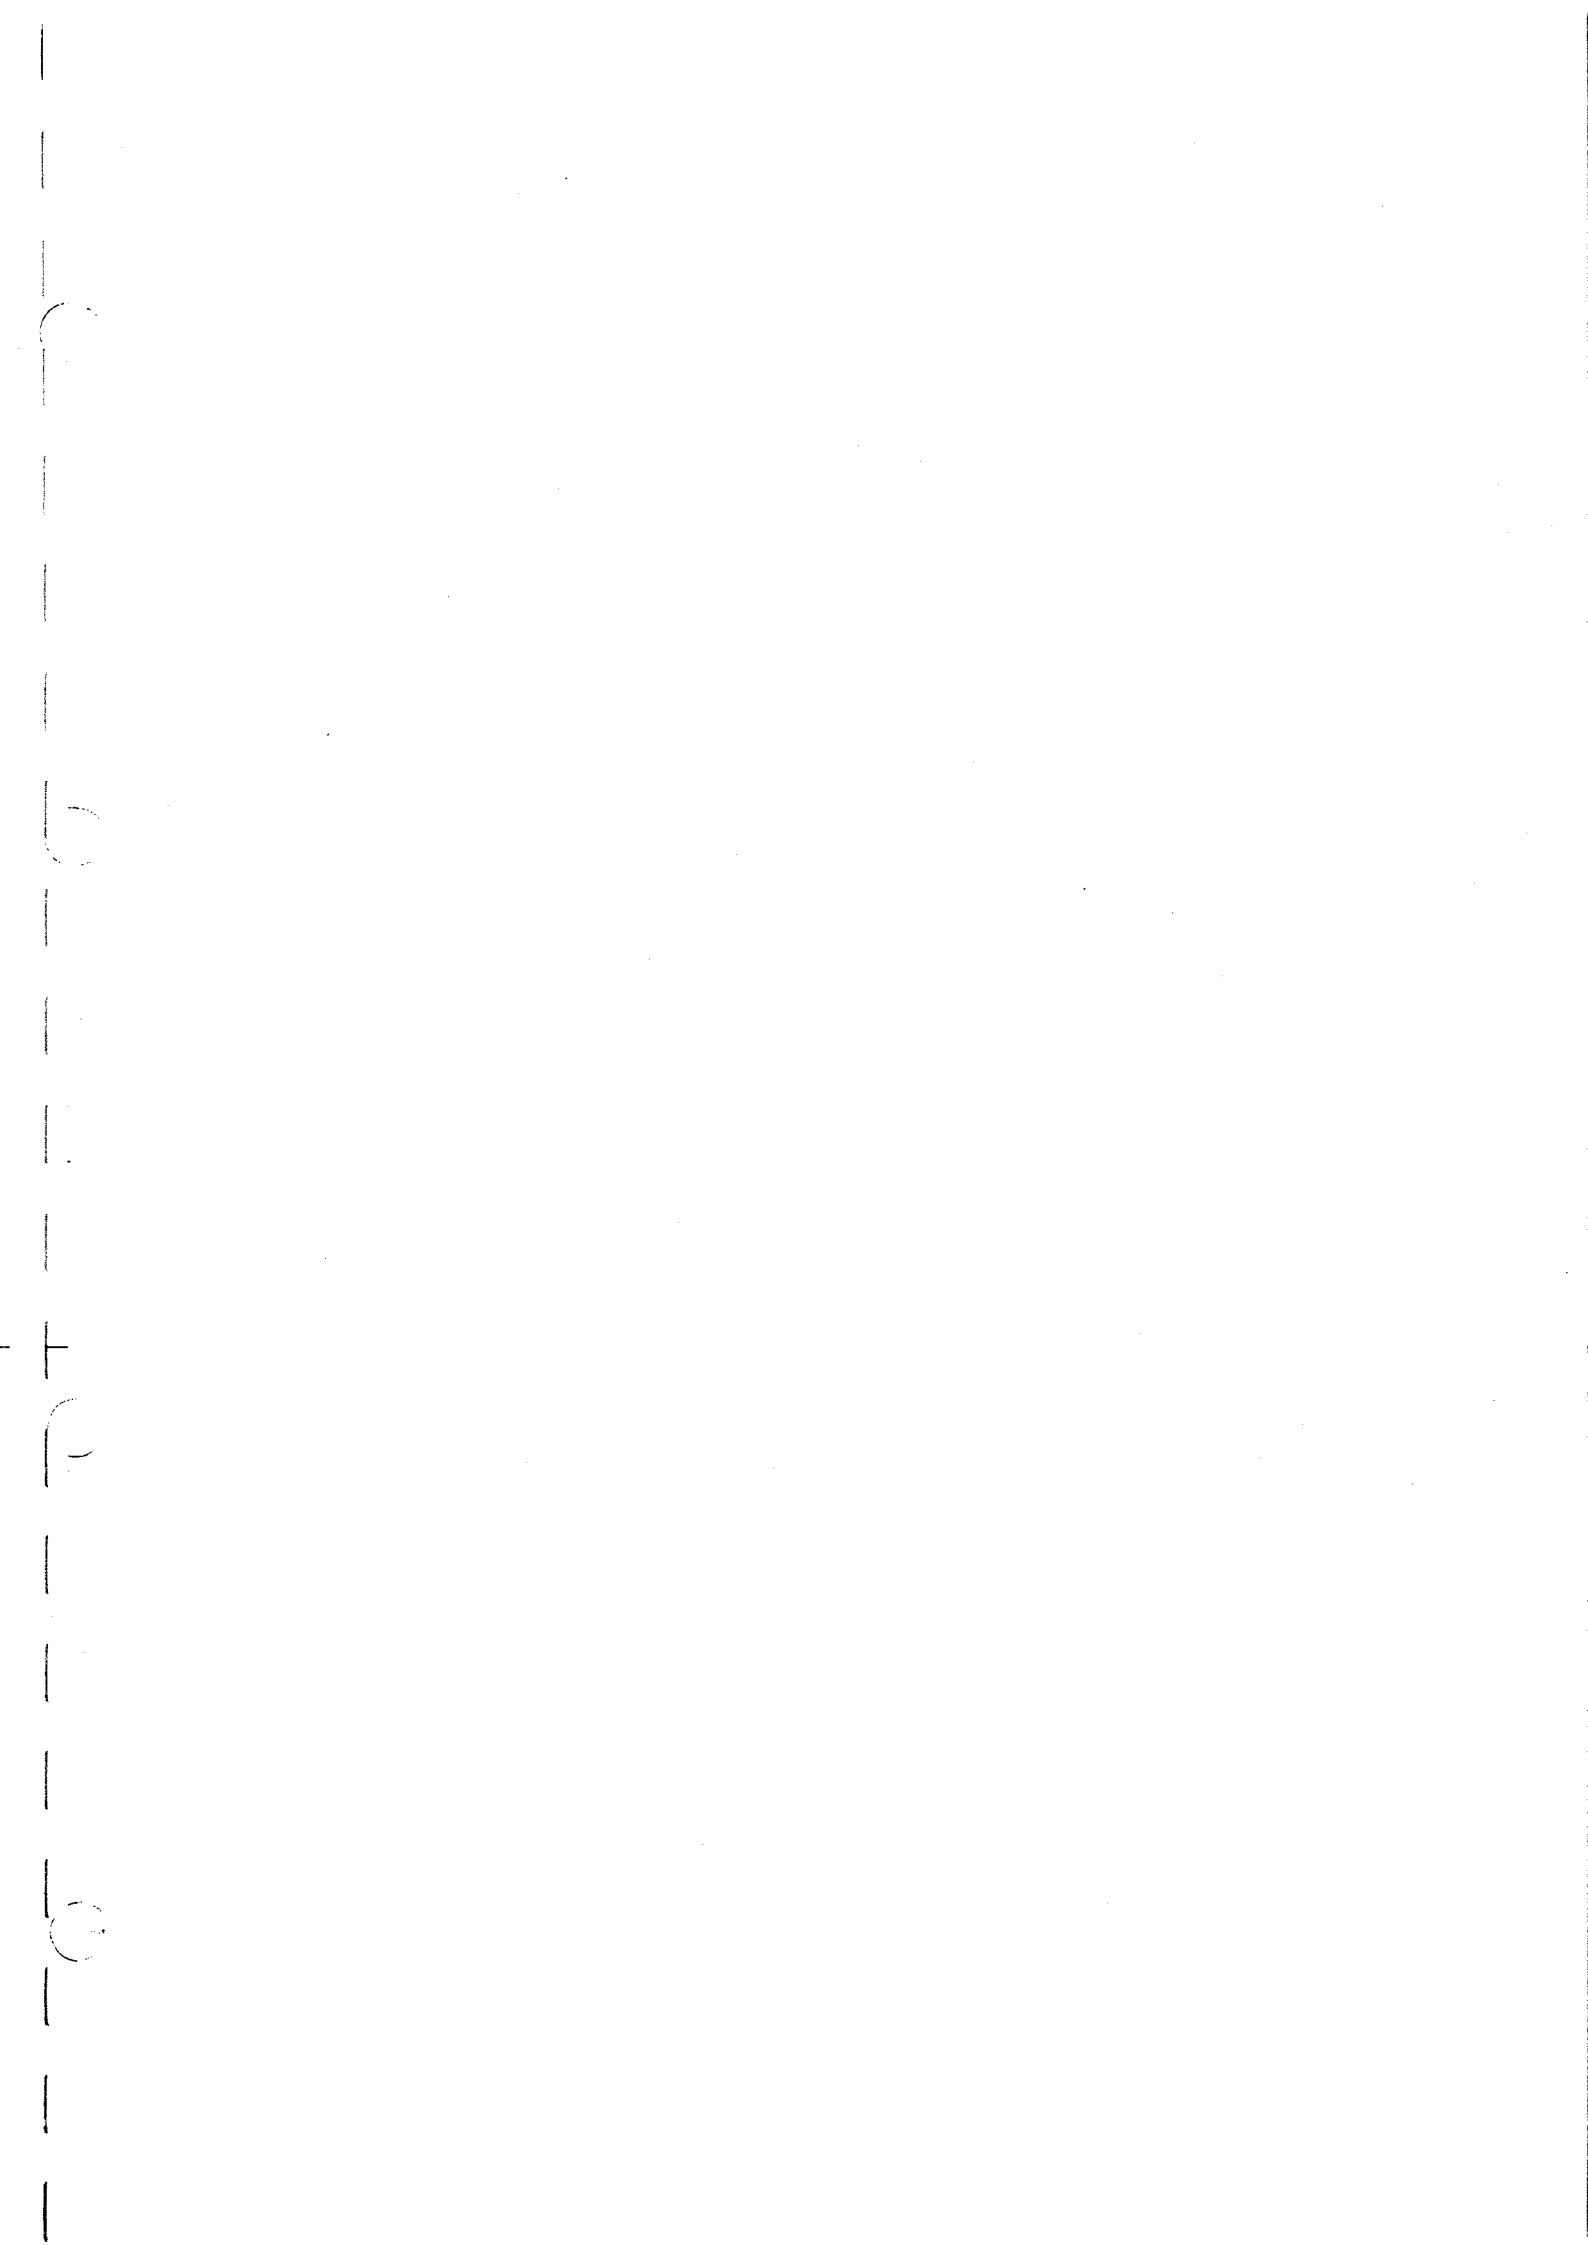



AP-31(1-648-906-11)

CN1	H-1	FS64	B-4	FS149	J-5	RV1	J-1
CN2	A-1	FS65	D-5	FS150	H-5	RV2	J-1
CN3	G-4	FS66	D-5	FS151	H-5	RV3	J-1
CN111	E-5	FS67	D-5	FS152	H-5	RV4	H-1
		FS68	E-5	FS153	G-5	RV5	H-1
*D1	J-2	FS69	C-5	FS154	G-5	RV201	B-1
*D7	J-5	FS70	C-5	FS155	H-5	RV202	B-1
*D8	H-5	FS71	E-3	FS156	H-5	RV203	B-1
*D10	G-5	FS72	E-3			RV204	C-1
*D11	E-3	FS73	F-3	IC1	J-2	RV205	C-1
*D201	A-2	FS74	E-4	IC2	J-4		
*D206	A-5	FS75	E-4	IC3	J-3	S1	J-1
*D207	B-5	FS77	F-4	IC4	H-3	S2	G-1
*D209	C-4	FS79	F-5	IC5	G-4	S201	A-1
*D401	F-3	FS80	F-5	IC6	G-3	S202	C-1
*D403	F-5	FS81	H-1	IC7	G-3		
		FS82	H-1	IC8	F-2	*TH1	J-2
E1	H-4	FS83	G-1	IC9	G-2	*TH2	B-2
E2	G-1	FS84	G-1	IC10	G-2		
E201	B-4	FS85	G-1	IC11	H-4	TP3	J-2
E202	E-1	FS86	G-1	IC12	E-5	TP4	G-2
		FS87	H-1	IC13	D-4	TP5	G-1
FS1	A-1	FS88	H-1	IC14	E-3	TP203	B-2
FS3	A-2	FS89	H-1	IC15	J-4	TP204	C-2
FS5	B-2	FS90	G-1	IC201	A-2	TP205	D-1
FS6	B-2	FS91	G-1	IC202	A-4	TP402	G-5
FS7	A-3	FS92	G-2	IC203	A-3	TP403	D-1
FS9	B-3	FS93	G-2	IC204	B-3		
FS10	A-3	FS94	F-2	IC205	C-4		
FS11	B-3	FS96	H-2	IC206	C-3		
FS12	A-3	FS97	H-2	IC207	C-3		
FS13	A-3	FS98	F-2	IC208	C-2		
FS14	B-3	FS99	F-2	IC209	C-2		
FS15	B-3	FS100	G-2	IC210	C-4		
FS16	A-4	FS101	H-2	IC211	A-4		
FS17	A-4	FS102	H-2	IC401	F-4		
FS18	A-4	FS103	G-3	IC402	F-4		
FS19	B-4	FS106	H-3	*IC405	C-5		
FS20	A-4	FS107	H-3	*IC406	D-5		
FS21	A-4	FS108	H-3	*IC407	D-5		
FS22	A-5	FS109	H-3	*IC408	C-5		
FS23	A-5	FS110	G-3	*IC409	D-5		
FS24	A-5	FS111	G-4	IC410	F-5		
FS25	B-5	FS112	G-4				
FS26	A-5	FS114	H-4	PS1	G-5		
FS27	B-5	FS115	H-4	PS2	G-5		
FS28	B-5	FS116	G-4				
FS29	B-5	FS117	H-4	*Q5	J-2		
FS30	C-1	FS118	H-4	*Q6	J-2		
FS31	C-1	FS119	H-5	*Q7	J-2		
FS32	C-1	FS121	G-5	*Q9	H-4		
FS33	C-1	FS122	G-5	*Q11	C-2		
FS34	C-1	FS123	H-5	*Q12	E-2		
FS35	C-1	FS124	H-5	*Q13	E-1		
FS36	D-1	FS125	H-1	Q18	J-5		
FS38	C-2	FS126	J-1	Q19	J-5		
FS39	C-2	FS127	J-1	Q20	H-5		
FS40	C-2	FS128	J-1	Q21	H-5		
FS41	D-2	FS129	H-2	*Q22	J-4		
FS43	C-2	FS131	J-2	*Q23	H-4		
FS44	D-2	FS132	J-2	Q25	G-4		
FS45	D-2	FS133	J-3	Q30	E-3		
FS46	D-2	FS135	J-3	*Q205	A-2		
FS47	C-3	FS136	H-3	*Q206	A-2		
FS48	C-3	FS137	J-3	*Q207	B-2		
FS49	C-3	FS138	J-3	*Q209	B-4		
FS50	C-3	FS139	H-3	*Q211	E-1		
FS51	C-3	FS140	J-3	Q216	A-5		
FS53	C-3	FS141	J-3	Q217	A-5		
FS54	C-4	FS142	J-4	Q218	C-5		
FS56	D-4	FS143	J-4	Q219	C-5		
FS57	D-4	FS144	J-4	*Q220	B-4		
FS58	C-4	FS145	J-4	*Q221	B-4		
FS59	C-4	FS146	J-4	Q223	C-4		
FS61	D-4	FS147	J-5	*Q403	F-3		
FS63	D-4	FS148	J-5				

*: B SIDE

AP-31(2/3);CH-2 PB EQ/NR,LINE/METER/HP DRIVE

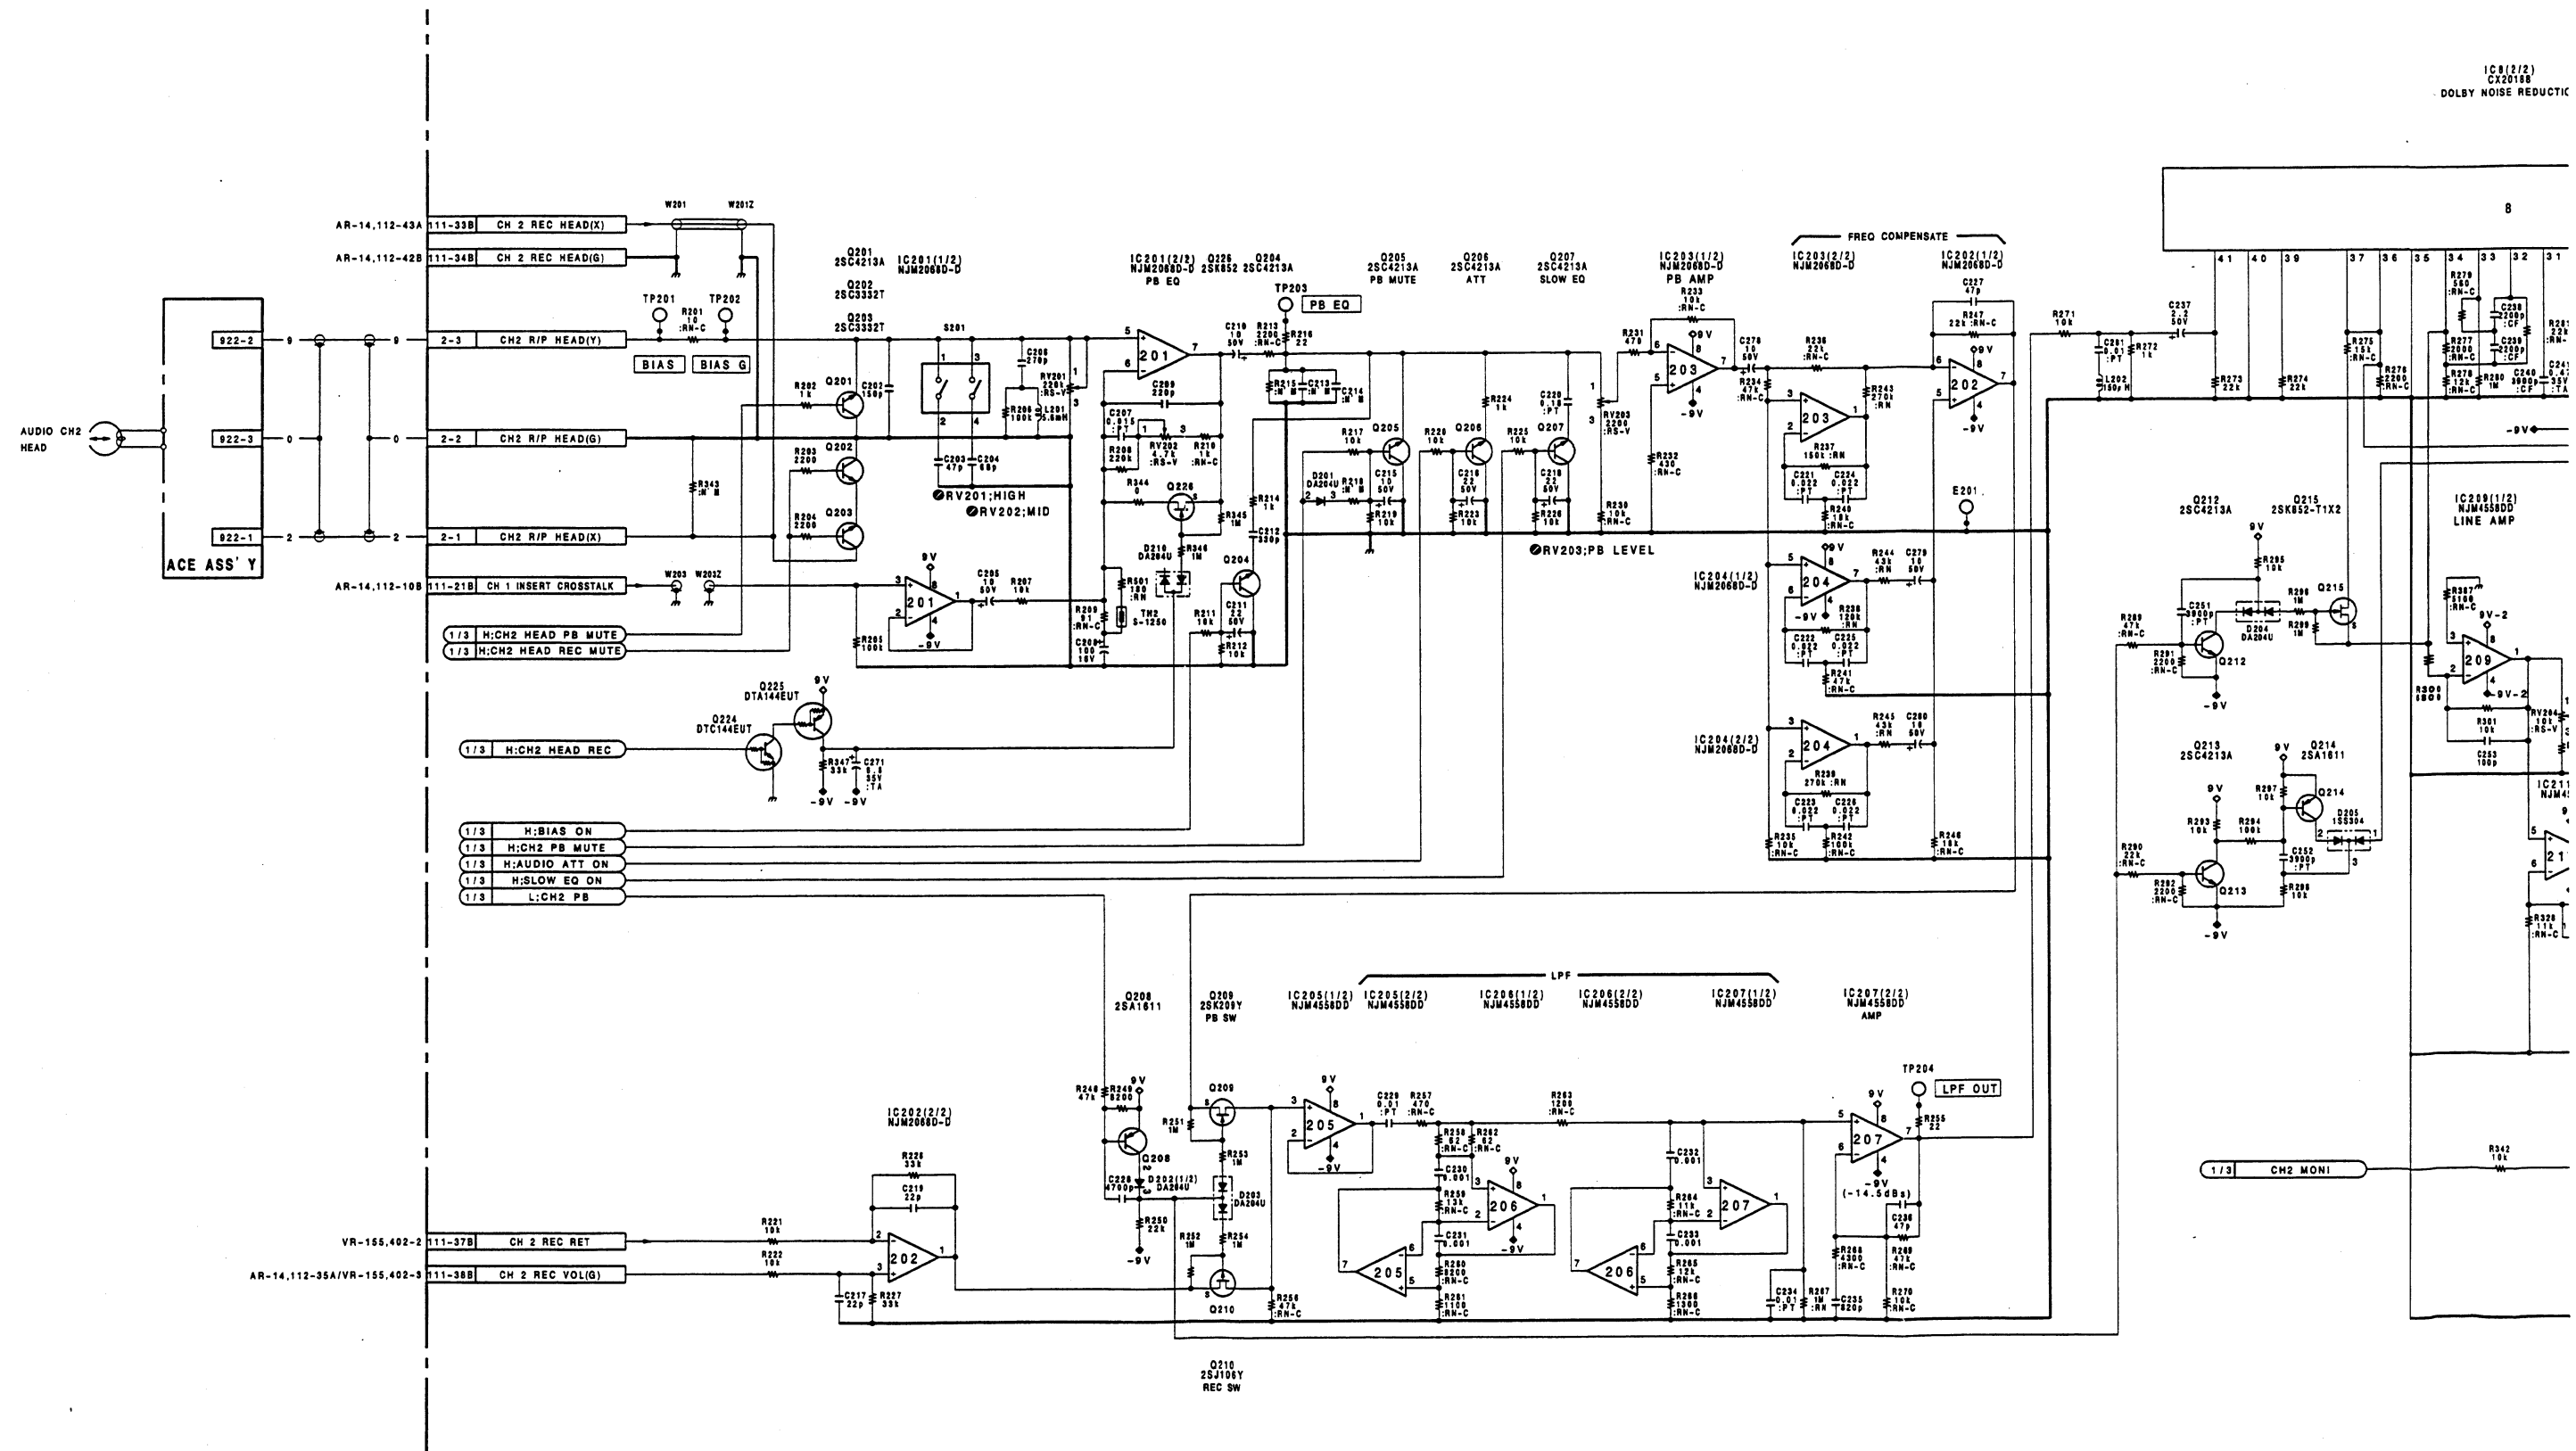

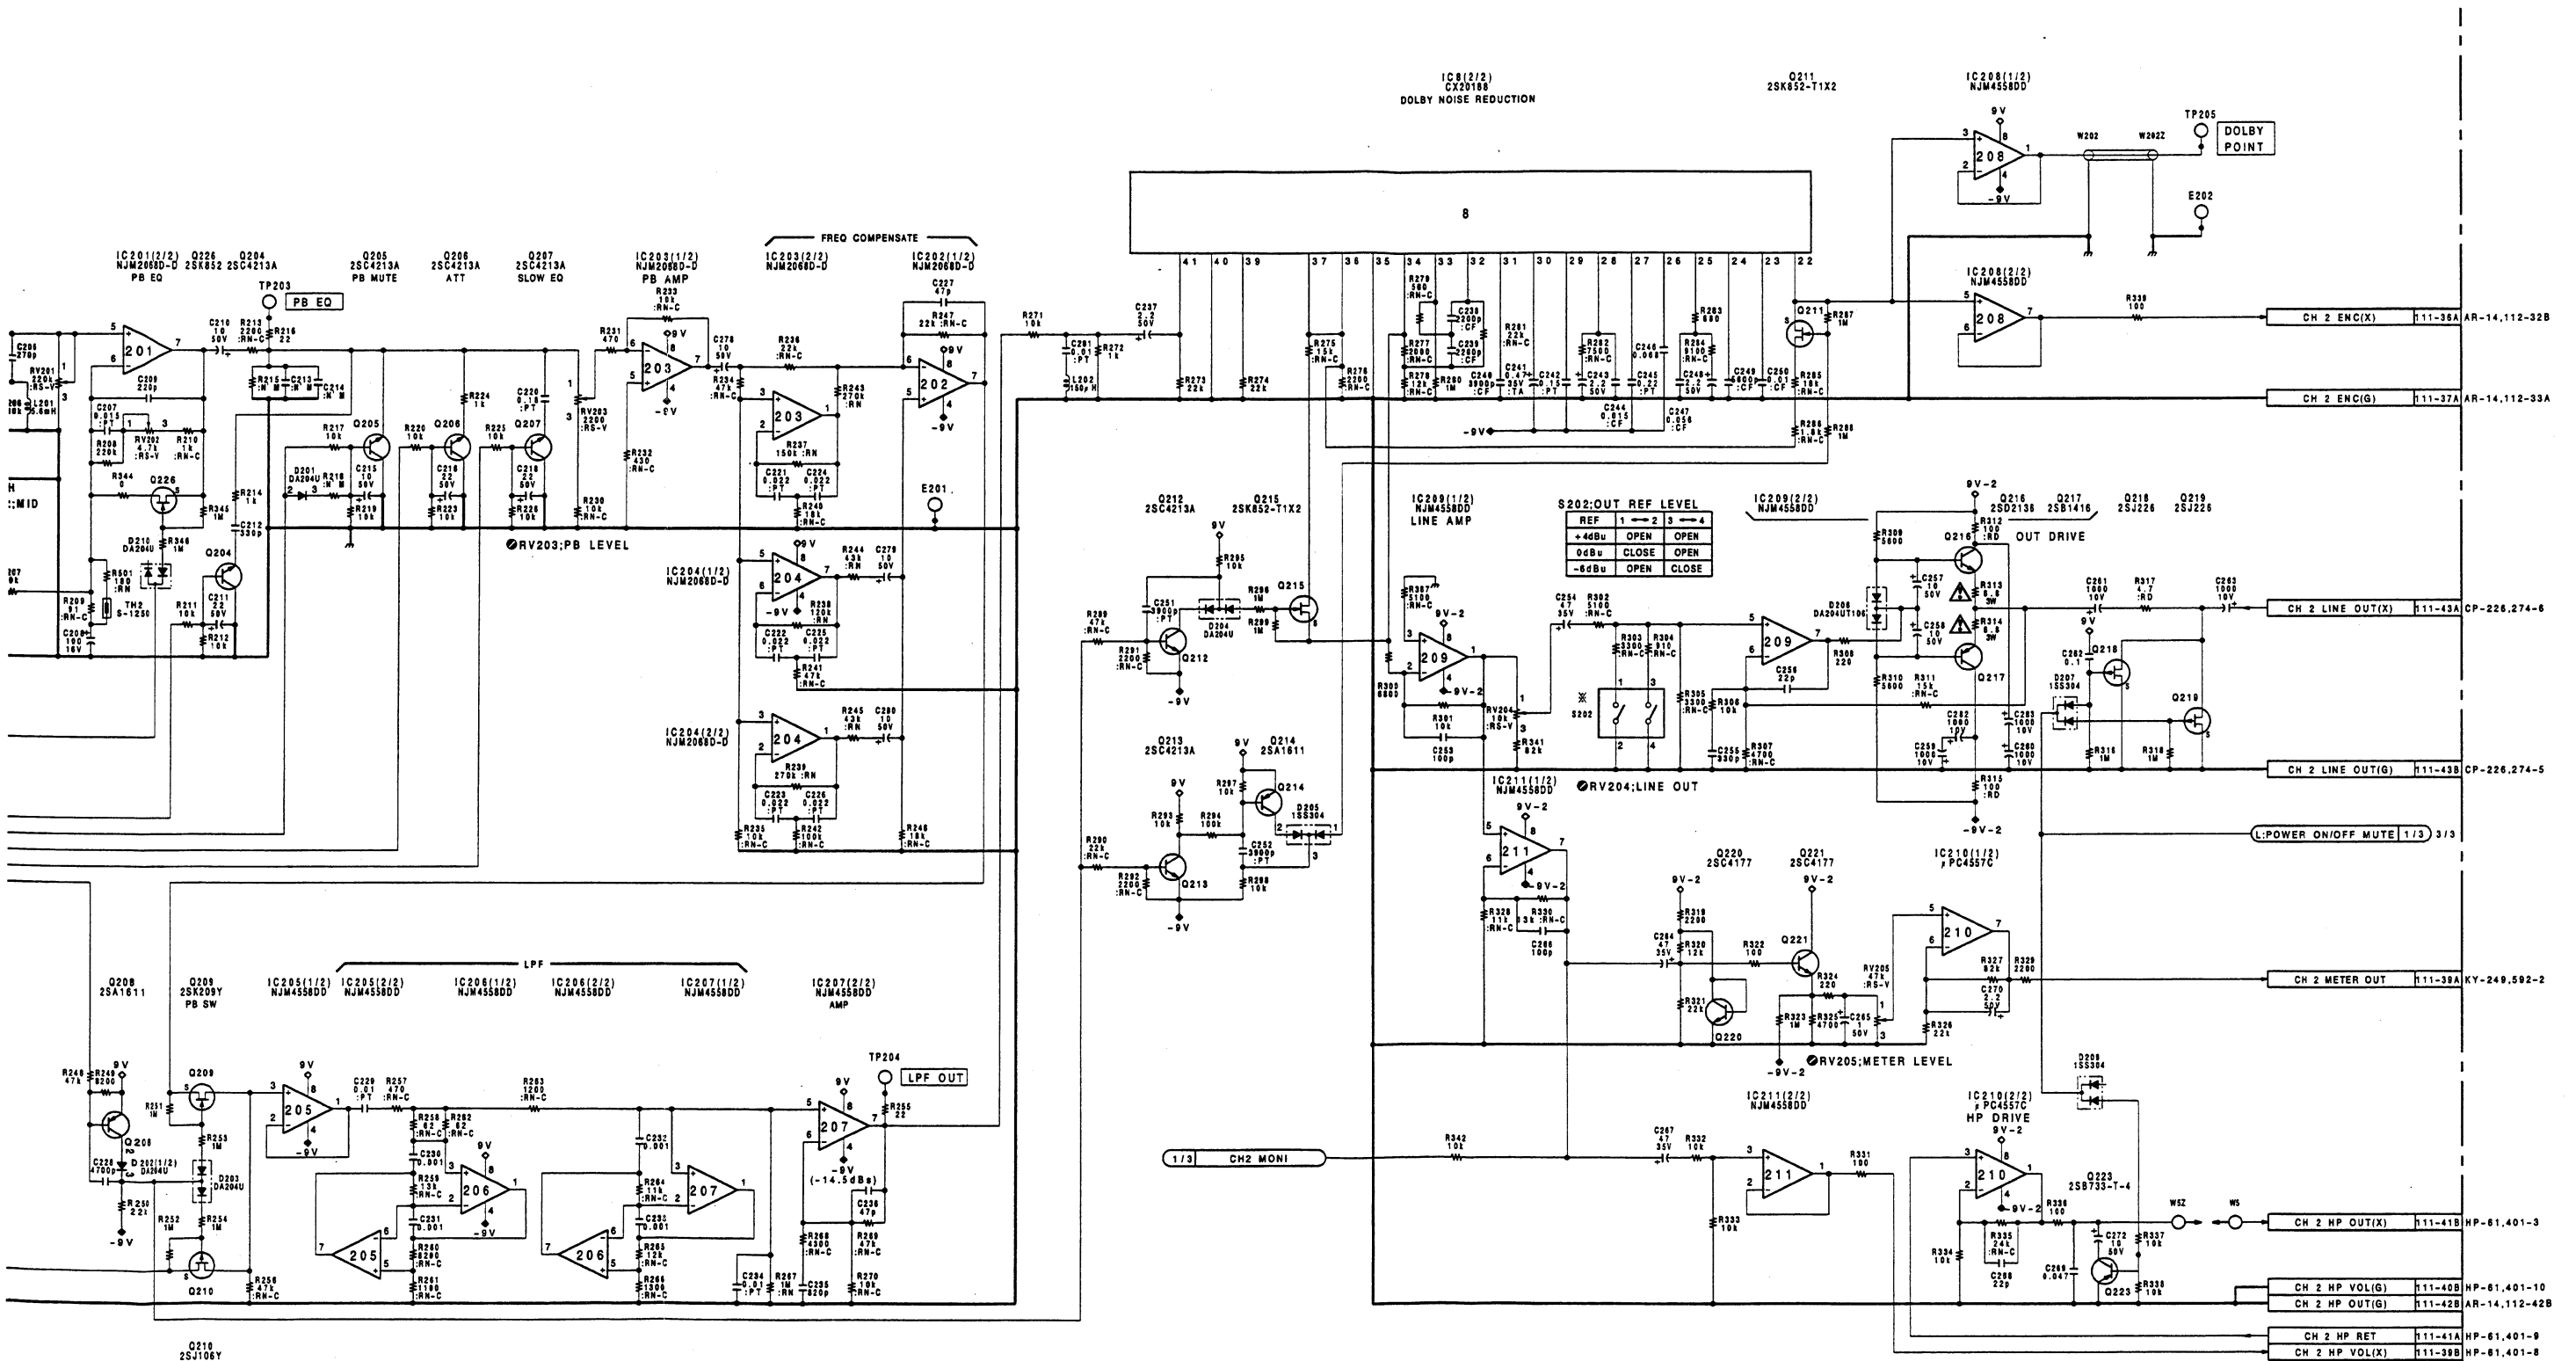

AP-31 BOARD (2/3)


BOARD NO.1-648-906-11
UVW-1800(J);#10001-
UVW-1800(UC);#10001-

AP-31(1-648-906-11)

CN1	H-1	FS64	B-4	FS149	J-5	RV1	J-1
CN2	A-1	FS65	D-5	FS150	H-5	RV2	J-1
CN3	G-4	FS66	D-5	FS151	H-5	RV3	J-1
CN111	E-5	FS67	D-5	FS152	H-5	RV4	H-1
		FS68	E-5	FS153	G-5	RV5	H-1
*D1	J-2	FS69	C-5	FS154	G-5	RV201	B-1
*D7	J-5	FS70	C-5	FS155	H-5	RV202	B-1
*D8	H-5	FS71	E-3	FS156	H-5	RV203	B-1
*D10	G-5	FS72	E-3			RV204	C-1
*D11	E-3	FS73	F-3	IC1	J-2	RV205	C-1
*D201	A-2	FS74	E-4	IC2	J-4		
*D206	A-5	FS75	E-4	IC3	J-3	S1	J-1
*D207	B-5	FS77	F-4	IC4	H-3	S2	G-1
*D209	C-4	FS79	F-5	IC5	G-4	S201	A-1
*D401	F-3	FS80	F-5	IC6	G-3	S202	C-1
*D403	F-5	FS81	H-1	IC7	G-3		
		FS82	H-1	IC8	F-2	*TH1	J-2
E1	H-4	FS83	G-1	IC9	G-2	*TH2	B-2
E2	G-1	FS84	G-1	IC10	G-2		
E201	B-4	FS85	G-1	IC11	H-4	TP3	J-2
E202	E-1	FS86	G-1	IC12	E-5	TP4	G-2
		FS87	H-1	IC13	D-4	TP5	G-1
FS1	A-1	FS88	H-1	IC14	E-3	TP203	B-2
FS3	A-2	FS89	H-1	IC15	J-4	TP204	C-2
FS5	B-2	FS90	G-1	IC201	A-2	TP205	D-1
FS6	B-2	FS91	G-1	IC202	A-4	TP402	G-5
FS7	A-3	FS92	G-2	IC203	A-3	TP403	D-1
FS9	B-3	FS93	G-2	IC204	B-3		
FS10	A-3	FS94	F-2	IC205	C-4		
FS11	B-3	FS96	H-2	IC206	C-3		
FS12	A-3	FS97	H-2	IC207	C-3		
FS13	A-3	FS98	F-2	IC208	C-2		
FS14	B-3	FS99	F-2	IC209	C-2		
FS15	B-3	FS100	G-2	IC210	C-4		
FS16	A-4	FS101	H-2	IC211	A-4		
FS17	A-4	FS102	H-2	IC401	F-4		
FS18	A-4	FS103	G-3	IC402	F-4		
FS19	B-4	FS106	H-3	*IC405	C-5		
FS20	A-4	FS107	H-3	*IC406	D-5		
FS21	A-4	FS108	H-3	*IC407	D-5		
FS22	A-5	FS109	H-3	*IC408	C-5		
FS23	A-5	FS110	G-3	*IC409	D-5		
FS24	A-5	FS111	G-4	IC410	F-5		
FS25	B-5	FS112	G-4				
FS26	A-5	FS114	H-4	PS1	G-5		
FS27	B-5	FS115	H-4	PS2	G-5		
FS28	B-5	FS116	G-4				
FS29	B-5	FS117	H-4	*Q5	J-2		
FS30	C-1	FS118	H-4	*Q6	J-2		
FS31	C-1	FS119	H-5	*Q7	J-2		
FS32	C-1	FS121	G-5	*Q9	H-4		
FS33	C-1	FS122	G-5	*Q11	C-2		
FS34	C-1	FS123	H-5	*Q12	E-2		
FS35	C-1	FS124	H-5	*Q13	E-1		
FS36	D-1	FS125	H-1	Q18	J-5		
FS38	C-2	FS126	J-1	Q19	J-5		
FS39	C-2	FS127	J-1	Q20	H-5		
FS40	C-2	FS128	J-1	Q21	H-5		
FS41	D-2	FS129	H-2	*Q22	J-4		
FS43	C-2	FS131	J-2	*Q23	H-4		
FS44	D-2	FS132	J-2	Q25	G-4		
FS45	D-2	FS133	J-3	Q30	E-3		
FS46	D-2	FS135	J-3	*Q205	A-2		
FS47	C-3	FS136	H-3	*Q206	A-2		
FS48	C-3	FS137	J-3	*Q207	B-2		
FS49	C-3	FS138	J-3	*Q209	B-4		
FS50	C-3	FS139	H-3	*Q211	E-1		
FS51	C-3	FS140	J-3	Q216	A-5		
FS53	C-3	FS141	J-3	Q217	A-5		
FS54	C-4	FS142	J-4	Q218	C-5		
FS56	D-4	FS143	J-4	Q219	C-5		
FS57	D-4	FS144	J-4	*Q220	B-4		
FS58	C-4	FS145	J-4	*Q221	B-4		
FS59	C-4	FS146	J-4	Q223	C-4		
FS61	D-4	FS147	J-5	*Q403	F-3		
FS63	D-4	FS148	J-5				


*: B SIDE

AP-31(3/3);LTC PB

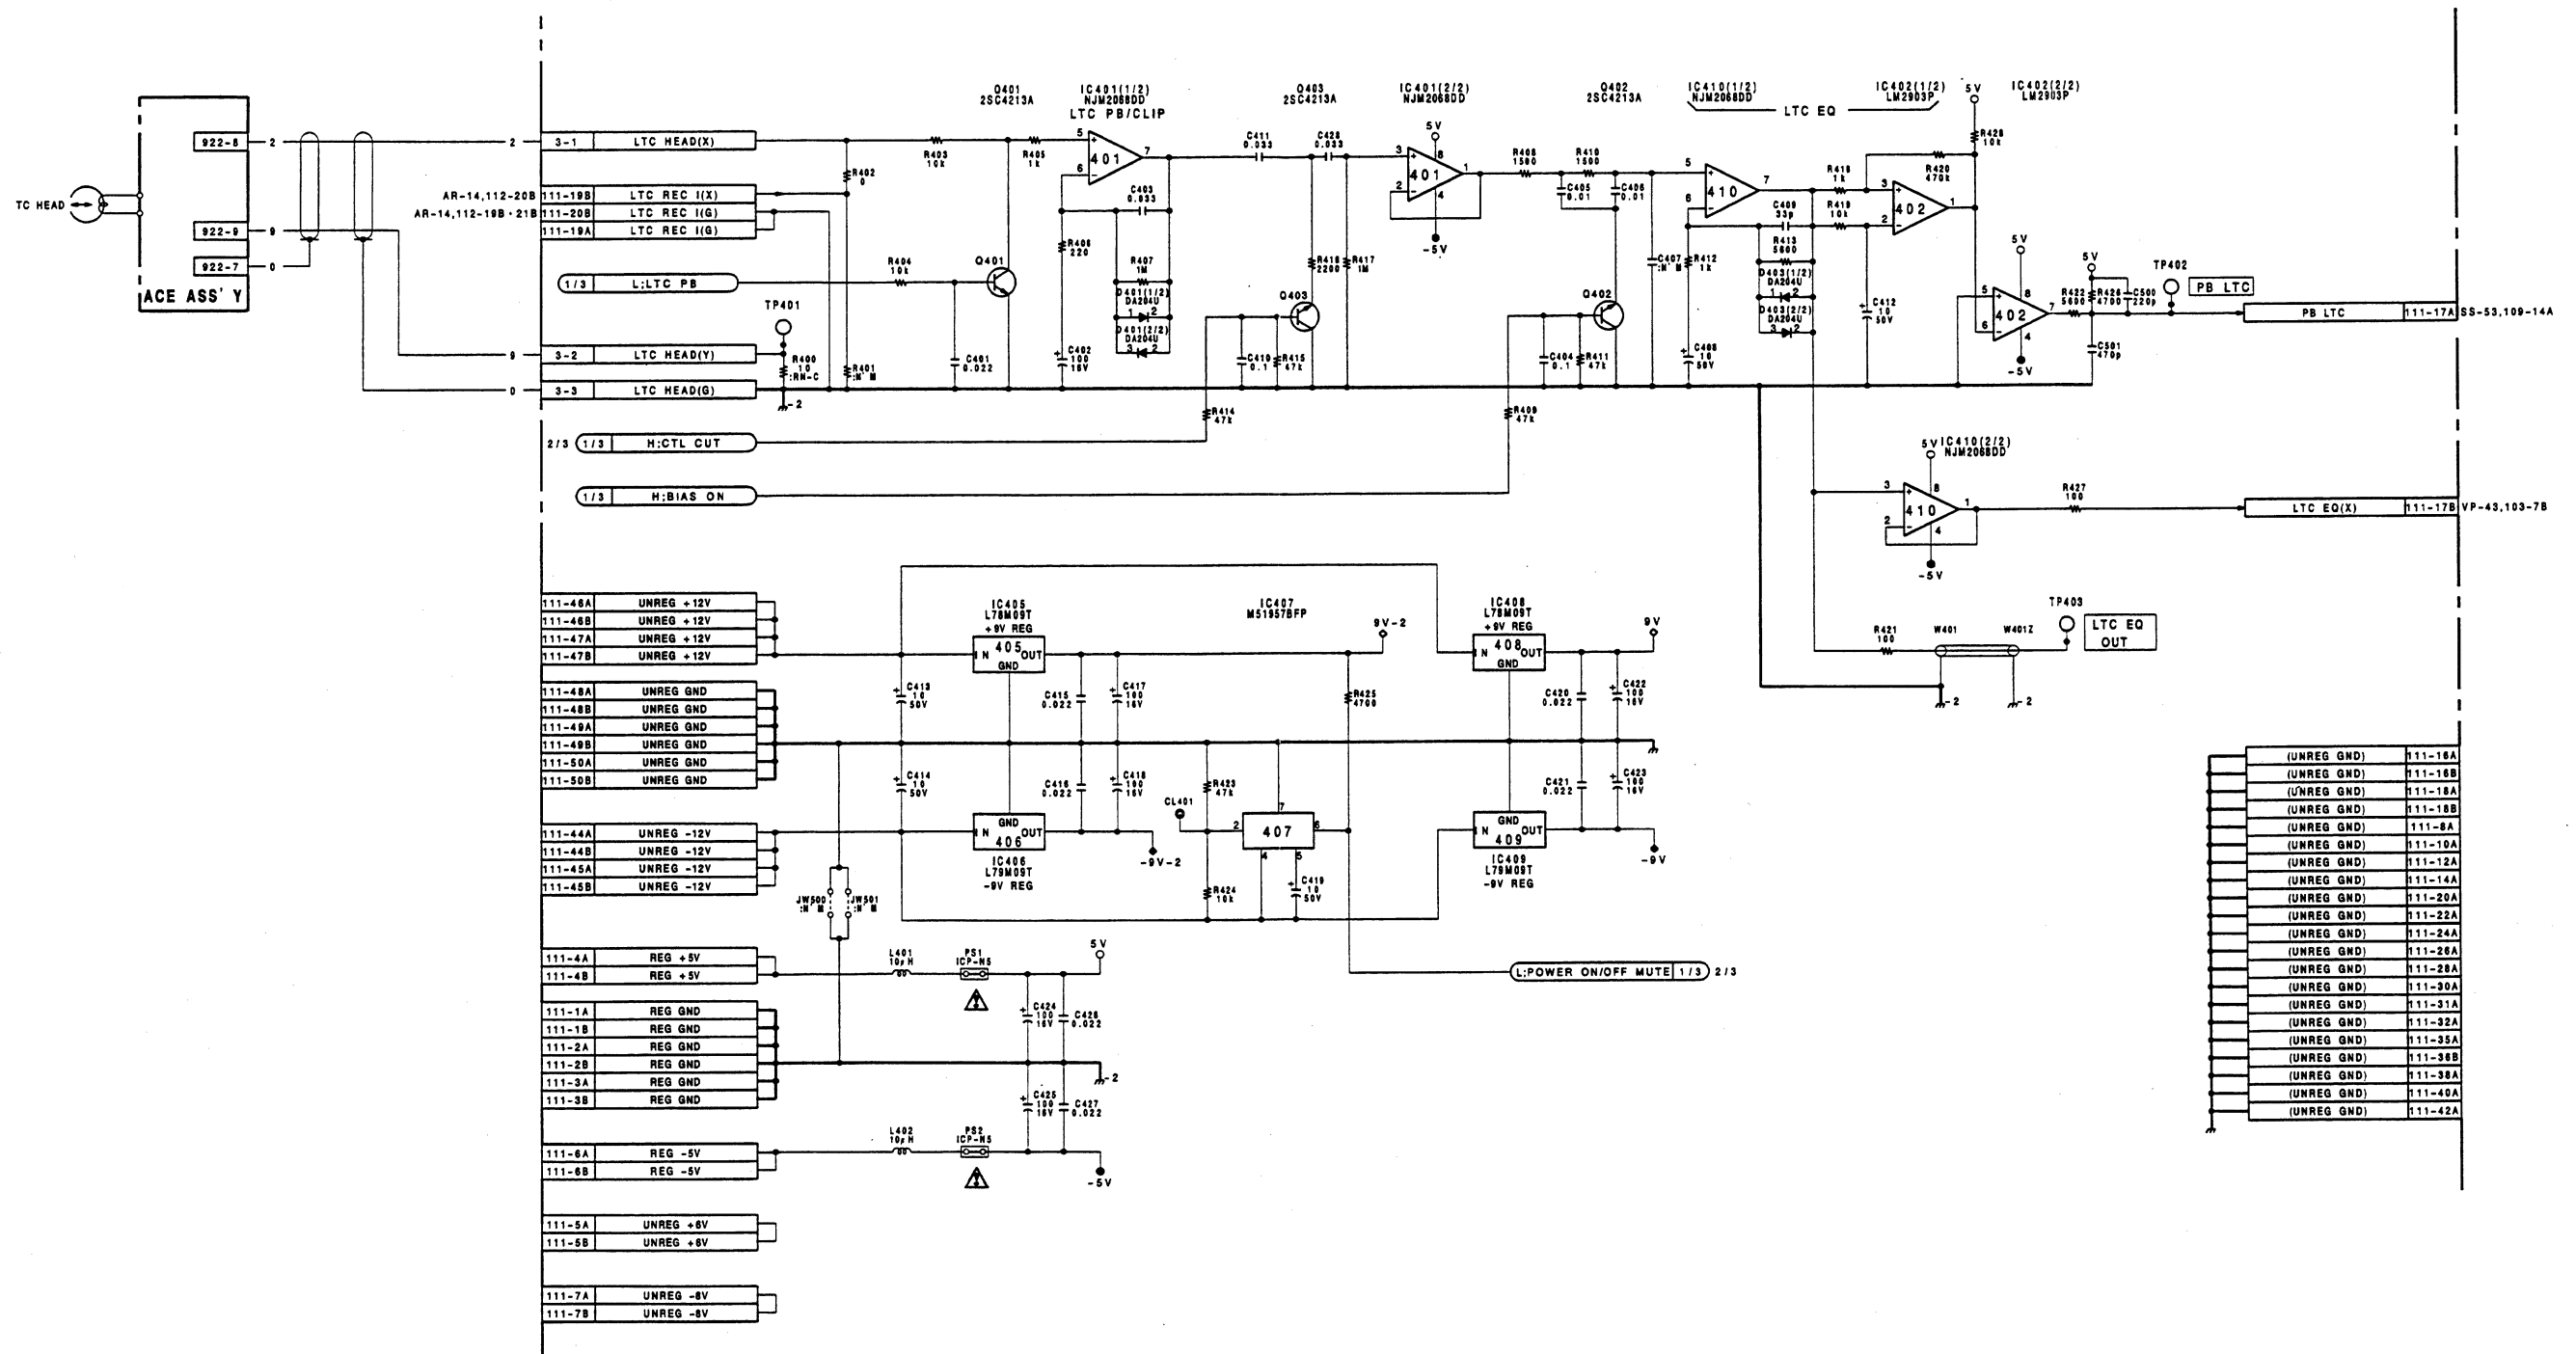

AP-31 BOARD (3 / 3)

BOARD NO.1-648-906-11
UVW-1800(J) ;#10001-
UVW-1800(UC);#10001-

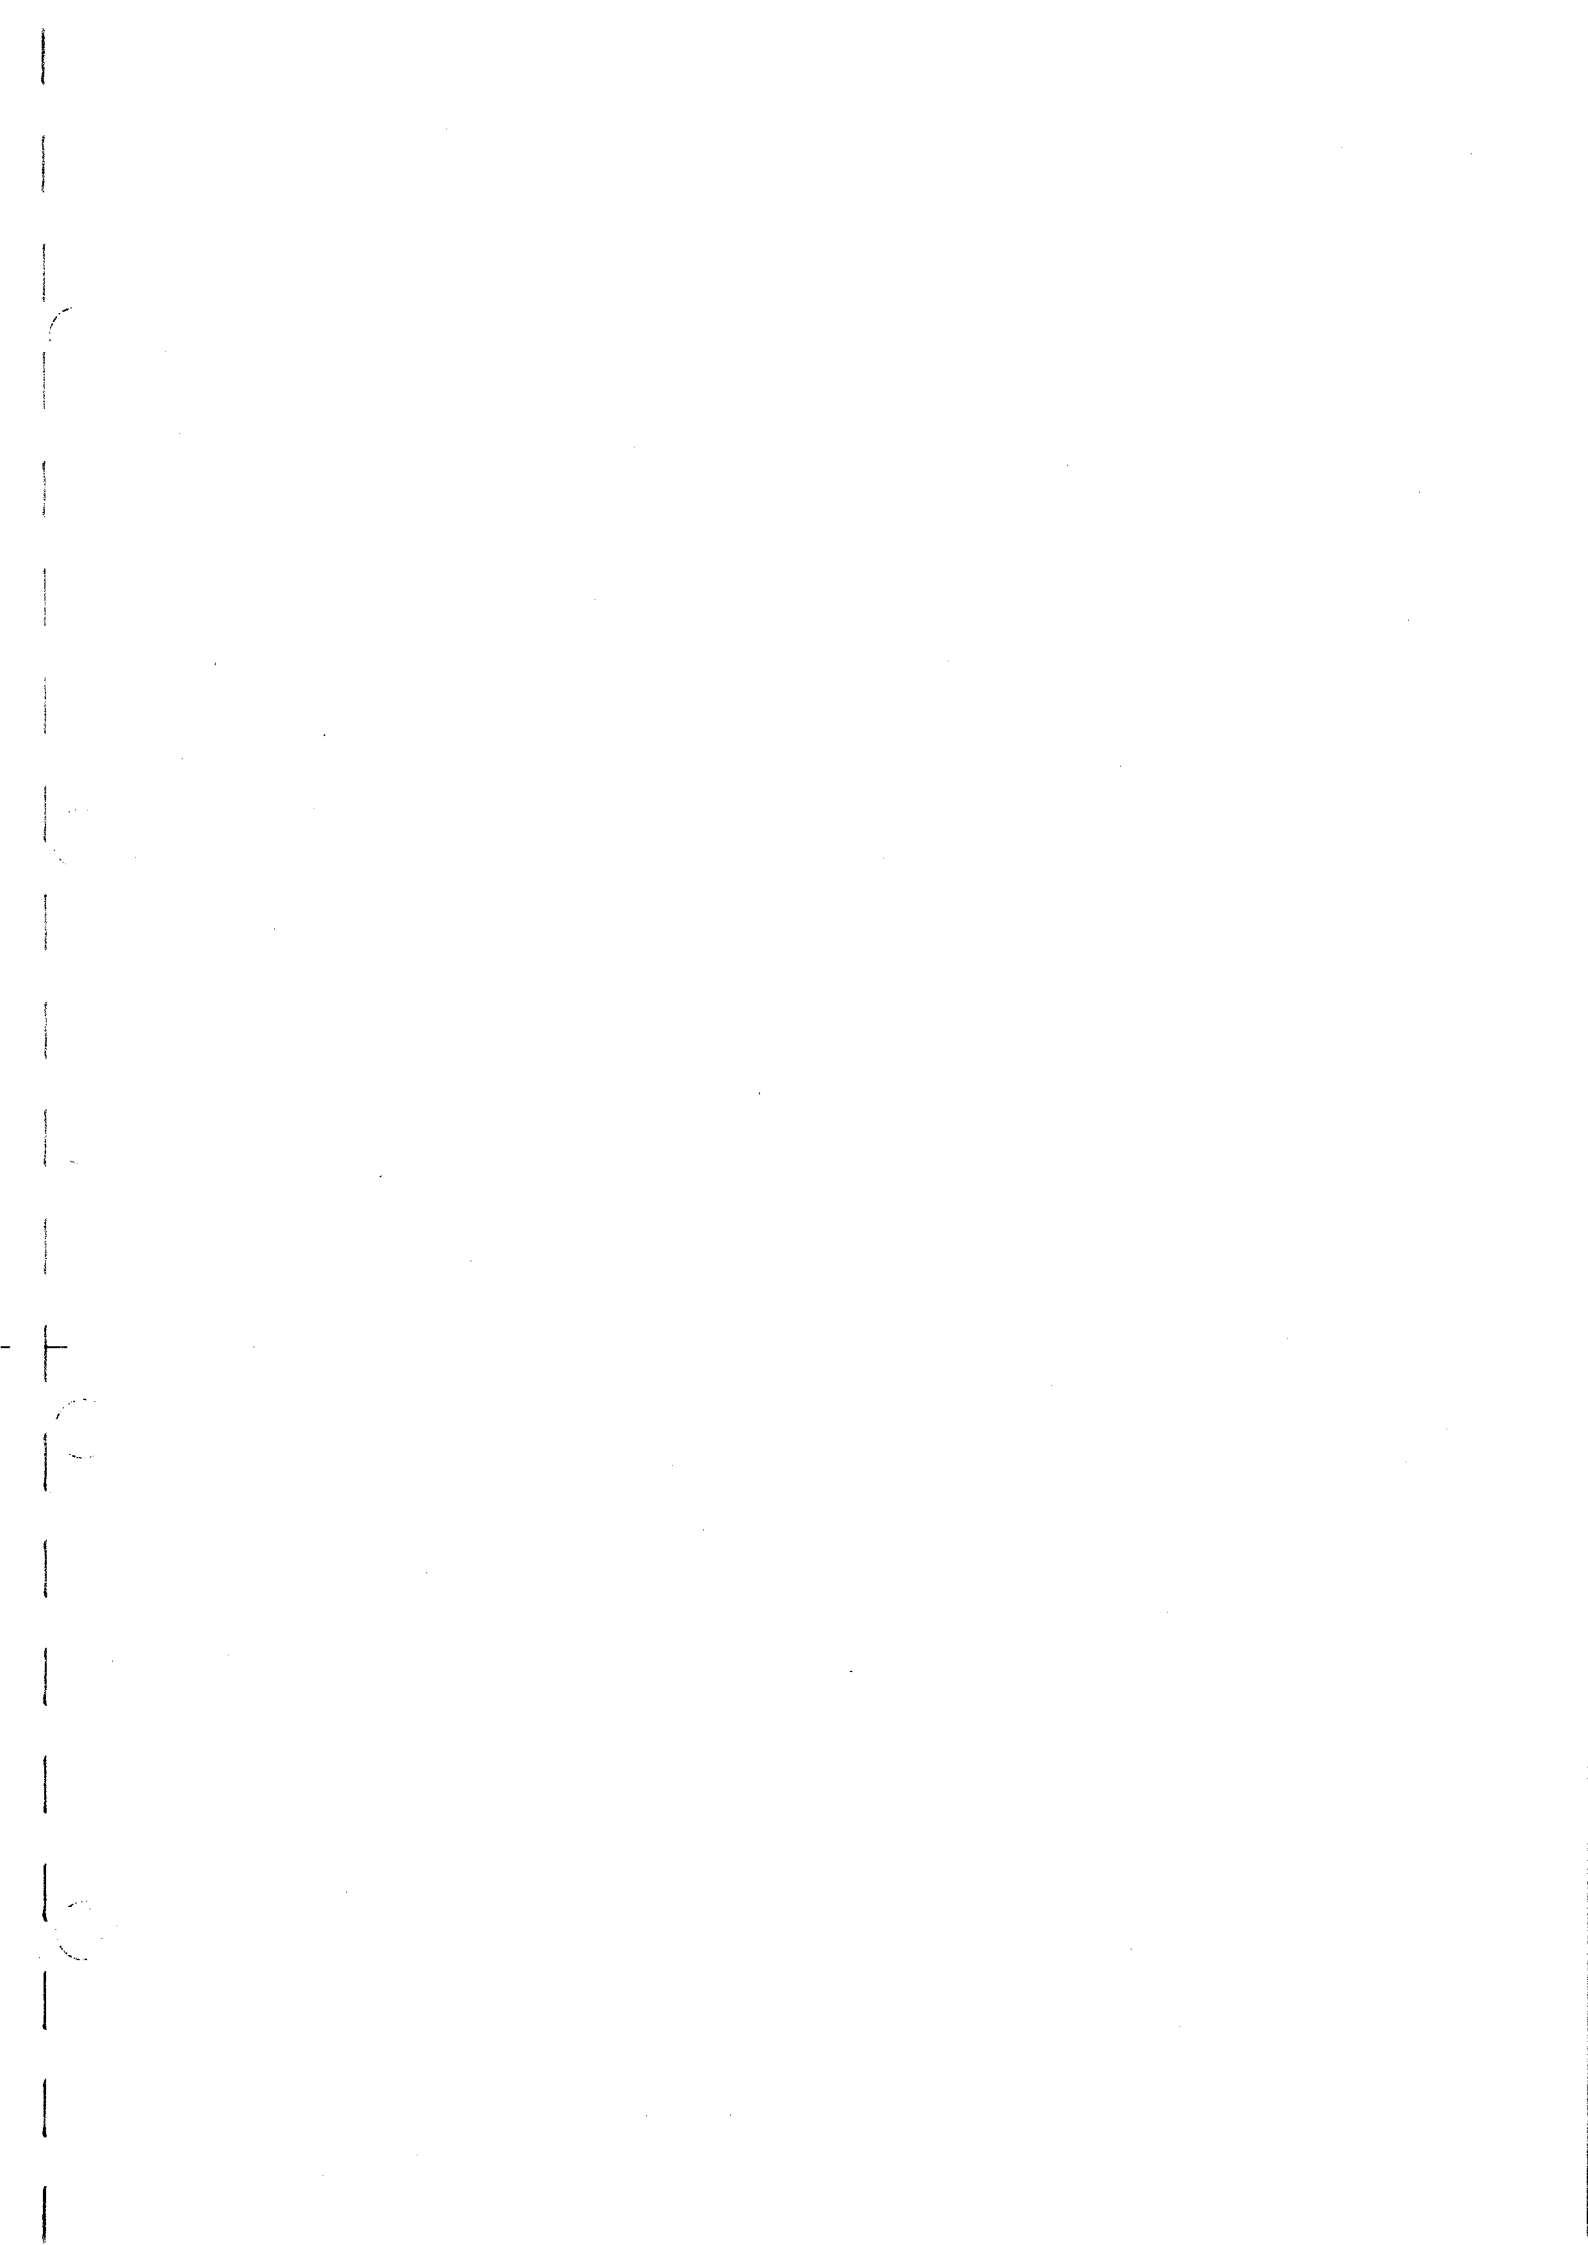



AP-31A(1-648-906-21)


CN1	H-1	FS64	B-4	FS149	J-5	RV2	J-1
CN2	A-1	FS65	D-5	FS150	H-5	RV3	J-1
CN3	G-4	FS66	D-5	FS151	H-5	RV4	H-1
CN111	E-5	FS67	D-5	FS152	H-5	RV5	H-1
		FS68	E-5	FS153	G-5	RV201	B-1
*D1	J-2	FS69	C-5	FS154	G-5	RV202	B-1
*D7	J-5	FS70	C-5	FS155	H-5	RV203	B-1
*D8	H-5	FS71	E-3	FS156	H-5	RV204	C-1
*D10	G-5	FS72	E-3			RV205	C-1
*D11	E-3	FS73	F-3	IC1	J-2		
*D201	A-2	FS74	E-4	IC2	J-4	S1	J-1
*D206	A-5	FS75	E-4	IC3	J-3	S2	G-1
*D207	B-5	FS77	F-4	IC4	H-3	S201	A-1
*D209	C-4	FS79	F-5	IC5	G-4	S202	C-1
*D401	F-3	FS80	F-5	IC6	G-3		
*D403	F-5	FS81	H-1	IC7	G-3	*TH1	J-2
		FS82	H-1	IC8	F-2	*TH2	B-2
E1	H-4	FS83	G-1	IC9	G-2		
E2	G-1	FS84	G-1	IC10	G-2	TP3	J-2
E201	B-4	FS85	G-1	IC11	H-4	TP4	G-2
E202	E-1	FS86	G-1	IC12	E-5	TP5	G-1
		FS87	H-1	IC13	D-4	TP203	B-2
FS1	A-1	FS88	H-1	IC14	E-3	TP204	C-2
FS3	A-2	FS89	H-1	IC15	J-4	TP205	D-1
FS5	B-2	FS90	G-1	IC201	A-2	TP402	G-5
FS6	B-2	FS91	G-1	IC202	A-4	TP403	D-1
FS7	A-3	FS92	G-2	IC203	A-3		
FS9	B-3	FS93	G-2	IC204	B-3		
FS10	A-3	FS94	F-2	IC205	C-4		
FS11	B-3	FS96	H-2	IC206	C-3		
FS12	A-3	FS97	H-2	IC207	C-3		
FS13	A-3	FS98	F-2	IC208	C-2		
FS14	B-3	FS99	F-2	IC209	C-2		
FS15	B-3	FS100	G-2	IC210	C-4		
FS16	A-4	FS101	H-2	IC211	A-4		
FS17	A-4	FS102	H-2	IC401	F-4		
FS18	A-4	FS103	G-3	IC402	F-4		
FS19	B-4	FS106	H-3	*IC405	C-5		
FS20	A-4	FS107	H-3	*IC406	D-5		
FS21	A-4	FS108	H-3	*IC407	D-5		
FS22	A-5	FS109	H-3	*IC408	C-5		
FS23	A-5	FS110	G-3	*IC409	D-5		
FS24	A-5	FS111	G-4	IC410	F-5		
FS25	B-5	FS112	G-4				
FS26	A-5	FS114	H-4	PS1	G-5		
FS27	B-5	FS115	H-4	PS2	G-5		
FS28	B-5	FS116	G-4				
FS29	B-5	FS117	H-4	*Q5	J-2		
FS30	C-1	FS118	H-4	*Q6	J-2		
FS31	C-1	FS119	H-5	*Q7	J-2		
FS32	C-1	FS121	G-5	*Q9	H-4		
FS33	C-1	FS122	G-5	*Q11	C-2		
FS34	C-1	FS123	H-5	*Q12	E-2		
FS35	C-1	FS124	H-5	*Q13	E-1		
FS36	D-1	FS125	H-1	Q18	J-5		
FS38	C-2	FS126	J-1	Q19	J-5		
FS39	C-2	FS127	J-1	Q20	H-5		
FS40	C-2	FS128	J-1	Q21	H-5		
FS41	D-2	FS129	H-2	*Q22	J-4		
FS43	C-2	FS131	J-2	*Q23	H-4		
FS44	D-2	FS132	J-2	Q25	G-4		
FS45	D-2	FS133	J-3	Q30	E-3		
FS46	D-2	FS135	J-3	*Q205	A-2		
FS47	C-3	FS136	H-3	*Q206	A-2		
FS48	C-3	FS137	J-3	*Q207	B-2		
FS49	C-3	FS138	J-3	*Q209	B-4		
FS50	C-3	FS139	H-3	*Q211	E-1		
FS51	C-3	FS140	J-3	Q216	A-5		
FS53	C-3	FS141	J-3	Q217	A-5		
FS54	C-4	FS142	J-4	Q218	C-5		
FS56	D-4	FS143	J-4	Q219	C-5		
FS57	D-4	FS144	J-4	*Q220	B-4		
FS58	C-4	FS145	J-4	*Q221	B-4		
FS59	C-4	FS146	J-4	Q223	C-4		
FS61	D-4	FS147	J-5	*Q403	F-3		
FS63	D-4	FS148	J-5	RV1	J-1		

*: B SIDE

AP-31A(1/3);CH-1 PB EQ/NR,LINE/METER/HP DRIVE

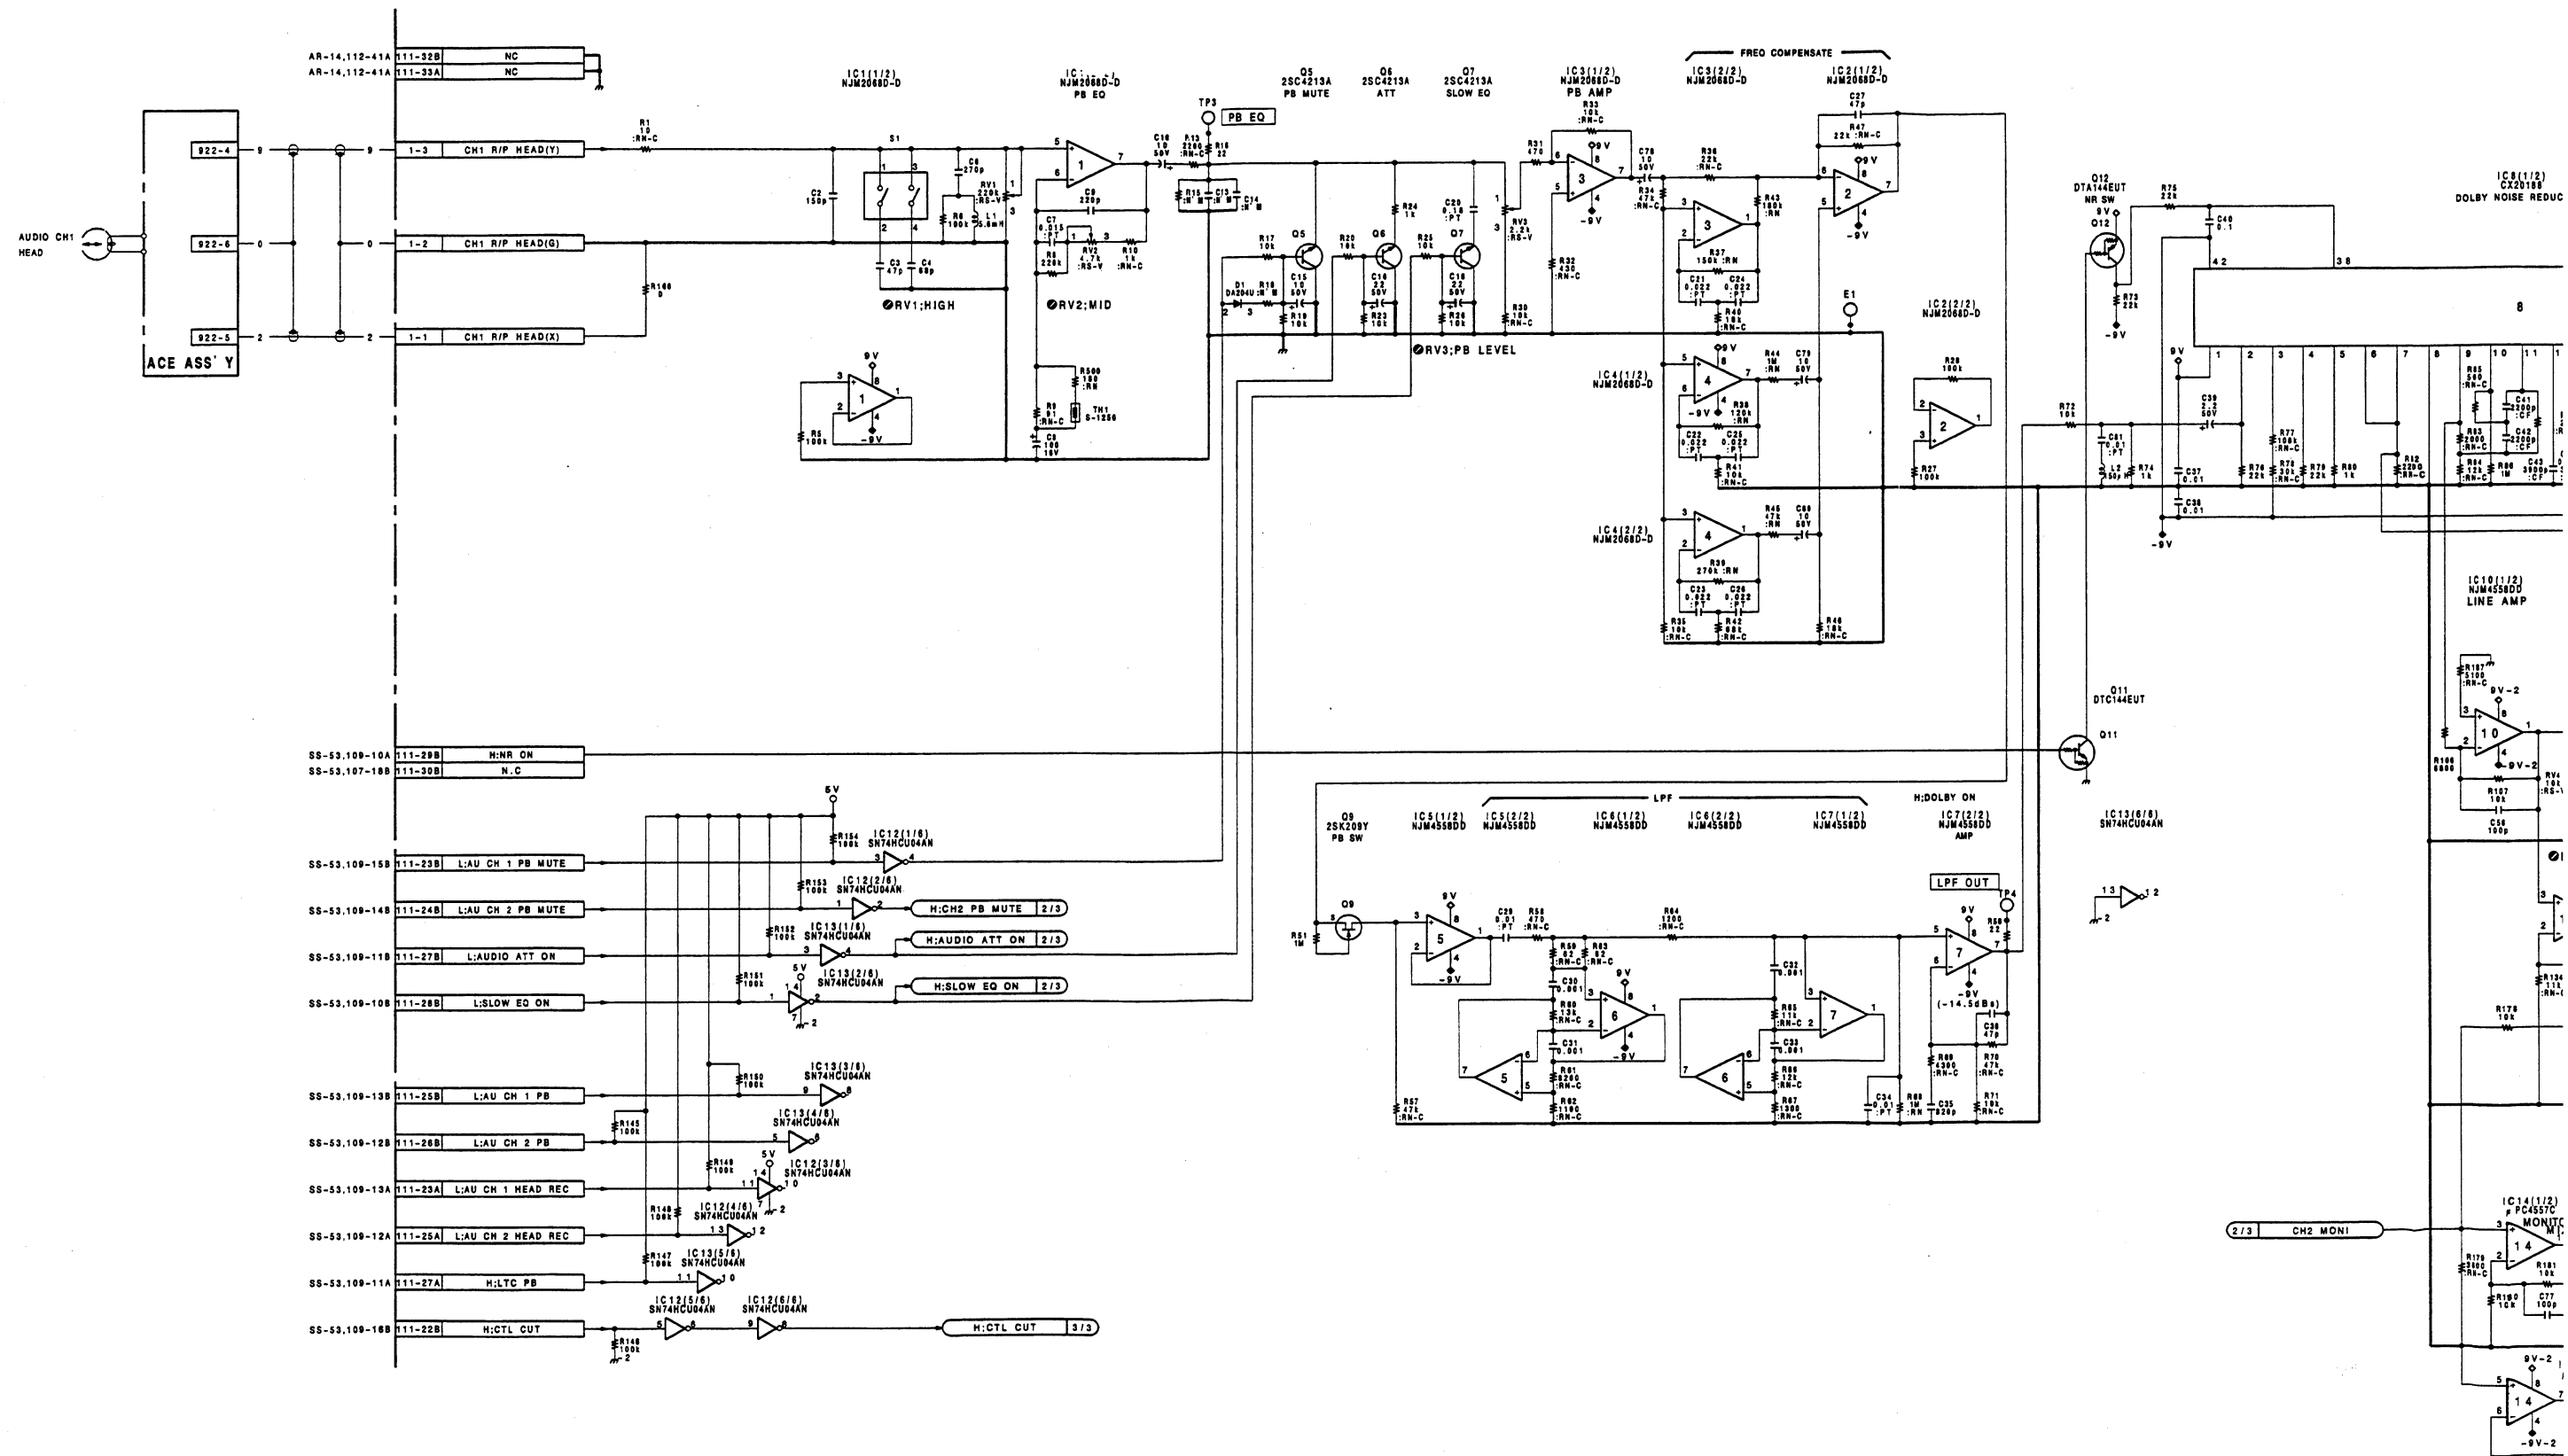



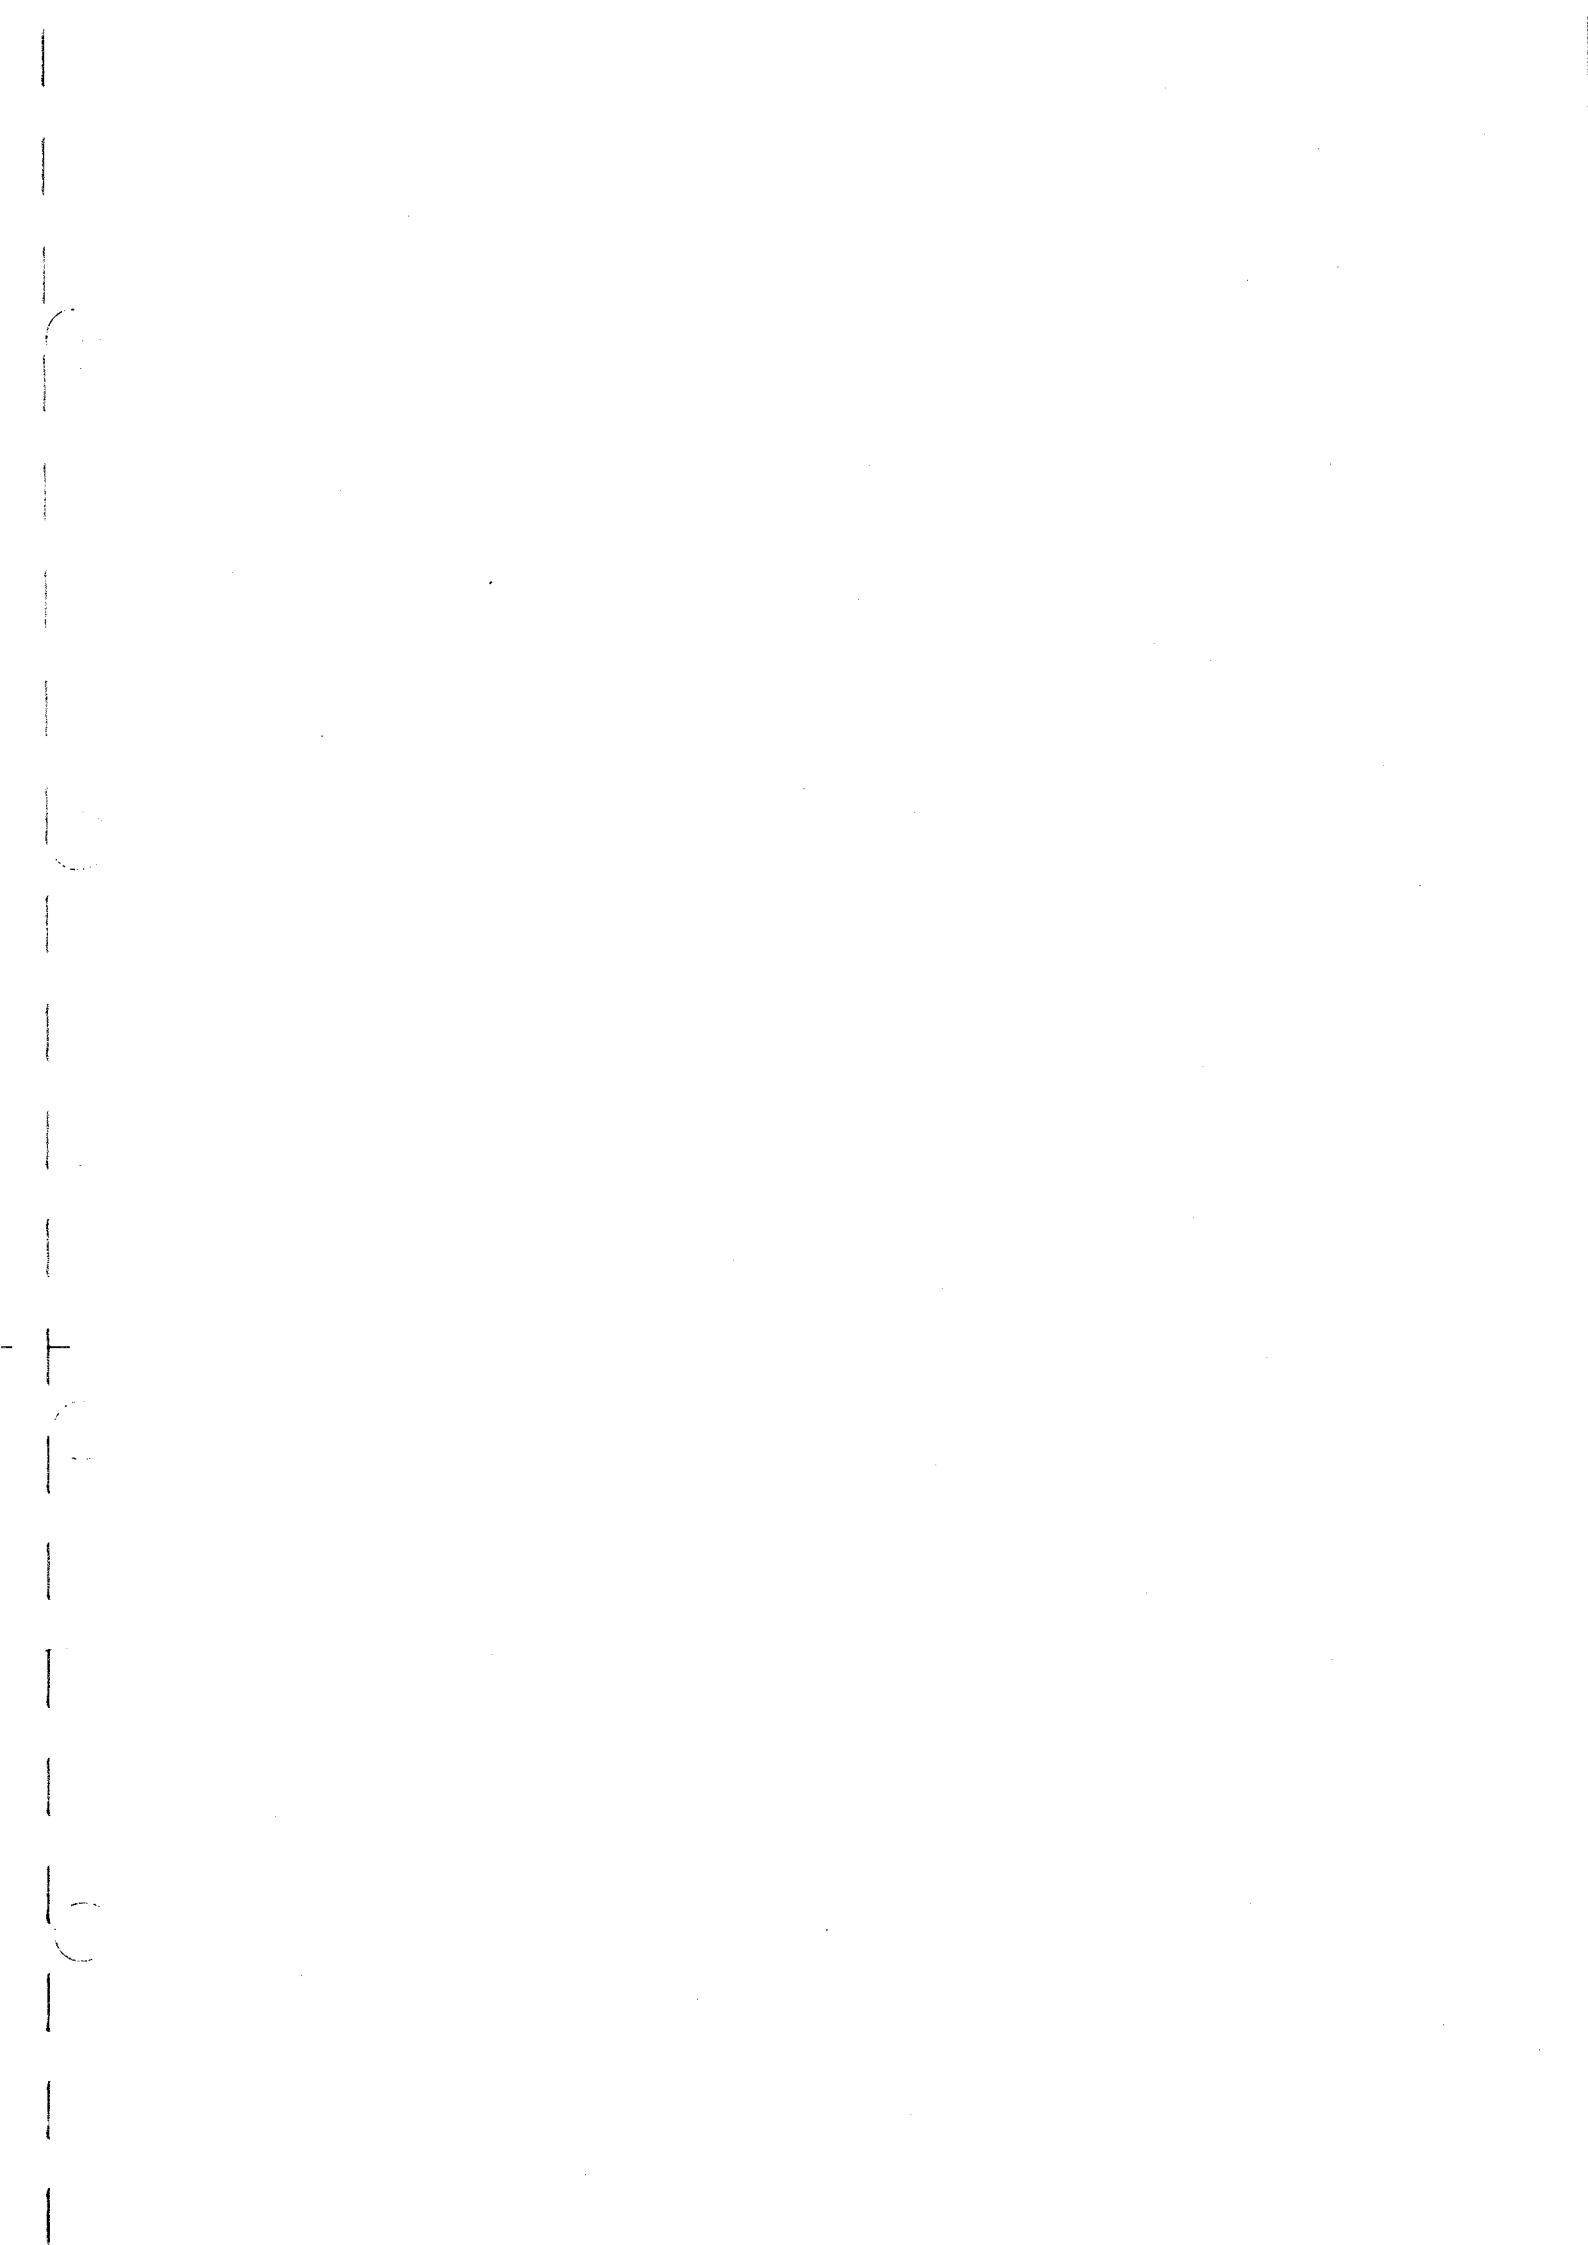



AP-31A(1-648-906-21)

CN1	H-1	FS64	B-4	FS149	J-5	RV2	J-1
CN2	A-1	FS65	D-5	FS150	H-5	RV3	J-1
CN3	G-4	FS66	D-5	FS151	H-5	RV4	H-1
CN111	E-5	FS67	D-5	FS152	H-5	RV5	H-1
		FS68	E-5	FS153	G-5	RV201	B-1
*D1	J-2	FS69	C-5	FS154	G-5	RV202	B-1
*D7	J-5	FS70	C-5	FS155	H-5	RV203	B-1
*D8	H-5	FS71	E-3	FS156	H-5	RV204	C-1
*D10	G-5	FS72	E-3			RV205	C-1
*D11	E-3	FS73	F-3	IC1	J-2		
*D201	A-2	FS74	E-4	IC2	J-4	S1	J-1
*D206	A-5	FS75	E-4	IC3	J-3	S2	G-1
*D207	B-5	FS77	F-4	IC4	H-3	S201	A-1
*D209	C-4	FS79	F-5	IC5	G-4	S202	C-1
*D401	F-3	FS80	F-5	IC6	G-3		
*D403	F-5	FS81	H-1	IC7	G-3	*TH1	J-2
		FS82	H-1	IC8	F-2	*TH2	B-2
E1	H-4	FS83	G-1	IC9	G-2		
E2	G-1	FS84	G-1	IC10	G-2	TP3	J-2
E201	B-4	FS85	G-1	IC11	H-4	TP4	G-2
E202	E-1	FS86	G-1	IC12	E-5	TP5	G-1
		FS87	H-1	IC13	D-4	TP203	B-2
FS1	A-1	FS88	H-1	IC14	E-3	TP204	C-2
FS3	A-2	FS89	H-1	IC15	J-4	TP205	D-1
FS5	B-2	FS90	G-1	IC201	A-2	TP402	G-5
FS6	B-2	FS91	G-1	IC202	A-4	TP403	D-1
FS7	A-3	FS92	G-2	IC203	A-3		
FS9	B-3	FS93	G-2	IC204	B-3		
FS10	A-3	FS94	F-2	IC205	C-4		
FS11	B-3	FS96	H-2	IC206	C-3		
FS12	A-3	FS97	H-2	IC207	C-3		
FS13	A-3	FS98	F-2	IC208	C-2		
FS14	B-3	FS99	F-2	IC209	C-2		
FS15	B-3	FS100	G-2	IC210	C-4		
FS16	A-4	FS101	H-2	IC211	A-4		
FS17	A-4	FS102	H-2	IC401	F-4		
FS18	A-4	FS103	G-3	IC402	F-4		
FS19	B-4	FS106	H-3	*IC405	C-5		
FS20	A-4	FS107	H-3	*IC406	D-5		
FS21	A-4	FS108	H-3	*IC407	D-5		
FS22	A-5	FS109	H-3	*IC408	C-5		
FS23	A-5	FS110	G-3	*IC409	D-5		
FS24	A-5	FS111	G-4	IC410	F-5		
FS25	B-5	FS112	G-4				
FS26	A-5	FS114	H-4	PS1	G-5		
FS27	B-5	FS115	H-4	PS2	G-5		
FS28	B-5	FS116	G-4				
FS29	B-5	FS117	H-4	*Q5	J-2		
FS30	C-1	FS118	H-4	*Q6	J-2		
FS31	C-1	FS119	H-5	*Q7	J-2		
FS32	C-1	FS121	G-5	*Q9	H-4		
FS33	C-1	FS122	G-5	*Q11	C-2		
FS34	C-1	FS123	H-5	*Q12	E-2		
FS35	C-1	FS124	H-5	*Q13	E-1		
FS36	D-1	FS125	H-1	Q18	J-5		
FS38	C-2	FS126	J-1	Q19	J-5		
FS39	C-2	FS127	J-1	Q20	H-5		
FS40	C-2	FS128	J-1	Q21	H-5		
FS41	D-2	FS129	H-2	*Q22	J-4		
FS43	C-2	FS131	J-2	*Q23	H-4		
FS44	D-2	FS132	J-2	Q25	G-4		
FS45	D-2	FS133	J-3	Q30	E-3		
FS46	D-2	FS135	J-3	*Q205	A-2		
FS47	C-3	FS136	H-3	*Q206	A-2		
FS48	C-3	FS137	J-3	*Q207	B-2		
FS49	C-3	FS138	J-3	*Q209	B-4		
FS50	C-3	FS139	H-3	*Q211	E-1		
FS51	C-3	FS140	J-3	Q216	A-5		
FS53	C-3	FS141	J-3	Q217	A-5		
FS54	C-4	FS142	J-4	Q218	C-5		
FS56	D-4	FS143	J-4	Q219	C-5		
FS57	D-4	FS144	J-4	*Q220	B-4		
FS58	C-4	FS145	J-4	*Q221	B-4		
FS59	C-4	FS146	J-4	Q223	C-4		
FS61	D-4	FS147	J-5	*Q403	F-3		
FS63	D-4	FS148	J-5	RV1	J-1		

*: B SIDE


AP-31A(2/3);CH-2 PB EQ/NR,LINE/METER/HP DRIVE

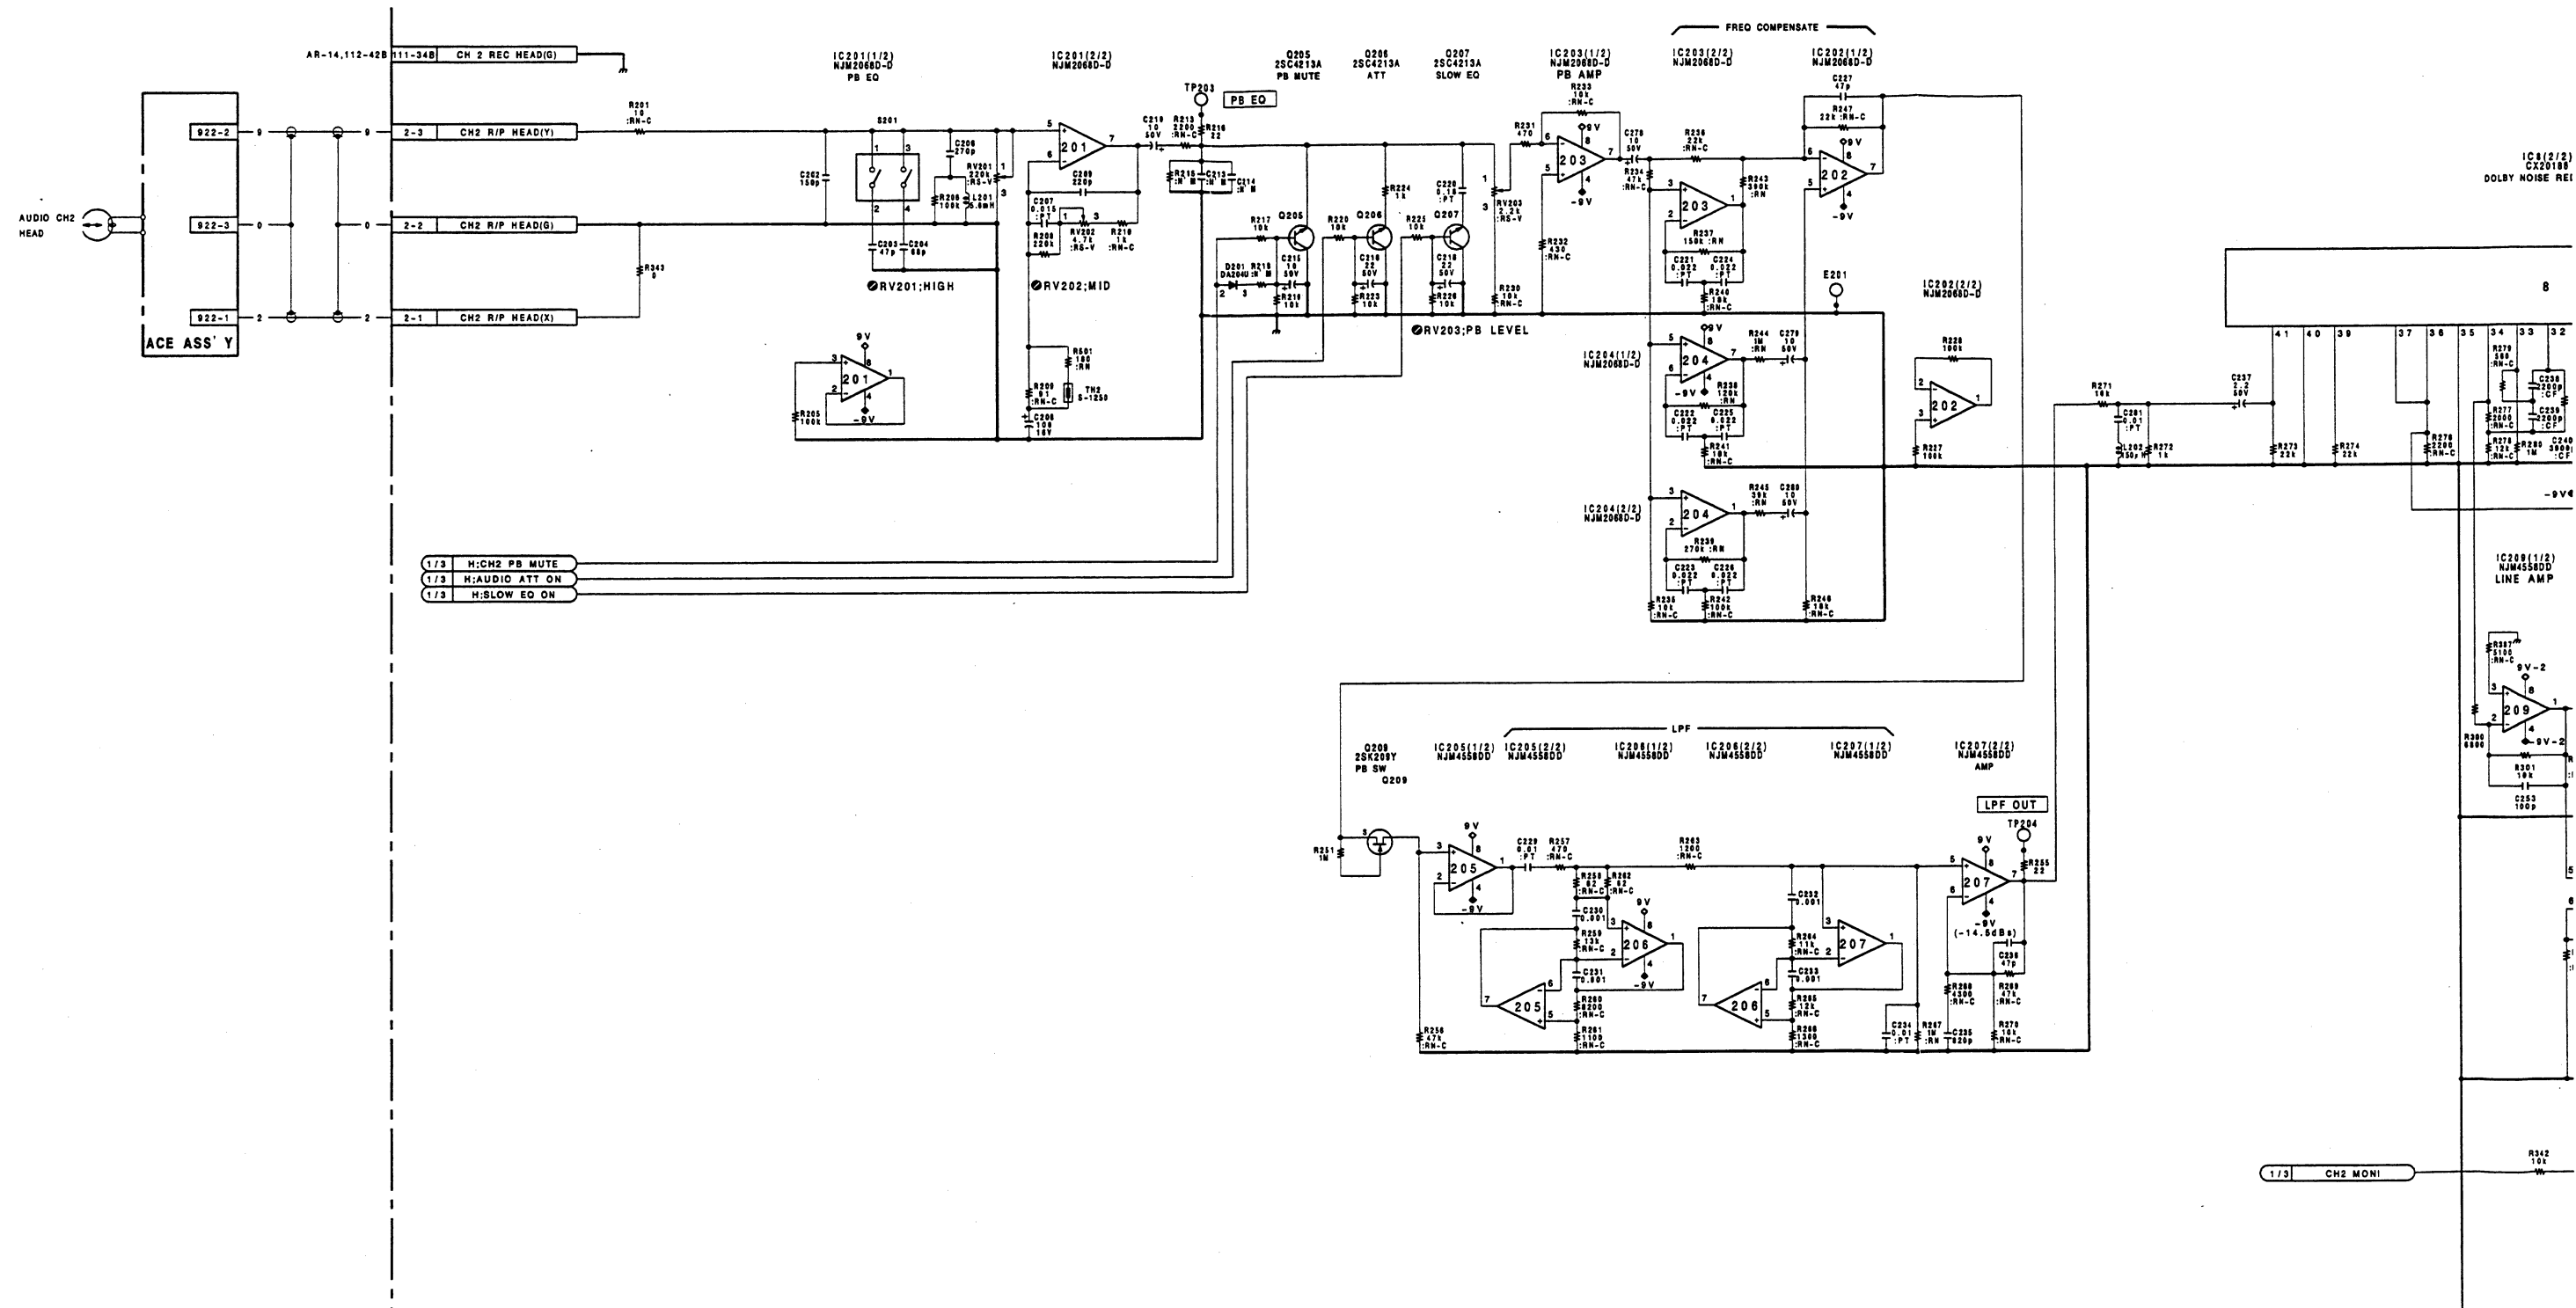

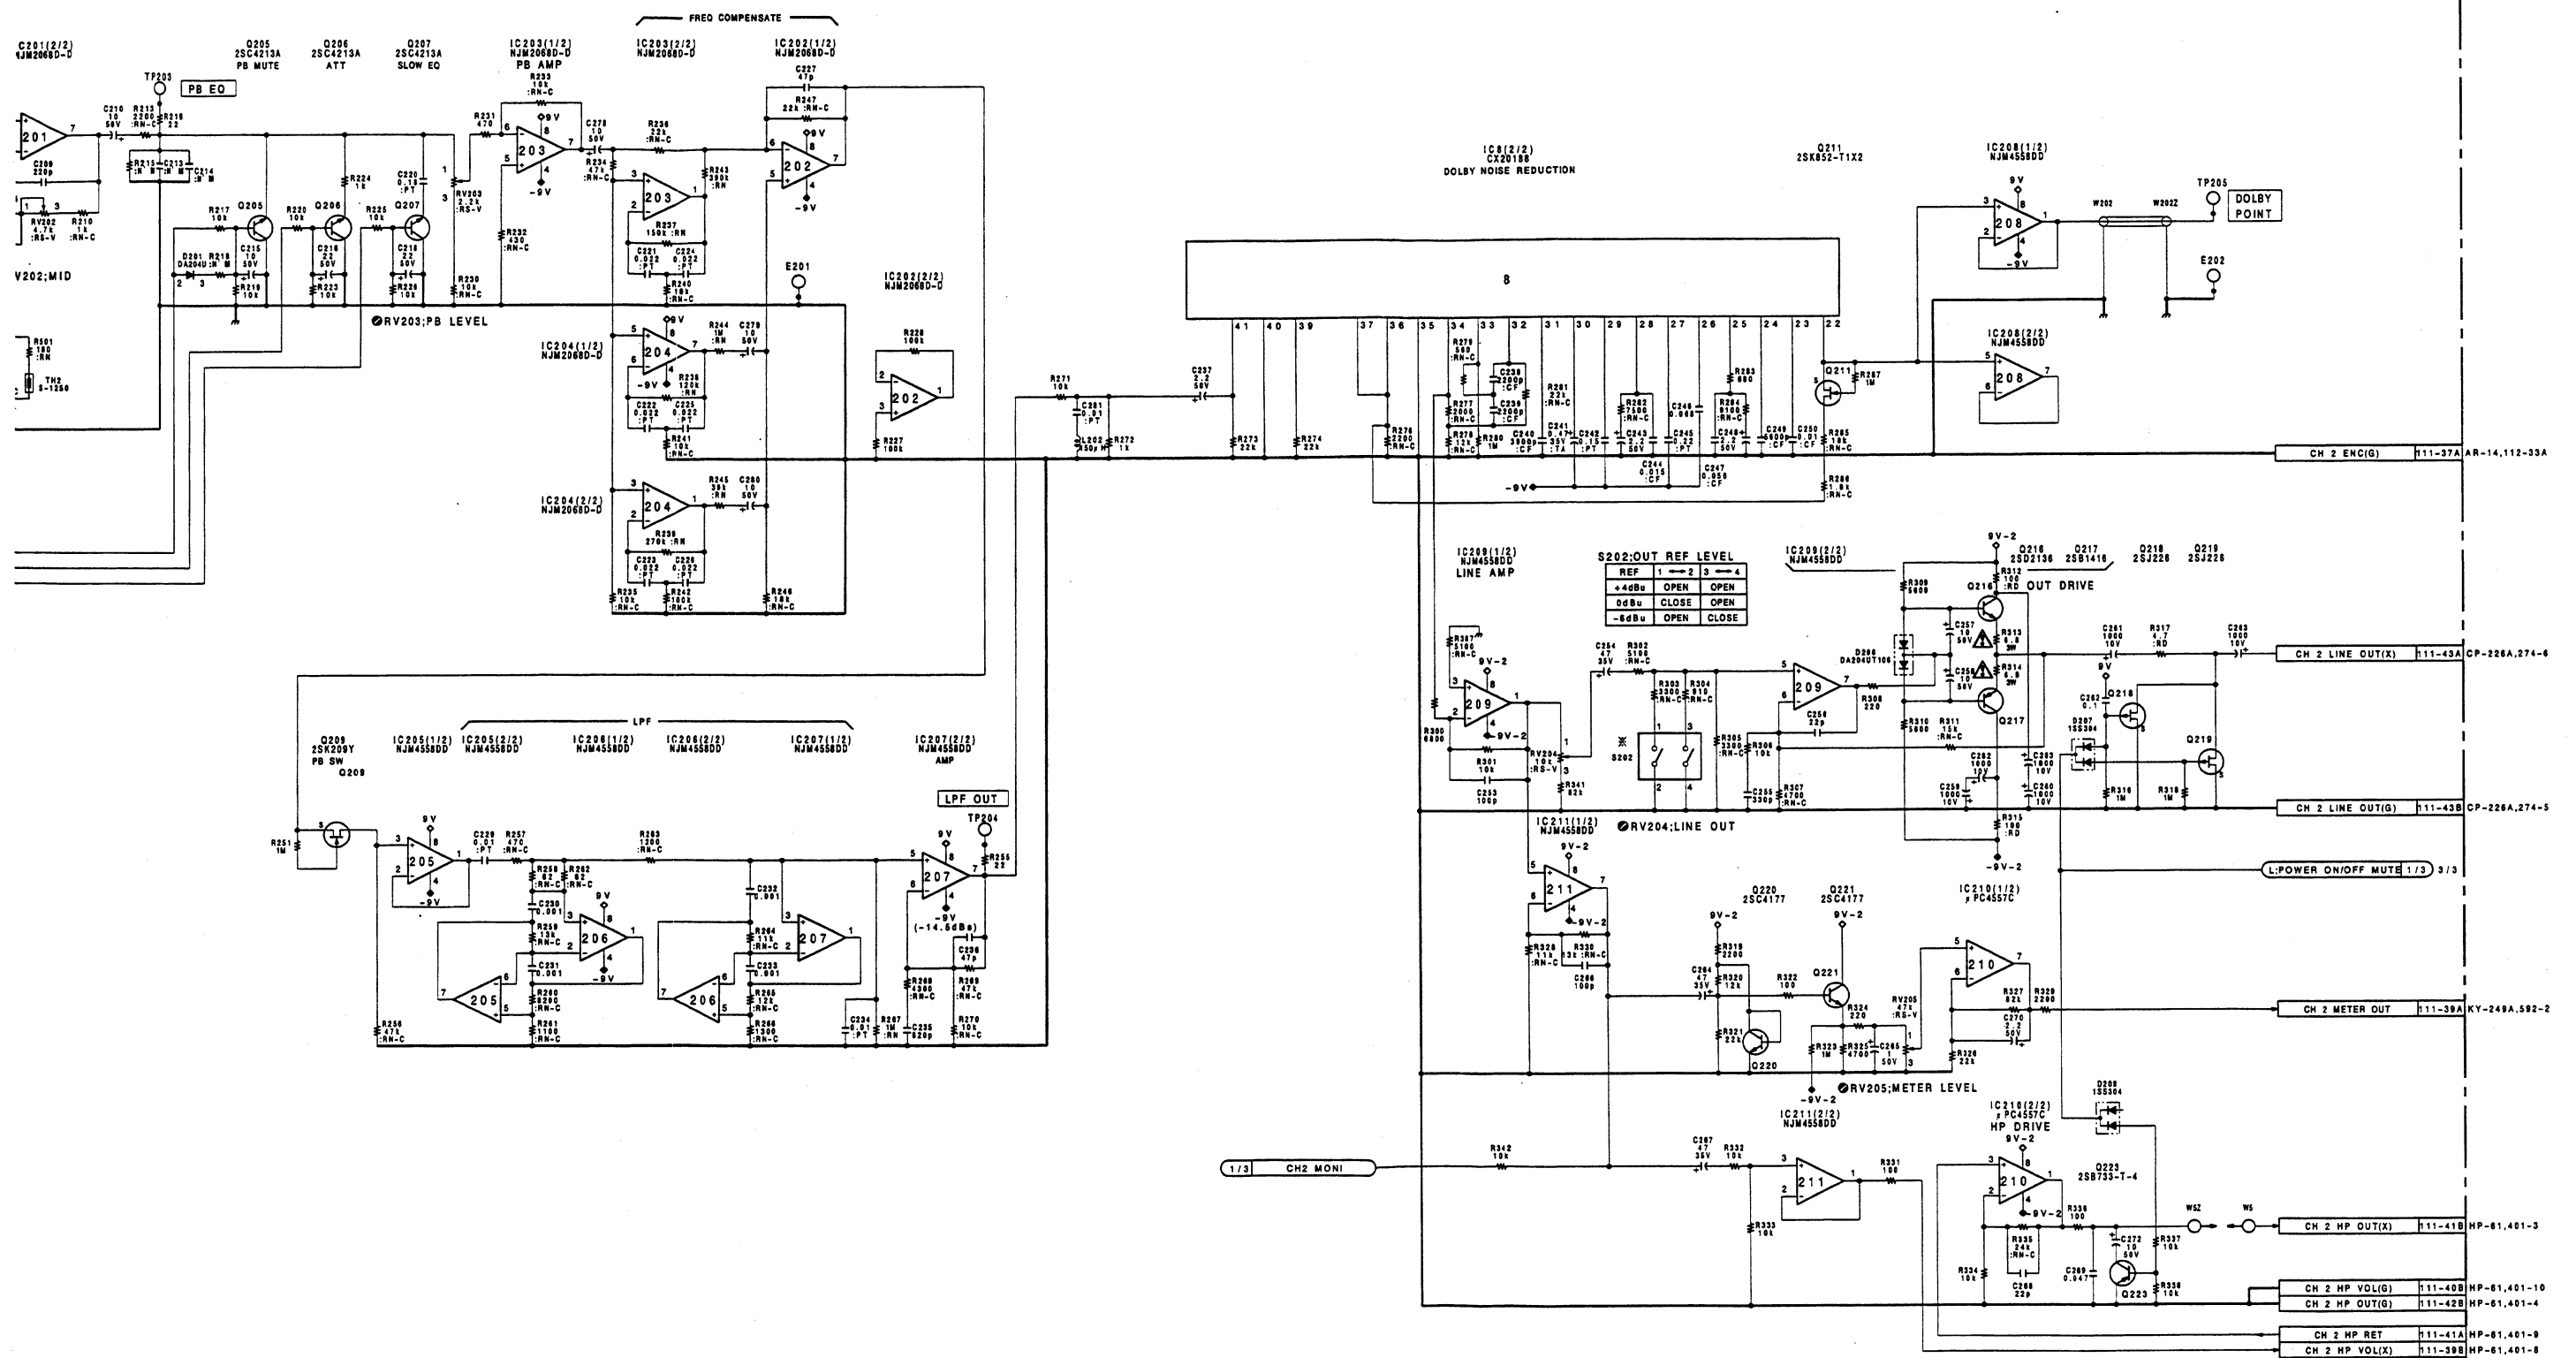

AP-31A BOARD (2/3)

BOARD NO.1-648-906-21
UVW-1600(J) ;#10001-
UVW-1600(UC);#10001-

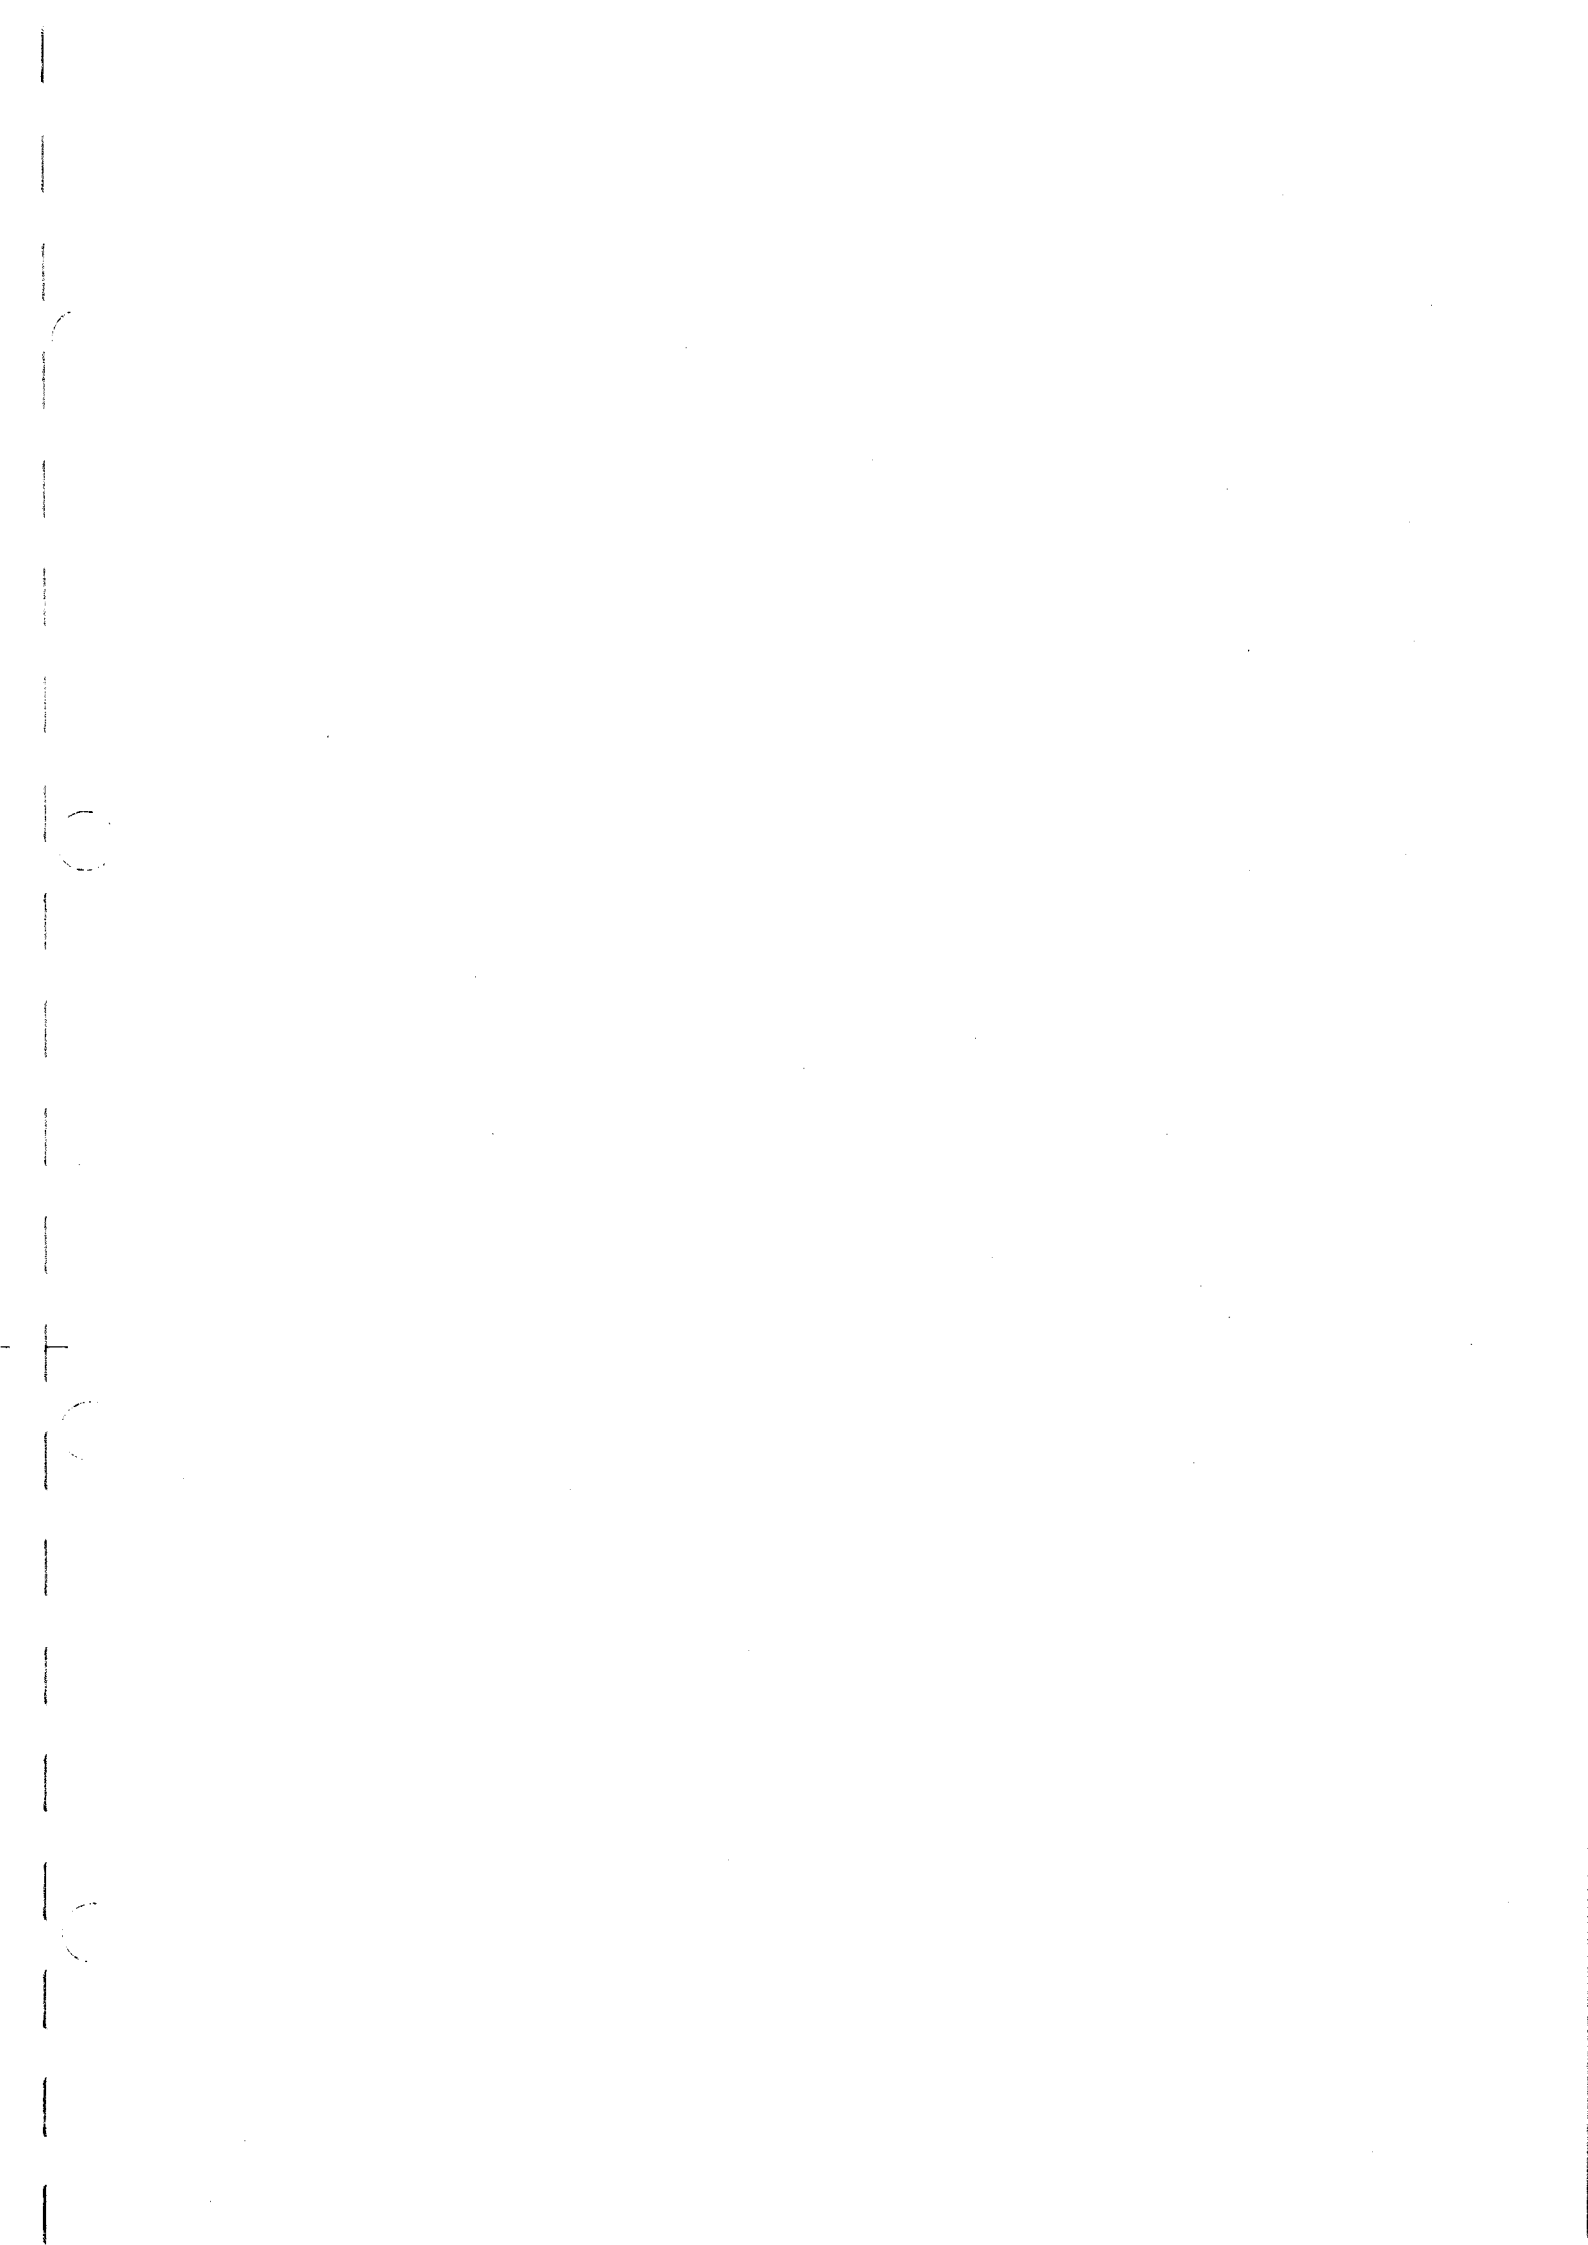


AP-31A(1-648-906-21)

CN1	H-1	FS64	B-4	FS149	J-5	RV2	J-1
CN2	A-1	FS65	D-5	FS150	H-5	RV3	J-1
CN3	G-4	FS66	D-5	FS151	H-5	RV4	H-1
CN111	E-5	FS67	D-5	FS152	H-5	RV5	H-1
		FS68	E-5	FS153	G-5	RV201	B-1
*D1	J-2	FS69	C-5	FS154	G-5	RV202	B-1
*D7	J-5	FS70	C-5	FS155	H-5	RV203	B-1
*D8	H-5	FS71	E-3	FS156	H-5	RV204	C-1
*D10	G-5	FS72	E-3			RV205	C-1
*D11	E-3	FS73	F-3	IC1	J-2		
*D201	A-2	FS74	E-4	IC2	J-4	S1	J-1
*D206	A-5	FS75	E-4	IC3	J-3	S2	G-1
*D207	B-5	FS77	F-4	IC4	H-3	S201	A-1
*D209	C-4	FS79	F-5	IC5	G-4	S202	C-1
*D401	F-3	FS80	F-5	IC6	G-3		
*D403	F-5	FS81	H-1	IC7	G-3	*TH1	J-2
		FS82	H-1	IC8	F-2	*TH2	B-2
E1	H-4	FS83	G-1	IC9	G-2		
E2	G-1	FS84	G-1	IC10	G-2	TP3	J-2
E201	B-4	FS85	G-1	IC11	H-4	TP4	G-2
E202	E-1	FS86	G-1	IC12	E-5	TP5	G-1
		FS87	H-1	IC13	D-4	TP203	B-2
FS1	A-1	FS88	H-1	IC14	E-3	TP204	C-2
FS3	A-2	FS89	H-1	IC15	J-4	TP205	D-1
FS5	B-2	FS90	G-1	IC201	A-2	TP402	G-5
FS6	B-2	FS91	G-1	IC202	A-4	TP403	D-1
FS7	A-3	FS92	G-2	IC203	A-3		
FS9	B-3	FS93	G-2	IC204	B-3		
FS10	A-3	FS94	F-2	IC205	C-4		
FS11	B-3	FS96	H-2	IC206	C-3		
FS12	A-3	FS97	H-2	IC207	C-3		
FS13	A-3	FS98	F-2	IC208	C-2		
FS14	B-3	FS99	F-2	IC209	C-2		
FS15	B-3	FS100	G-2	IC210	C-4		
FS16	A-4	FS101	H-2	IC211	A-4		
FS17	A-4	FS102	H-2	IC401	F-4		
FS18	A-4	FS103	G-3	IC402	F-4		
FS19	B-4	FS106	H-3	*IC405	C-5		
FS20	A-4	FS107	H-3	*IC406	D-5		
FS21	A-4	FS108	H-3	*IC407	D-5		
FS22	A-5	FS109	H-3	*IC408	C-5		
FS23	A-5	FS110	G-3	*IC409	D-5		
FS24	A-5	FS111	G-4	IC410	F-5		
FS25	B-5	FS112	G-4				
FS26	A-5	FS114	H-4	PS1	G-5		
FS27	B-5	FS115	H-4	PS2	G-5		
FS28	B-5	FS116	G-4				
FS29	B-5	FS117	H-4	*Q5	J-2		
FS30	C-1	FS118	H-4	*Q6	J-2		
FS31	C-1	FS119	H-5	*Q7	J-2		
FS32	C-1	FS121	G-5	*Q9	H-4		
FS33	C-1	FS122	G-5	*Q11	C-2		
FS34	C-1	FS123	H-5	*Q12	E-2		
FS35	C-1	FS124	H-5	*Q13	E-1		
FS36	D-1	FS125	H-1	Q18	J-5		
FS38	C-2	FS126	J-1	Q19	J-5		
FS39	C-2	FS127	J-1	Q20	H-5		
FS40	C-2	FS128	J-1	Q21	H-5		
FS41	D-2	FS129	H-2	*Q22	J-4		
FS43	C-2	FS131	J-2	*Q23	H-4		
FS44	D-2	FS132	J-2	Q25	G-4		
FS45	D-2	FS133	J-3	Q30	E-3		
FS46	D-2	FS135	J-3	*Q205	A-2		
FS47	C-3	FS136	H-3	*Q206	A-2		
FS48	C-3	FS137	J-3	*Q207	B-2		
FS49	C-3	FS138	J-3	*Q209	B-4		
FS50	C-3	FS139	H-3	*Q211	E-1		
FS51	C-3	FS140	J-3	Q216	A-5		
FS53	C-3	FS141	J-3	Q217	A-5		
FS54	C-4	FS142	J-4	Q218	C-5		
FS56	D-4	FS143	J-4	Q219	C-5		
FS57	D-4	FS144	J-4	*Q220	B-4		
FS58	C-4	FS145	J-4	*Q221	B-4		
FS59	C-4	FS146	J-4	Q223	C-4		
FS61	D-4	FS147	J-5	*Q403	F-3		
FS63	D-4	FS148	J-5	RV1	J-1		

*: B SIDE

AP-31A(3/3);LTC PB

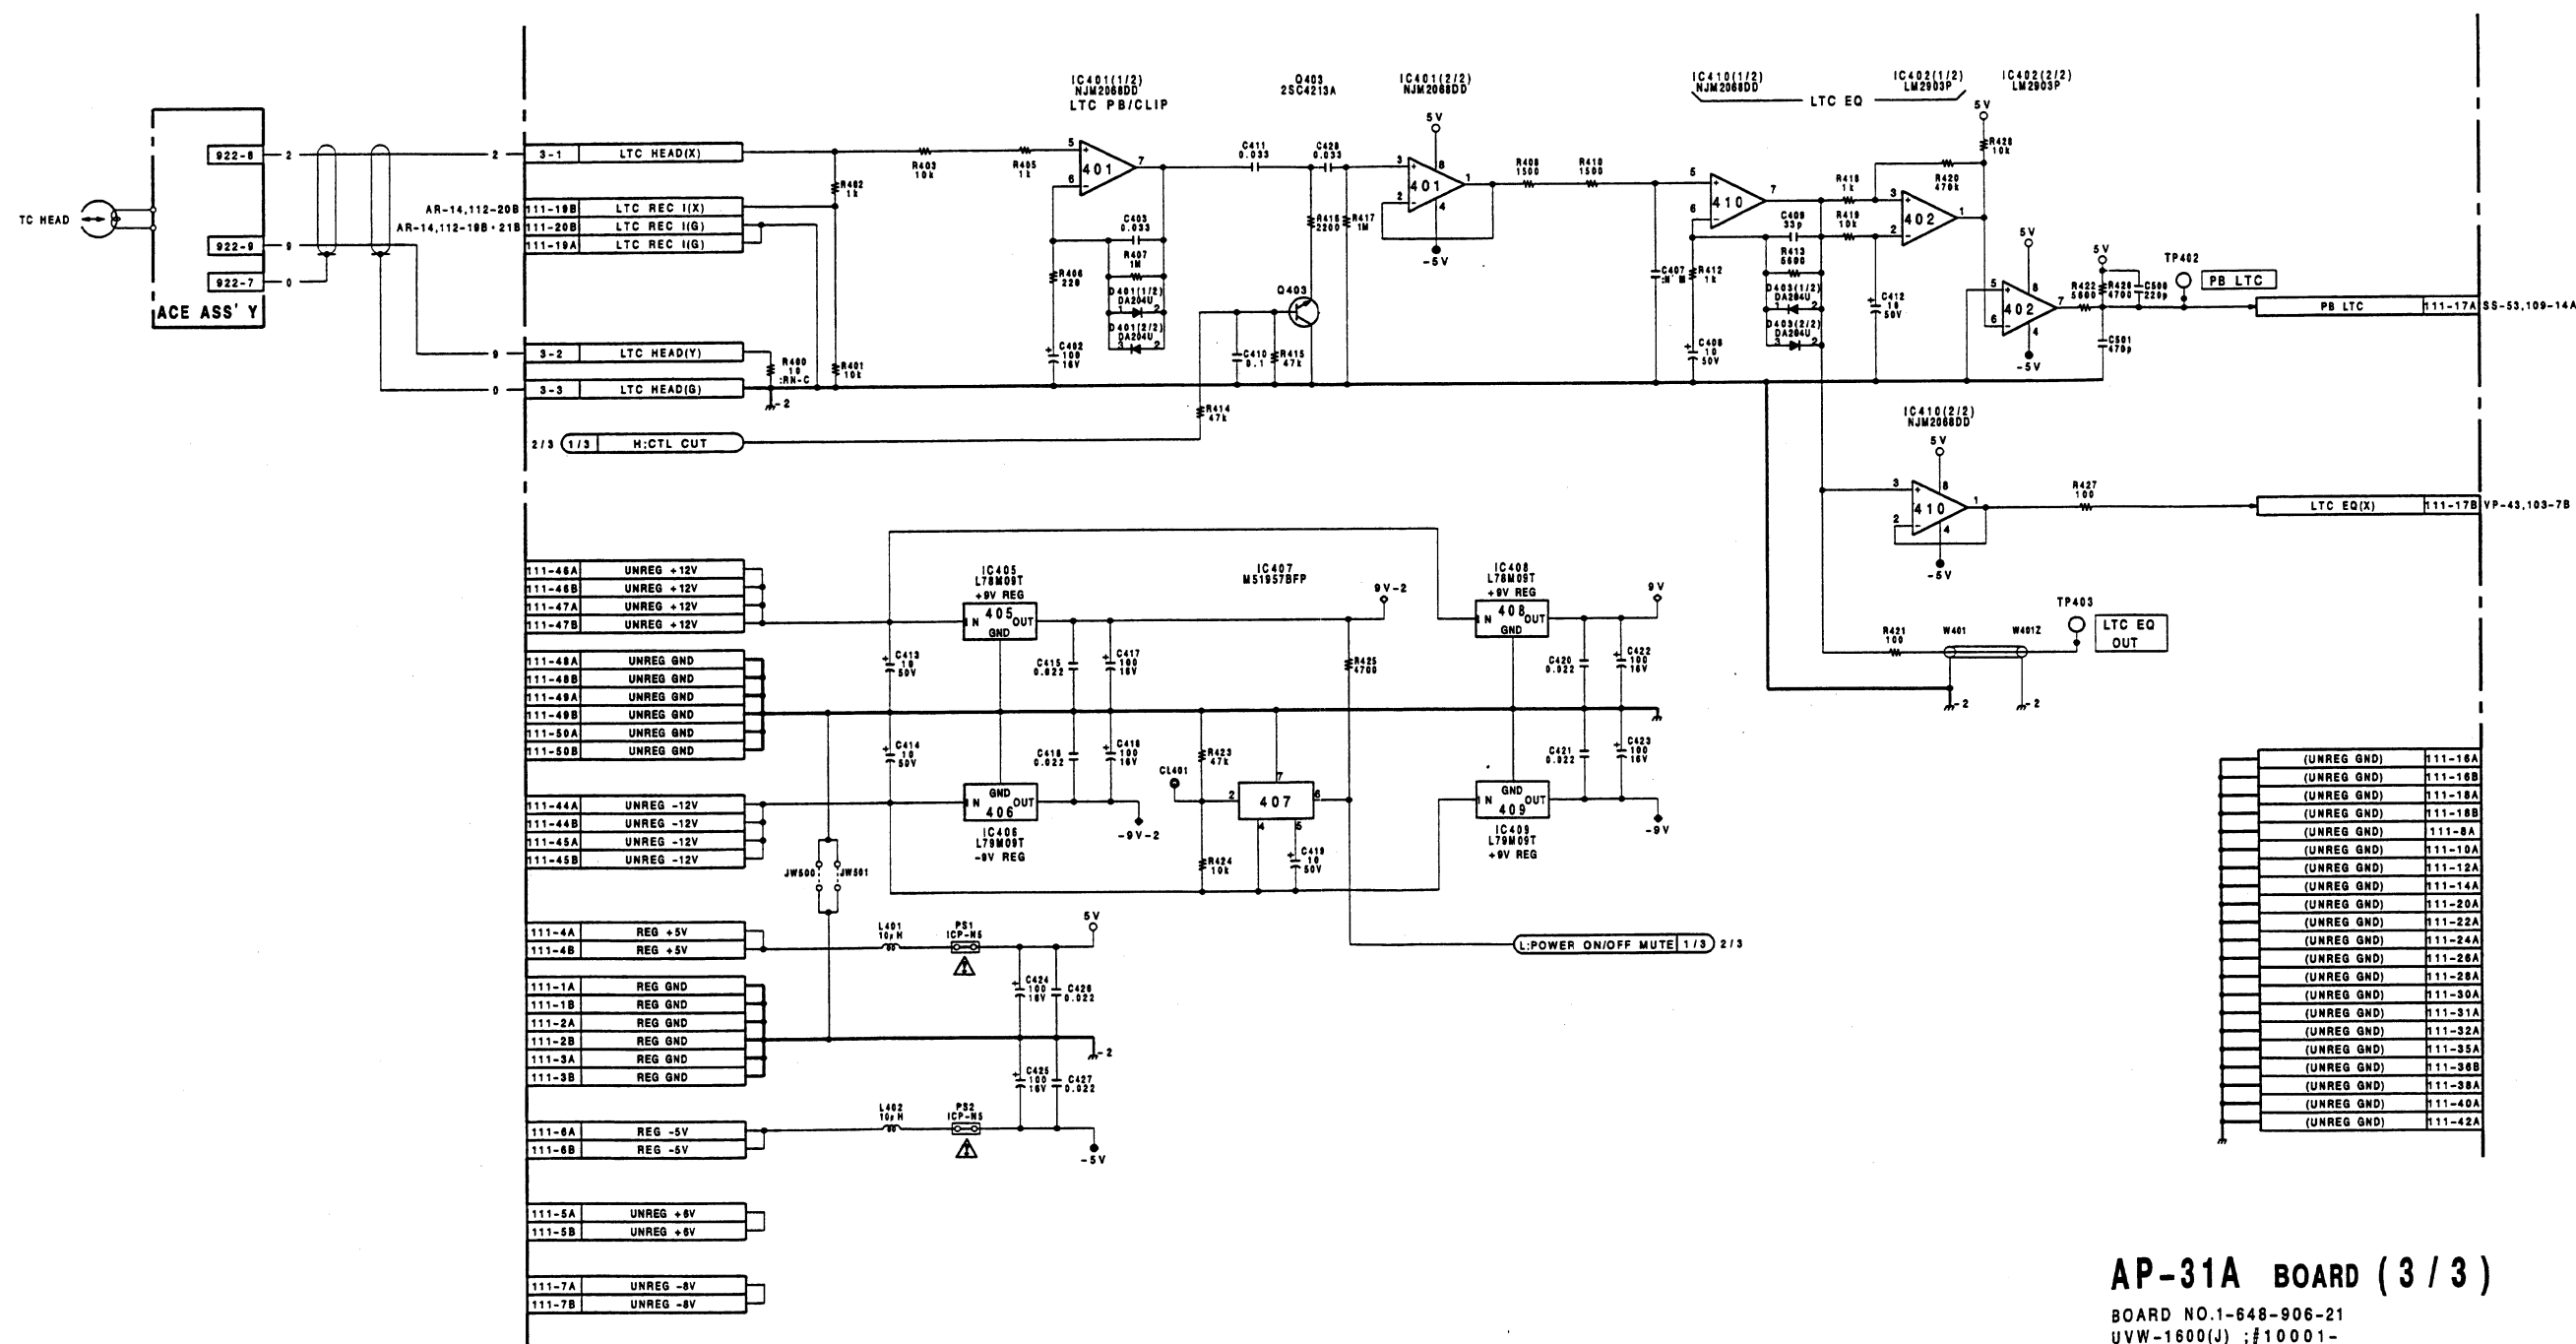

AP-31A BOARD (3 / 3)


BOARD NO.1-648-906-21
UVW-1600(J) ;#10001-
UVW-1600(UC);#10001-

AR-14(1-648-907-11)

CN1	J-5	FS44	C-3	FS123	H-1	*Q1	E-5	TP301	J-1
CN112	E-5	FS45	C-3	FS124	J-1	*Q2	E-5	TP311	J-1
		FS46	C-3	FS125	H-2	*Q3	E-5	TP321	J-1
*D1	D-5	FS47	C-3	FS126	H-2	*Q4	E-5		
*D101	J-2	FS48	C-3	FS127	H-2	*Q5	F-5	X301	D-3
*D102	J-1	FS49	C-4	FS128	H-4	*Q101	G-1		
*D103	C-3	FS50	C-4	FS129	J-1	*Q102	E-4		
*D201	A-2	FS51	C-5	FS130	J-1	*Q103	G-2		
*D202	A-1	FS52	D-1	FS131	J-1	Q104	C-4		
*D203	A-3	FS54	D-3	FS132	J-2	Q105	B-4		
*D301	C-5	FS55	D-3	FS133	J-2	*Q201	C-1		
*D302	D-4	FS56	D-3	FS134	J-2	*Q202	E-4		
*D303	B-3	FS57	D-4	FS135	H-2	*Q203	C-1		
*D304	B-5	FS58	D-4	FS136	J-2	Q204	A-4		
*D305	B-3	FS59	D-4	FS137	J-2	Q205	A-4		
*D306	A-5	FS60	D-5	FS138	J-3	*Q301	B-3		
*D311	G-4	FS61	D-1	FS139	J-3	Q302	C-5		
*D312	G-4	FS62	E-1	FS140	J-5	*Q303	B-3		
*D313	J-3	FS63	D-3	FS141	J-5	Q304	A-5		
*D314	F-3	FS64	E-3	FS142	J-1	Q305	C-5		
*D321	G-3	FS65	E-3	FS143	J-1	Q306	A-5		
*D322	G-3	FS66	D-4	FS144	J-1	*Q311	F-3		
*D323	J-2	FS68	E-4	FS145	J-2	Q312	G-4		
*D324	E-4	FS69	D-4	FS146	J-2	*Q313	F-2		
*D331	G-5	FS70	D-4	FS147	J-2	*Q314	H-4		
*D332	G-5	FS72	E-1	FS148	J-3	*Q315	H-4		
*D334	E-4	FS73	E-2	FS149	J-3	Q316	H-3		
		FS74	E-3	FS150	J-4	Q317	H-4		
E106	H-1	FS75	F-3	FS152	H-2	*Q318	J-3		
E206	A-1	FS76	E-3	FS153	E-1	Q319	G-4		
E301	J-1	FS77	F-3	FS154	F-1	*Q321	G-3		
E311	J-1	FS78	E-4	FS155	J-5	Q322	G-2		
		FS79	E-4	FS156	J-4	*Q323	E-3		
FS1	A-1	FS80	F-4			*Q324	H-2		
FS2	A-1	FS81	E-5	IC1	E-4	*Q325	H-3		
FS3	A-1	FS82	E-5	IC2	E-2	Q326	H-2		
FS4	A-2	FS83	F-1	IC3	D-5	Q327	H-3		
FS5	A-2	FS84	F-1	IC5	B-5	*Q328	J-2		
FS6	A-5	FS85	F-1	IC6	B-5	Q329	G-2		
FS7	A-2	FS86	F-1	IC7	C-5	*Q331	F-5		
FS8	A-2	FS87	F-1	IC101	J-2	Q332	G-5		
FS9	A-2	FS88	F-2	IC102	J-2	*Q333	F-3		
FS10	A-5	FS89	F-2	IC103	H-2	*Q334	H-4		
FS11	A-5	FS90	F-2	IC104	G-2	*Q335	H-5		
FS12	A-5	FS91	F-3	IC105	F-2	Q336	H-4		
FS13	B-1	FS92	F-3	IC201	A-2	Q337	H-5		
FS14	B-2	FS93	F-3	IC202	B-2	Q339	G-5		
FS15	B-5	FS94	F-4	IC203	C-2				
FS16	B-5	FS95	F-4	IC204	D-2	RV106	J-1		
FS17	A-5	FS96	F-4	IC205	E-2	RV107	H-1		
FS18	A-5	FS97	F-4	IC301	D-3	RV108	H-1		
FS19	A-5	FS98	F-5	IC302	D-4	RV109	G-1		
FS20	B-1	FS99	F-5	IC303	C-4	RV110	F-1		
FS21	B-2	FS100	F-5	IC304	C-3	RV111	C-1		
FS22	B-2	FS101	F-5	IC305	D-3	RV112	C-1		
FS23	B-3	FS102	F-5	IC306	C-3	RV206	A-1		
FS24	B-3	FS103	F-5	IC307	C-5	RV207	B-1		
FS25	B-4	FS104	F-5	IC308	C-4	RV208	B-1		
FS26	B-5	FS105	F-5	IC309	B-5	RV209	B-1		
FS27	B-1	FS106	F-5	IC310	G-3	RV210	D-1		
FS28	B-2	FS107	G-1	IC311	E-3	RV211	G-1		
FS29	C-2	FS108	G-1	IC312	E-4	RV212	F-1		
FS30	B-5	FS109	G-2	IC313	G-5	RV301	B-4		
FS31	B-5	FS110	G-2	IC314	E-3	RV302	B-4		
FS32	B-5	FS111	G-2	IC315	J-3				
FS33	B-5	FS112	G-2	IC316	J-5				
FS34	C-1	FS113	G-3			RY301	J-3		
FS35	C-2	FS114	G-3	LV101	C-2	RY311	J-2		
FS36	C-2	FS115	G-3	LV201	A-2				
FS37	C-5	FS116	G-4	LV301	J-4	S103	J-1		
FS38	C-5	FS117	G-4	LV311	J-3	S203	A-1		
FS39	C-5	FS118	G-4	LV321	J-5				
FS40	C-1	FS119	G-5			*TH1	G-2		
FS41	C-1	FS120	G-5	PS1	H-5	*TH2	C-2		
FS42	C-2	FS121	G-5	PS2	H-5	TP106	H-1		
FS43	C-2	FS122	H-1			TP206	A-1		

*: B SIDE

AR-14(1/4);LTC REC/CANCEL CROSSTALK SIG.

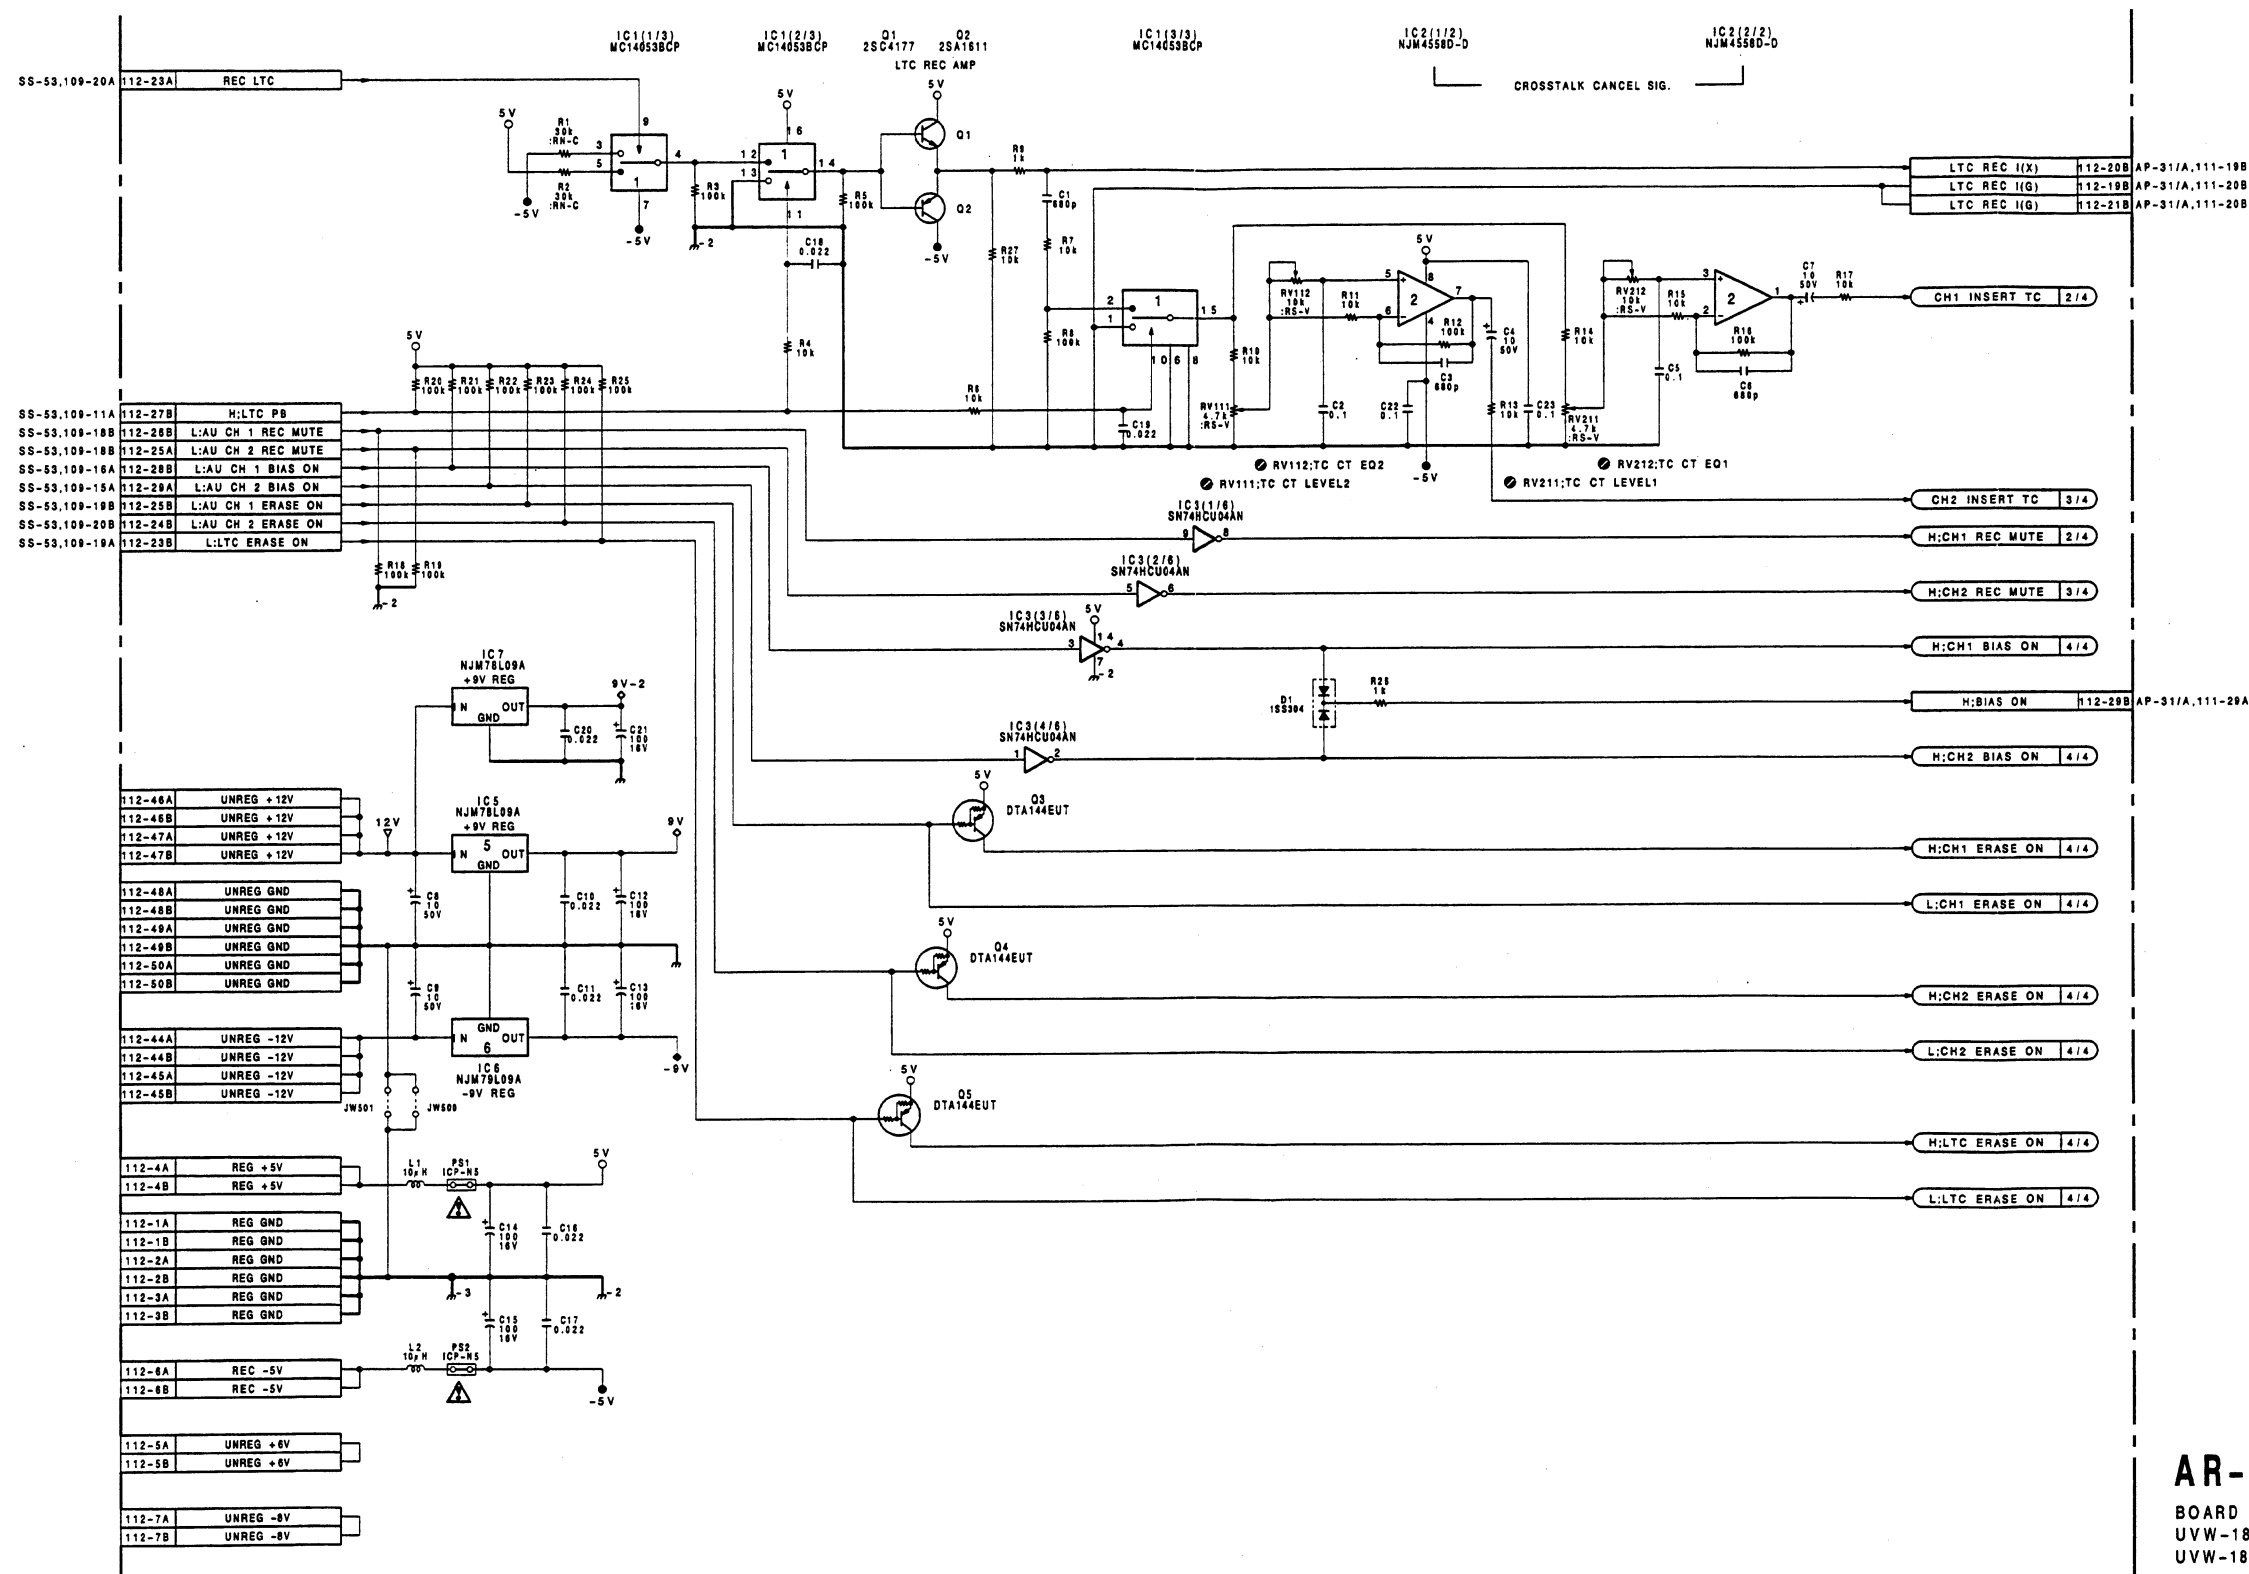




AR-14(1-648-907-11)

CN1	J-5	FS44	C-3	FS123	H-1	*Q1	E-5	TP301	J-1
CN112	E-5	FS45	C-3	FS124	J-1	*Q2	E-5	TP311	J-1
		FS46	C-3	FS125	H-2	*Q3	E-5	TP321	J-1
*D1	D-5	FS47	C-3	FS126	H-2	*Q4	E-5		
*D101	J-2	FS48	C-3	FS127	H-2	*Q5	F-5	X301	D-3
*D102	J-1	FS49	C-4	FS128	H-4	*Q101	G-1		
*D103	C-3	FS50	C-4	FS129	J-1	*Q102	E-4		
*D201	A-2	FS51	C-5	FS130	J-1	*Q103	G-2		
*D202	A-1	FS52	D-1	FS131	J-1	Q104	C-4		
*D203	A-3	FS54	D-3	FS132	J-2	Q105	B-4		
*D301	C-5	FS55	D-3	FS133	J-2	*Q201	C-1		
*D302	D-4	FS56	D-3	FS134	J-2	*Q202	E-4		
*D303	B-3	FS57	D-4	FS135	H-2	*Q203	C-1		
*D304	B-5	FS58	D-4	FS136	J-2	Q204	A-4		
*D305	B-3	FS59	D-4	FS137	J-2	Q205	A-4		
*D306	A-5	FS60	D-5	FS138	J-3	*Q301	B-3		
*D311	G-4	FS61	D-1	FS139	J-3	Q302	C-5		
*D312	G-4	FS62	E-1	FS140	J-5	*Q303	B-3		
*D313	J-3	FS63	D-3	FS141	J-5	Q304	A-5		
*D314	F-3	FS64	E-3	FS142	J-1	Q305	C-5		
*D321	G-3	FS65	E-3	FS143	J-1	Q306	A-5		
*D322	G-3	FS66	D-4	FS144	J-1	*Q311	F-3		
*D323	J-2	FS68	E-4	FS145	J-2	Q312	G-4		
*D324	E-4	FS69	D-4	FS146	J-2	*Q313	F-2		
*D331	G-5	FS70	D-4	FS147	J-2	*Q314	H-4		
*D332	G-5	FS72	E-1	FS148	J-3	*Q315	H-4		
*D334	E-4	FS73	E-2	FS149	J-3	Q316	H-3		
		FS74	E-3	FS150	J-4	Q317	H-4		
E106	H-1	FS75	F-3	FS152	H-2	*Q318	J-3		
E206	A-1	FS76	E-3	FS153	E-1	Q319	G-4		
E301	J-1	FS77	F-3	FS154	F-1	*Q321	G-3		
E311	J-1	FS78	E-4	FS155	J-5	Q322	G-2		
		FS79	E-4	FS156	J-4	*Q323	E-3		
FS1	A-1	FS80	F-4			*Q324	H-2		
FS2	A-1	FS81	E-5	IC1	E-4	*Q325	H-3		
FS3	A-1	FS82	E-5	IC2	E-2	Q326	H-2		
FS4	A-2	FS83	F-1	IC3	D-5	Q327	H-3		
FS5	A-2	FS84	F-1	IC5	B-5	*Q328	J-2		
FS6	A-5	FS85	F-1	IC6	B-5	Q329	G-2		
FS7	A-2	FS86	F-1	IC7	C-5	*Q331	F-5		
FS8	A-2	FS87	F-1	IC101	J-2	Q332	G-5		
FS9	A-2	FS88	F-2	IC102	J-2	*Q333	F-3		
FS10	A-5	FS89	F-2	IC103	H-2	*Q334	H-4		
FS11	A-5	FS90	F-2	IC104	G-2	*Q335	H-5		
FS12	A-5	FS91	F-3	IC105	F-2	Q336	H-4		
FS13	B-1	FS92	F-3	IC201	A-2	Q337	H-5		
FS14	B-2	FS93	F-3	IC202	B-2	Q339	G-5		
FS15	B-5	FS94	F-4	IC203	C-2				
FS16	B-5	FS95	F-4	IC204	D-2	RV106	J-1		
FS17	A-5	FS96	F-4	IC205	E-2	RV107	H-1		
FS18	A-5	FS97	F-4	IC301	D-3	RV108	H-1		
FS19	A-5	FS98	F-5	IC302	D-4	RV109	G-1		
FS20	B-1	FS99	F-5	IC303	C-4	RV110	F-1		
FS21	B-2	FS100	F-5	IC304	C-3	RV111	C-1		
FS22	B-2	FS101	F-5	IC305	D-3	RV112	C-1		
FS23	B-3	FS102	F-5	IC306	C-3	RV206	A-1		
FS24	B-3	FS103	F-5	IC307	C-5	RV207	B-1		
FS25	B-4	FS104	F-5	IC308	C-4	RV208	B-1		
FS26	B-5	FS105	F-5	IC309	B-5	RV209	B-1		
FS27	B-1	FS106	F-5	IC310	G-3	RV210	D-1		
FS28	B-2	FS107	G-1	IC311	E-3	RV211	G-1		
FS29	C-2	FS108	G-1	IC312	E-4	RV212	F-1		
FS30	B-5	FS109	G-2	IC313	G-5	RV301	B-4		
FS31	B-5	FS110	G-2	IC314	E-3	RV302	B-4		
FS32	B-5	FS111	G-2	IC315	J-3				
FS33	B-5	FS112	G-2	IC316	J-5	RY301	J-3		
FS34	C-1	FS113	G-3			RY311	J-2		
FS35	C-2	FS114	G-3	LV101	C-2				
FS36	C-2	FS115	G-3	LV201	A-2	S103	J-1		
FS37	C-5	FS116	G-4	LV301	J-4	S203	A-1		
FS38	C-5	FS117	G-4	LV311	J-3				
FS39	C-5	FS118	G-4	LV321	J-5	*TH1	G-2		
FS40	C-1	FS119	G-5			*TH2	C-2		
FS41	C-1	FS120	G-5	PS1	H-5				
FS42	C-2	FS121	G-5	PS2	H-5	TP106	H-1		
FS43	C-2	FS122	H-1			TP206	A-1		


*: B SIDE

AR-14(2/4);CH-1 REC/BIAS DRIVE,CH-1 CANCEL CROSSTALK SIG.

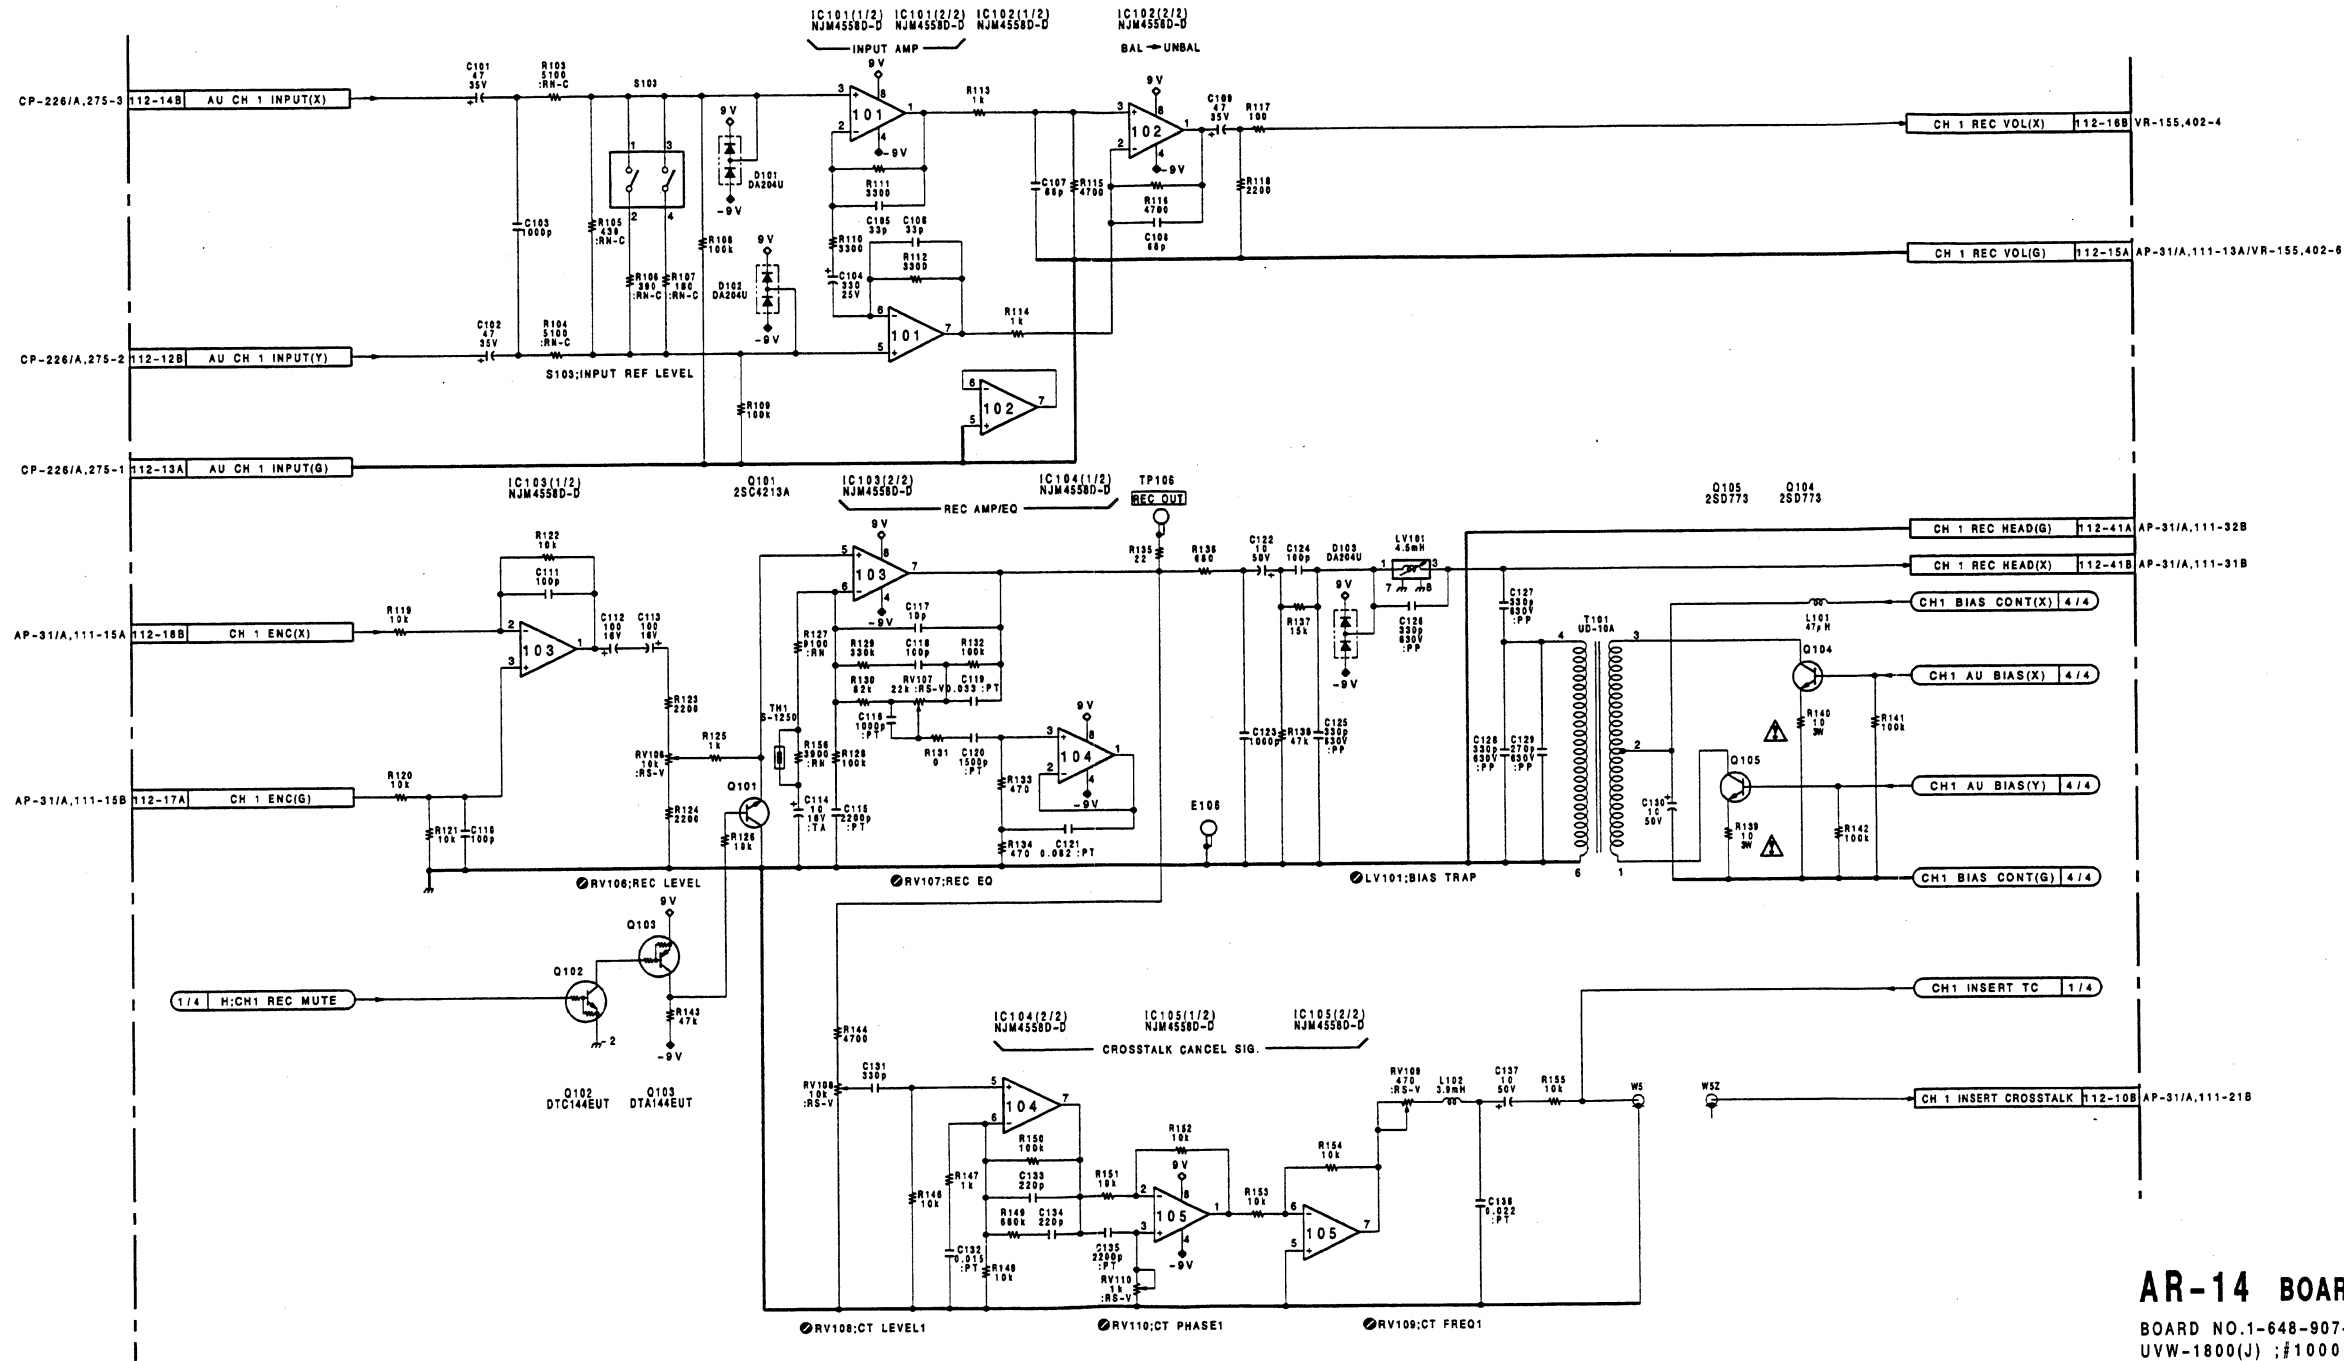

AR-14 BOARD (2 / 4)

BOARD NO.1-648-907-11
UVW-1800(J) ;#10001-
UVW-1800(UC);#10001-

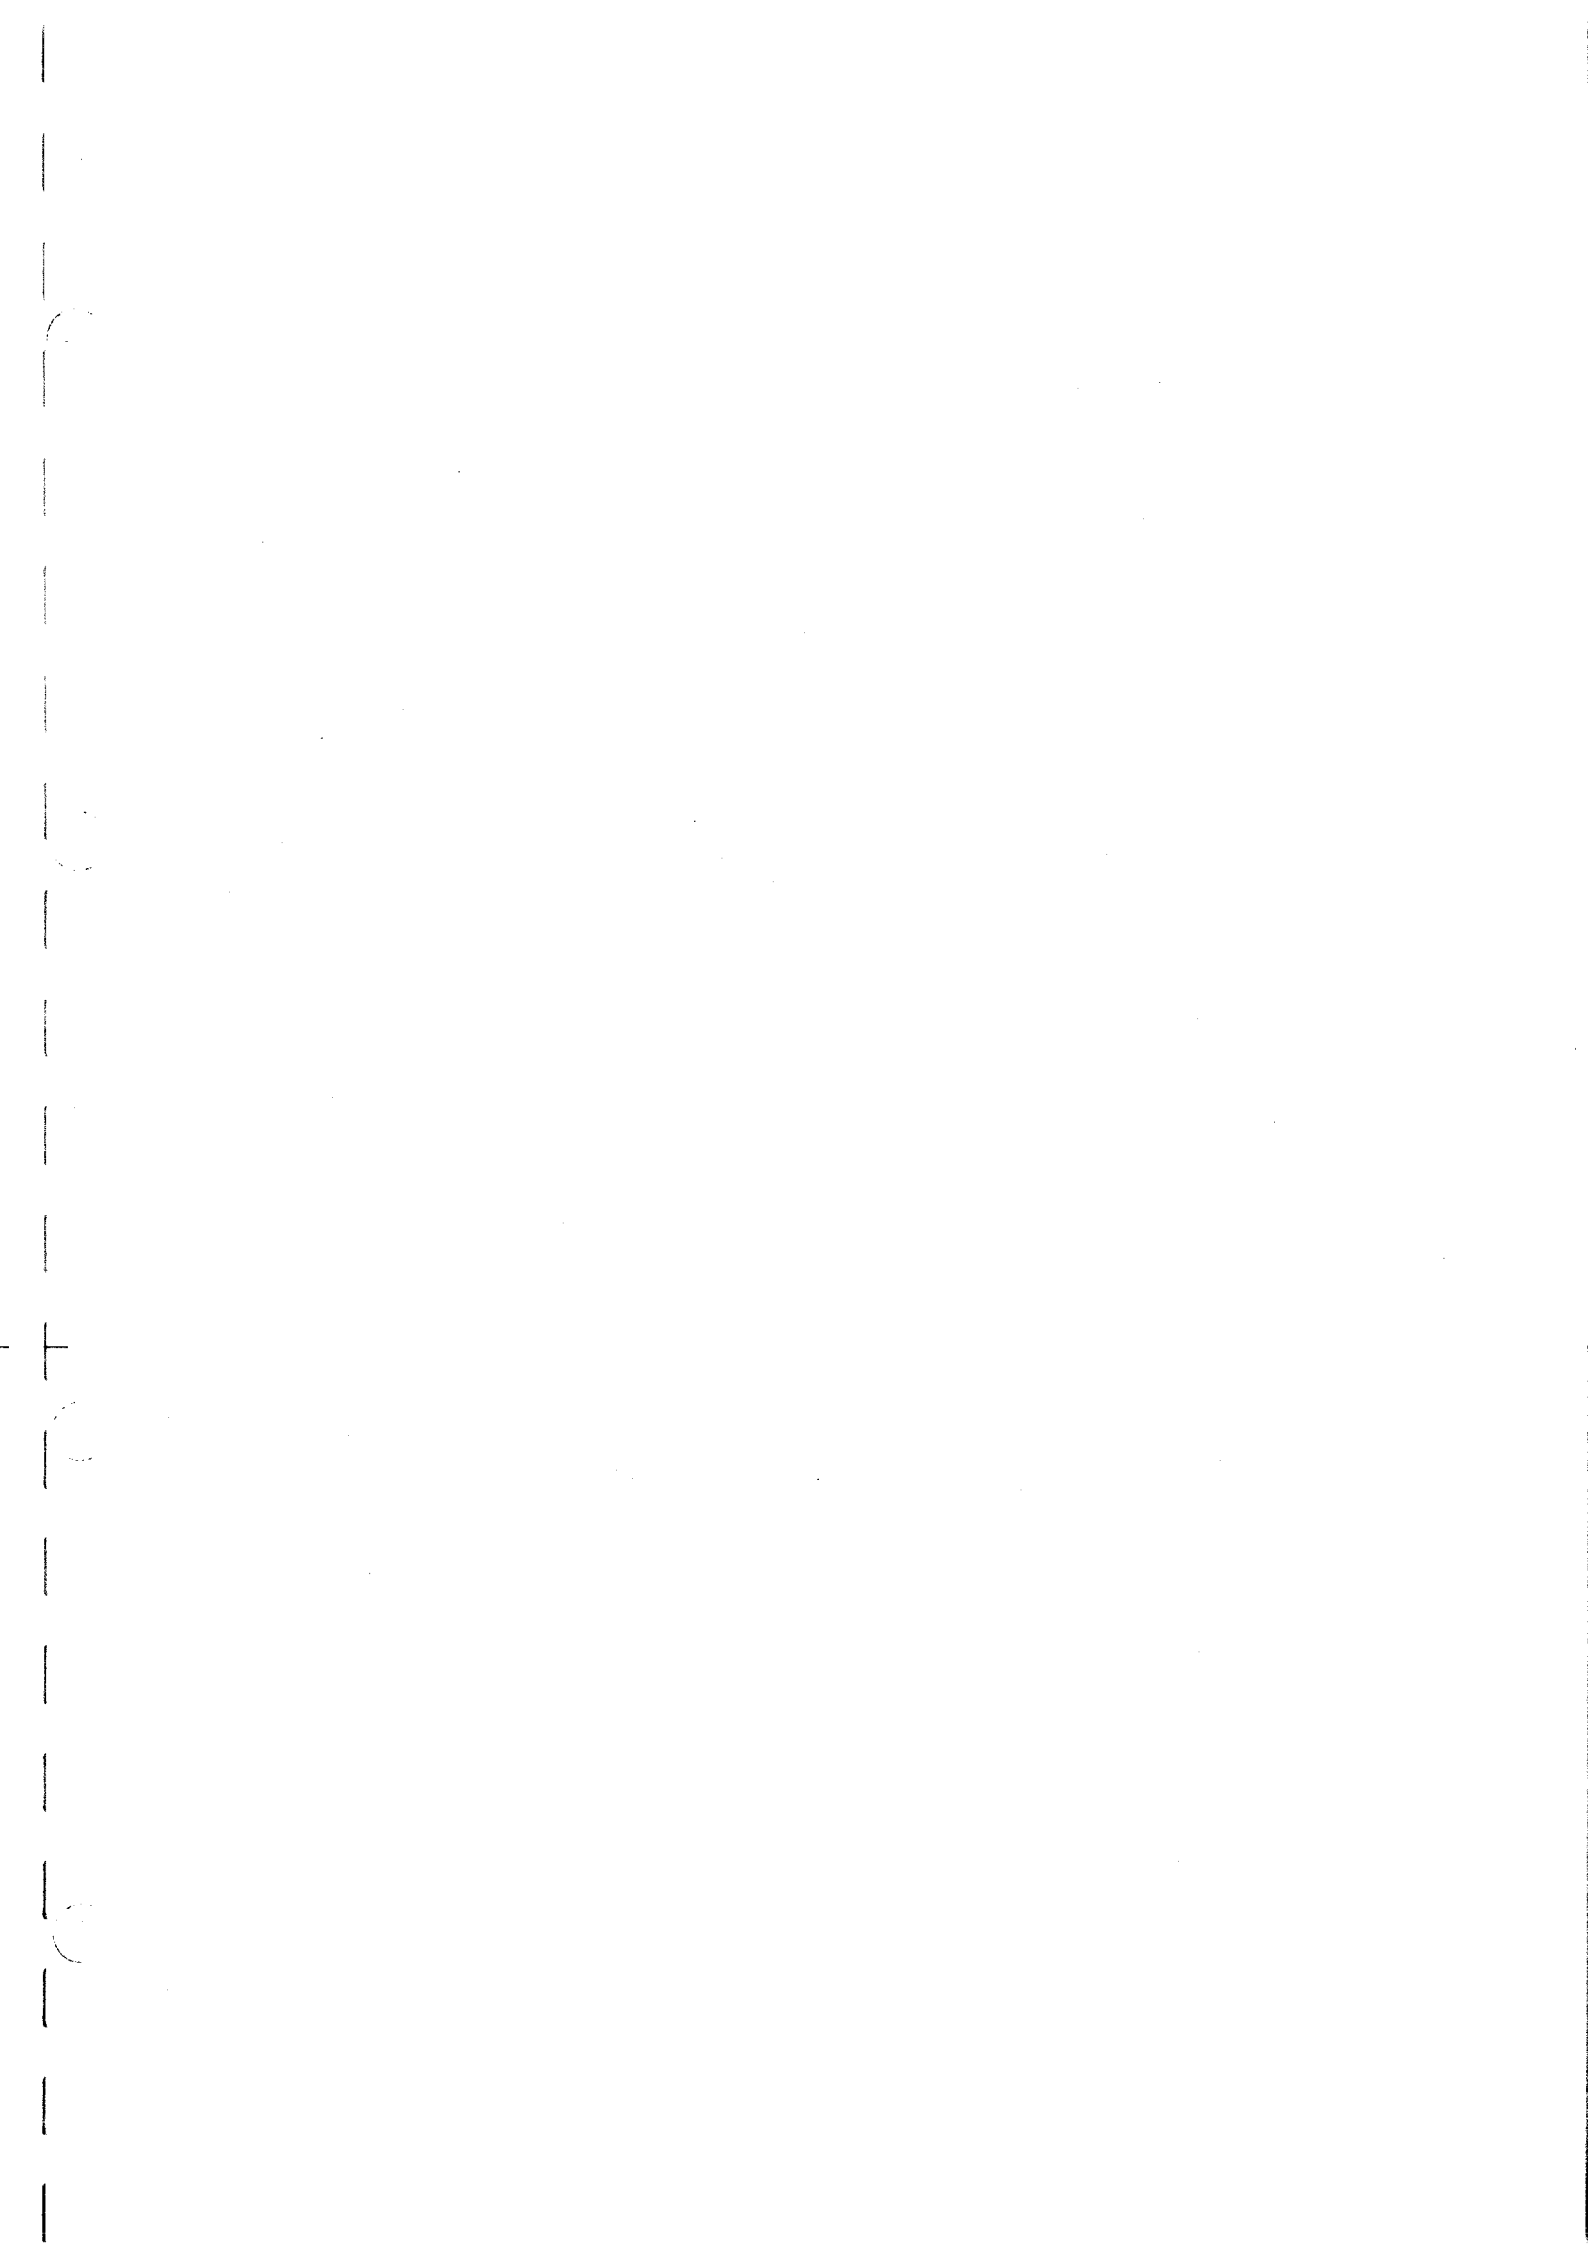


AR-14(1-648-907-11)

CN1	J-5	FS44	C-3	FS123	H-1	*Q1	E-5	TP301	J-1
CN112	E-5	FS45	C-3	FS124	J-1	*Q2	E-5	TP311	J-1
		FS46	C-3	FS125	H-2	*Q3	E-5	TP321	J-1
*D1	D-5	FS47	C-3	FS126	H-2	*Q4	E-5		
*D101	J-2	FS48	C-3	FS127	H-2	*Q5	F-5	X301	D-3
*D102	J-1	FS49	C-4	FS128	H-4	*Q101	G-1		
*D103	C-3	FS50	C-4	FS129	J-1	*Q102	E-4		
*D201	A-2	FS51	C-5	FS130	J-1	*Q103	G-2		
*D202	A-1	FS52	D-1	FS131	J-1	Q104	C-4		
*D203	A-3	FS54	D-3	FS132	J-2	Q105	B-4		
*D301	C-5	FS55	D-3	FS133	J-2	*Q201	C-1		
*D302	D-4	FS56	D-3	FS134	J-2	*Q202	E-4		
*D303	B-3	FS57	D-4	FS135	H-2	*Q203	C-1		
*D304	B-5	FS58	D-4	FS136	J-2	Q204	A-4		
*D305	B-3	FS59	D-4	FS137	J-2	Q205	A-4		
*D306	A-5	FS60	D-5	FS138	J-3	*Q301	B-3		
*D311	G-4	FS61	D-1	FS139	J-3	Q302	C-5		
*D312	G-4	FS62	E-1	FS140	J-5	*Q303	B-3		
*D313	J-3	FS63	D-3	FS141	J-5	Q304	A-5		
*D314	F-3	FS64	E-3	FS142	J-1	Q305	C-5		
*D321	G-3	FS65	E-3	FS143	J-1	Q306	A-5		
*D322	G-3	FS66	D-4	FS144	J-1	*Q311	F-3		
*D323	J-2	FS68	E-4	FS145	J-2	Q312	G-4		
*D324	E-4	FS69	D-4	FS146	J-2	*Q313	F-2		
*D331	G-5	FS70	D-4	FS147	J-2	*Q314	H-4		
*D332	G-5	FS72	E-1	FS148	J-3	*Q315	H-4		
*D334	E-4	FS73	E-2	FS149	J-3	Q316	H-3		
		FS74	E-3	FS150	J-4	Q317	H-4		
E106	H-1	FS75	F-3	FS152	H-2	*Q318	J-3		
E206	A-1	FS76	E-3	FS153	E-1	Q319	G-4		
E301	J-1	FS77	F-3	FS154	F-1	*Q321	G-3		
E311	J-1	FS78	E-4	FS155	J-5	Q322	G-2		
		FS79	E-4	FS156	J-4	*Q323	E-3		
FS1	A-1	FS80	F-4			*Q324	H-2		
FS2	A-1	FS81	E-5	IC1	E-4	*Q325	H-3		
FS3	A-1	FS82	E-5	IC2	E-2	Q326	H-2		
FS4	A-2	FS83	F-1	IC3	D-5	Q327	H-3		
FS5	A-2	FS84	F-1	IC5	B-5	*Q328	J-2		
FS6	A-5	FS85	F-1	IC6	B-5	Q329	G-2		
FS7	A-2	FS86	F-1	IC7	C-5	*Q331	F-5		
FS8	A-2	FS87	F-1	IC101	J-2	Q332	G-5		
FS9	A-2	FS88	F-2	IC102	J-2	*Q333	F-3		
FS10	A-5	FS89	F-2	IC103	H-2	*Q334	H-4		
FS11	A-5	FS90	F-2	IC104	G-2	*Q335	H-5		
FS12	A-5	FS91	F-3	IC105	F-2	Q336	H-4		
FS13	B-1	FS92	F-3	IC201	A-2	Q337	H-5		
FS14	B-2	FS93	F-3	IC202	B-2	Q339	G-5		
FS15	B-5	FS94	F-4	IC203	C-2				
FS16	B-5	FS95	F-4	IC204	D-2	RV106	J-1		
FS17	A-5	FS96	F-4	IC205	E-2	RV107	H-1		
FS18	A-5	FS97	F-4	IC301	D-3	RV108	H-1		
FS19	A-5	FS98	F-5	IC302	D-4	RV109	G-1		
FS20	B-1	FS99	F-5	IC303	C-4	RV110	F-1		
FS21	B-2	FS100	F-5	IC304	C-3	RV111	C-1		
FS22	B-2	FS101	F-5	IC305	D-3	RV112	C-1		
FS23	B-3	FS102	F-5	IC306	C-3	RV206	A-1		
FS24	B-3	FS103	F-5	IC307	C-5	RV207	B-1		
FS25	B-4	FS104	F-5	IC308	C-4	RV208	B-1		
FS26	B-5	FS105	F-5	IC309	B-5	RV209	B-1		
FS27	B-1	FS106	F-5	IC310	G-3	RV210	D-1		
FS28	B-2	FS107	G-1	IC311	E-3	RV211	G-1		
FS29	C-2	FS108	G-1	IC312	E-4	RV212	F-1		
FS30	B-5	FS109	G-2	IC313	G-5	RV301	B-4		
FS31	B-5	FS110	G-2	IC314	E-3	RV302	B-4		
FS32	B-5	FS111	G-2	IC315	J-3				
FS33	B-5	FS112	G-2	IC316	J-5	RY301	J-3		
FS34	C-1	FS113	G-3			RY311	J-2		
FS35	C-2	FS114	G-3	LV101	C-2				
FS36	C-2	FS115	G-3	LV201	A-2	S103	J-1		
FS37	C-5	FS116	G-4	LV301	J-4	S203	A-1		
FS38	C-5	FS117	G-4	LV311	J-3				
FS39	C-5	FS118	G-4	LV321	J-5	*TH1	G-2		
FS40	C-1	FS119	G-5			*TH2	C-2		
FS41	C-1	FS120	G-5	PS1	H-5				
FS42	C-2	FS121	G-5	PS2	H-5	TP106	H-1		
FS43	C-2	FS122	H-1			TP206	A-1		

*: B SIDE

AR-14(3/4);CH-2 REC/BIAS DRIVE,CH-2 CANCEL CROSSTALK SIG.

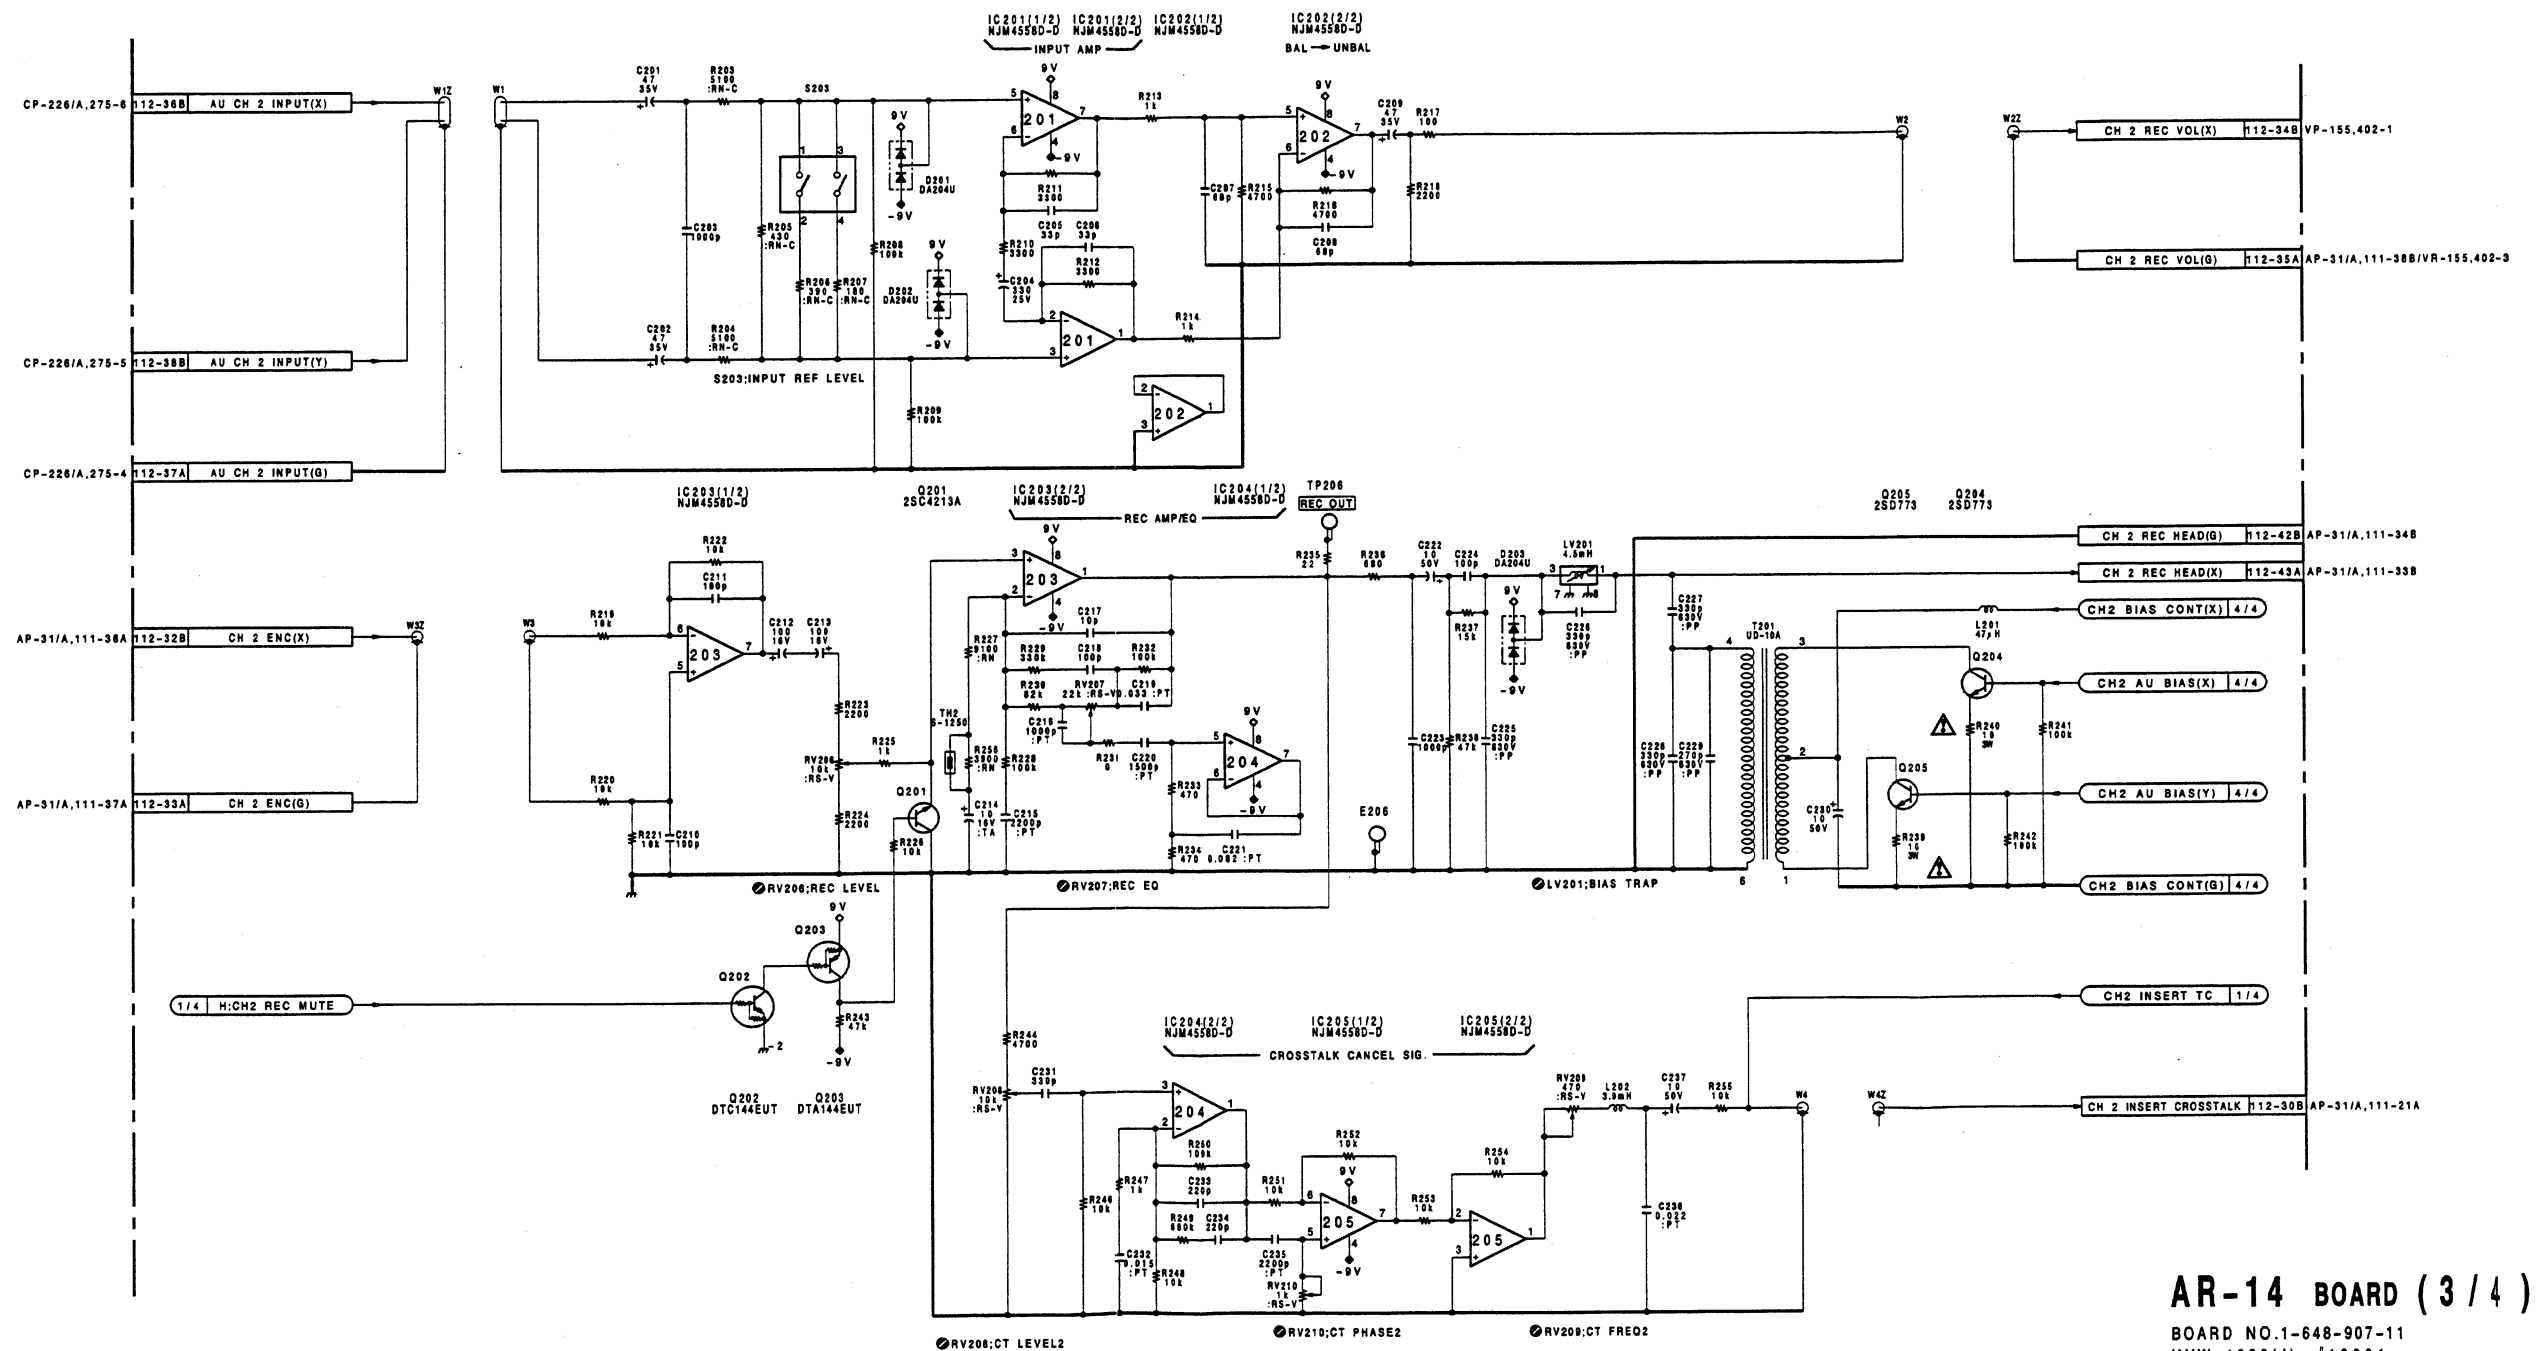





AR-14(1-648-907-11)

CN1	J-5	FS44	C-3	FS123	H-1	*Q1	E-5	TP301	J-1
CN112	E-5	FS45	C-3	FS124	J-1	*Q2	E-5	TP311	J-1
		FS46	C-3	FS125	H-2	*Q3	E-5	TP321	J-1
*D1	D-5	FS47	C-3	FS126	H-2	*Q4	E-5		
*D101	J-2	FS48	C-3	FS127	H-2	*Q5	F-5	X301	D-3
*D102	J-1	FS49	C-4	FS128	H-4	*Q101	G-1		
*D103	C-3	FS50	C-4	FS129	J-1	*Q102	E-4		
*D201	A-2	FS51	C-5	FS130	J-1	*Q103	G-2		
*D202	A-1	FS52	D-1	FS131	J-1	Q104	C-4		
*D203	A-3	FS54	D-3	FS132	J-2	Q105	B-4		
*D301	C-5	FS55	D-3	FS133	J-2	*Q201	C-1		
*D302	D-4	FS56	D-3	FS134	J-2	*Q202	E-4		
*D303	B-3	FS57	D-4	FS135	H-2	*Q203	C-1		
*D304	B-5	FS58	D-4	FS136	J-2	Q204	A-4		
*D305	B-3	FS59	D-4	FS137	J-2	Q205	A-4		
*D306	A-5	FS60	D-5	FS138	J-3	*Q301	B-3		
*D311	G-4	FS61	D-1	FS139	J-3	Q302	C-5		
*D312	G-4	FS62	E-1	FS140	J-5	*Q303	B-3		
*D313	J-3	FS63	D-3	FS141	J-5	Q304	A-5		
*D314	F-3	FS64	E-3	FS142	J-1	Q305	C-5		
*D321	G-3	FS65	E-3	FS143	J-1	Q306	A-5		
*D322	G-3	FS66	D-4	FS144	J-1	*Q311	F-3		
*D323	J-2	FS68	E-4	FS145	J-2	Q312	G-4		
*D324	E-4	FS69	D-4	FS146	J-2	*Q313	F-2		
*D331	G-5	FS70	D-4	FS147	J-2	*Q314	H-4		
*D332	G-5	FS72	E-1	FS148	J-3	*Q315	H-4		
*D334	E-4	FS73	E-2	FS149	J-3	Q316	H-3		
		FS74	E-3	FS150	J-4	Q317	H-4		
E106	H-1	FS75	F-3	FS152	H-2	*Q318	J-3		
E206	A-1	FS76	E-3	FS153	E-1	Q319	G-4		
E301	J-1	FS77	F-3	FS154	F-1	*Q321	G-3		
E311	J-1	FS78	E-4	FS155	J-5	Q322	G-2		
		FS79	E-4	FS156	J-4	*Q323	E-3		
		FS80	F-4			*Q324	H-2		
FS1	A-1	FS81	E-5	IC1	E-4	*Q325	H-3		
FS2	A-1	FS82	E-5	IC2	E-2	Q326	H-2		
FS3	A-1	FS83	F-1	IC3	D-5	Q327	H-3		
FS4	A-2	FS84	F-1	IC5	B-5	*Q328	J-2		
FS5	A-2	FS85	F-1	IC6	B-5	Q329	G-2		
FS6	A-5	FS86	F-1	IC7	C-5	*Q331	F-5		
FS7	A-2	FS87	F-1	IC101	J-2	Q332	G-5		
FS8	A-2	FS88	F-2	IC102	J-2	*Q333	F-3		
FS9	A-2	FS89	F-2	IC103	H-2	*Q334	H-4		
FS10	A-5	FS90	F-2	IC104	G-2	*Q335	H-5		
FS11	A-5	FS91	F-3	IC105	F-2	Q336	H-4		
FS12	A-5	FS92	F-3	IC201	A-2	Q337	H-5		
FS13	B-1	FS93	F-3	IC202	B-2	Q339	G-5		
FS14	B-2	FS94	F-4	IC203	C-2				
FS15	B-5	FS95	F-4	IC204	D-2	RV106	J-1		
FS16	B-5	FS96	F-4	IC205	E-2	RV107	H-1		
FS17	A-5	FS97	F-4	IC301	D-3	RV108	H-1		
FS18	A-5	FS98	F-5	IC302	D-4	RV109	G-1		
FS19	A-5	FS99	F-5	IC303	C-4	RV110	F-1		
FS20	B-1	FS100	F-5	IC304	C-3	RV111	C-1		
FS21	B-2	FS101	F-5	IC305	D-3	RV112	C-1		
FS22	B-2	FS102	F-5	IC306	C-3	RV206	A-1		
FS23	B-3	FS103	F-5	IC307	C-5	RV207	B-1		
FS24	B-3	FS104	F-5	IC308	C-4	RV208	B-1		
FS25	B-4	FS105	F-5	IC309	B-5	RV209	B-1		
FS26	B-5	FS106	F-5	IC310	G-3	RV210	D-1		
FS27	B-1	FS107	G-1	IC311	E-3	RV211	G-1		
FS28	B-2	FS108	G-1	IC312	E-4	RV212	F-1		
FS29	C-2	FS109	G-2	IC313	G-5	RV301	B-4		
FS30	B-5	FS110	G-2	IC314	E-3	RV302	B-4		
FS31	B-5	FS111	G-2	IC315	J-3				
FS32	B-5	FS112	G-2	IC316	J-5	RY301	J-3		
FS33	B-5	FS113	G-3			RY311	J-2		
FS34	C-1	FS114	G-3	LV101	C-2				
FS35	C-2	FS115	G-3	LV201	A-2	S103	J-1		
FS36	C-2	FS116	G-4	LV301	J-4	S203	A-1		
FS37	C-5	FS117	G-4	LV311	J-3				
FS38	C-5	FS118	G-4	LV321	J-5	*TH1	G-2		
FS39	C-5	FS119	G-5			*TH2	C-2		
FS40	C-1	FS120	G-5	PS1	H-5				
FS41	C-1	FS121	G-5	PS2	H-5	TP106	H-1		
FS42	C-2	FS122	H-1			TP206	A-1		
FS43	C-2								


*: B SIDE

AR-14(4/4);BIAS/ERASE OSC,AU/TC ERASE DRIVE

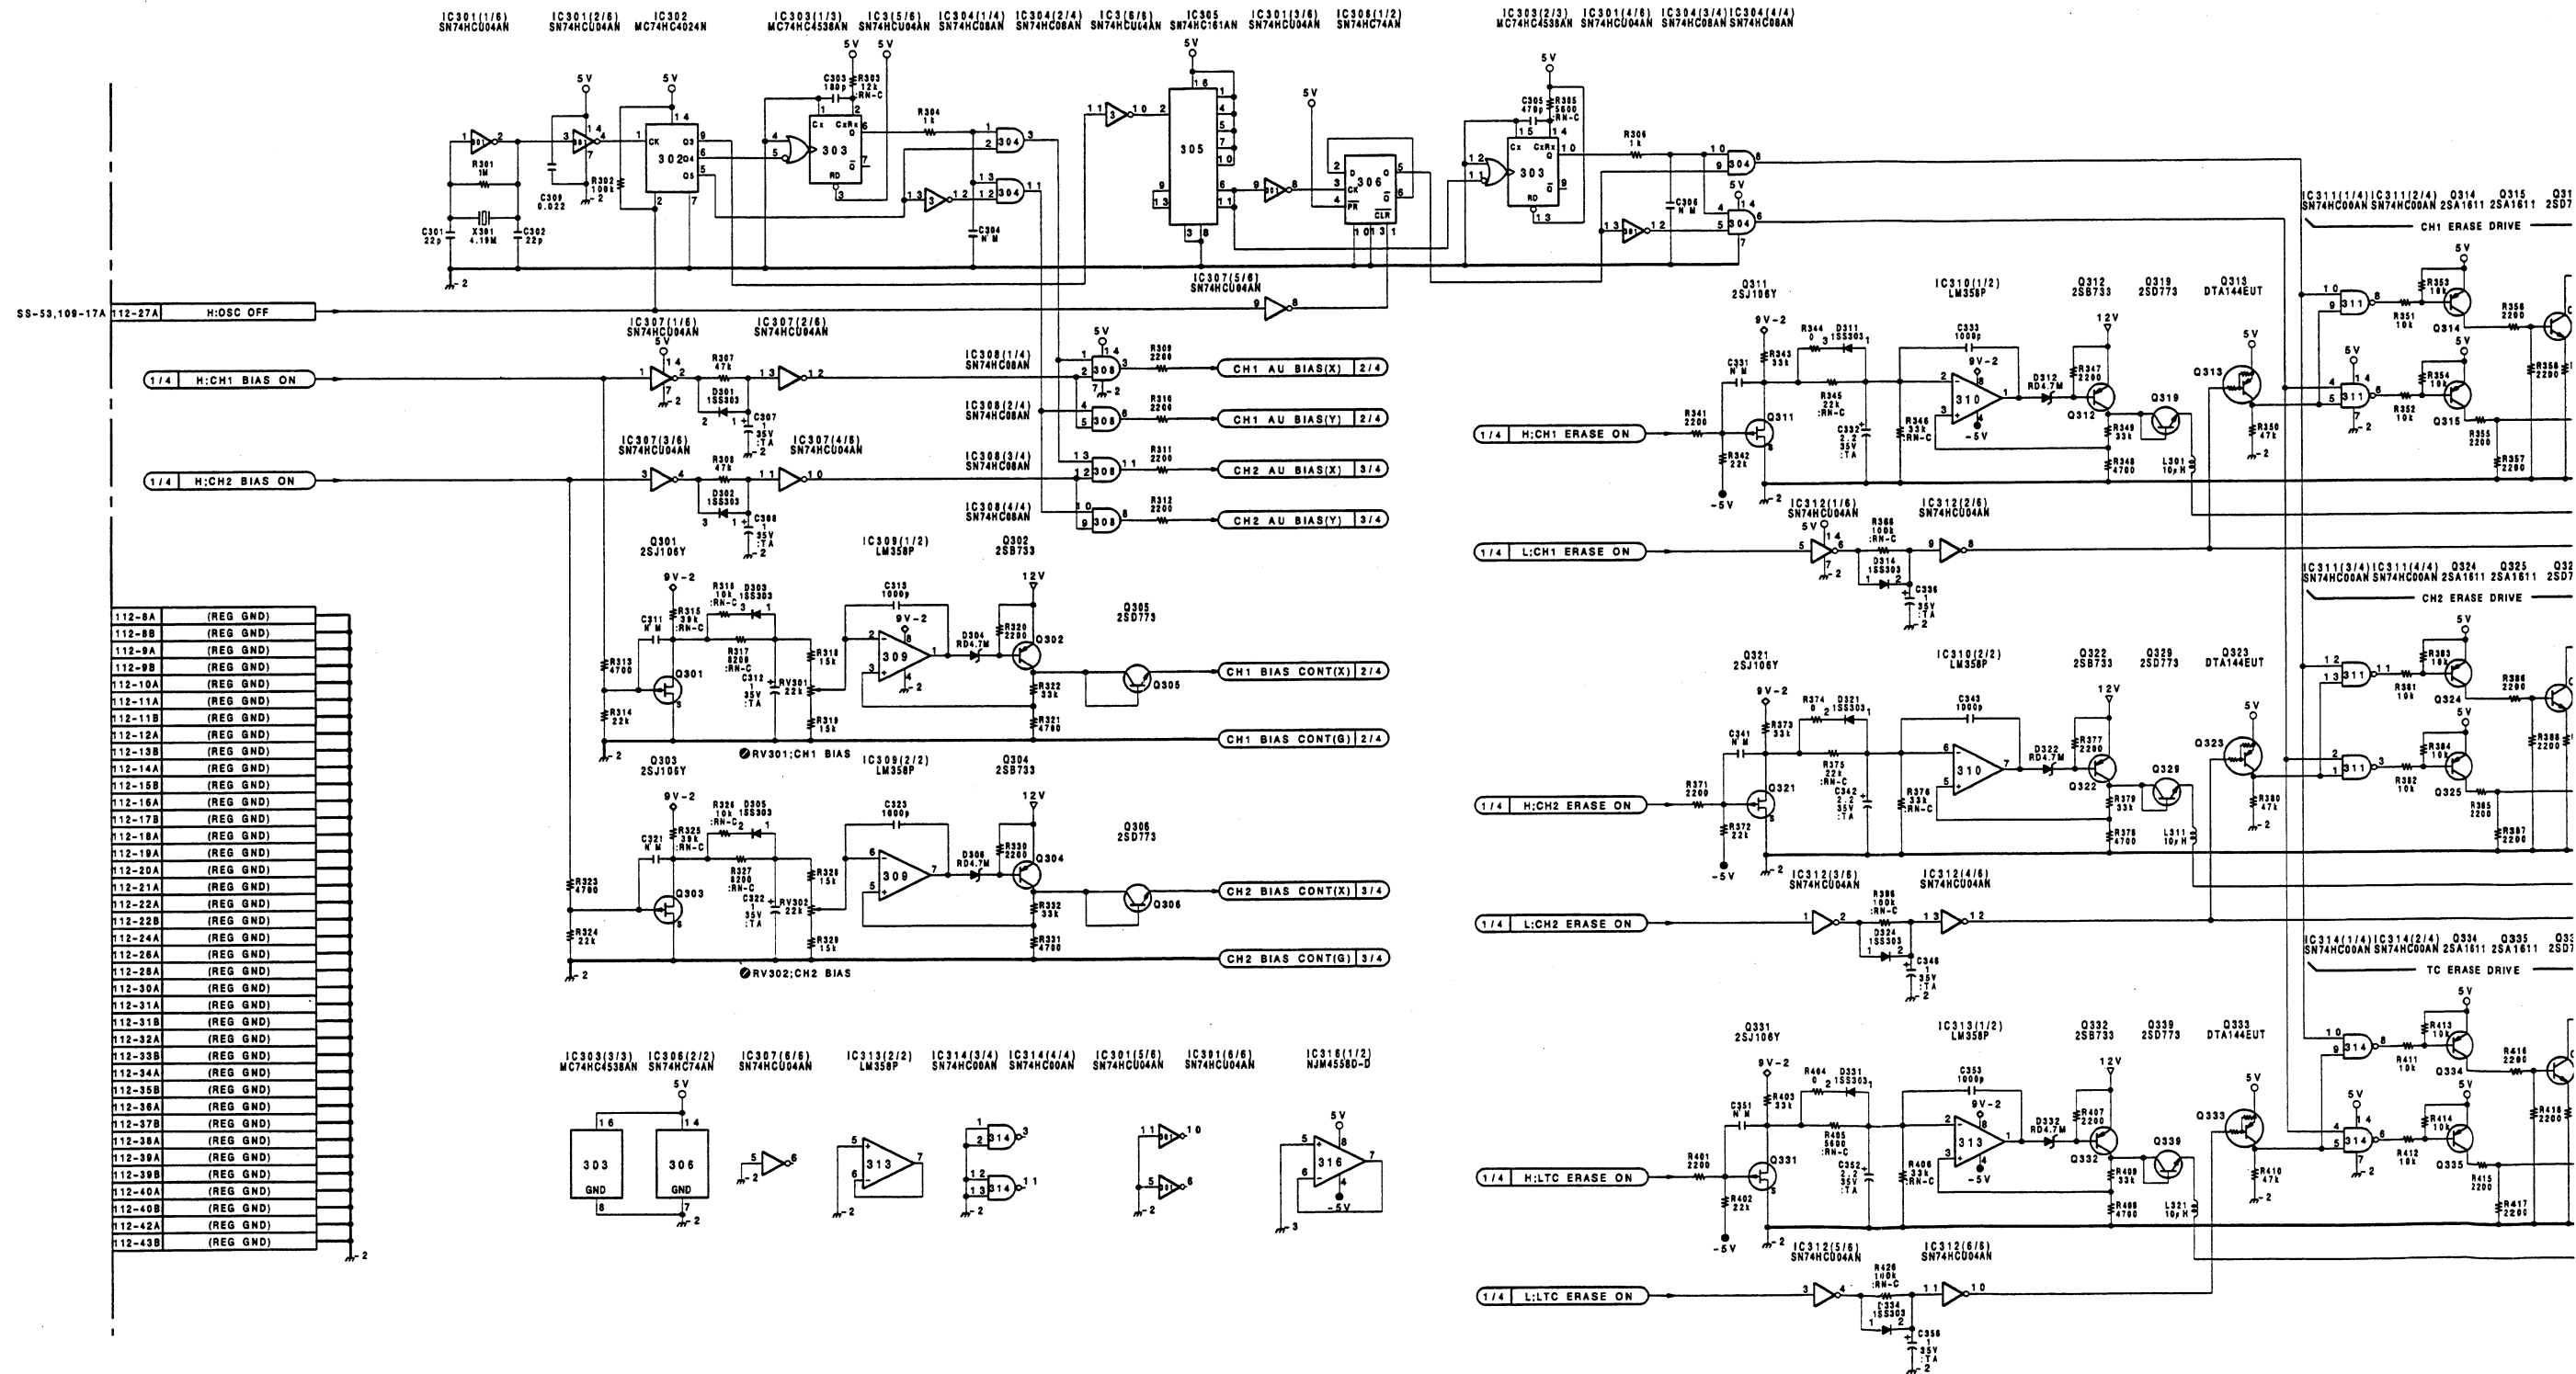

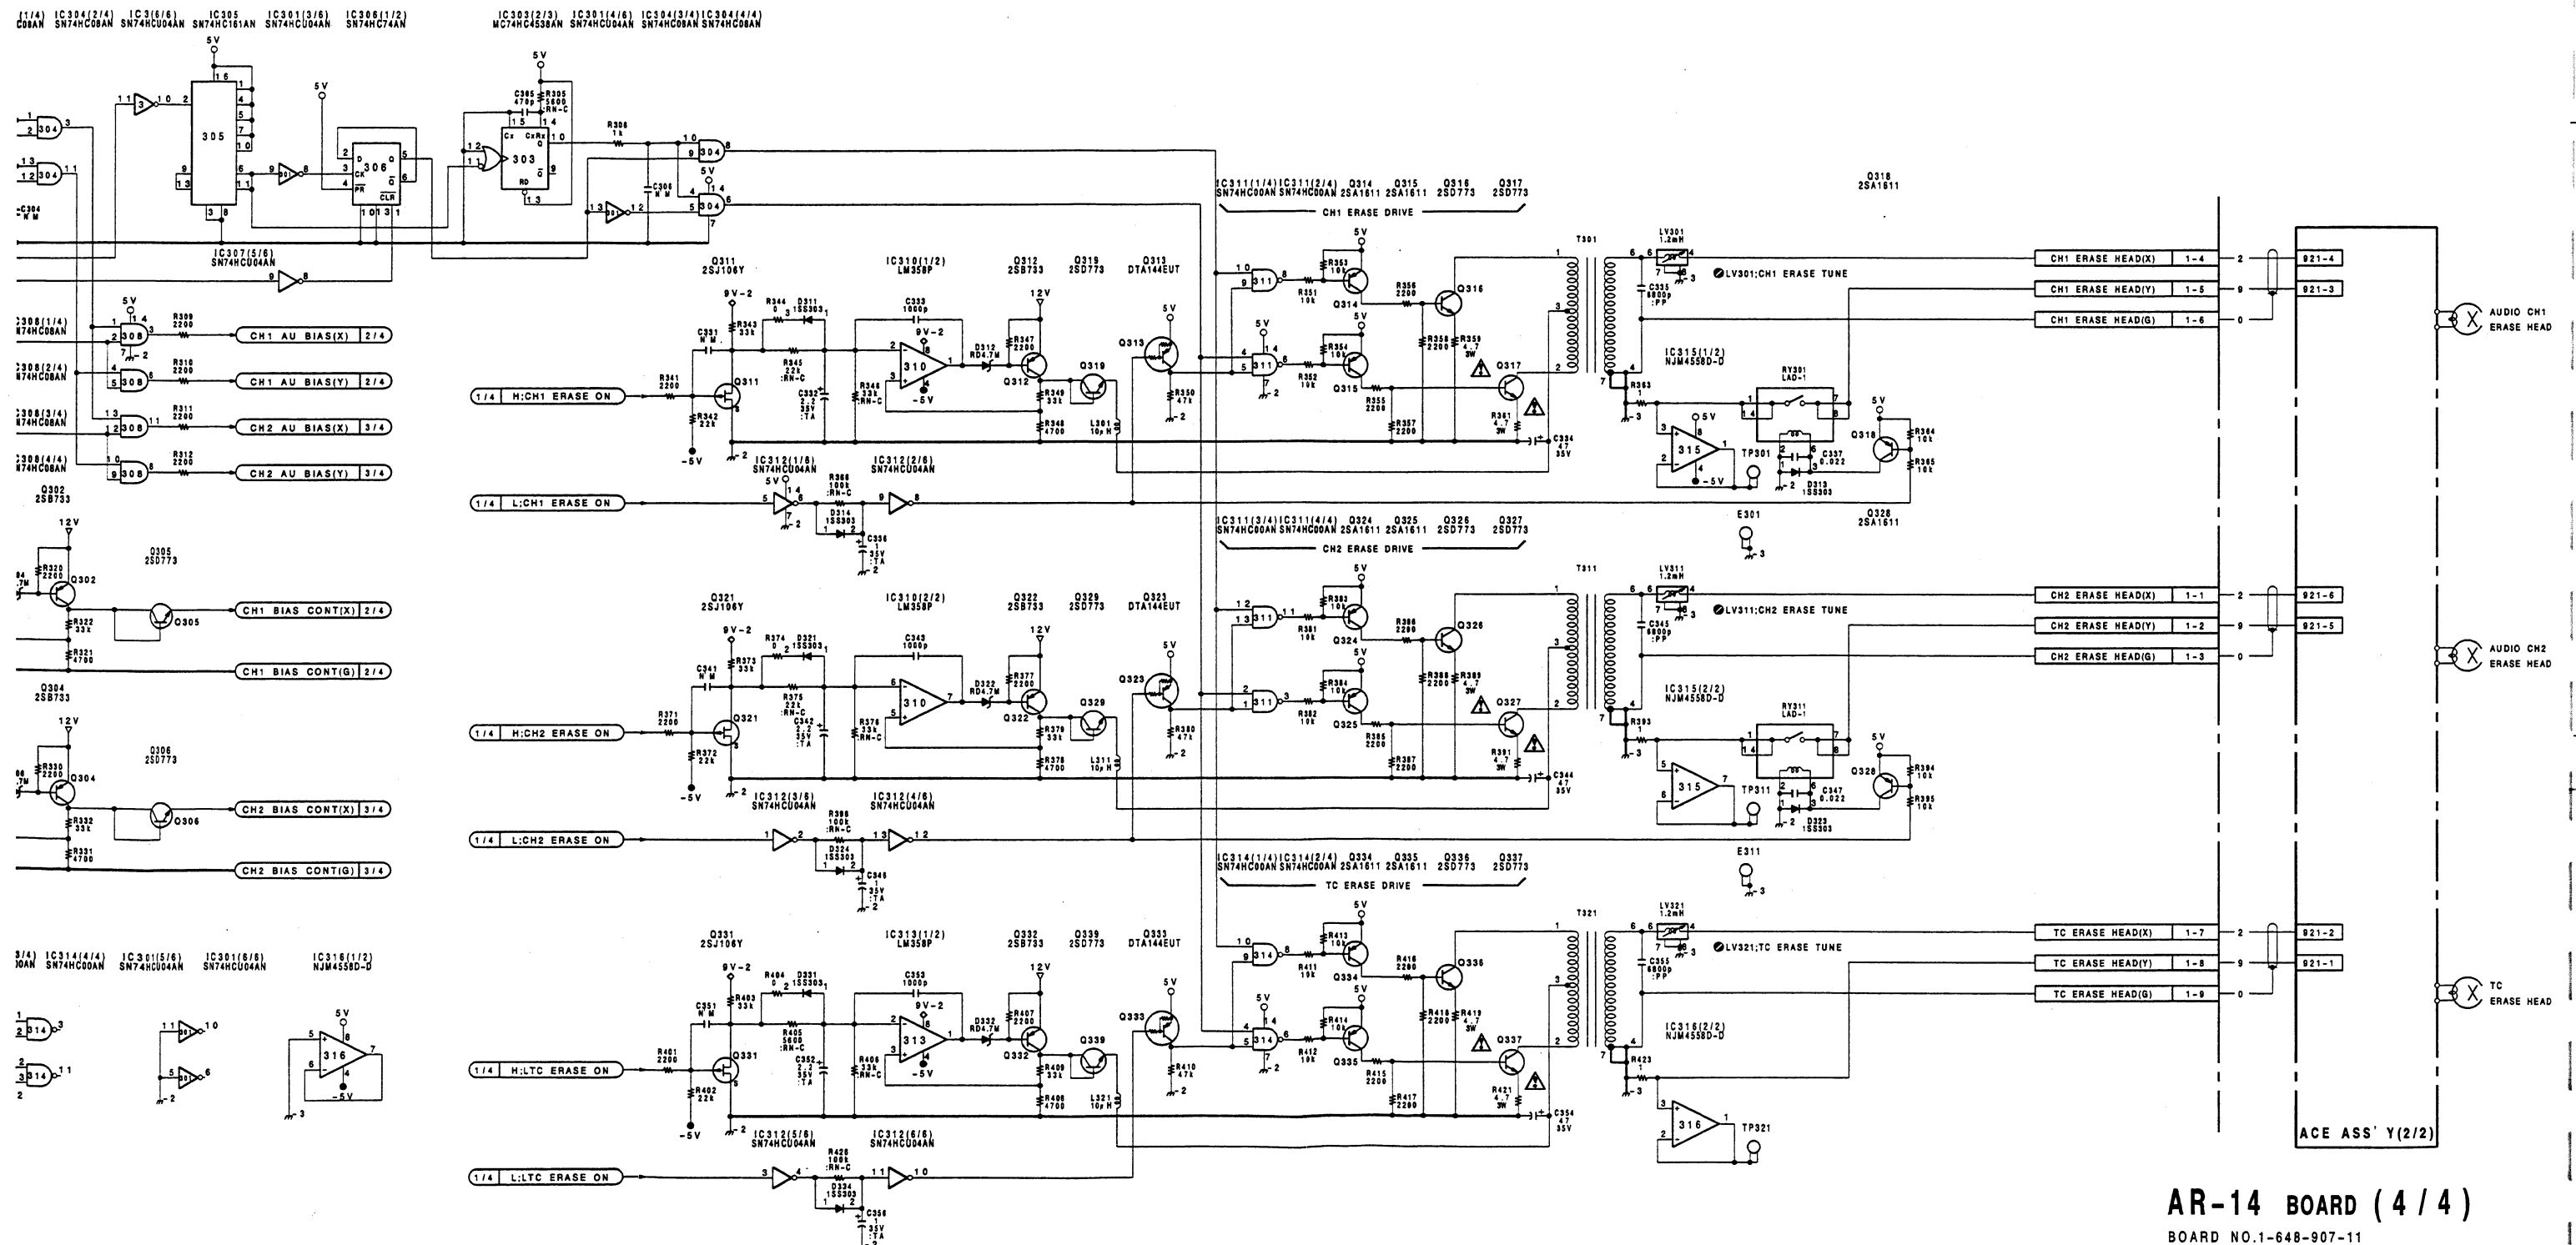



CP-225 ;VIDEO INPUT/OUTPUT CONNECTOR
CP-225A;VIDEO OUTPUT CONNECTOR

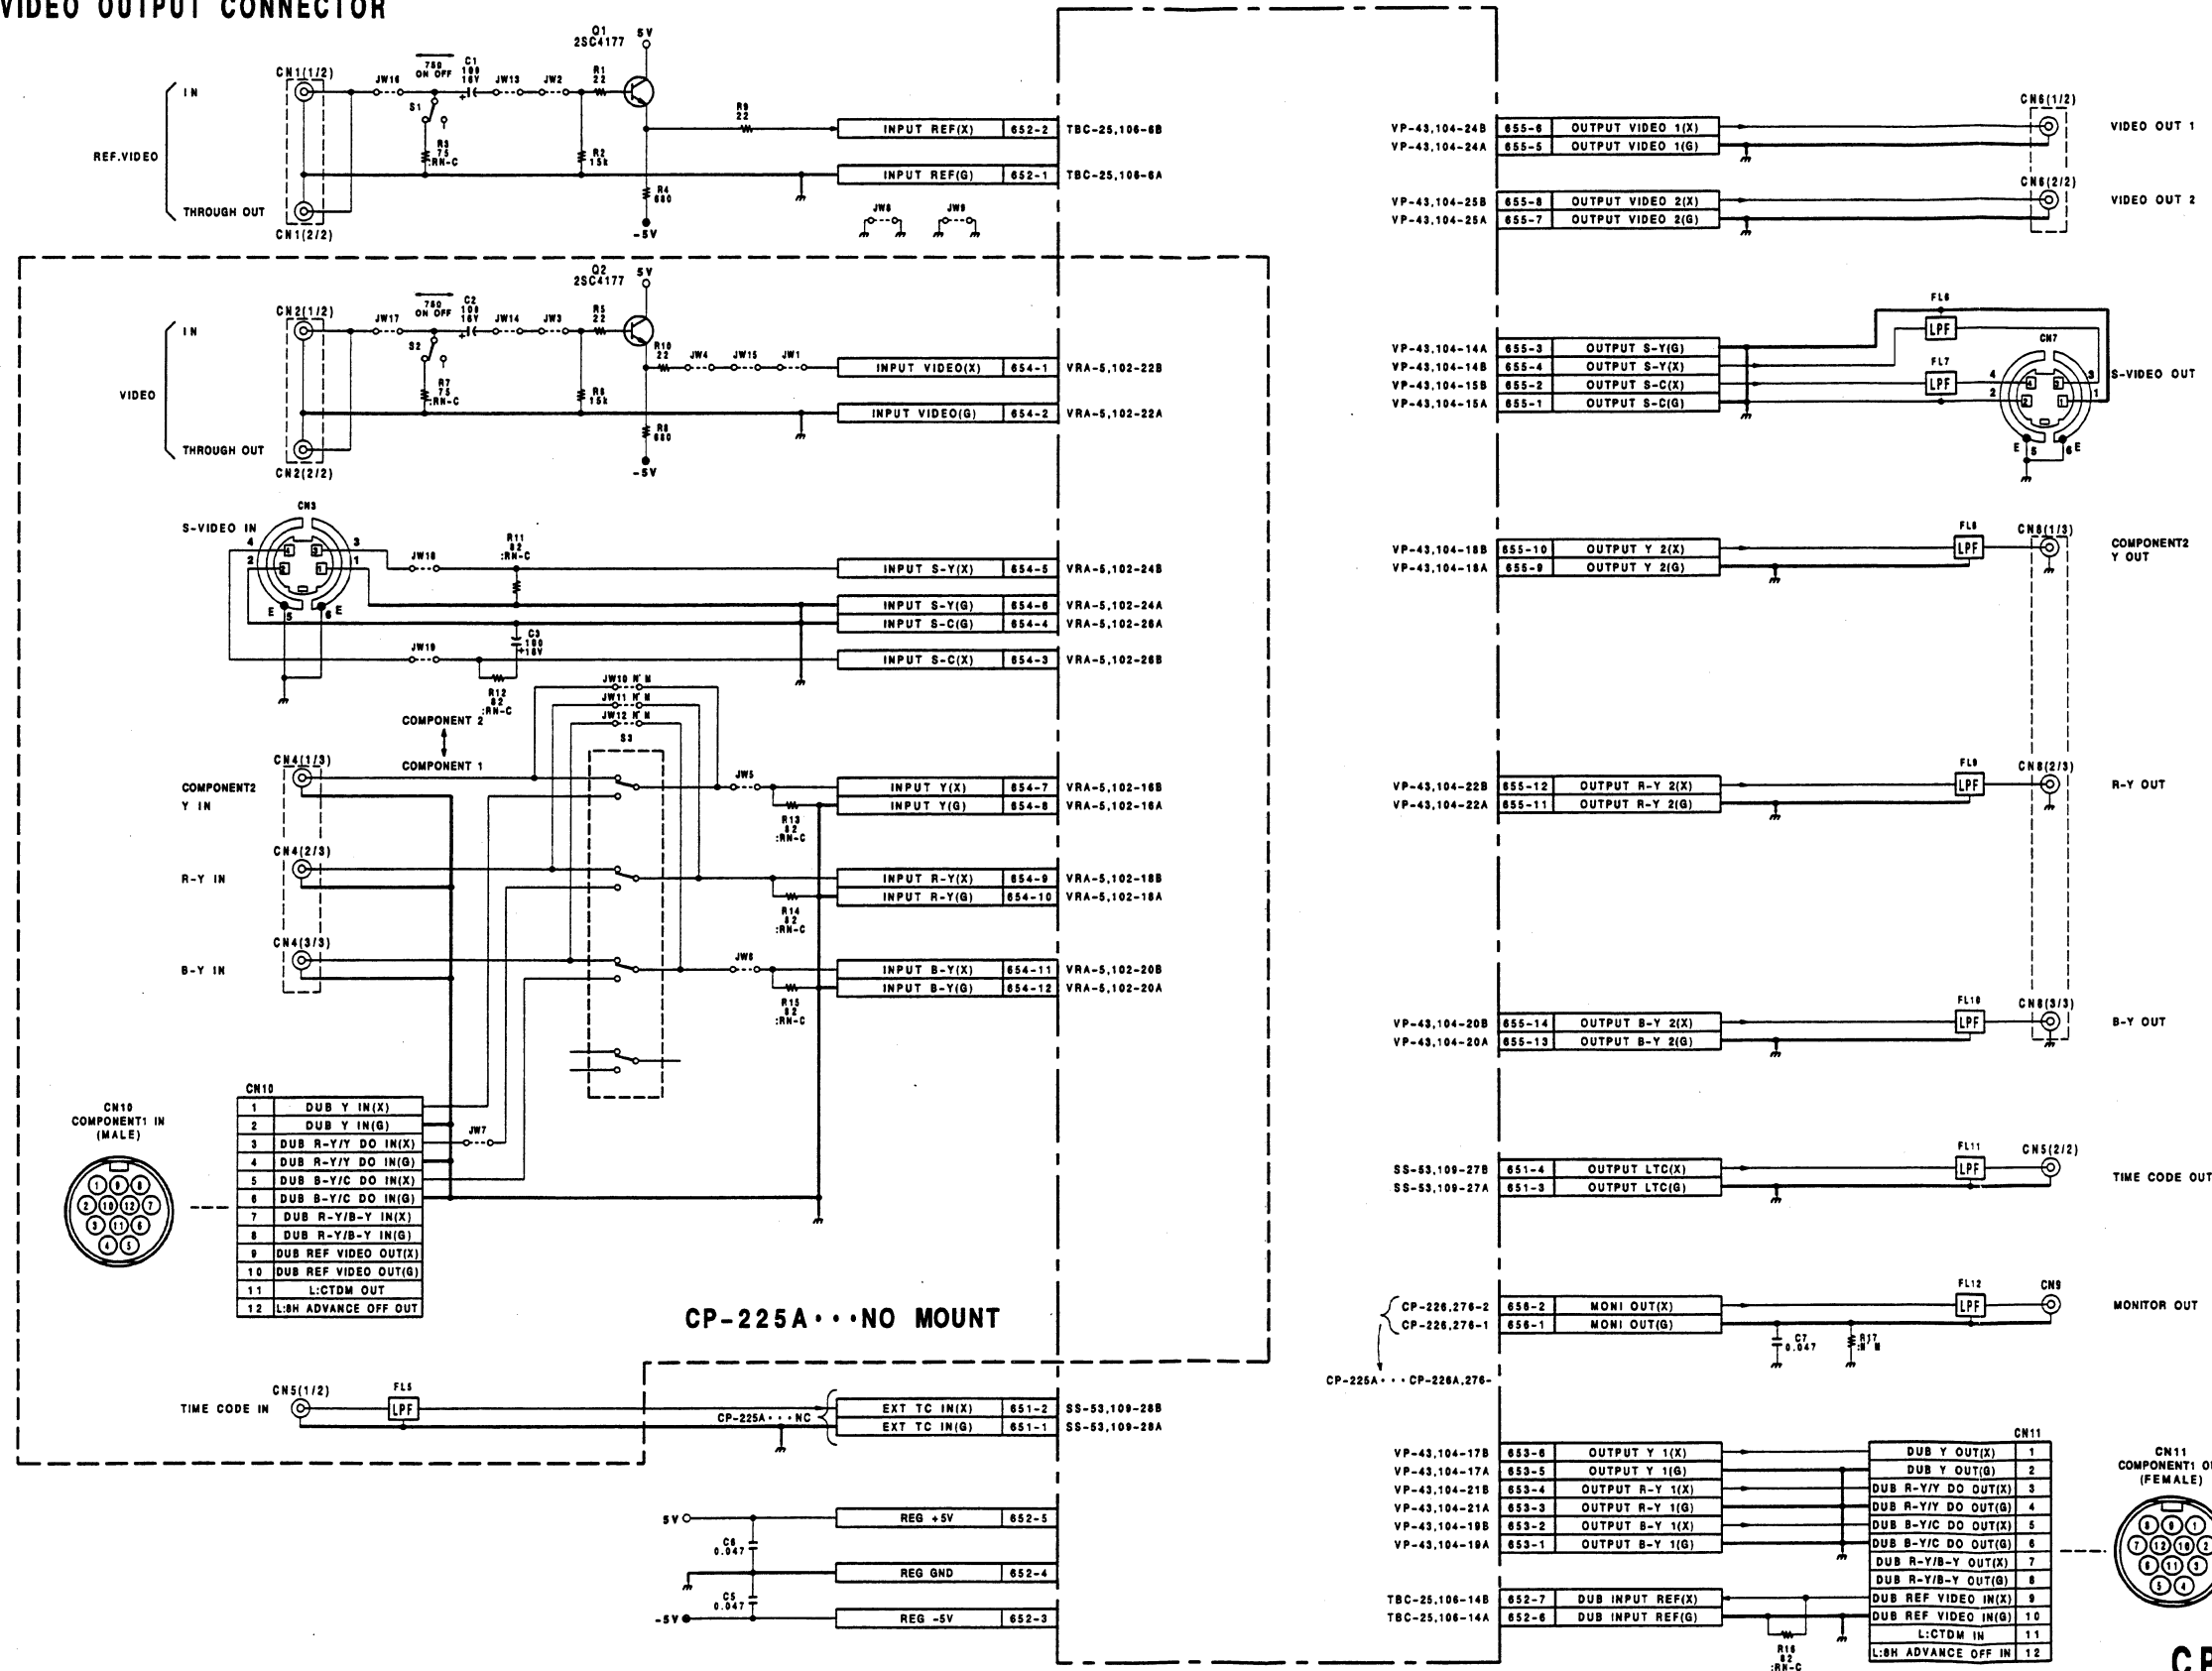

CP-225/225A BOARD

BOARD NO.1-648-910-11,21
UVW-1800/1600(J);#10001-
UVW-1800/1600(UC);#10001-

CP-226 ;AUDIO INPUT/OUTPUT CONNECTOR,OUTPUT TRANSFORMER
CP-226A;AUDIO OUTPUT CONNECTOR,OUTPUT TRANSFORMER

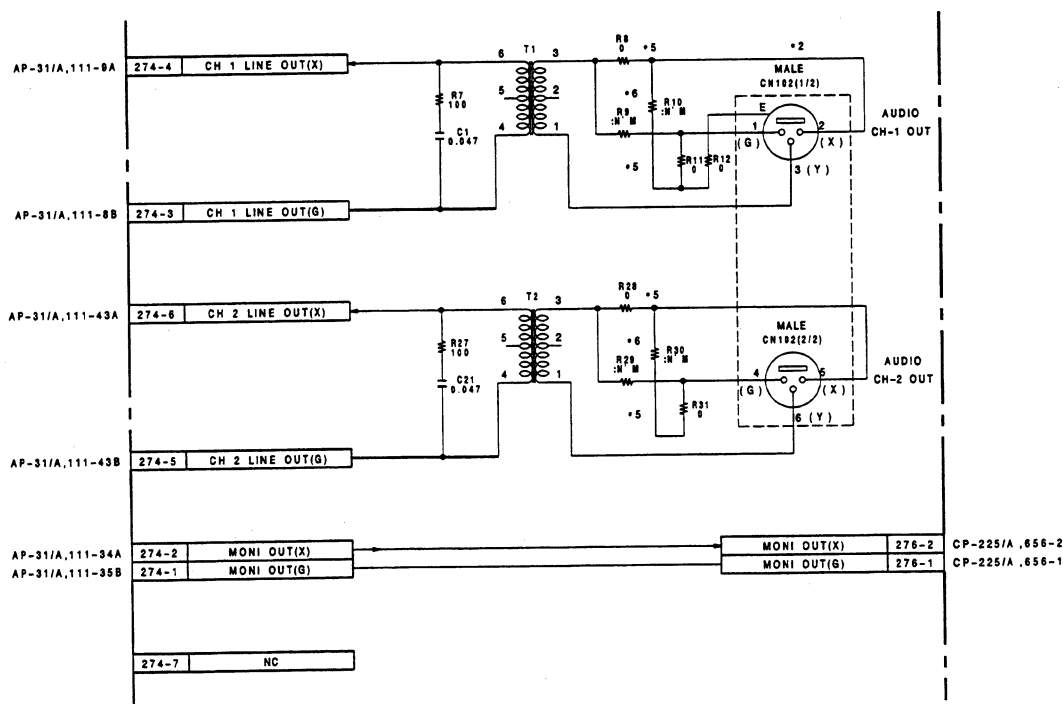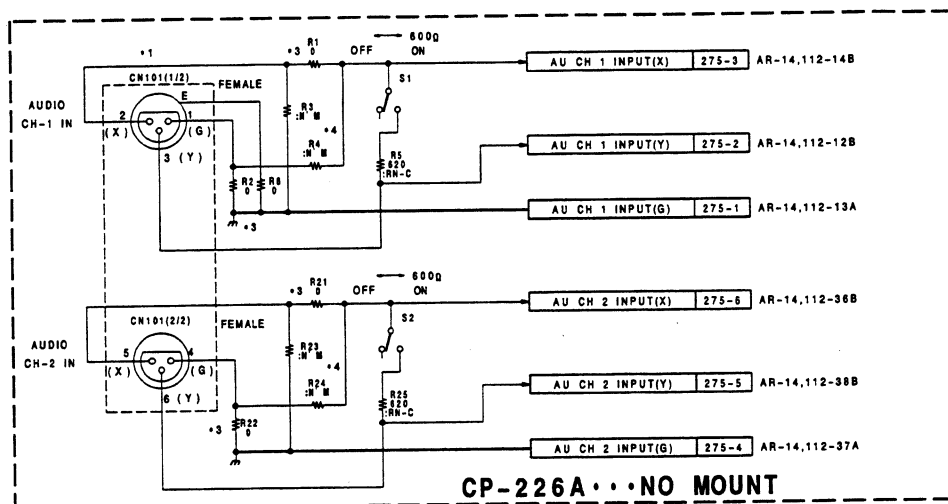

CP-226


REF.No	UC	J
*1 CN101	FEMALE	MALE
*2 CN102	MALE	FEMALE
*3 R1,2,21,22	0	:N' M
*4 R3,4,23,24	:N' M	0
*5 R8,11,28,31	0	:N' M
*6 R9,10,29,30	:N' M	0


CP-226A

REF.No	UC	J
*2 CN102	MALE	FEMALE
*5 R8,11,28,31	0	:N' M
*6 R9,10,29,30	:N' M	0

CP-226/226A BOARD

BOARD NO.1-648-911-11,21
 UVW-1800/1600(J) ;#10001-
 UVW-1800/1600(UC);#10001-

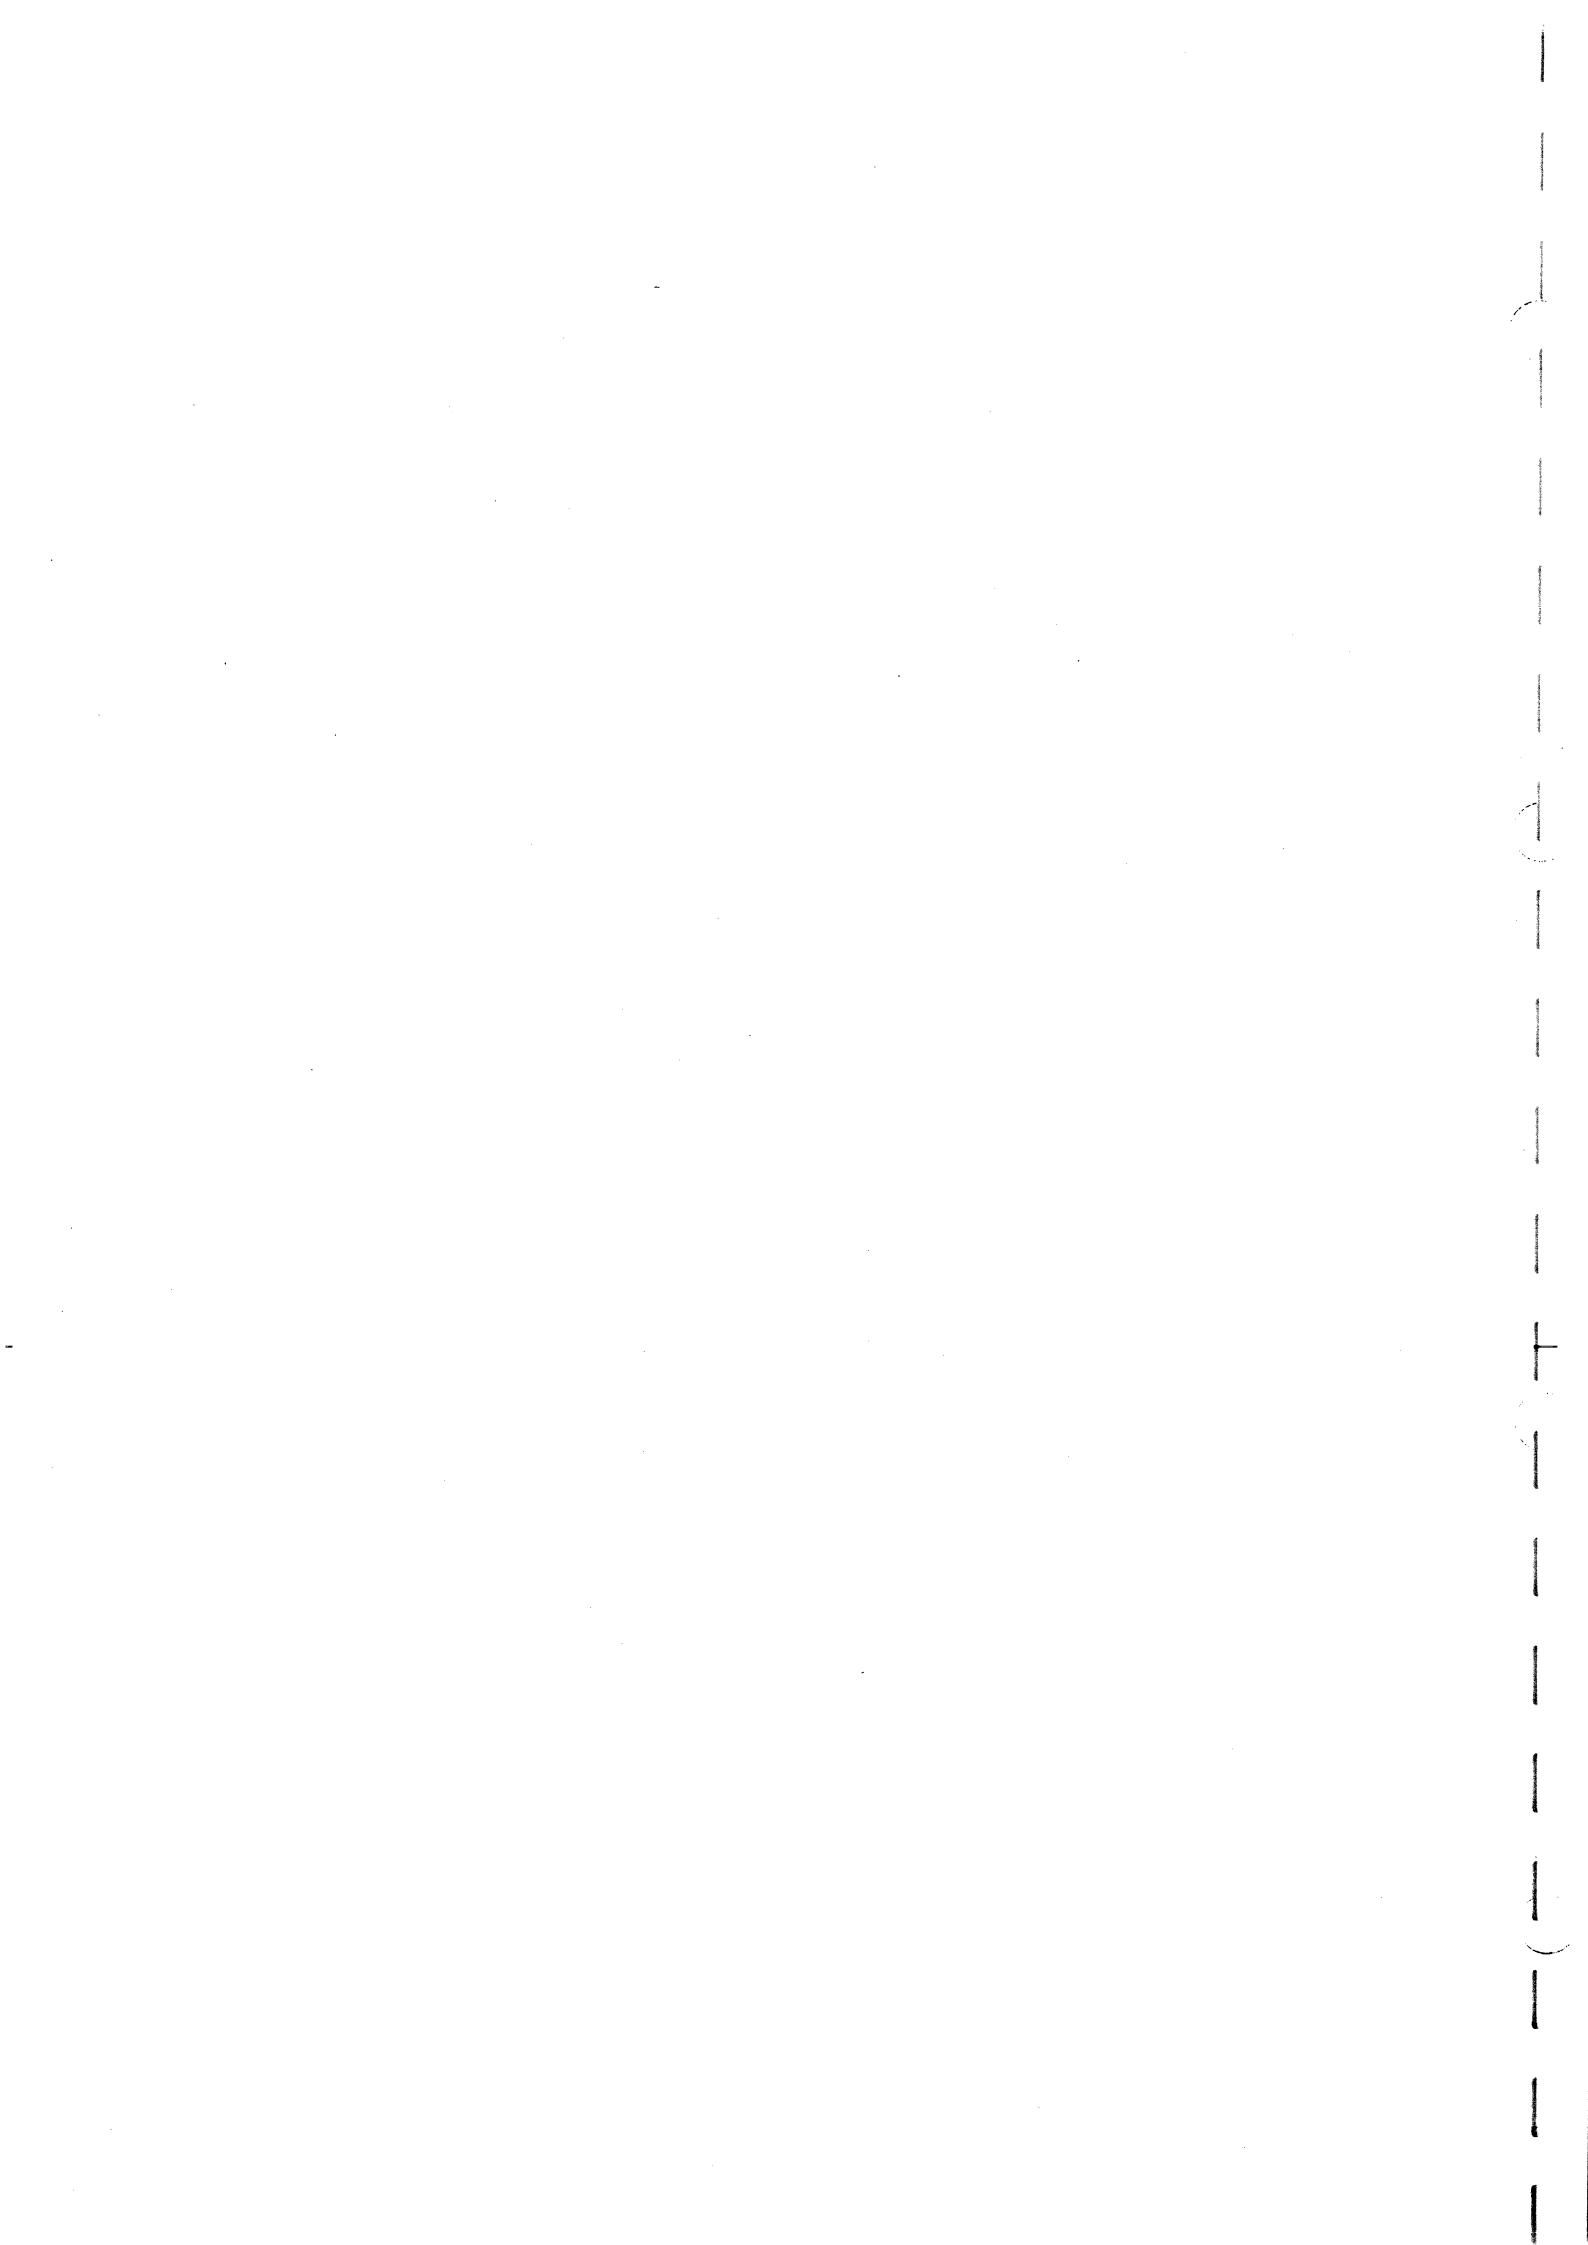

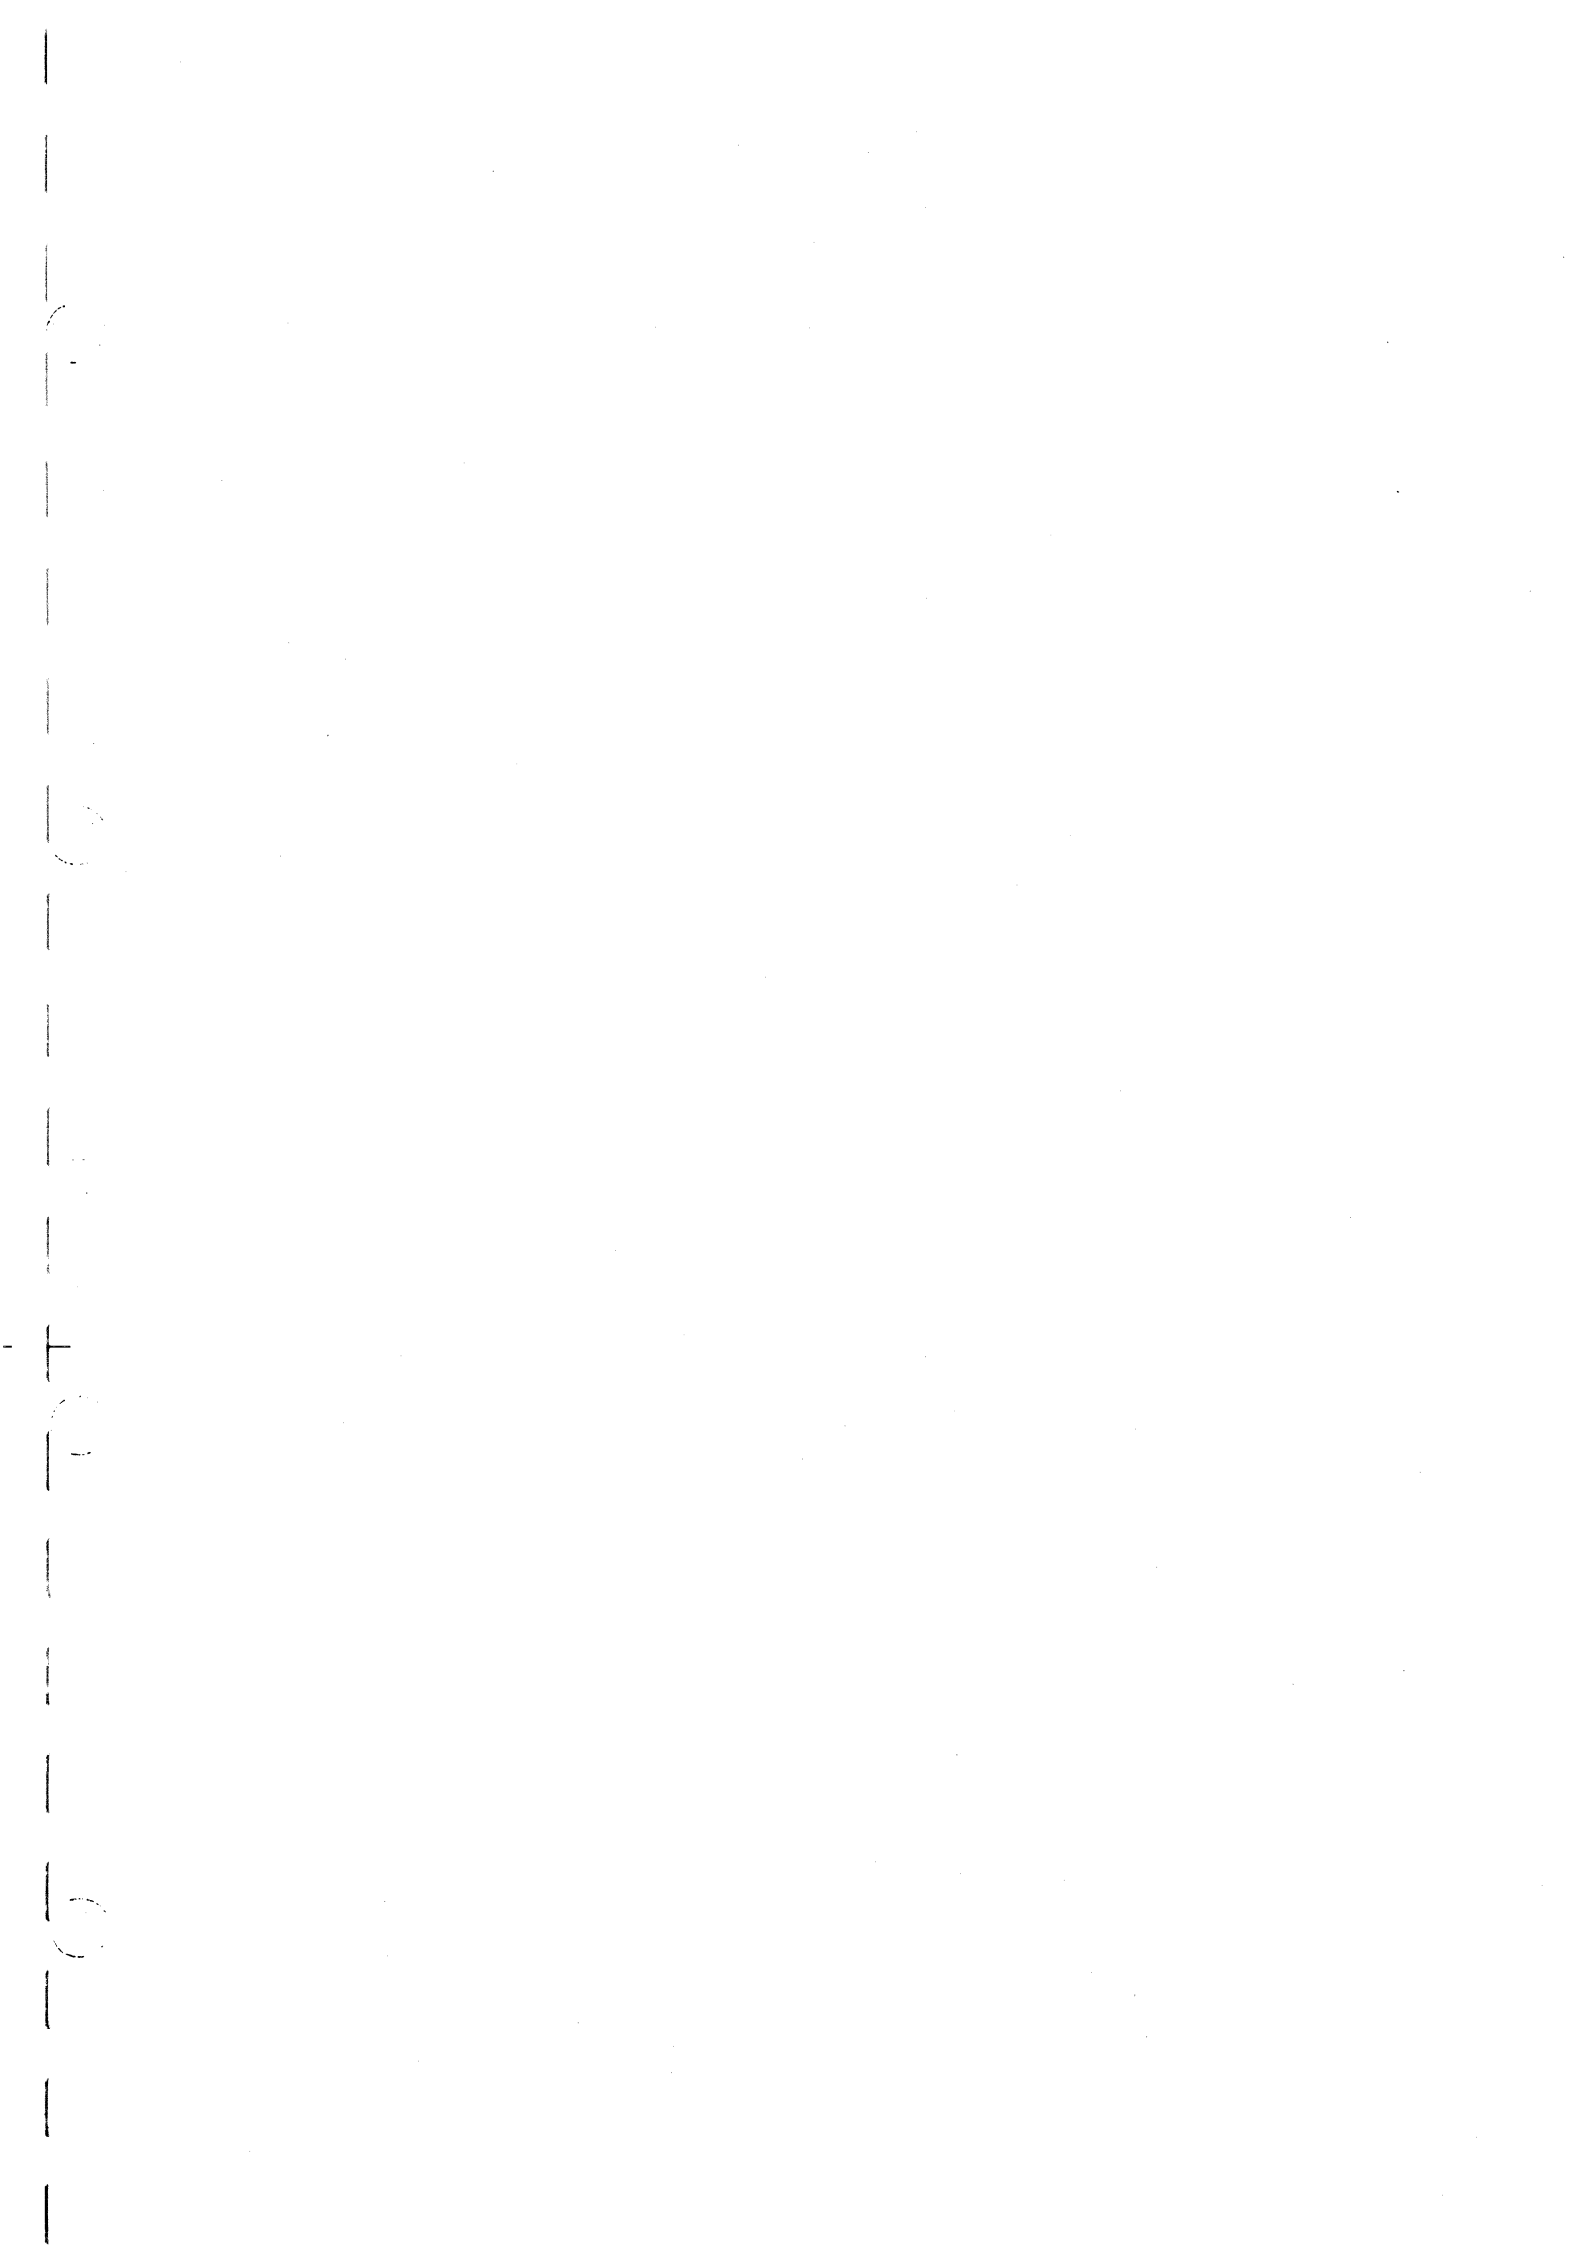

DR-214(1-648-908-11)

CN300 H-1
CN301 C-5
CN302 H-5
CN303 L-5

D1 G-2
D151 L-3
D152 K-3
D153 L-2
D154 M-3
D155 K-3
D156 L-2
D301 G-2
D302 J-4
D303 H-4
D304 H-2
D306 H-3


E1 K-1
E2 K-5


IC1 G-2
IC51 C-2
IC52 D-3
IC151 L-4
IC152 L-4
IC153 L-2
IC201 C-1
IC251 L-1
IC301 F-3
IC302 F-4
IC303 F-2
IC304 G-4
IC305 J-5
IC306 H-4
IC307 J-2
IC308 E-5
IC310 J-3
IC311 J-1
IC313 H-2


Q1 G-3
Q51 B-5
Q52 B-5
Q53 B-5
Q101 B-4
Q102 B-4
Q103 B-4
Q151 M-2
Q152 N-4
Q153 M-3
Q154 N-5
Q155 M-3
Q201 B-1
Q202 B-1
Q203 B-2
Q204 B-2
Q205 B-3
Q206 B-3
Q207 B-3
Q208 B-4
Q251 N-1
Q252 N-1
Q253 N-2
Q254 M-2
Q255 N-3
Q256 N-3
Q257 N-3
Q258 N-4
Q301 H-2
Q302 K-1
Q303 K-2

*: B SIDE

DR-214(1/2);DRUM/CAP/THREAD/REEL POS./CC/REEL MOTOR DRIVE

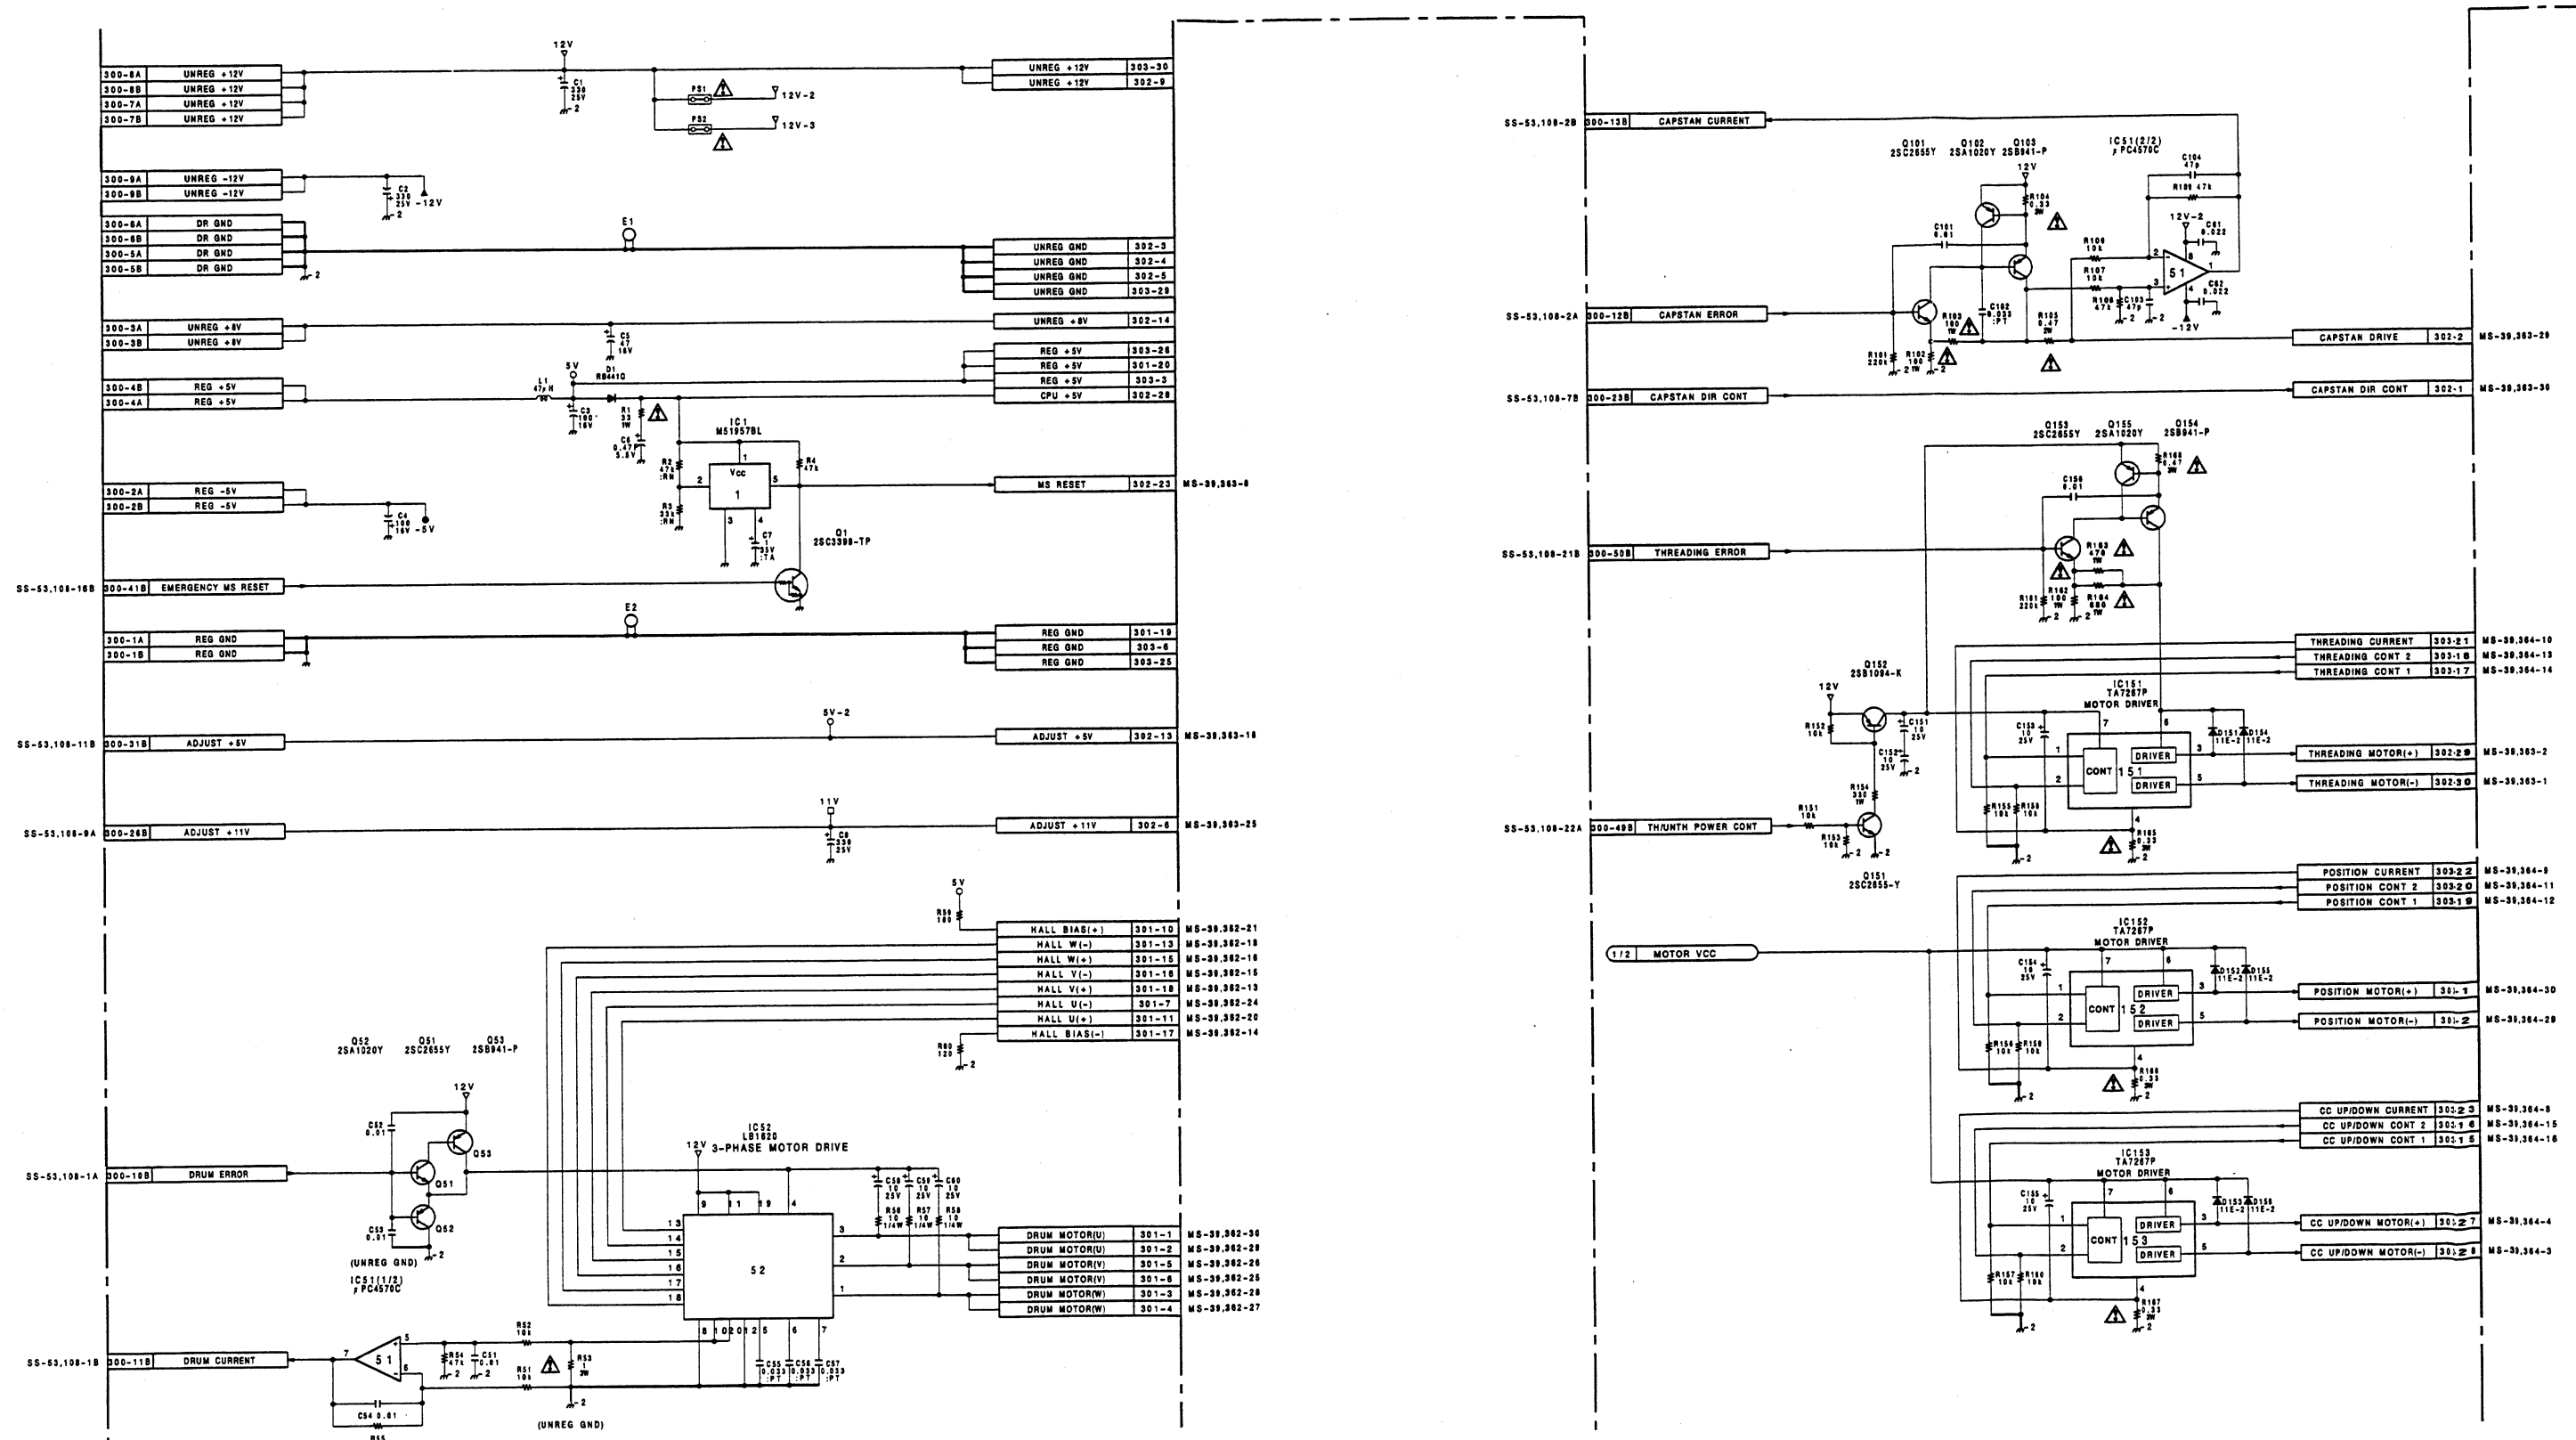

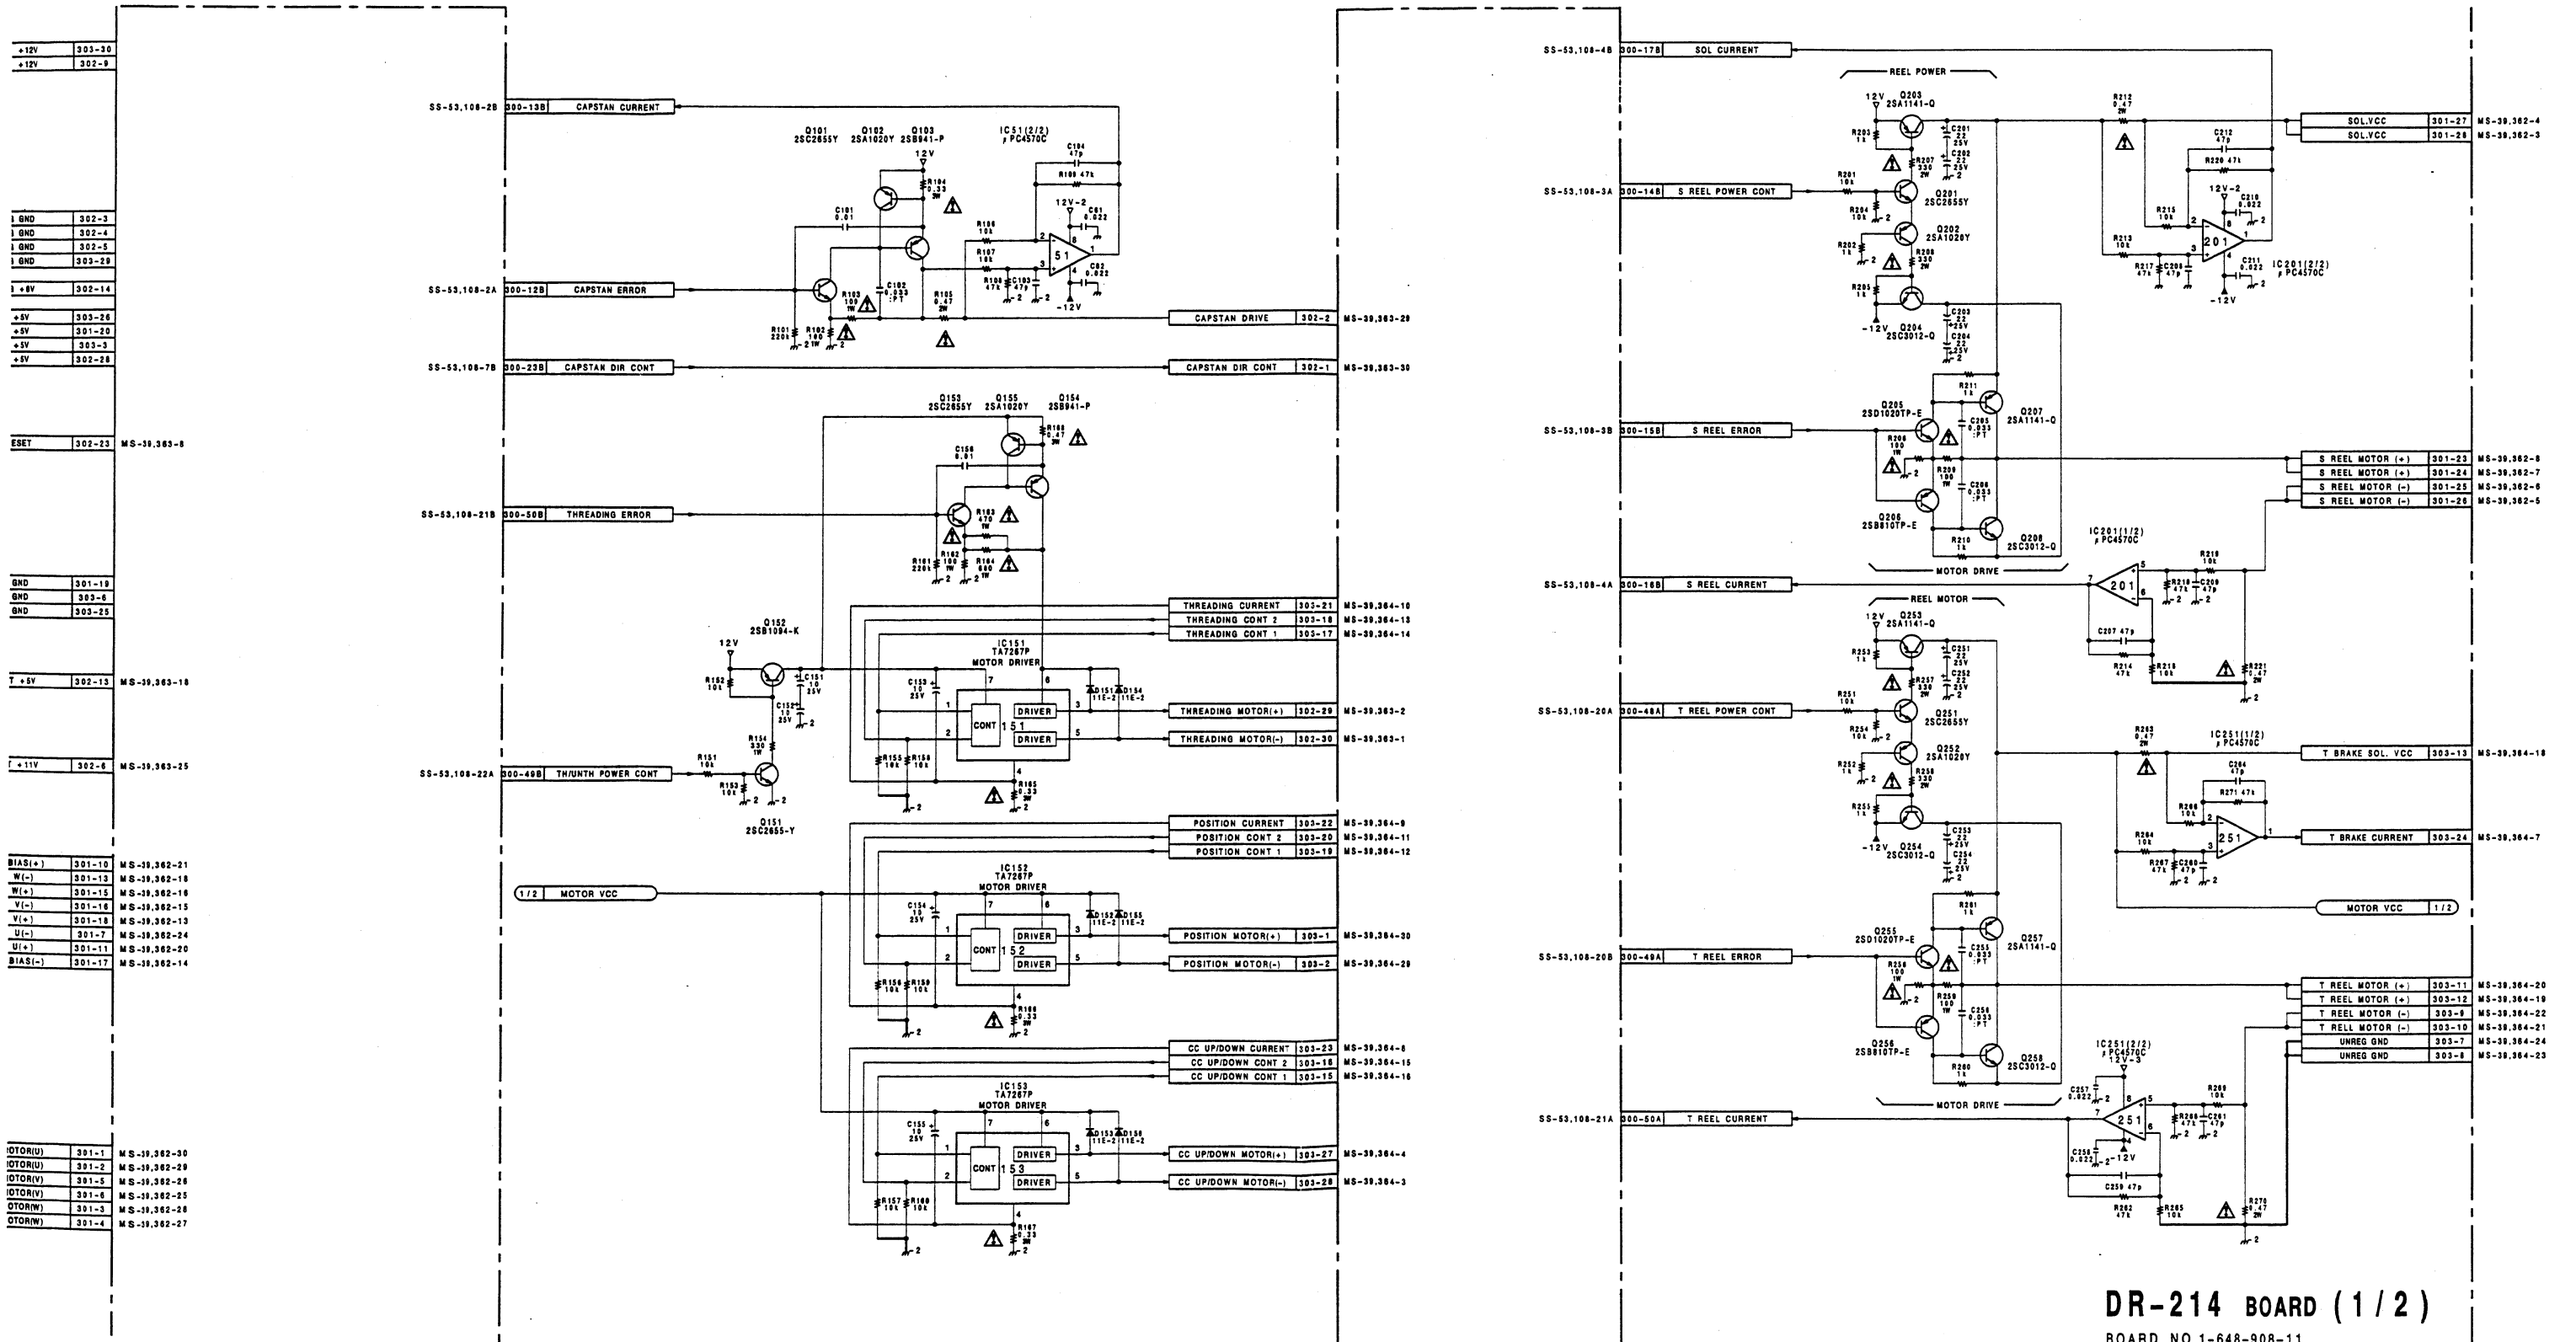



DR-214(1-648-908-11)

CN300 H-1
CN301 C-5
CN302 H-5
CN303 L-5

D1 G-2
D151 L-3
D152 K-3
D153 L-2
D154 M-3
D155 K-3
D156 L-2
D301 G-2
D302 J-4
D303 H-4
D304 H-2
D306 H-3



E1 K-1
E2 K-5

IC1 G-2
IC51 C-2
IC52 D-3
IC151 L-4
IC152 L-4
IC153 L-2
IC201 C-1
IC251 L-1
IC301 F-3
IC302 F-4
IC303 F-2
IC304 G-4
IC305 J-5
IC306 H-4
IC307 J-2
IC308 E-5
IC310 J-3
IC311 J-1
IC313 H-2

Q1 G-3
Q51 B-5
Q52 B-5
Q53 B-5
Q101 B-4
Q102 B-4
Q103 B-4
Q151 M-2
Q152 N-4
Q153 M-3
Q154 N-5
Q155 M-3
Q201 B-1
Q202 B-1
Q203 B-2
Q204 B-2
Q205 B-3
Q206 B-3
Q207 B-3
Q208 B-4
Q251 N-1
Q252 N-1
Q253 N-2
Q254 M-2
Q255 N-3
Q256 N-3
Q257 N-3
Q258 N-4
Q301 H-2
Q302 K-1
Q303 K-2

*: B SIDE

DR-214(2/2);CTL REC/PB,DRUM PG/FG AMP.,CAPSTAN FG AMP.,TENSION AMP.,TAPE TOP/END DETECT

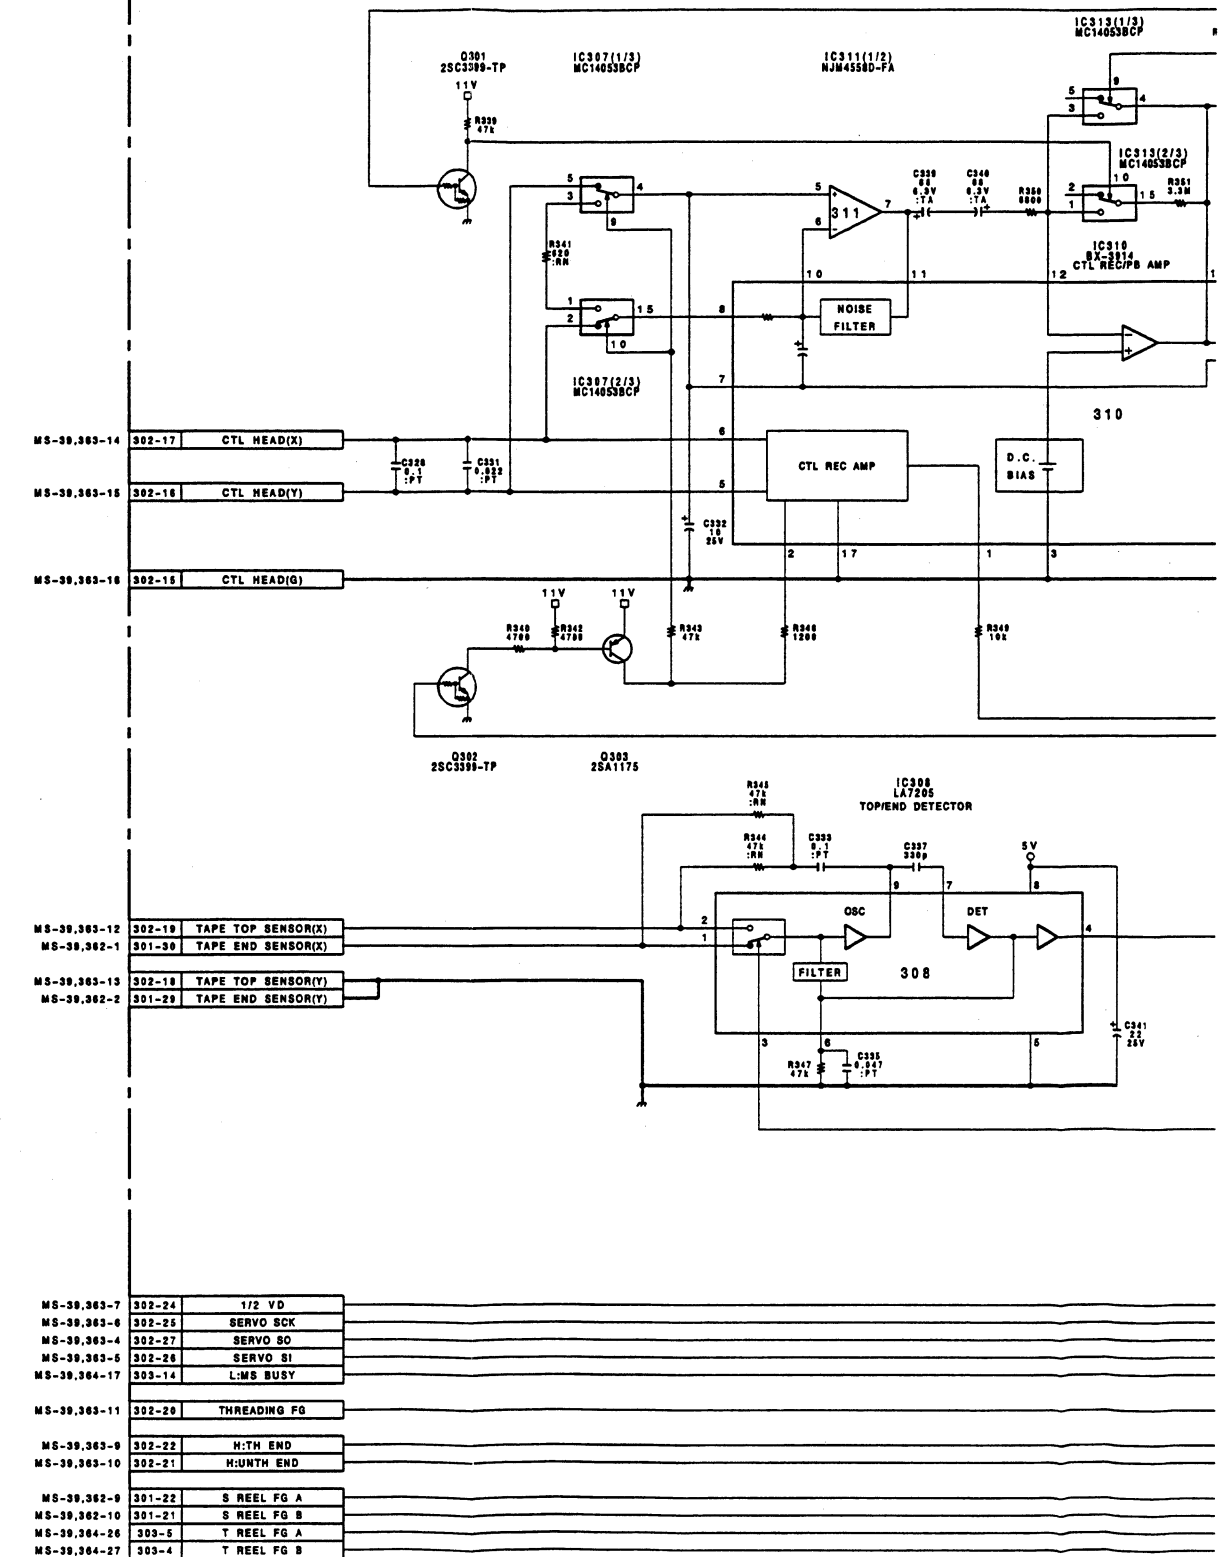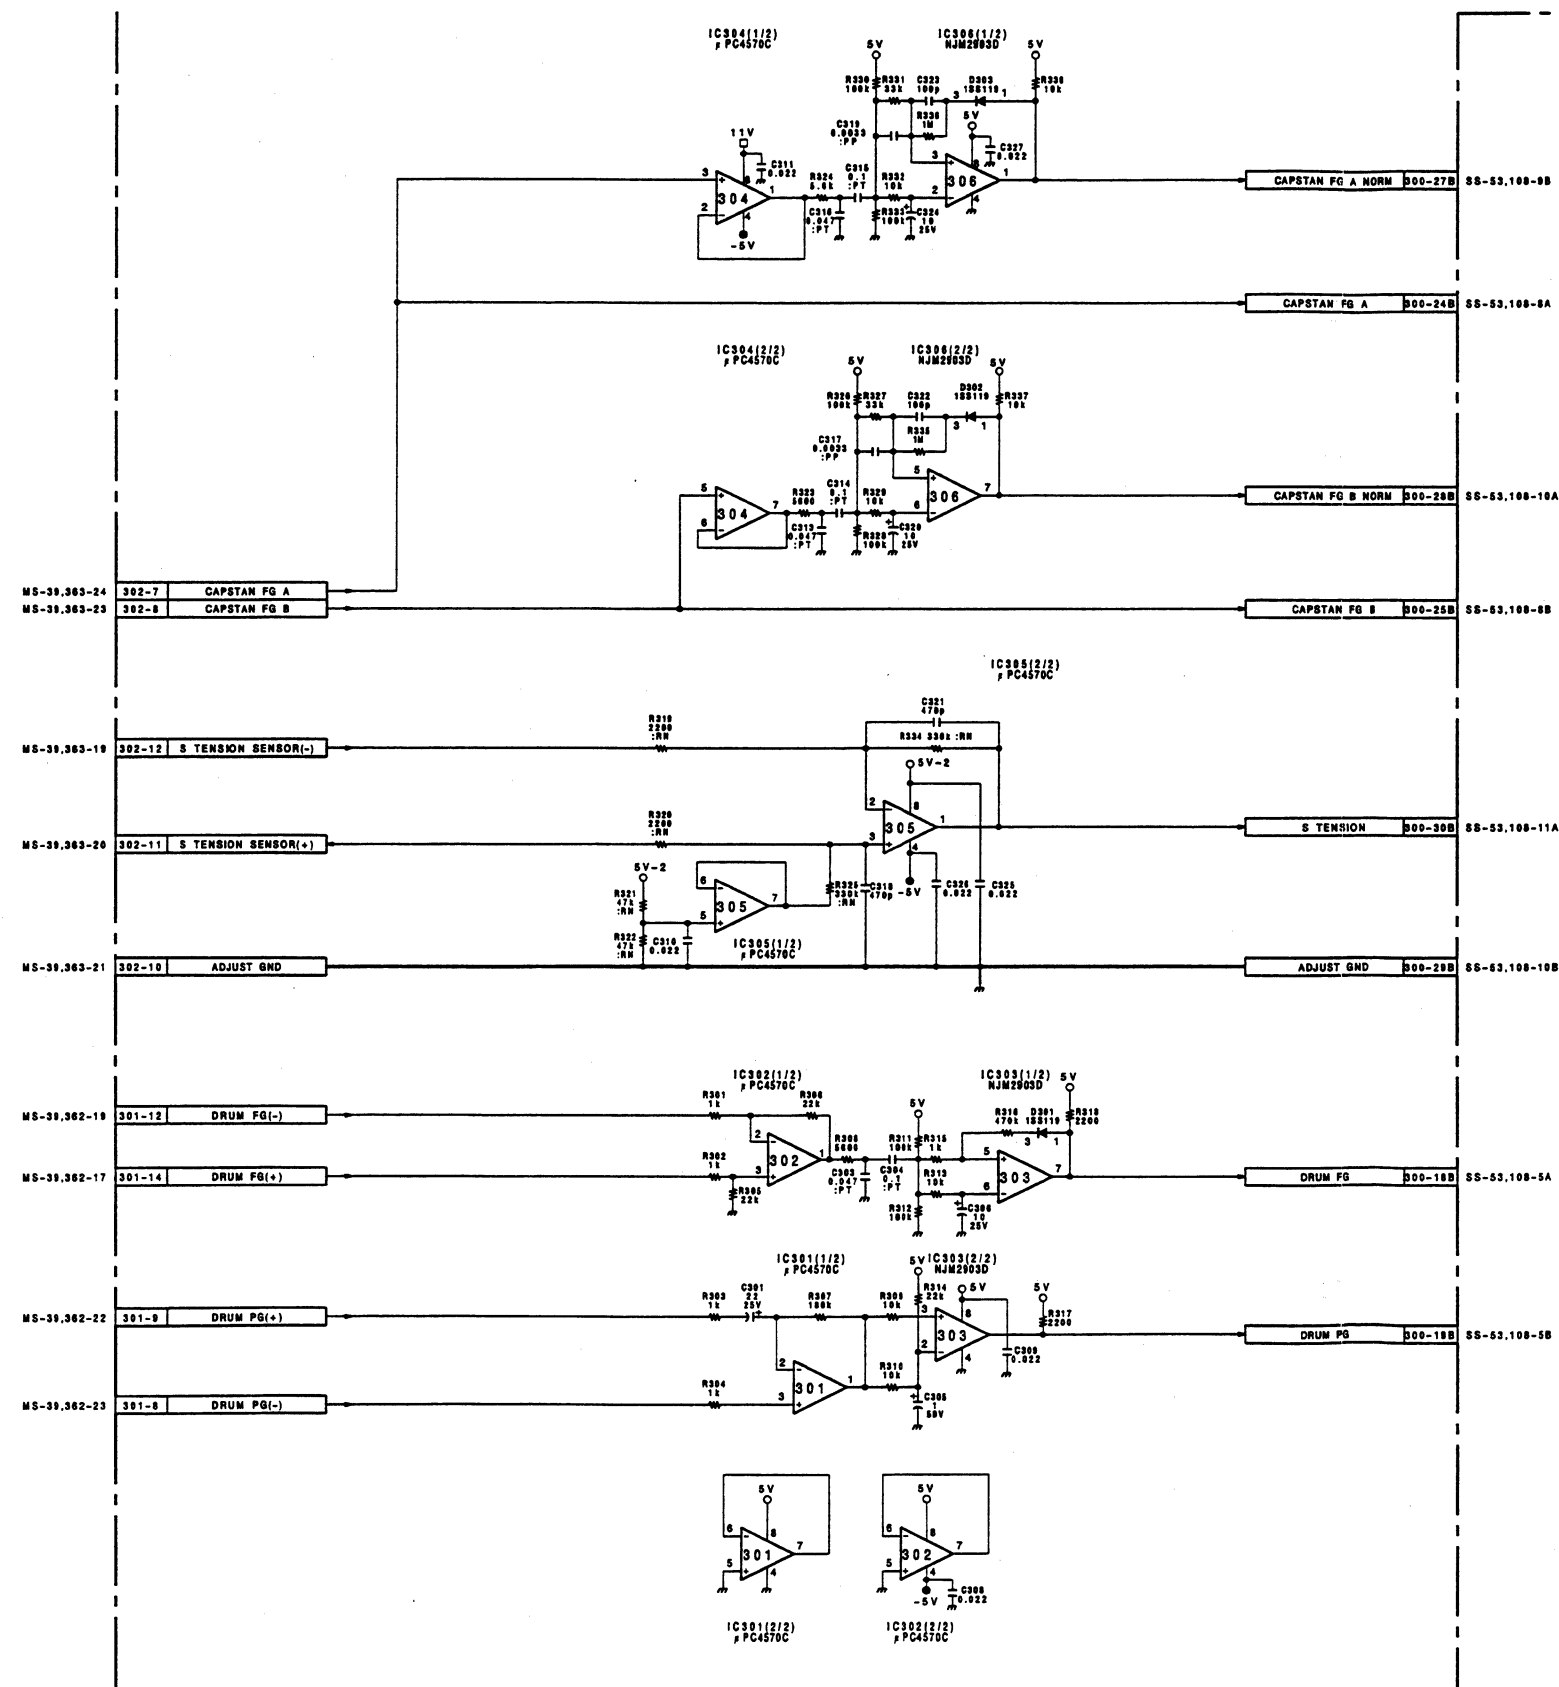


3



•

18





KY-249(1-648-914-11)

CN590	M-3	S8	H-2
CN591	D-1	S9	H-3
CN592	N-3	S10	H-3
CN593	B-1	S11	G-3
		S12	J-3
*D1	N-2	S13	G-3
*D2	K-1	S14	G-3
*D3	K-1	S15	G-2
*D4	K-1	S16	E-2
*D5	J-2	S17	F-2
*D6	J-2	S18	J-3
*D7	H-2	S19	E-3
*D8	H-2	S20	F-3
*D9	H-3	S21	E-2
*D10	J-3		
*D11	J-3	X1	N-2
IC1	L-3		
IC2	E-2		
IC3	M-2		
IC6	M-3		
ND1	E-2		
*Q1	D-3		
*Q2	D-3		
*Q3	D-2		
*Q4	D-2		
*Q5	D-2		
*Q6	D-2		
*Q7	B-2		
*Q8	C-2		
*Q9	D-1		
*Q10	D-1		
*Q11	D-1		
*Q12	D-1		
*Q13	D-1		
*Q14	D-1		
*Q15	E-1		
*Q16	A-1		
*Q17	B-1		
*Q18	B-1		
*Q19	B-1		
*Q20	B-1		
*Q21	B-1		
*Q22	B-1		
*Q23	D-1		
*Q24	D-1		
*Q25	C-1		
*Q26	C-1		
*Q27	C-1		
*Q28	C-1		
*Q29	C-1		
*Q30	C-1		
*Q31	C-1		
*Q32	C-1		
*Q33	B-1		
*Q34	B-1		
*Q35	B-1		
*Q36	N-1		
*Q37	M-1		
*Q38	M-1		
*Q39	N-1		
*Q40	M-1		
*Q41	M-1		
*Q42	D-2		
RV1	E-3		
RV2	D-3		
S1	K-1		
S2	P-1		
S3	N-1		
S4	L-1		
S5	M-1		
S7	P-1		

*: B SIDE

KY-249;FUNCTION KEY

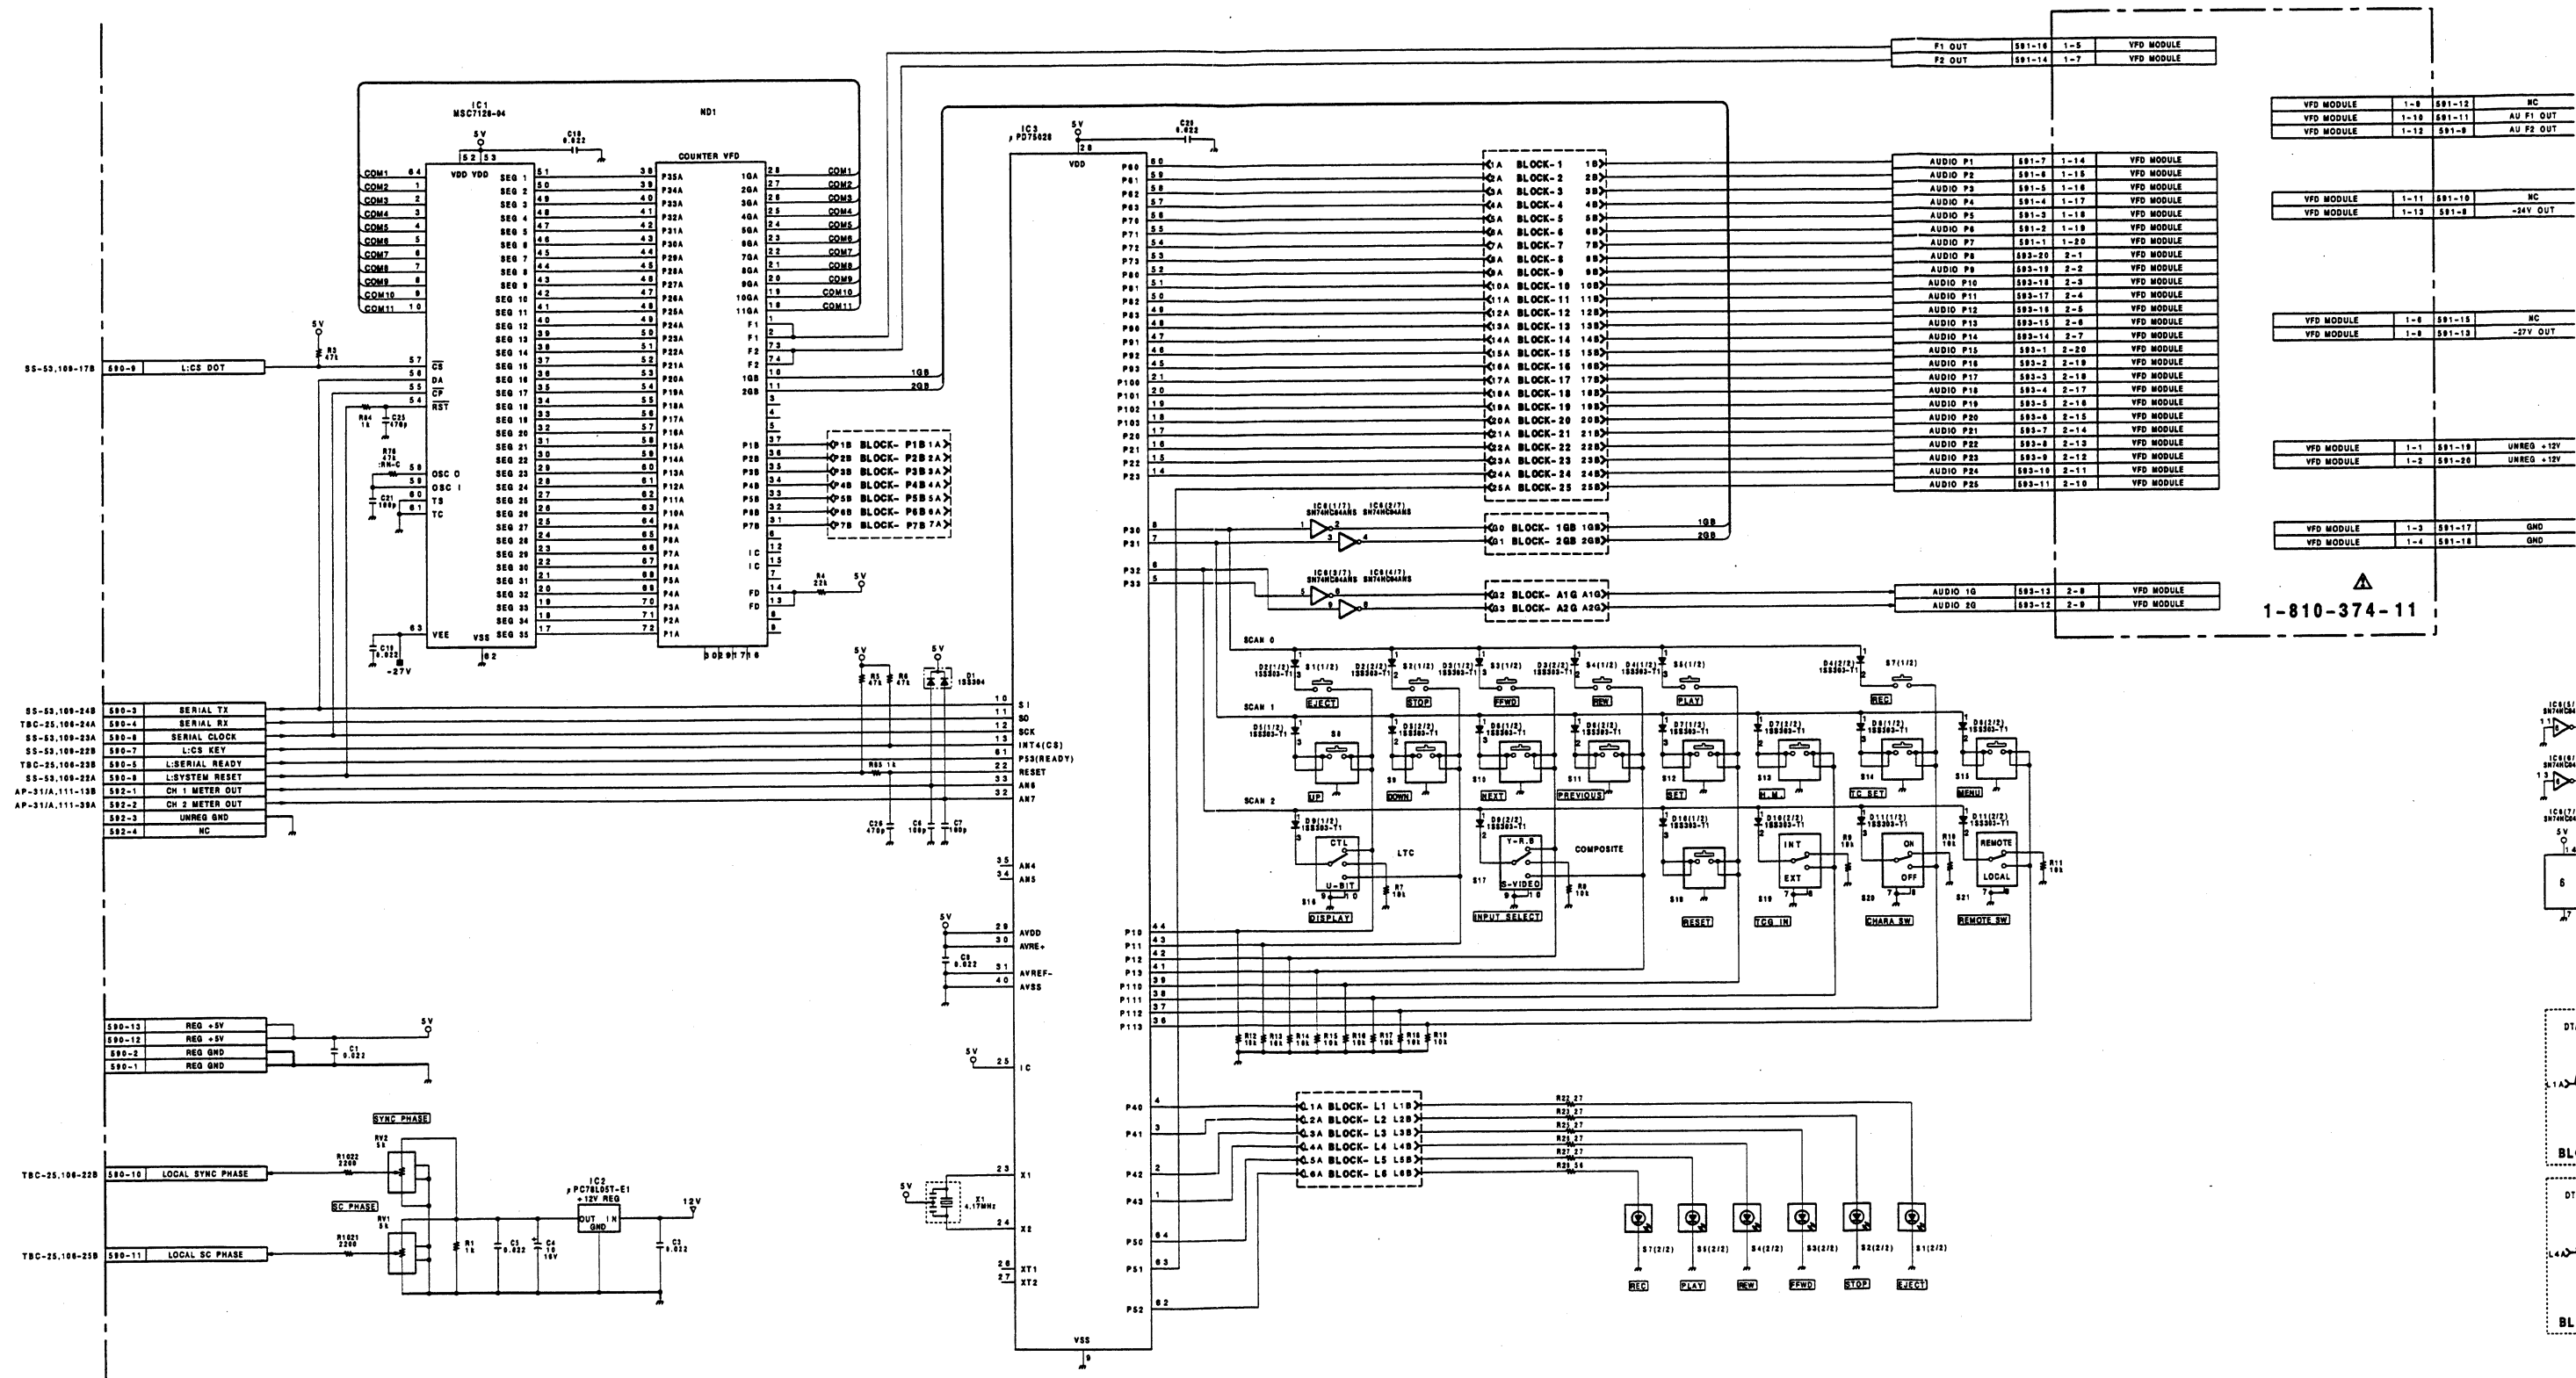

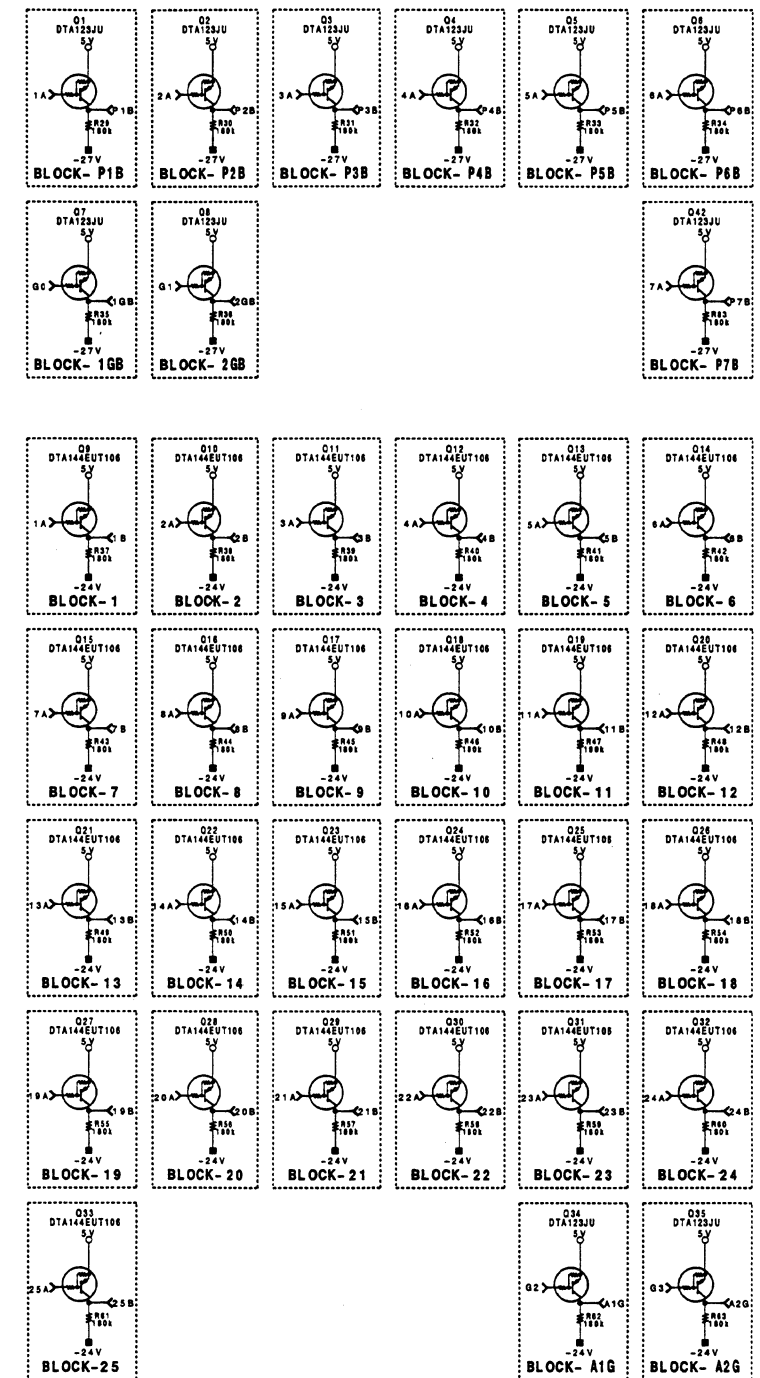

BOARD NO.1-648-914-11
UVW-1800(J) ;#10001-
UVW-1800(UC);#10001-





KY-249A(1-648-914-21)

CN590	M-3	S10	H-3
CN591	D-1	S11	G-3
CN592	N-3	S12	J-3
CN593	B-1	S13	G-3
		S15	G-2
*D1	N-2	S16	E-2
*D2	K-1	S18	J-3
*D3	K-1	S20	F-3
*D4	K-1	S21	E-2
*D5	J-2		
*D6	J-2	X1	N-2
*D7	H-2		
*D8	H-2		
*D9	H-3		
*D10	J-3		
*D11	J-3		
IC1	L-3		
IC2	E-2		
IC3	M-2		
IC6	M-3		
ND1	E-2		
*Q1	D-3		
*Q2	D-3		
*Q3	D-2		
*Q4	D-2		
*Q5	D-2		
*Q6	D-2		
*Q7	B-2		
*Q8	C-2		
*Q9	D-1		
*Q10	D-1		
*Q11	D-1		
*Q12	D-1		
*Q13	D-1		
*Q14	D-1		
*Q15	E-1		
*Q16	A-1		
*Q17	B-1		
*Q18	B-1		
*Q19	B-1		
*Q20	B-1		
*Q21	B-1		
*Q22	B-1		
*Q23	D-1		
*Q24	D-1		
*Q25	C-1		
*Q26	C-1		
*Q27	C-1		
*Q28	C-1		
*Q29	C-1		
*Q30	C-1		
*Q31	C-1		
*Q32	C-1		
*Q33	B-1		
*Q34	B-1		
*Q35	B-1		
*Q36	N-1		
*Q37	M-1		
*Q38	M-1		
*Q39	N-1		
*Q40	M-1		
*Q42	D-2		
RV1	E-3		
RV2	D-3		
S1	K-1		
S2	P-1		
S3	N-1		
S4	L-1		
S5	M-1		
S8	H-2		
S9	H-3		

*: B SIDE

KY-249A;FUNCTION KEY

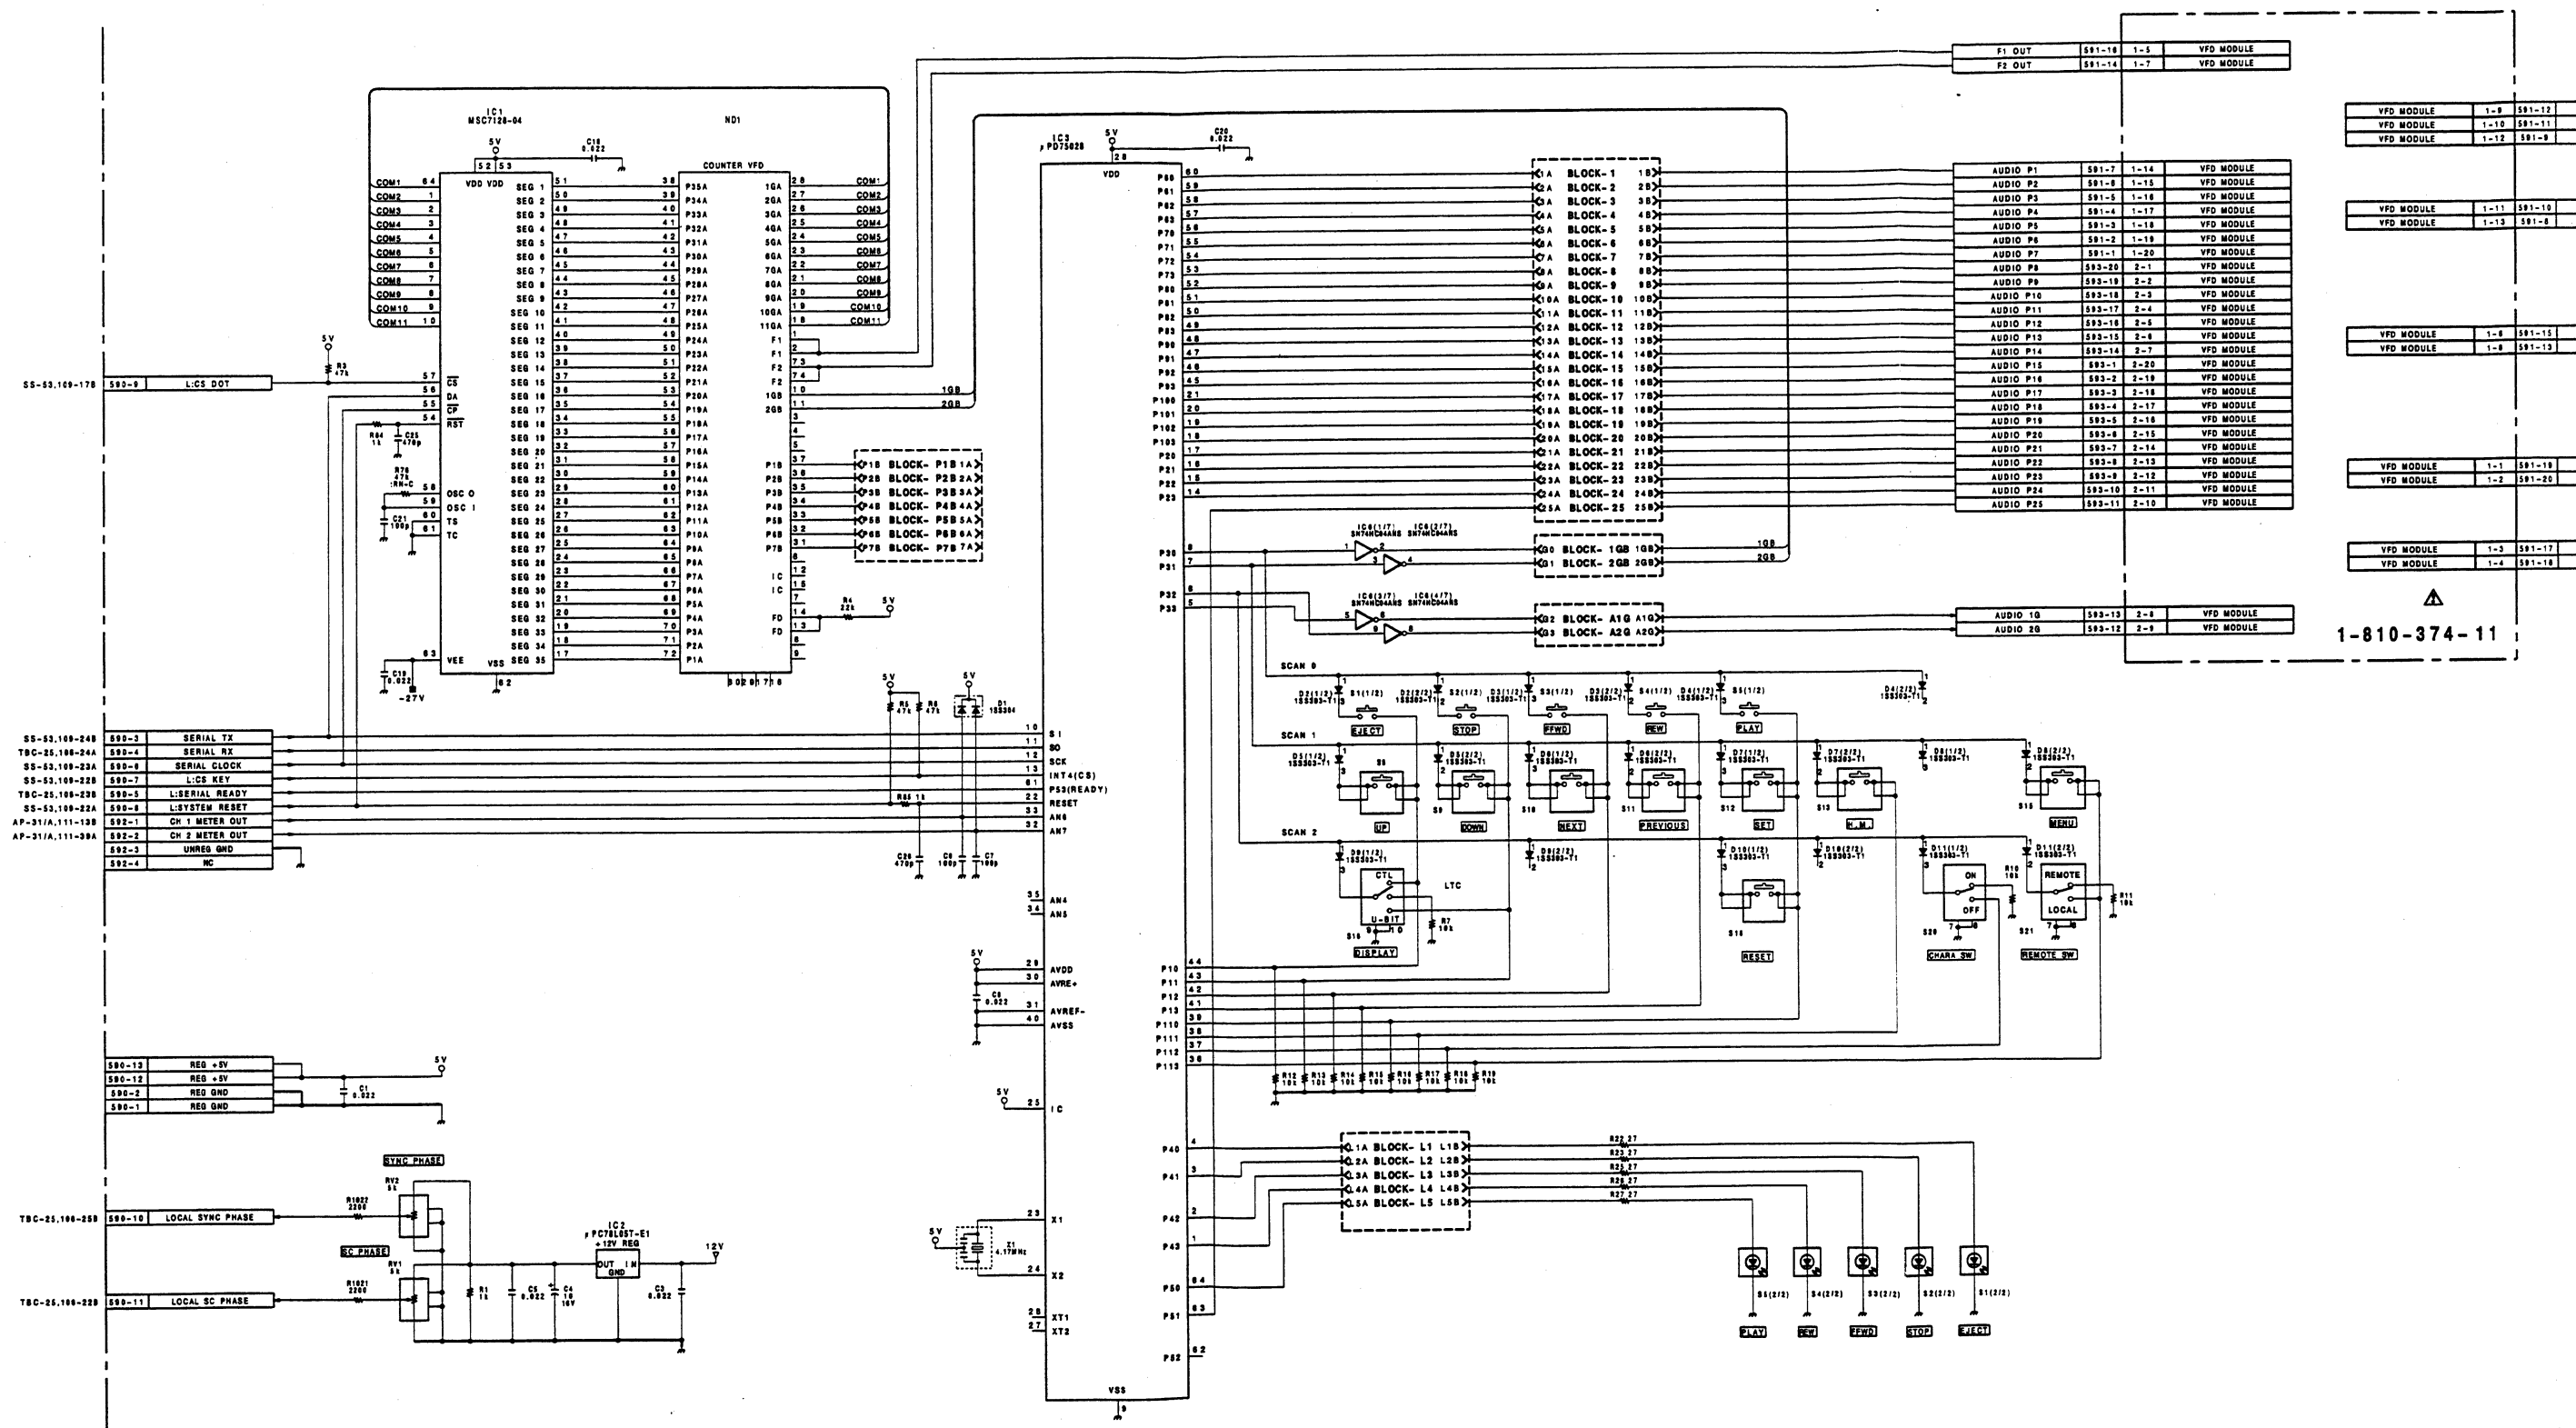

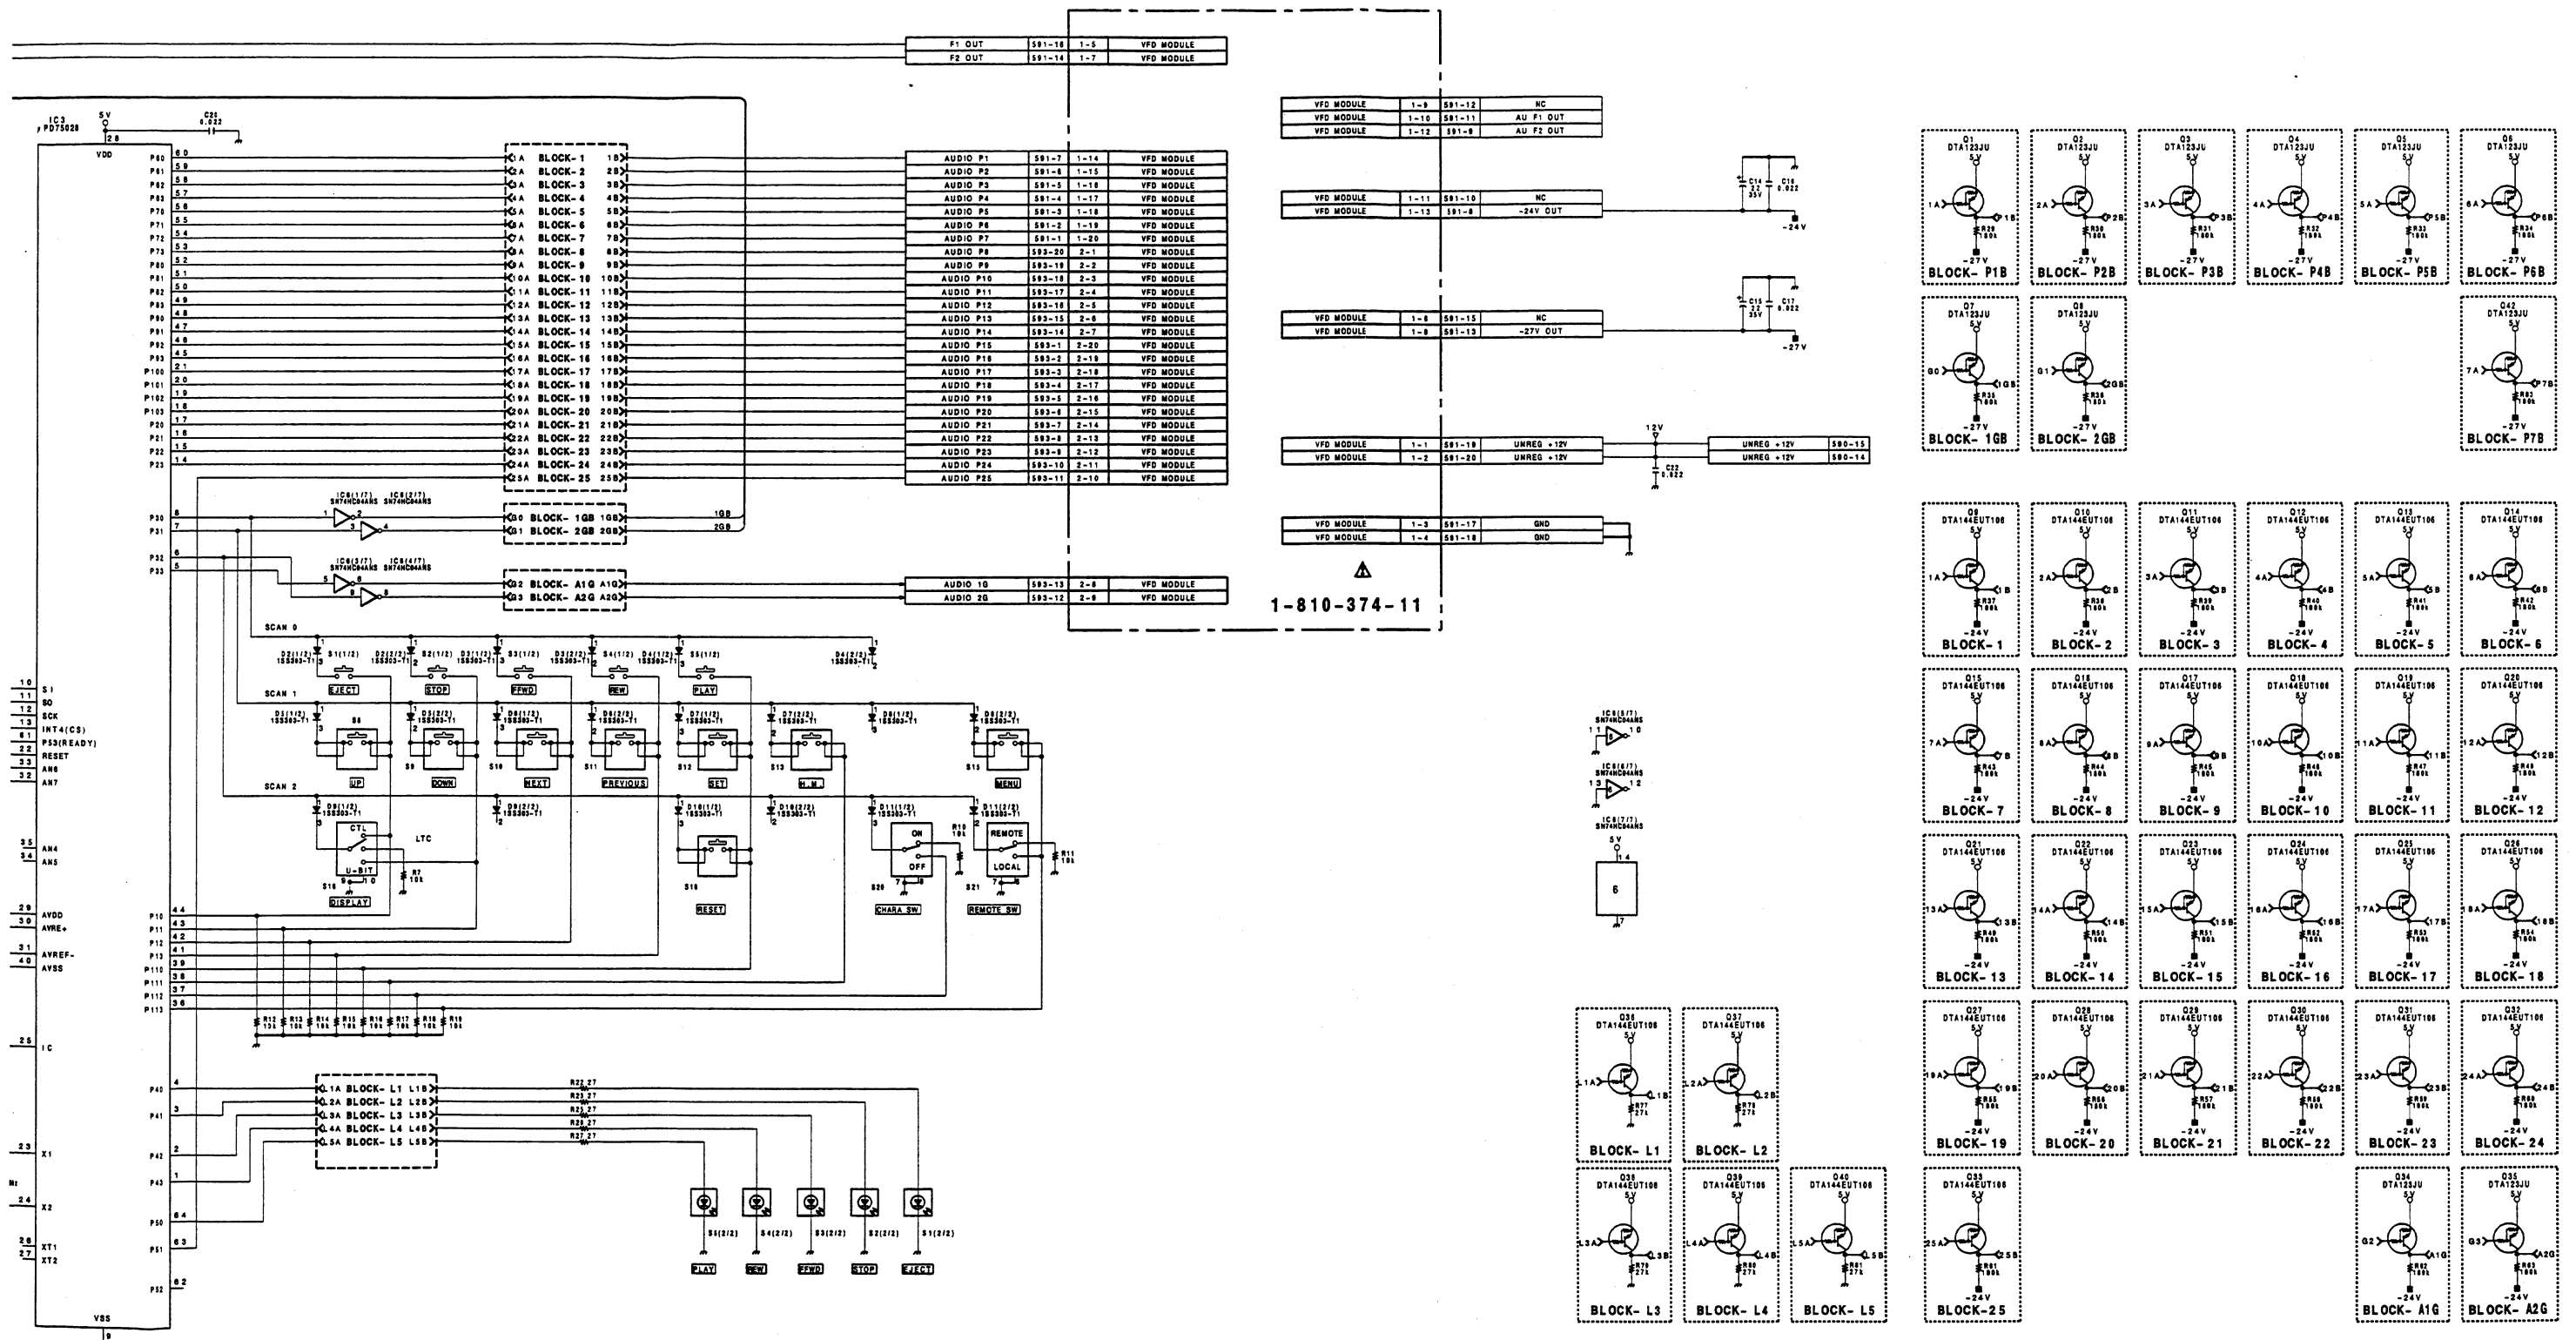

KY-249A BOARD

BOARD NO.1-648-914-21
UVW-1600(J);#10001-
UVW-1600(U);#10001-



MS-39/39A(1-648-909-11)

CN350	L-5
CN351	F-1
CN352	F-1
CN353	J-5
CN354	B-3
CN355	D-3
CN356	B-1
CN357	J-1
CN358	C-3
CN359	K-5
CN360	F-5
CN361	G-5
CN362	B-2
CN363	G-4
CN364	K-2

D1	F-2
D2	F-2
D3	B-2
D4	M-2
D7	K-1
D8	K-1
D9	K-1
D10	L-1


IC1	H-4
IC2	E-3
IC3	D-3
IC7	G-4
IC8	G-3

Q1	F-1
Q2	F-1
Q3	B-1
<u>Q4</u>	M-1


X1	J-4
----	-----

*: B SIDE
_: UVW-1800 ONLY

MS-39/39A;CASSETTE INFORMATION,SOLENOID DRIVER,MECHA.CONTROL MPU,DATA STRAGE

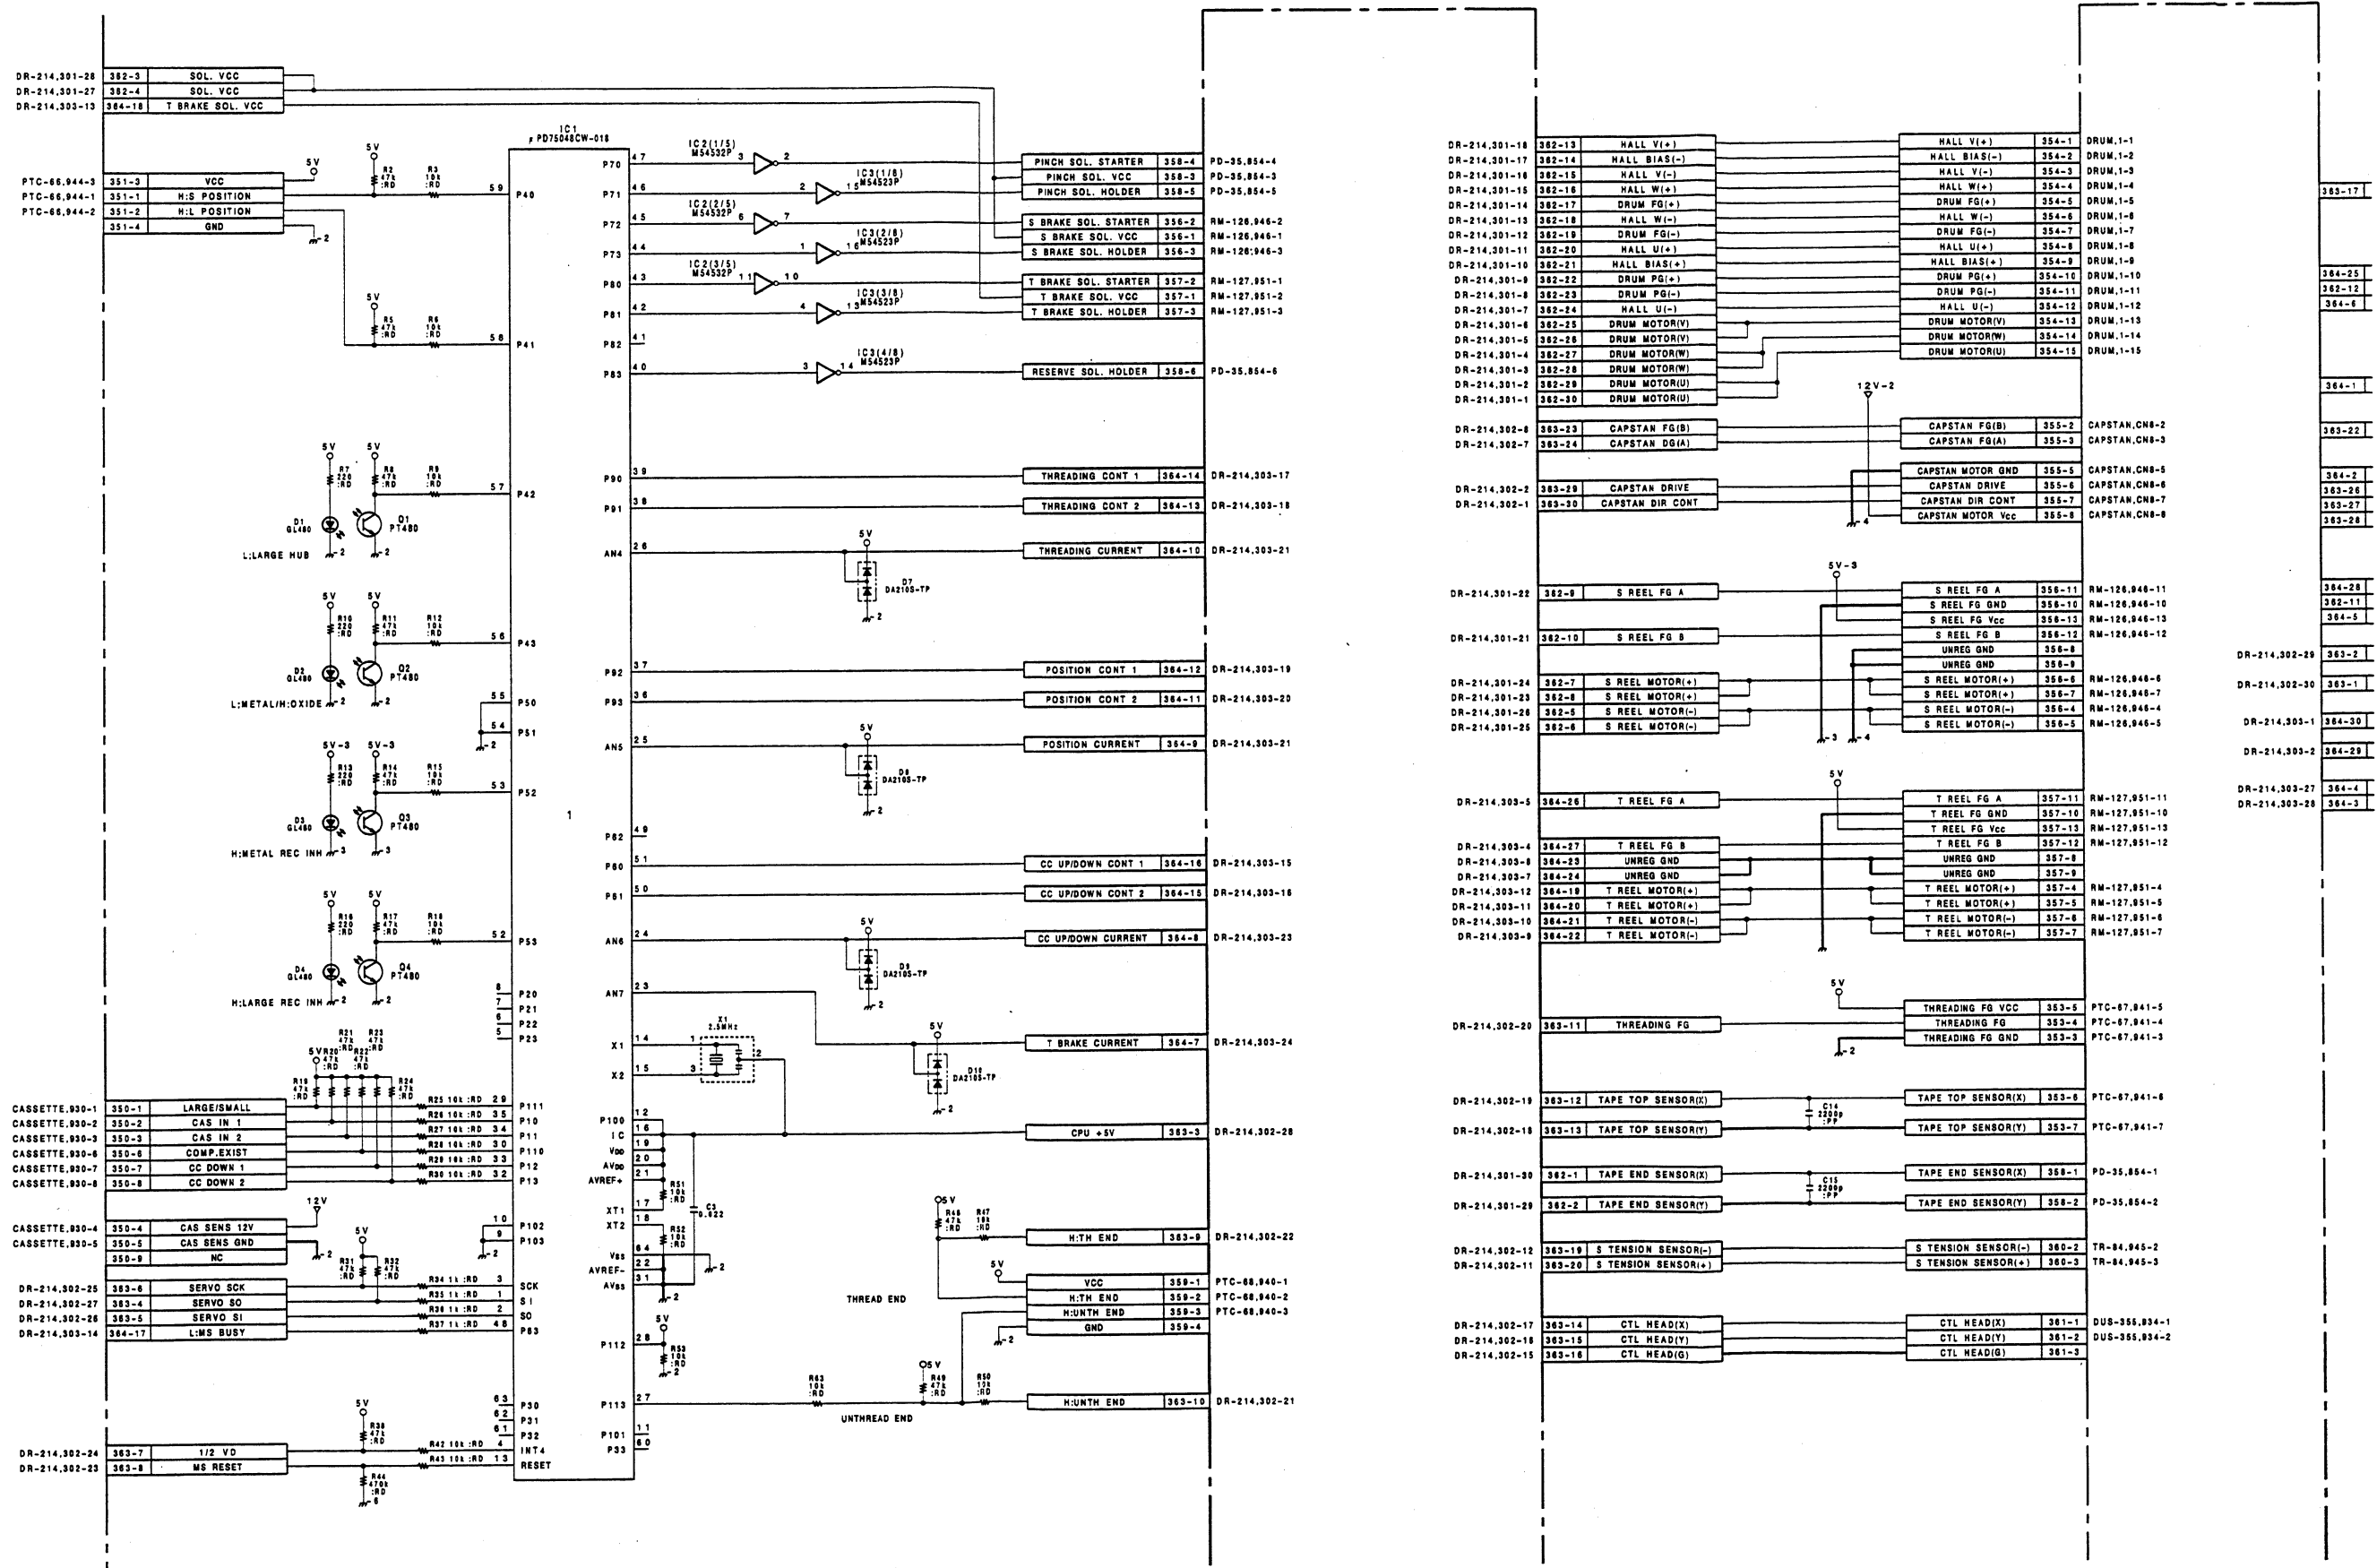

STRAGE

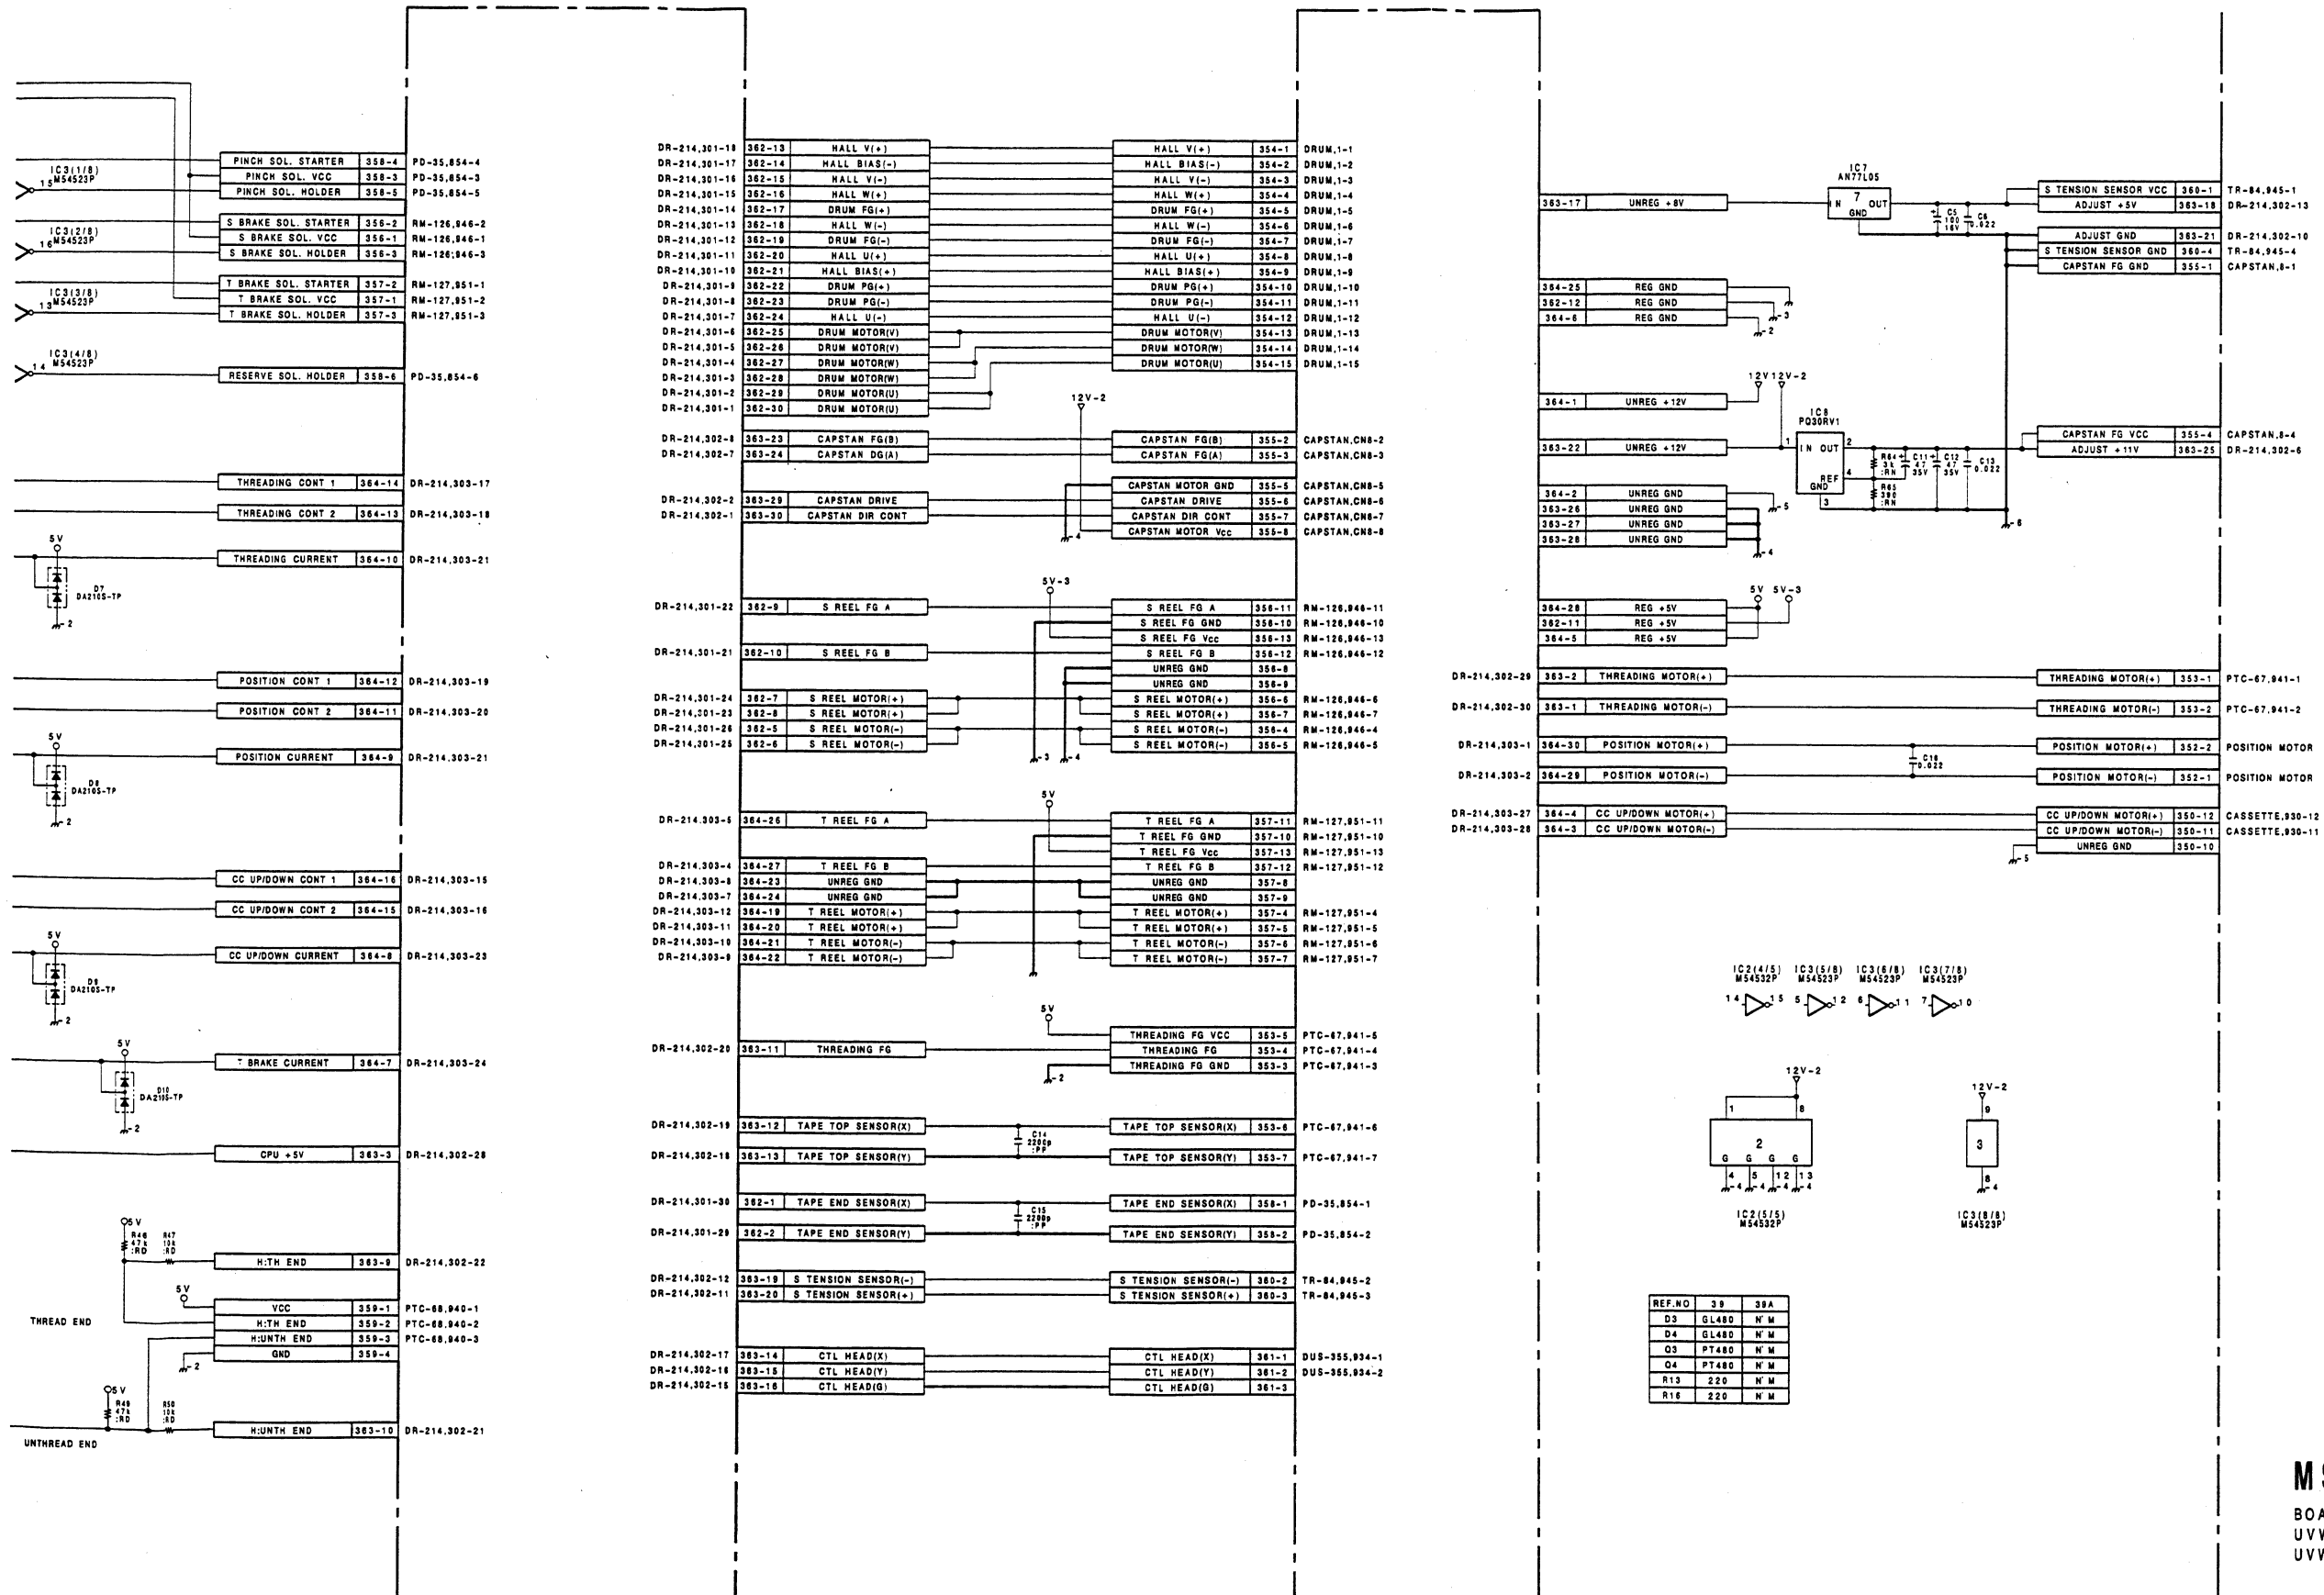

MS-39/39A BOARD

BOARD NO.1-648-909-11
UVW-1800/1600(J) :#10001-
UVW-1800/1600(UC):#10001-

RP-70(1-648-904-11)

CN1	J-4	FS708	C-5	RV202	G-3
CN101	H-4	FS709	C-5	RV301	E-2
CN110	E-5	FS710	C-5	RV302	F-3
CN201	F-4	FS711	C-5		
CN301	E-4	FS712	D-5	S1	J-3
		FS713	E-5	S101	H-3
*D701	D-2	FS714	F-5	S201	F-3
*D702	D-5	FS715	G-5	S301	E-3
*D703	D-3	FS716	J-5		
*D704	D-4	FS717	D-1	TP1	J-1
		FS718	D-1	TP2	J-1
E1	J-1	FS719	D-1	TP3	J-3
E2	J-4	FS720	H-5	TP4	J-4
E201	F-1	FS721	G-5	TP103	H-3
E202	F-4	FS722	G-5	TP104	H-4
E601	B-1	FS723	D-1	TP201	G-1
		FS724	E-1	TP202	F-1
		FS725	H-5	TP203	F-3
FS2	J-1	FS726	H-5	TP204	F-4
FS3	J-2			TP303	E-3
FS4	J-2	IC1	J-2	TP304	E-4
FS5	J-3	IC2	J-4	TP601	B-1
FS6	J-4	IC101	H-2	TP602	C-1
FS7	J-4	IC102	H-4		
FS101	H-2	IC201	F-2		
FS102	H-2	IC202	G-4		
FS103	H-3	IC301	E-2		
FS104	H-4	IC302	E-4		
FS105	H-4	*IC501	H-1		
FS106	H-1	*IC502	G-1		
FS201	F-1	*IC503	F-1		
FS202	G-2	*IC601	A-3		
FS203	F-2	*IC602	B-3		
FS204	F-3	*IC701	D-2		
FS205	G-4	IC702	D-1		
FS206	F-4	IC703	D-5		
FS301	E-2	IC704	D-4		
FS302	E-2	*IC705	D-3		
FS303	E-3	IC706	D-3		
FS304	F-5	IC707	D-4		
FS305	E-4	IC708	D-3		
FS501	E-1				
FS503	F-1	*Q1	J-1		
FS504	F-1	*Q2	J-2		
FS505	G-1	*Q3	J-2		
FS506	H-1	*Q102	H-2		
FS507	H-1	*Q103	H-2		
FS508	H-1	*Q201	F-1		
FS509	H-1	*Q202	F-2		
FS510	J-1	*Q203	F-2		
FS511	J-1	*Q302	E-2		
FS601	B-2	*Q303	E-2		
FS602	B-2	*Q501	H-1		
FS603	B-2	Q601	A-2		
FS604	B-3	Q602	A-3		
FS605	B-3	Q603	A-3		
FS606	B-4	Q604	A-3		
FS607	B-4	Q605	B-2		
FS609	A-2	Q606	B-3		
FS610	A-3	Q607	B-3		
FS611	B-3	Q608	B-3		
FS612	B-4	*Q609	B-2		
FS613	A-4	*Q610	B-2		
FS614	B-1	Q611	B-2		
FS615	A-5	*Q612	B-2		
FS616	B-5	*Q613	B-1		
FS617	C-5	*Q614	B-1		
FS618	C-5	*Q615	B-2		
FS619	B-5	*Q616	B-2		
FS620	B-5	*Q617	B-2		
FS701	D-2				
FS702	D-3	RV1	J-2		
FS703	D-4	RV2	J-3		
FS704	D-4	RV101	H-2		
FS705	C-4	RV102	H-3		
FS706	D-4	RV201	F-2		
FS707	D-5				


*: B SIDE


RP-70A(1-648-904-21)

CN1	J-4
CN101	H-4
CN110	E-5
CN201	F-4
CN301	E-4
*D702	D-5
E2	J-4
E202	F-4
FS2	J-1
FS3	J-2
FS6	J-4
FS7	J-4
FS101	H-2
FS104	H-4
FS105	H-4
FS106	H-1
FS201	F-1
FS202	G-2
FS205	G-4
FS206	F-4
FS301	E-2
FS304	F-5
FS305	E-4
FS501	E-1
FS504	F-1
FS506	H-1
FS509	H-1
FS614	B-1
FS615	A-5
FS616	B-5
FS617	C-5
FS618	C-5
FS619	B-5
FS620	B-5
FS701	D-2
FS702	D-3
FS703	D-4
FS704	D-4
FS705	C-4
FS706	D-4
FS707	D-5
FS709	C-5
FS710	C-5
FS716	J-5
FS720	H-5
FS721	G-5
FS722	G-5
FS723	D-1
FS725	H-5
FS726	H-5
IC2	J-4
IC102	H-4
IC202	G-4
IC302	E-4
IC703	D-5
IC704	D-4
T2	J-4
T102	H-4
T202	G-4
T302	F-4

*: B SIDE

RP-70(1/2);Y RF REC/PB
RP-70A(1/2);Y RF PB

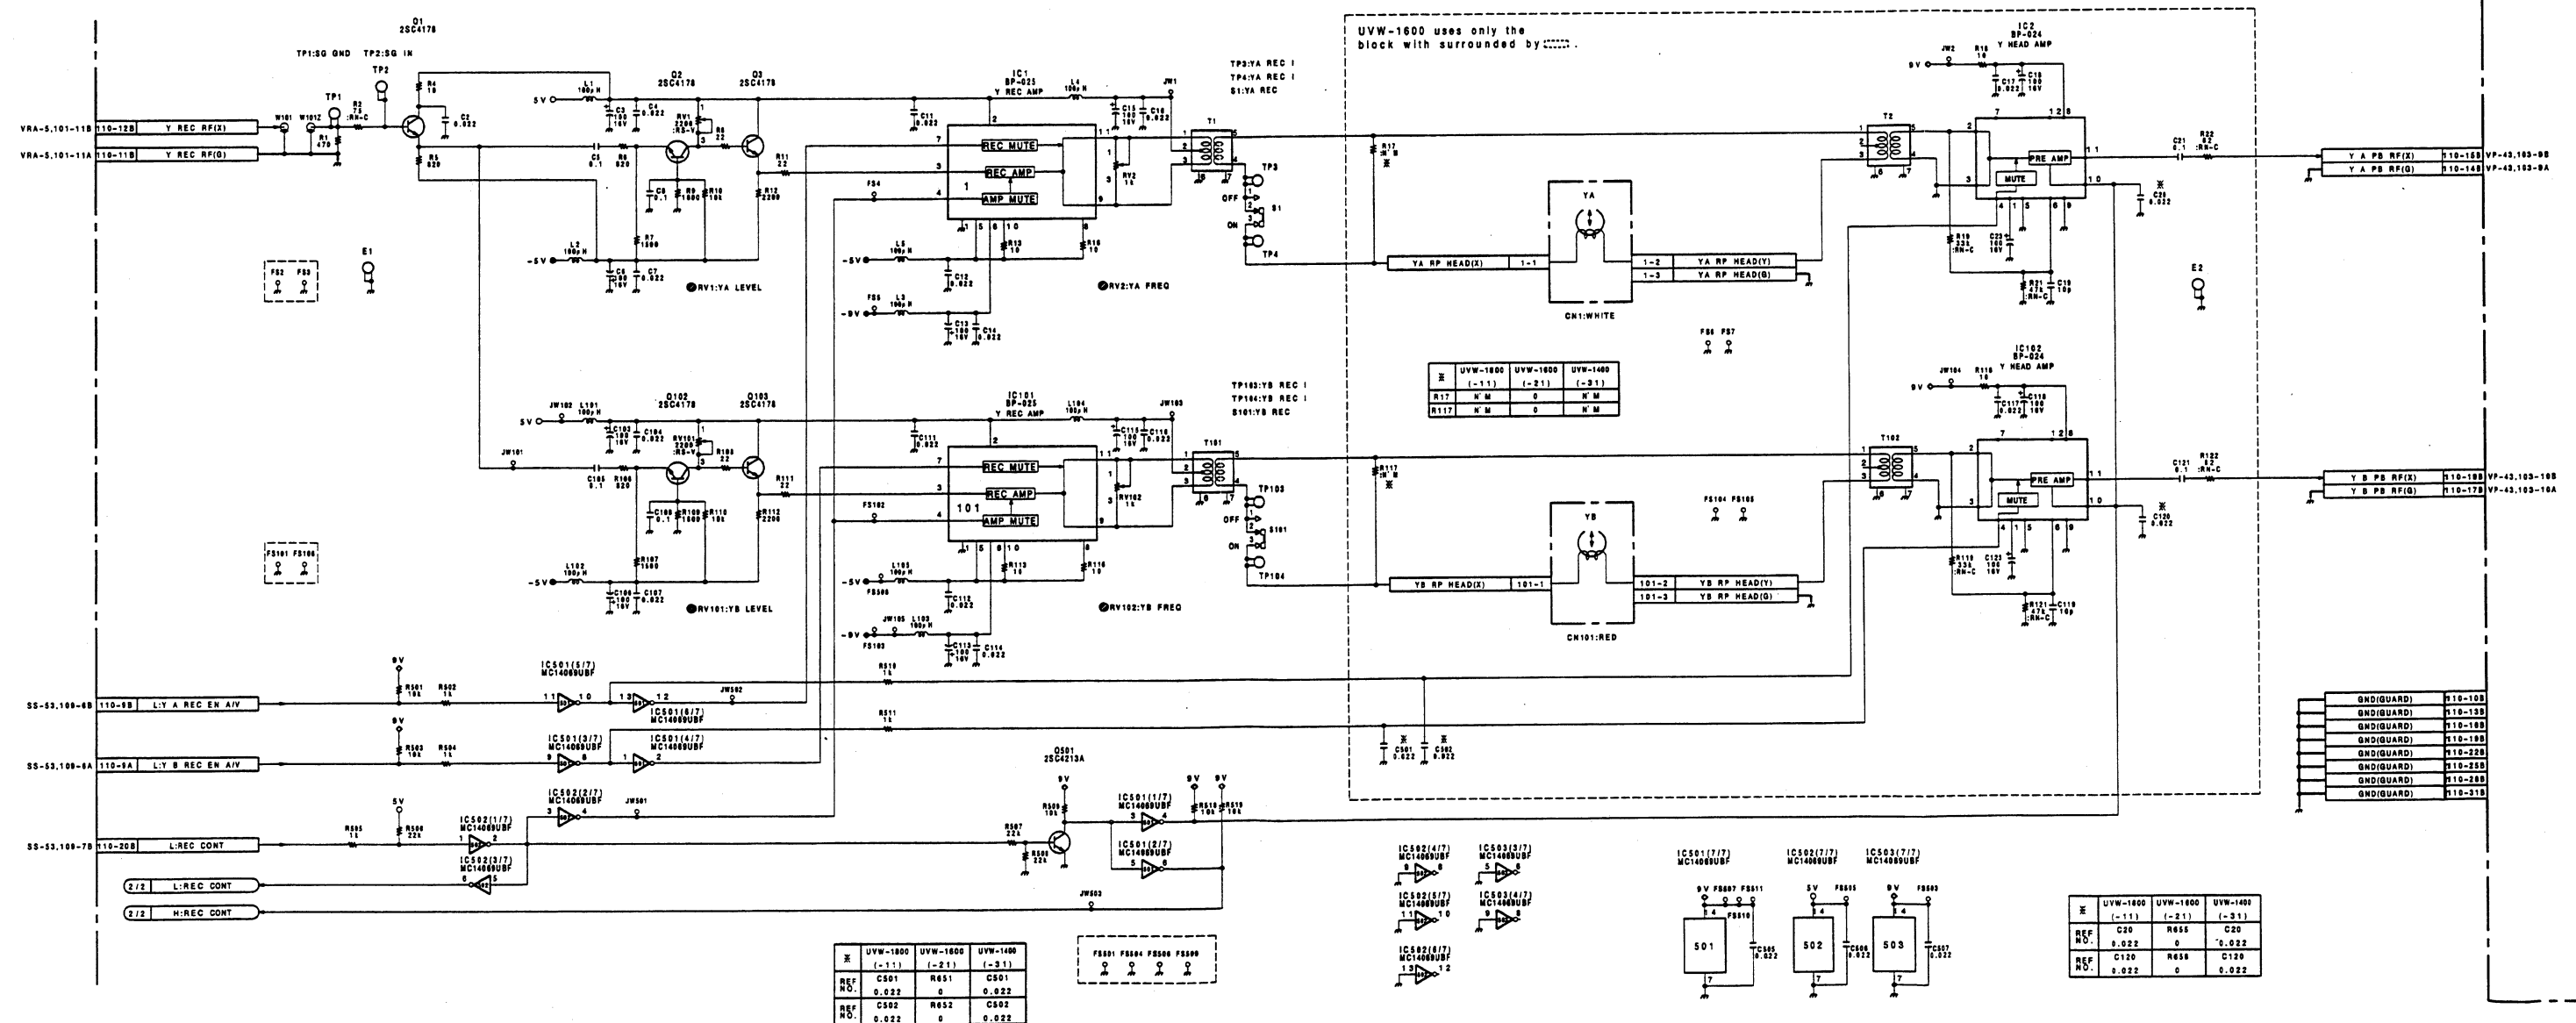

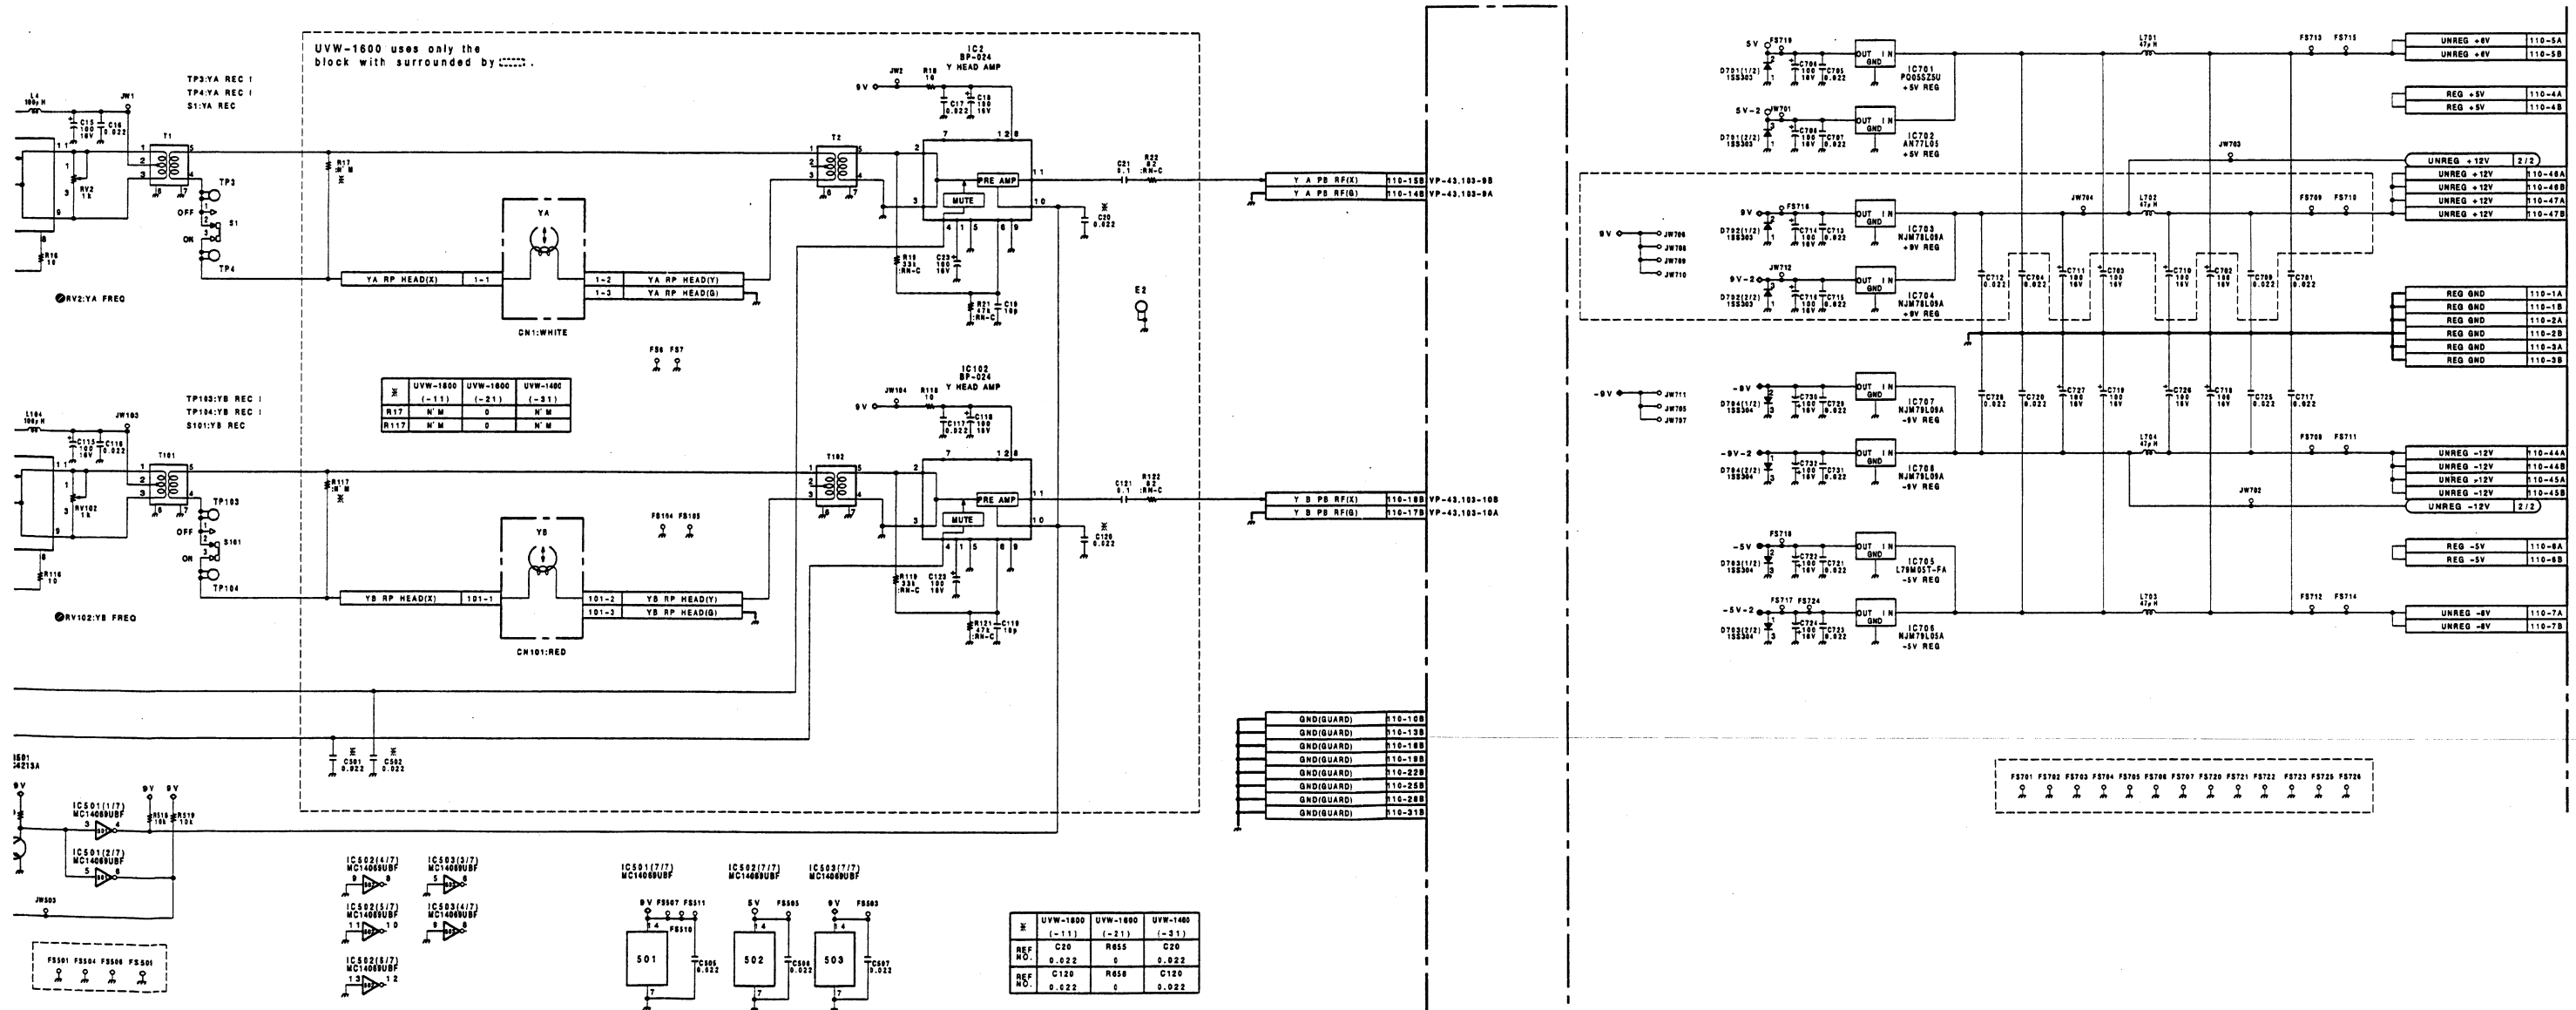

RP-70/70A BOARD (1 / 2)

BOARD NO.1-648-904-11,21
UVW-1800/1600(J) ;#10001-
UVW-1800/1600(UC);#10001-



RP-70(1-648-904-11)

CN1	J-4	FS708	C-5
CN101	H-4	FS709	C-5
CN110	E-5	FS710	C-5
CN201	F-4	FS711	C-5
CN301	E-4	FS712	D-5
		FS713	E-5
*D701	D-2	FS714	F-5
*D702	D-5	FS715	G-5
*D703	D-3	FS716	J-5
*D704	D-4	FS717	D-1
		FS718	D-1
E1	J-1	FS719	D-1
E2	J-4	FS720	H-5
E201	F-1	FS721	G-5
E202	F-4	FS722	G-5
E601	B-1	FS723	D-1
		FS724	E-1
FS2	J-1	FS725	H-5
FS3	J-2	FS726	H-5
FS4	J-2		
FS5	J-3	IC1	J-2
FS6	J-4	IC2	J-4
FS7	J-4	IC101	H-2
FS101	H-2	IC102	H-4
FS102	H-2	IC201	F-2
FS103	H-3	IC202	G-4
FS104	H-4	IC301	E-2
FS105	H-4	IC302	E-4
FS106	H-1	*IC501	H-1
FS201	F-1	*IC502	G-1
FS202	G-2	*IC503	F-1
FS203	F-2	*IC601	A-3
FS204	F-3	*IC602	B-3
FS205	G-4	*IC701	D-2
FS206	F-4	IC702	D-1
FS301	E-2	IC703	D-5
FS302	E-2	IC704	D-4
FS303	E-3	*IC705	D-3
FS304	F-5	IC706	D-3
FS305	E-4	IC707	D-4
FS501	E-1	IC708	D-3
FS503	F-1		
FS504	F-1	*Q1	J-1
FS505	G-1	*Q2	J-2
FS506	H-1	*Q3	J-2
FS507	H-1	*Q102	H-2
FS508	H-1	*Q103	H-2
FS509	H-1	*Q201	F-1
FS510	J-1	*Q202	F-2
FS511	J-1	*Q203	F-2
FS601	B-2	*Q302	E-2
FS602	B-2	*Q303	E-2
FS603	B-2	*Q501	H-1
FS604	B-3	Q601	A-2
FS605	B-3	Q602	A-3
FS606	B-4	Q603	A-3
FS607	B-4	Q604	A-3
FS609	A-2	Q605	B-2
FS610	A-3	Q606	B-3
FS611	B-3	Q607	B-3
FS612	B-4	Q608	B-3
FS613	A-4	*Q609	B-2
FS614	B-1	*Q610	B-2
FS615	A-5	Q611	B-2
FS616	B-5	*Q612	B-2
FS617	C-5	*Q613	B-1
FS618	C-5	*Q614	B-1
FS619	B-5	*Q615	B-2
FS620	B-5	*Q616	B-2
FS701	D-2	*Q617	B-2
FS702	D-3		
FS703	D-4	RV1	J-2
FS704	D-4	RV2	J-3
FS705	C-4	RV101	H-2
FS706	D-4	RV102	H-3
FS707	D-5	RV201	F-2


*: B SIDE


RP-70A(1-648-904-21)

CN1	J-4
CN101	H-4
CN110	E-5
CN201	F-4
CN301	E-4
*D702	D-5
E2	J-4
E202	F-4
FS2	J-1
FS3	J-2
FS6	J-4
FS7	J-4
FS101	H-2
FS104	H-4
FS105	H-4
FS106	H-1
FS201	F-1
FS202	G-2
FS205	G-4
FS206	F-4
FS301	E-2
FS304	F-5
FS305	E-4
FS501	E-1
FS504	F-1
FS506	H-1
FS509	H-1
FS614	B-1
FS615	A-5
FS616	B-5
FS617	C-5
FS618	C-5
FS619	B-5
FS620	B-5
FS701	D-2
FS702	D-3
FS703	D-4
FS704	D-4
FS705	C-4
FS706	D-4
FS707	D-5
FS709	C-5
FS710	C-5
FS716	J-5
FS720	H-5
FS721	G-5
FS722	G-5
FS723	D-1
FS725	H-5
FS726	H-5
IC2	J-4
IC102	H-4
IC202	G-4
IC302	E-4
IC703	D-5
IC704	D-4
T2	J-4
T102	H-4
T202	G-4
T302	F-4

*: B SIDE

RP-70(2/2) ;C RF REC/PB,ROTARY/FULL ERASE OSC
RP-70A(2/2);C RF PB

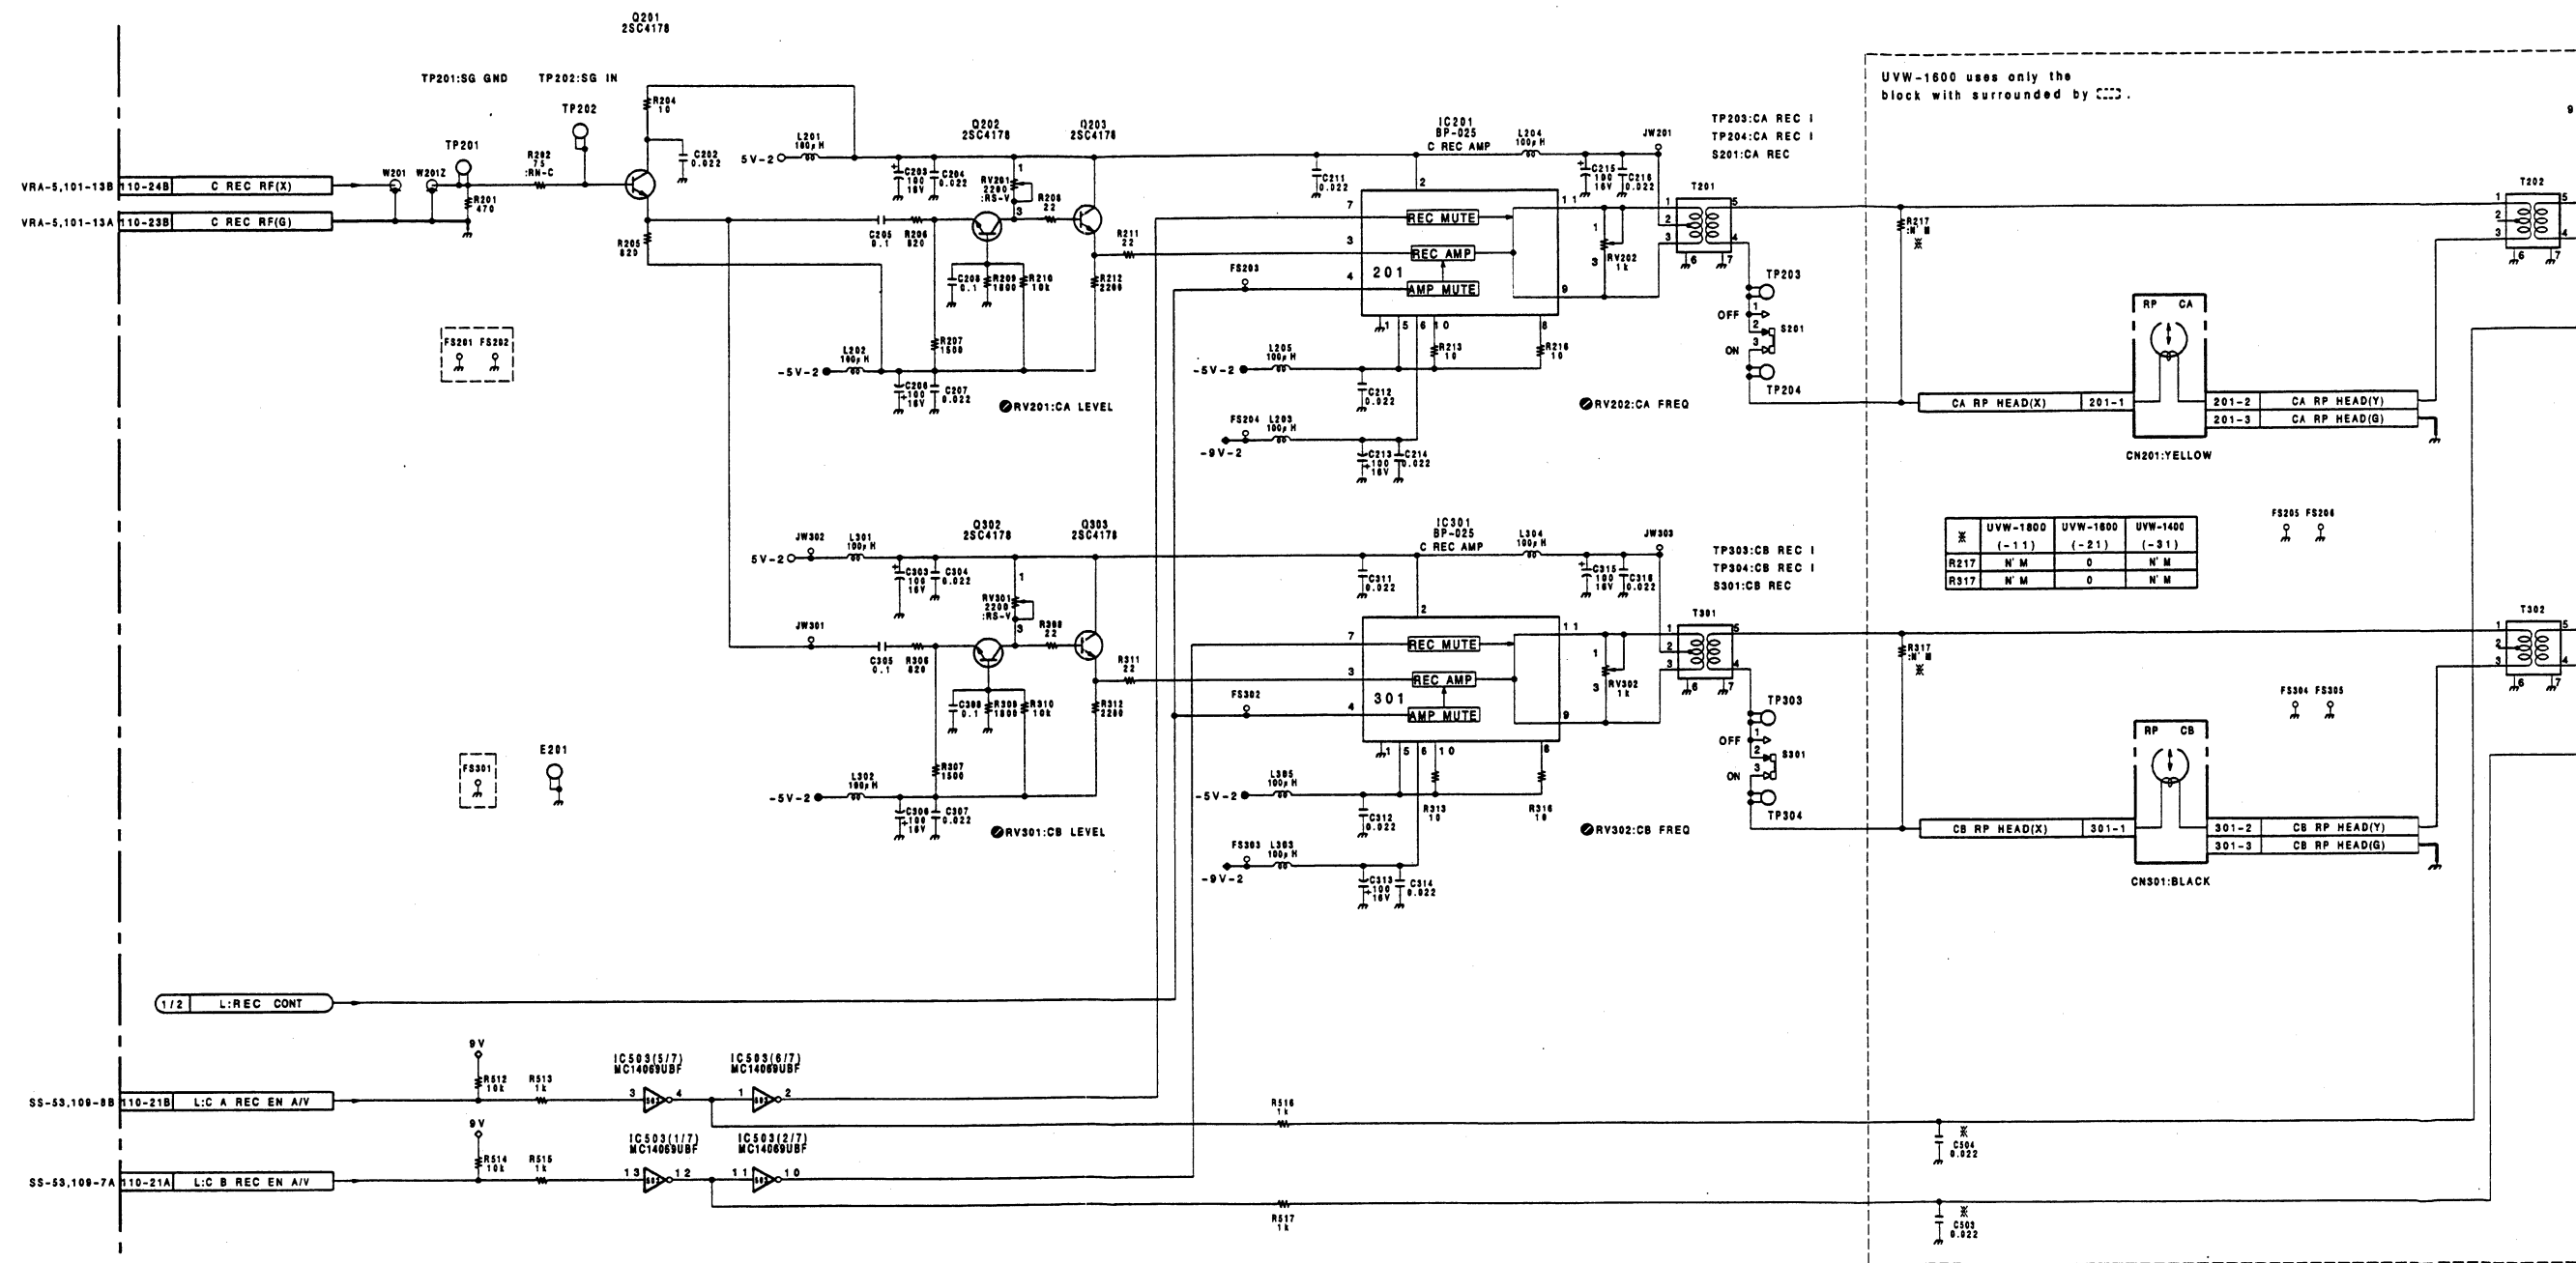

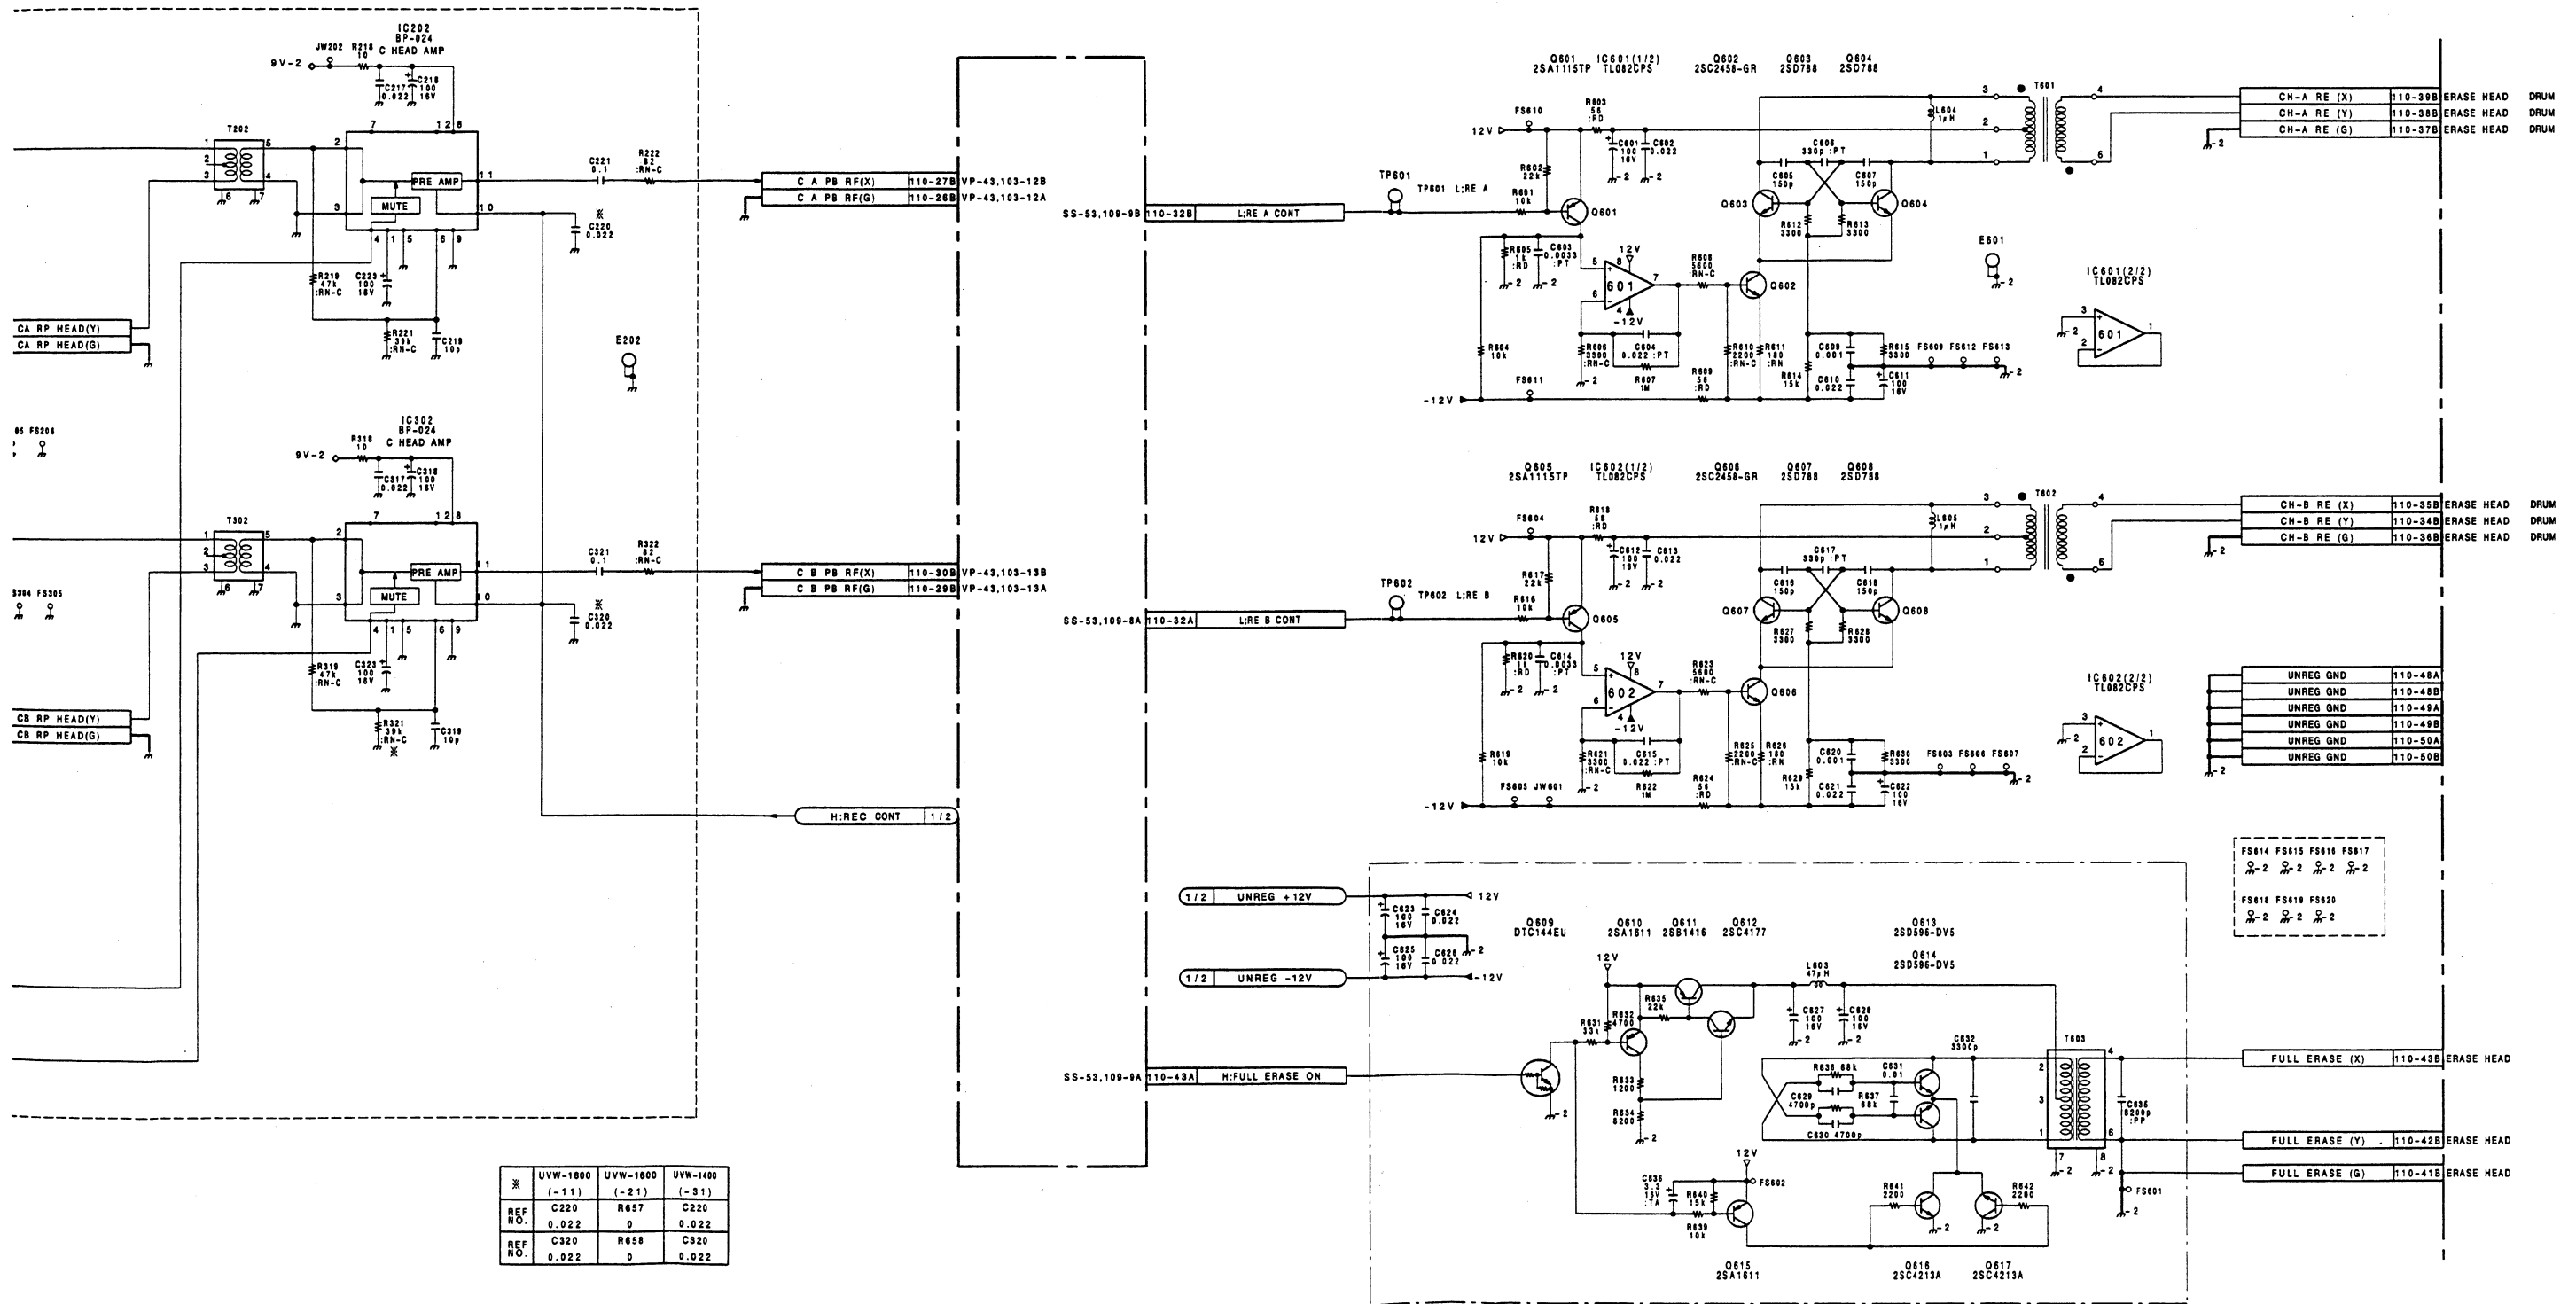

	UVW-1800 (-11)	UVW-1800 (-21)	UVW-1400 (-31)
REF NO.	C220	R657	C220
	0.022	0	0.022
REF NO.	C320	R658	C320
	0.022	0	0.022

RP-70/70A BOARD (2/2)


BOARD NO.1-648-904-11,21
UVW-1800/1600(J) ;#10001-
UVW-1800/1600(UC);#10001-


SS-53(1-648-903-11)

CNI4	K-3	IC223	J-4
CNI212	C-2	IC224	J-3
		IC225	J-3
CN1	E-1	IC226	C-4
CN2	F-1	IC227	A-2
CN3	P-1	IC228	F-2
CN107	N-6	IC229	L-3
CN108	K-6	IC230	H-3
CN109	C-6	IC231	L-3
		IC232	L-4
CV1	N-1	IC233	M-3
*D100	A-5	PS1	L-5
*D101	A-5	PS2	M-5
*D102	A-5		
*D103	A-5	*Q105	B-5
*D104	A-5	*Q106	B-5
*D105	B-4	*Q107	B-4
*D200	E-3	*Q108	B-5
*D201	E-3	*Q204	D-5
*D202	E-3	*Q205	D-5
*D203	E-3	*Q206	D-5
*D204	E-3	*Q207	D-5
*D205	E-2	*Q208	D-5
*D206	F-3	*Q209	D-5
*D207	F-3	*Q210	J-3
*D208	E-3	*Q211	J-3
*D210	G-4		
*D211	E-2	*RB1	P-3
*D213	E-3	*RB2	R-2
*D214	J-6	*RB201	E-1
*D215	J-5	*RB202	B-1
		*RB203	K-4
E1	N-1		
E200	E-4	S1	R-4
E201	D-1	S201	B-1
E202	J-1		
		TP1	R-2
IC1	P-3	TP100	A-4
IC2	N-3	TP103	B-4
IC3	N-3	TP201	A-2
IC4	K-3	TP202	A-2
IC5	L-1	TP203	D-1
IC6	M-2	TP205	H-3
IC7	R-1	TP206	G-3
IC8	R-5	TP207	F-4
IC9	P-5	TP211	G-2
IC10	R-2	TP216	H-2
IC11	P-2	TP217	G-3
IC12	N-2	TP219	D-1
IC15	N-2	TP223	H-2
IC100	A-3	TP224	J-2
IC101	A-5	TP225	C-1
IC102	A-5		
IC103	B-5	X1	R-2
IC200	E-3	X101	A-3
IC201	F-4	X200	G-1
IC202	E-2		
IC203	E-3		
IC204	D-4		
IC206	E-3		
IC207	D-3		
IC208	D-3		
IC209	D-3		
IC210	D-3		
IC211	B-2		
IC212	C-2		
IC213	C-3		
IC214	E-3		
IC215	G-3		
IC216	G-3		
IC217	G-3		
IC219	H-1		
IC220	J-3		
IC221	J-4		
IC222	J-3		

*: B SIDE


SS-53(1/4);SYSCON MAIN

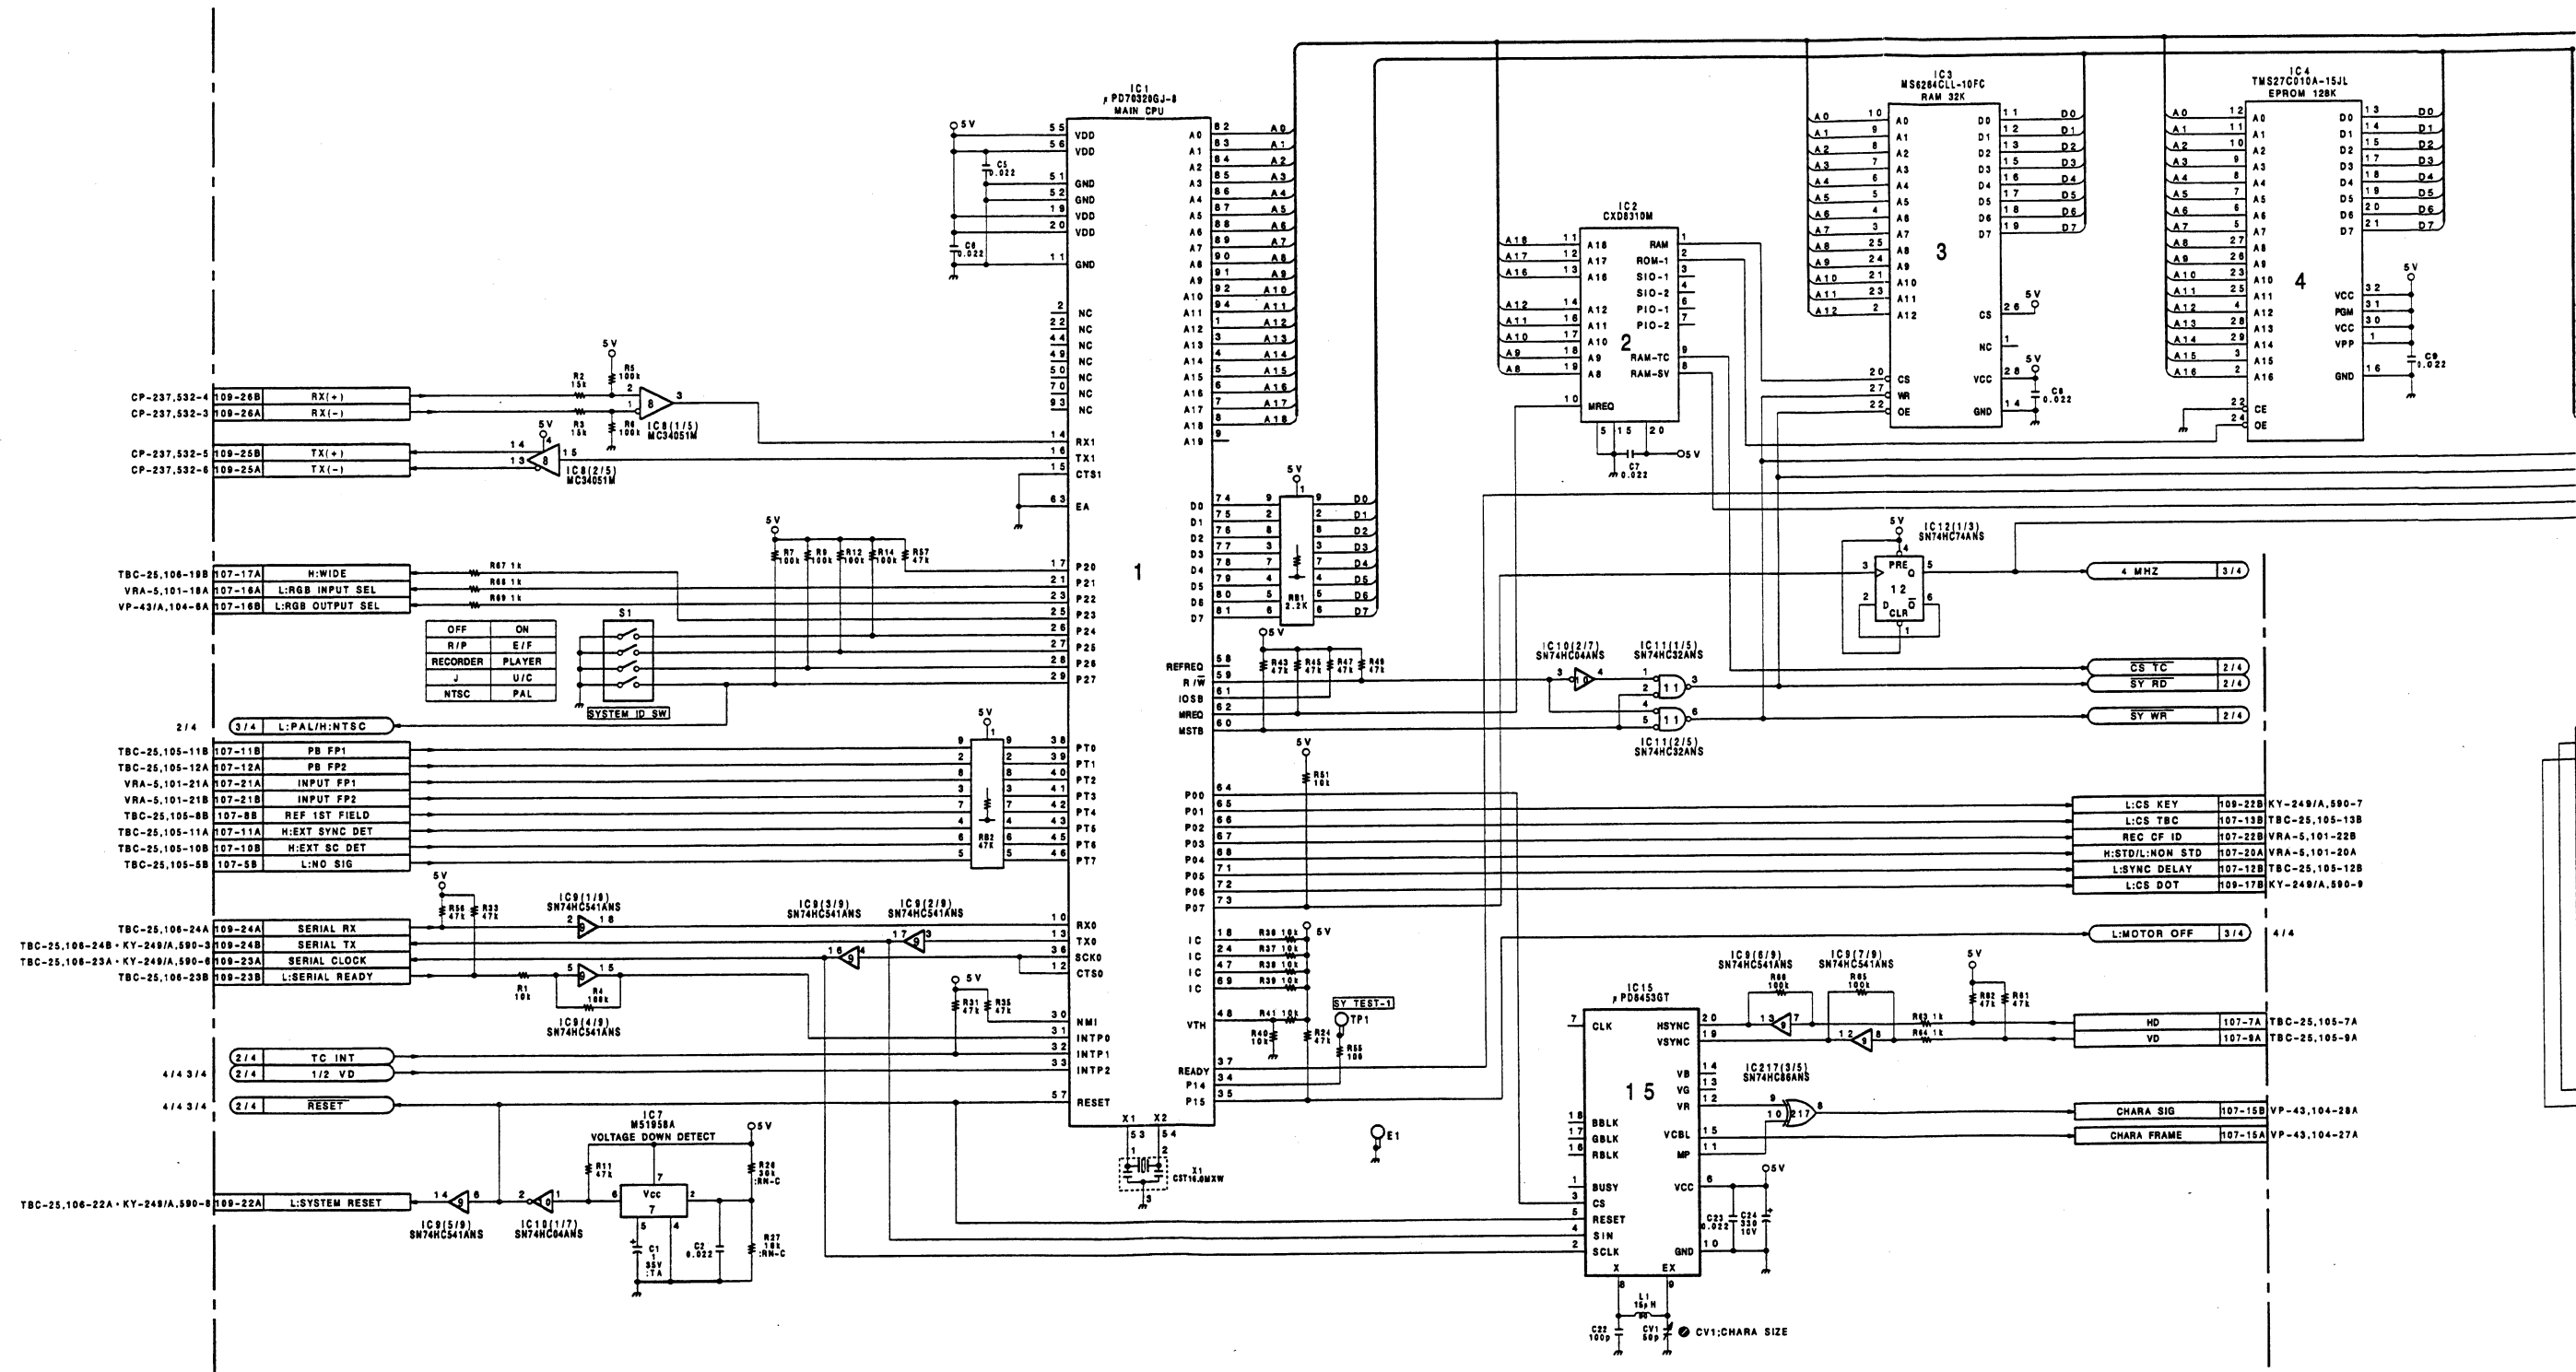

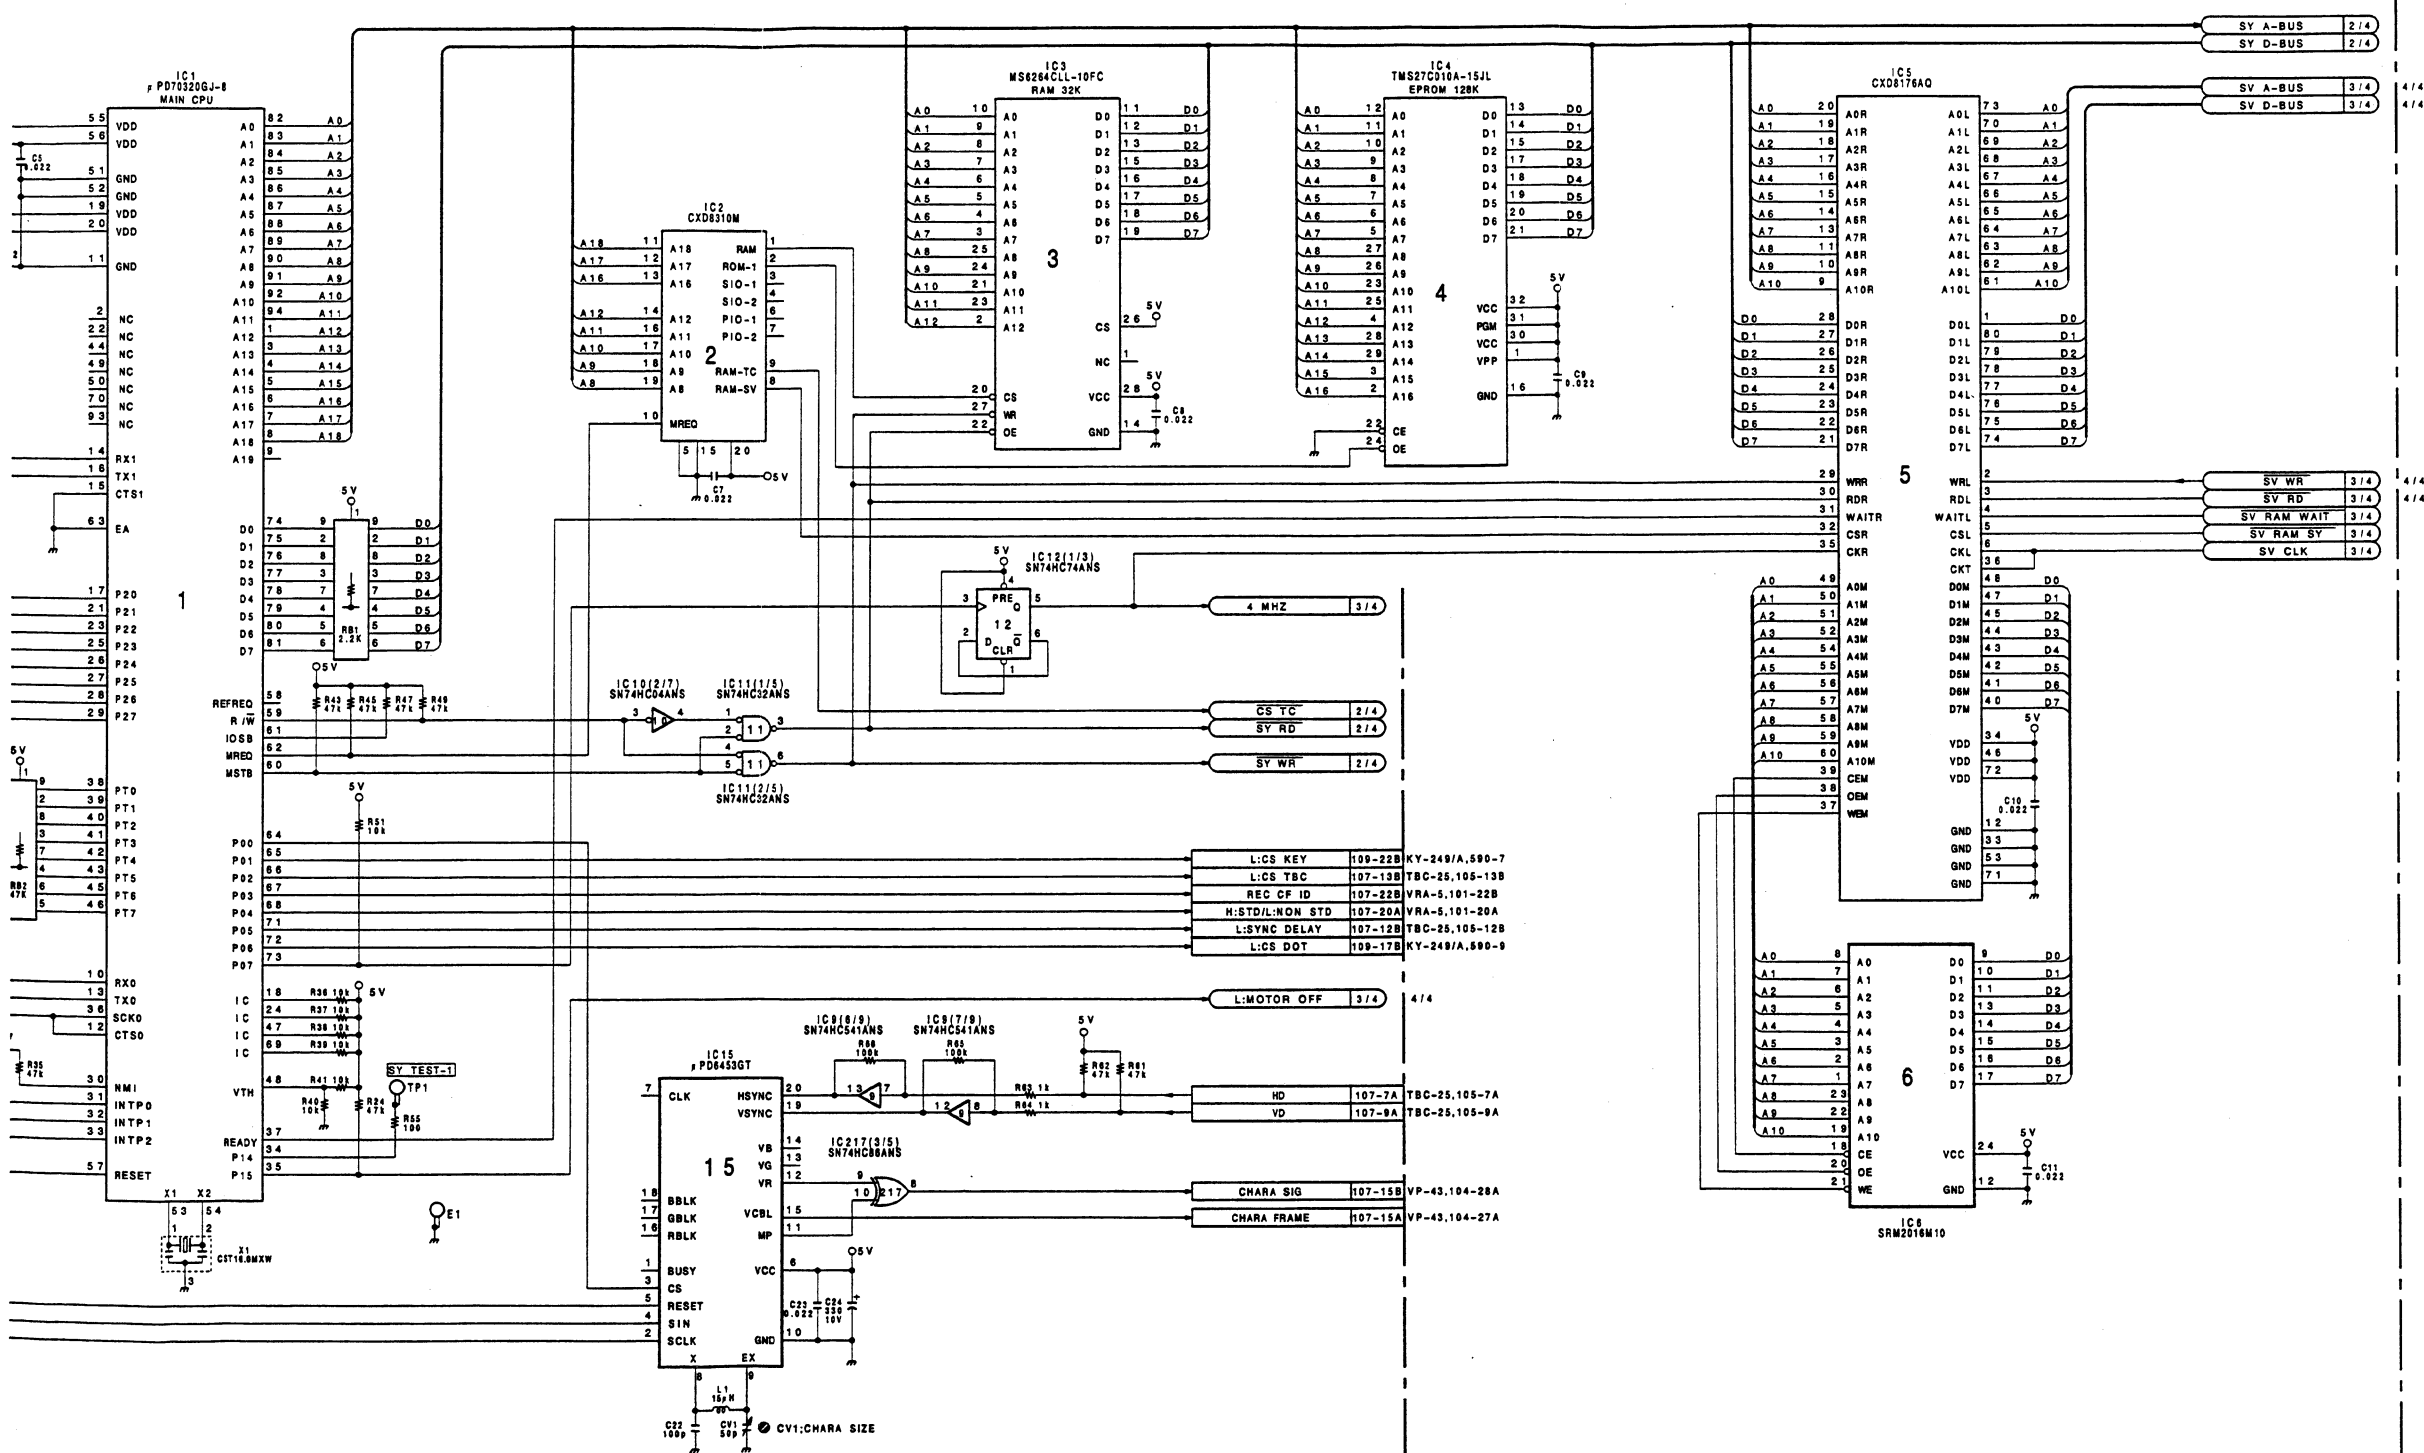

SS-53 BOARD (1/4)

BOARD NO.1-648-903-11
UVW-1800/1600(J) :#10001-
UVW-1800/1600(UC):#10001-

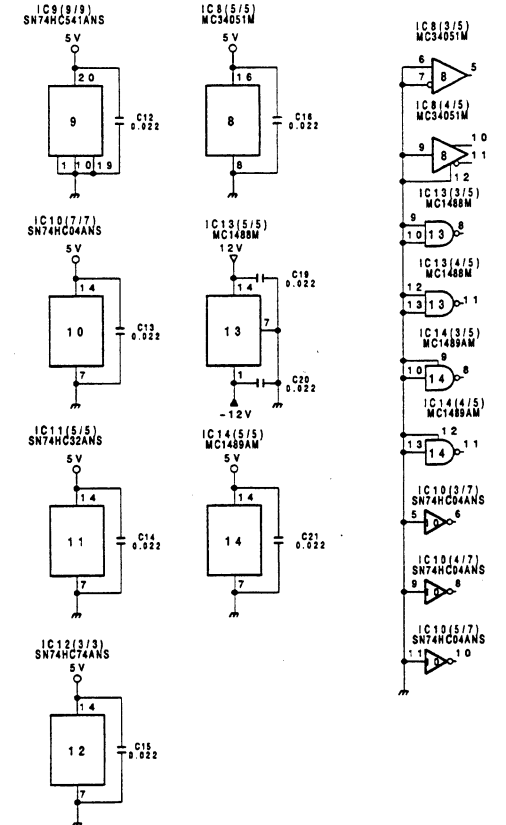


SS-53(1-648-903-11)

CNI4	K-3	IC223	J-4
CNI212	C-2	IC224	J-3
		IC225	J-3
CN1	E-1	IC226	C-4
CN2	F-1	IC227	A-2
CN3	P-1	IC228	F-2
CN107	N-6	IC229	L-3
CN108	K-6	IC230	H-3
CN109	C-6	IC231	L-3
		IC232	L-4
CV1	N-1	IC233	M-3
*D100	A-5	PS1	L-5
*D101	A-5	PS2	M-5
*D102	A-5		
*D103	A-5	*Q105	B-5
*D104	A-5	*Q106	B-5
*D105	B-4	*Q107	B-4
*D200	E-3	*Q108	B-5
*D201	E-3	*Q204	D-5
*D202	E-3	*Q205	D-5
*D203	E-3	*Q206	D-5
*D204	E-3	*Q207	D-5
*D205	E-2	*Q208	D-5
*D206	F-3	*Q209	D-5
*D207	F-3	*Q210	J-3
*D208	E-3	*Q211	J-3
*D210	G-4		
*D211	E-2	*RB1	P-3
*D213	E-3	*RB2	R-2
*D214	J-6	*RB201	E-1
*D215	J-5	*RB202	B-1
		*RB203	K-4
E1	N-1		
E200	E-4	S1	R-4
E201	D-1	S201	B-1
E202	J-1		
		TP1	R-2
IC1	P-3	TP100	A-4
IC2	N-3	TP103	B-4
IC3	N-3	TP201	A-2
IC4	K-3	TP202	A-2
IC5	L-1	TP203	D-1
IC6	M-2	TP205	H-3
IC7	R-1	TP206	G-3
IC8	R-5	TP207	F-4
IC9	P-5	TP211	G-2
IC10	R-2	TP216	H-2
IC11	P-2	TP217	G-3
IC12	N-2	TP219	D-1
IC15	N-2	TP223	H-2
IC100	A-3	TP224	J-2
IC101	A-5	TP225	C-1
IC102	A-5		
IC103	B-5	X1	R-2
IC200	E-3	X101	A-3
IC201	F-4	X200	G-1
IC202	E-2		
IC203	E-3		
IC204	D-4		
IC206	E-3		
IC207	D-3		
IC208	D-3		
IC209	D-3		
IC210	D-3		
IC211	B-2		
IC212	C-2		
IC213	C-3		
IC214	E-3		
IC215	G-3		
IC216	G-3		
IC217	G-3		
IC219	H-1		
IC220	J-3		
IC221	J-4		
IC222	J-3		

*: B SIDE

SS-53(2/4);TC GENERATOR/READER

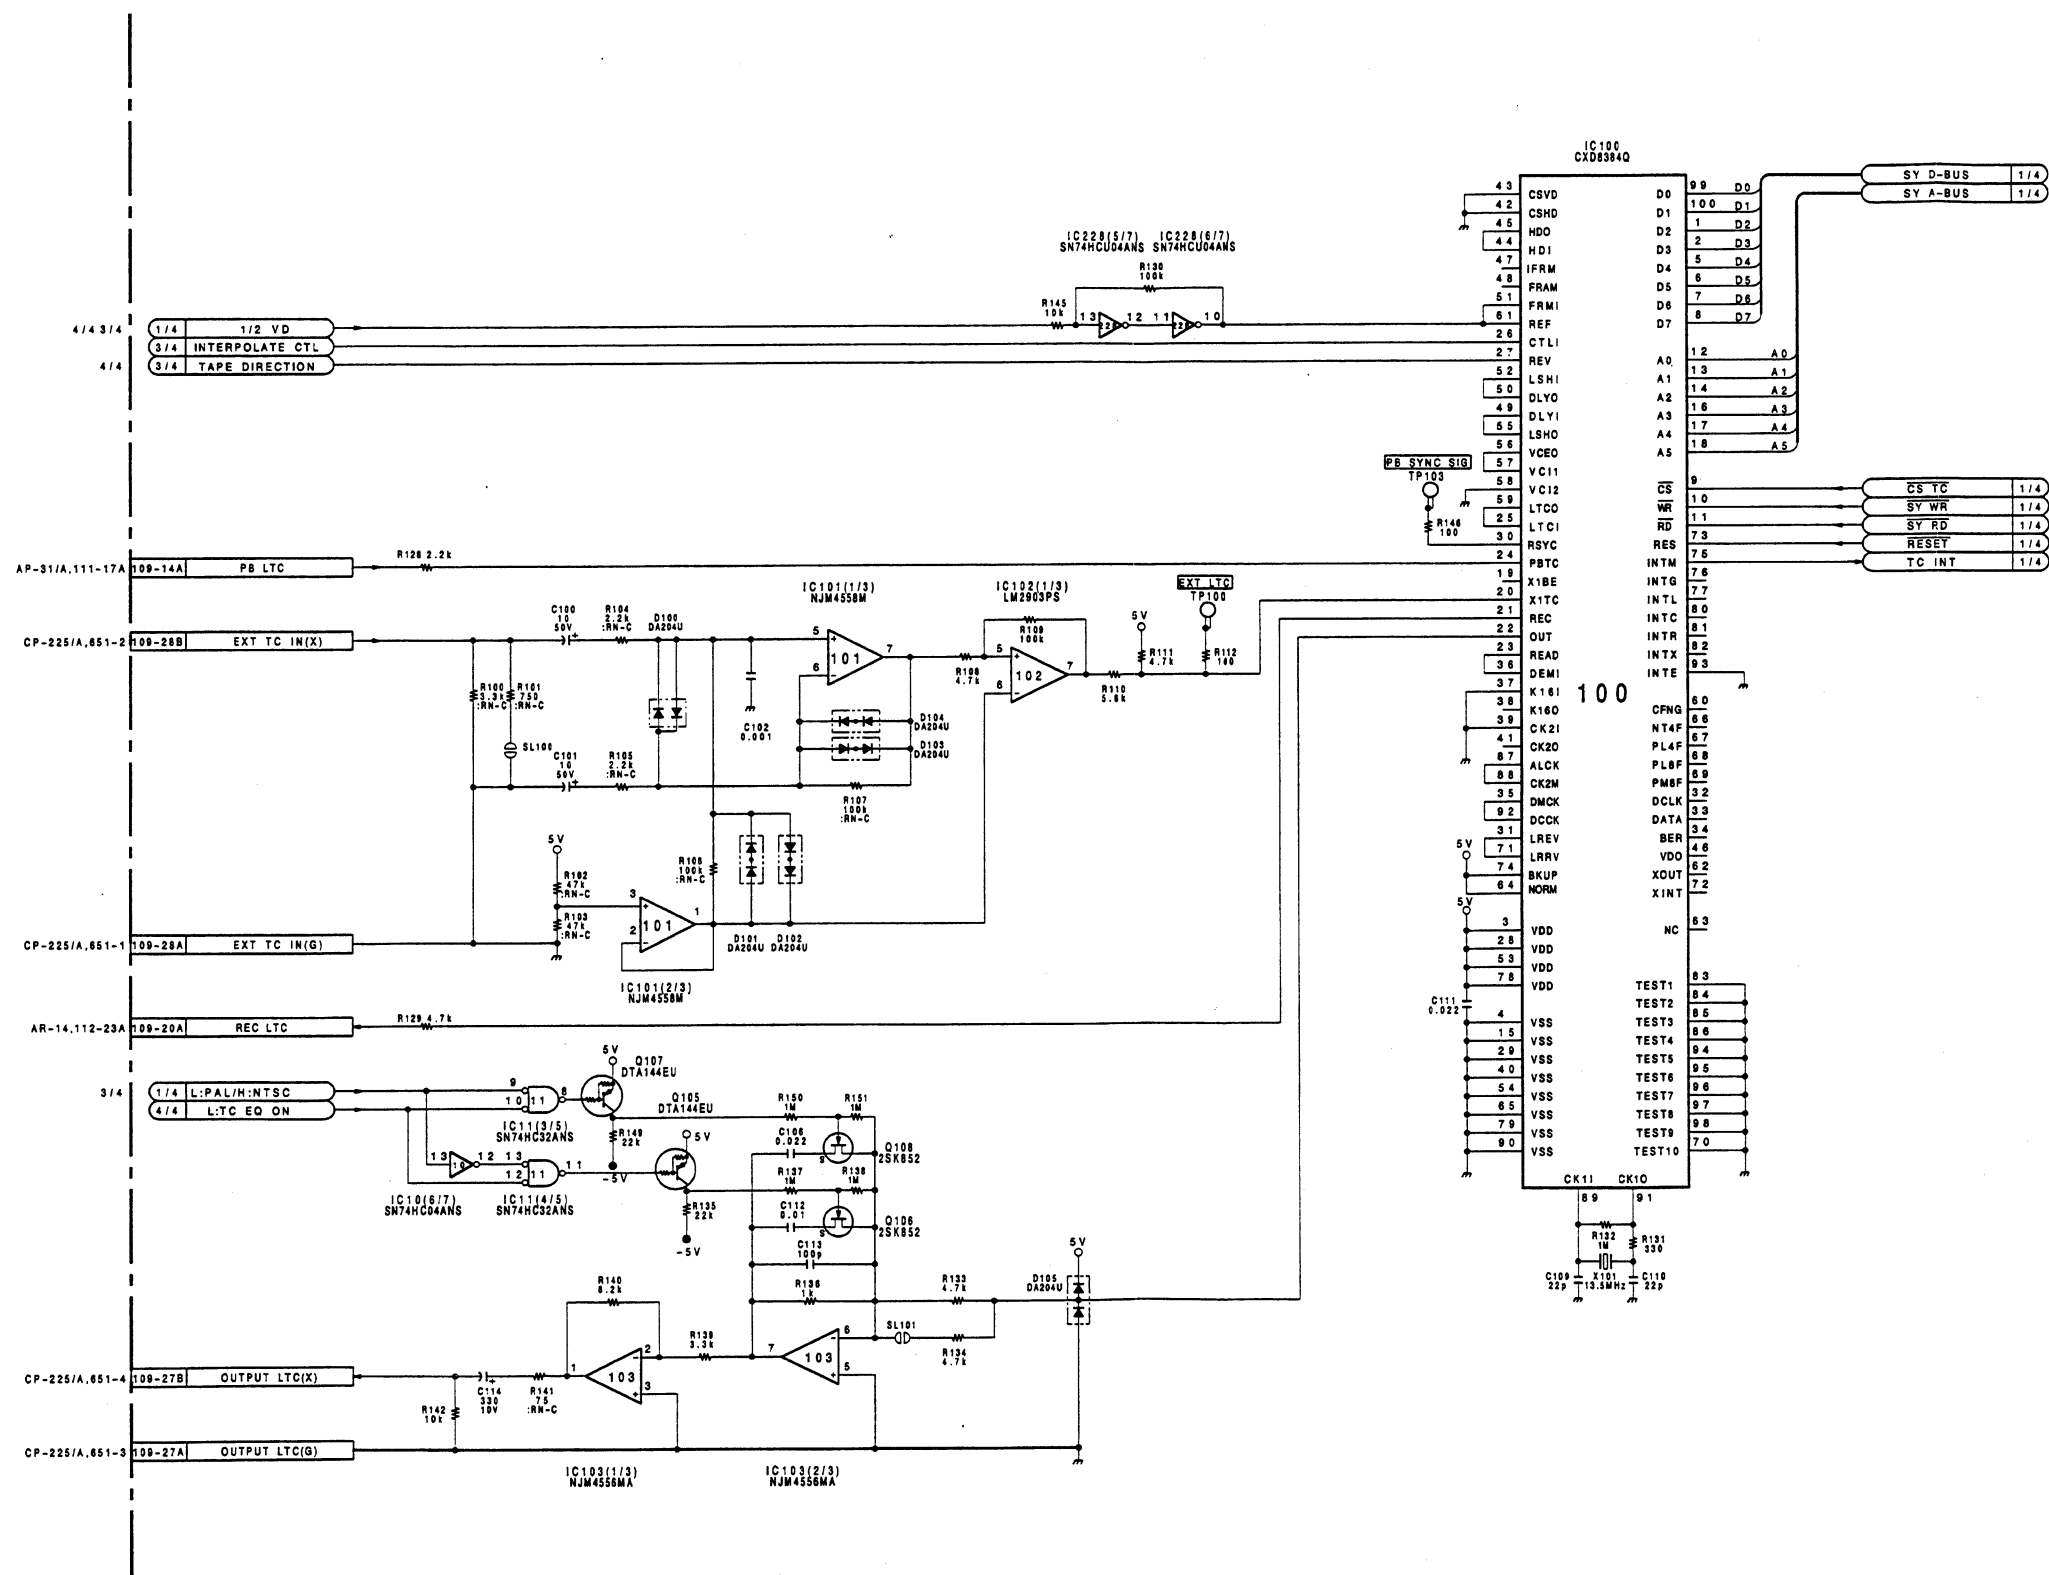

SS-53 BOARD (2/4)


BOARD NO.1-648-903-11
UVW-1800/1600(J) :#10001-
UVW-1800/1600(UC):#10001-


SS-53(1-648-903-11)

CN14	K-3	IC223	J-4
CN1212	C-2	IC224	J-3
		IC225	J-3
CN1	E-1	IC226	C-4
CN2	F-1	IC227	A-2
CN3	P-1	IC228	F-2
CN107	N-6	IC229	L-3
CN108	K-6	IC230	H-3
CN109	C-6	IC231	L-3
		IC232	L-4
CV1	N-1	IC233	M-3
*D100	A-5	PS1	L-5
*D101	A-5	PS2	M-5
*D102	A-5		
*D103	A-5	*Q105	B-5
*D104	A-5	*Q106	B-5
*D105	B-4	*Q107	B-4
*D200	E-3	*Q108	B-5
*D201	E-3	*Q204	D-5
*D202	E-3	*Q205	D-5
*D203	E-3	*Q206	D-5
*D204	E-3	*Q207	D-5
*D205	E-2	*Q208	D-5
*D206	F-3	*Q209	D-5
*D207	F-3	*Q210	J-3
*D208	E-3	*Q211	J-3
*D210	G-4		
*D211	E-2	*RB1	P-3
*D213	E-3	*RB2	R-2
*D214	J-6	*RB201	E-1
*D215	J-5	*RB202	B-1
		*RB203	K-4
E1	N-1		
E200	E-4	S1	R-4
E201	D-1	S201	B-1
E202	J-1		
		TP1	R-2
IC1	P-3	TP100	A-4
IC2	N-3	TP103	B-4
IC3	N-3	TP201	A-2
IC4	K-3	TP202	A-2
IC5	L-1	TP203	D-1
IC6	M-2	TP205	H-3
IC7	R-1	TP206	G-3
IC8	R-5	TP207	F-4
IC9	P-5	TP211	G-2
IC10	R-2	TP216	H-2
IC11	P-2	TP217	G-3
IC12	N-2	TP219	D-1
IC15	N-2	TP223	H-2
IC100	A-3	TP224	J-2
IC101	A-5	TP225	C-1
IC102	A-5		
IC103	B-5	X1	R-2
IC200	E-3	X101	A-3
IC201	F-4	X200	G-1
IC202	E-2		
IC203	E-3		
IC204	D-4		
IC206	E-3		
IC207	D-3		
IC208	D-3		
IC209	D-3		
IC210	D-3		
IC211	B-2		
IC212	C-2		
IC213	C-3		
IC214	E-3		
IC215	G-3		
IC216	G-3		
IC217	G-3		
IC219	H-1		
IC220	J-3		
IC221	J-4		
IC222	J-3		

*: B SIDE

SS-53(3/4);SERVO MAIN

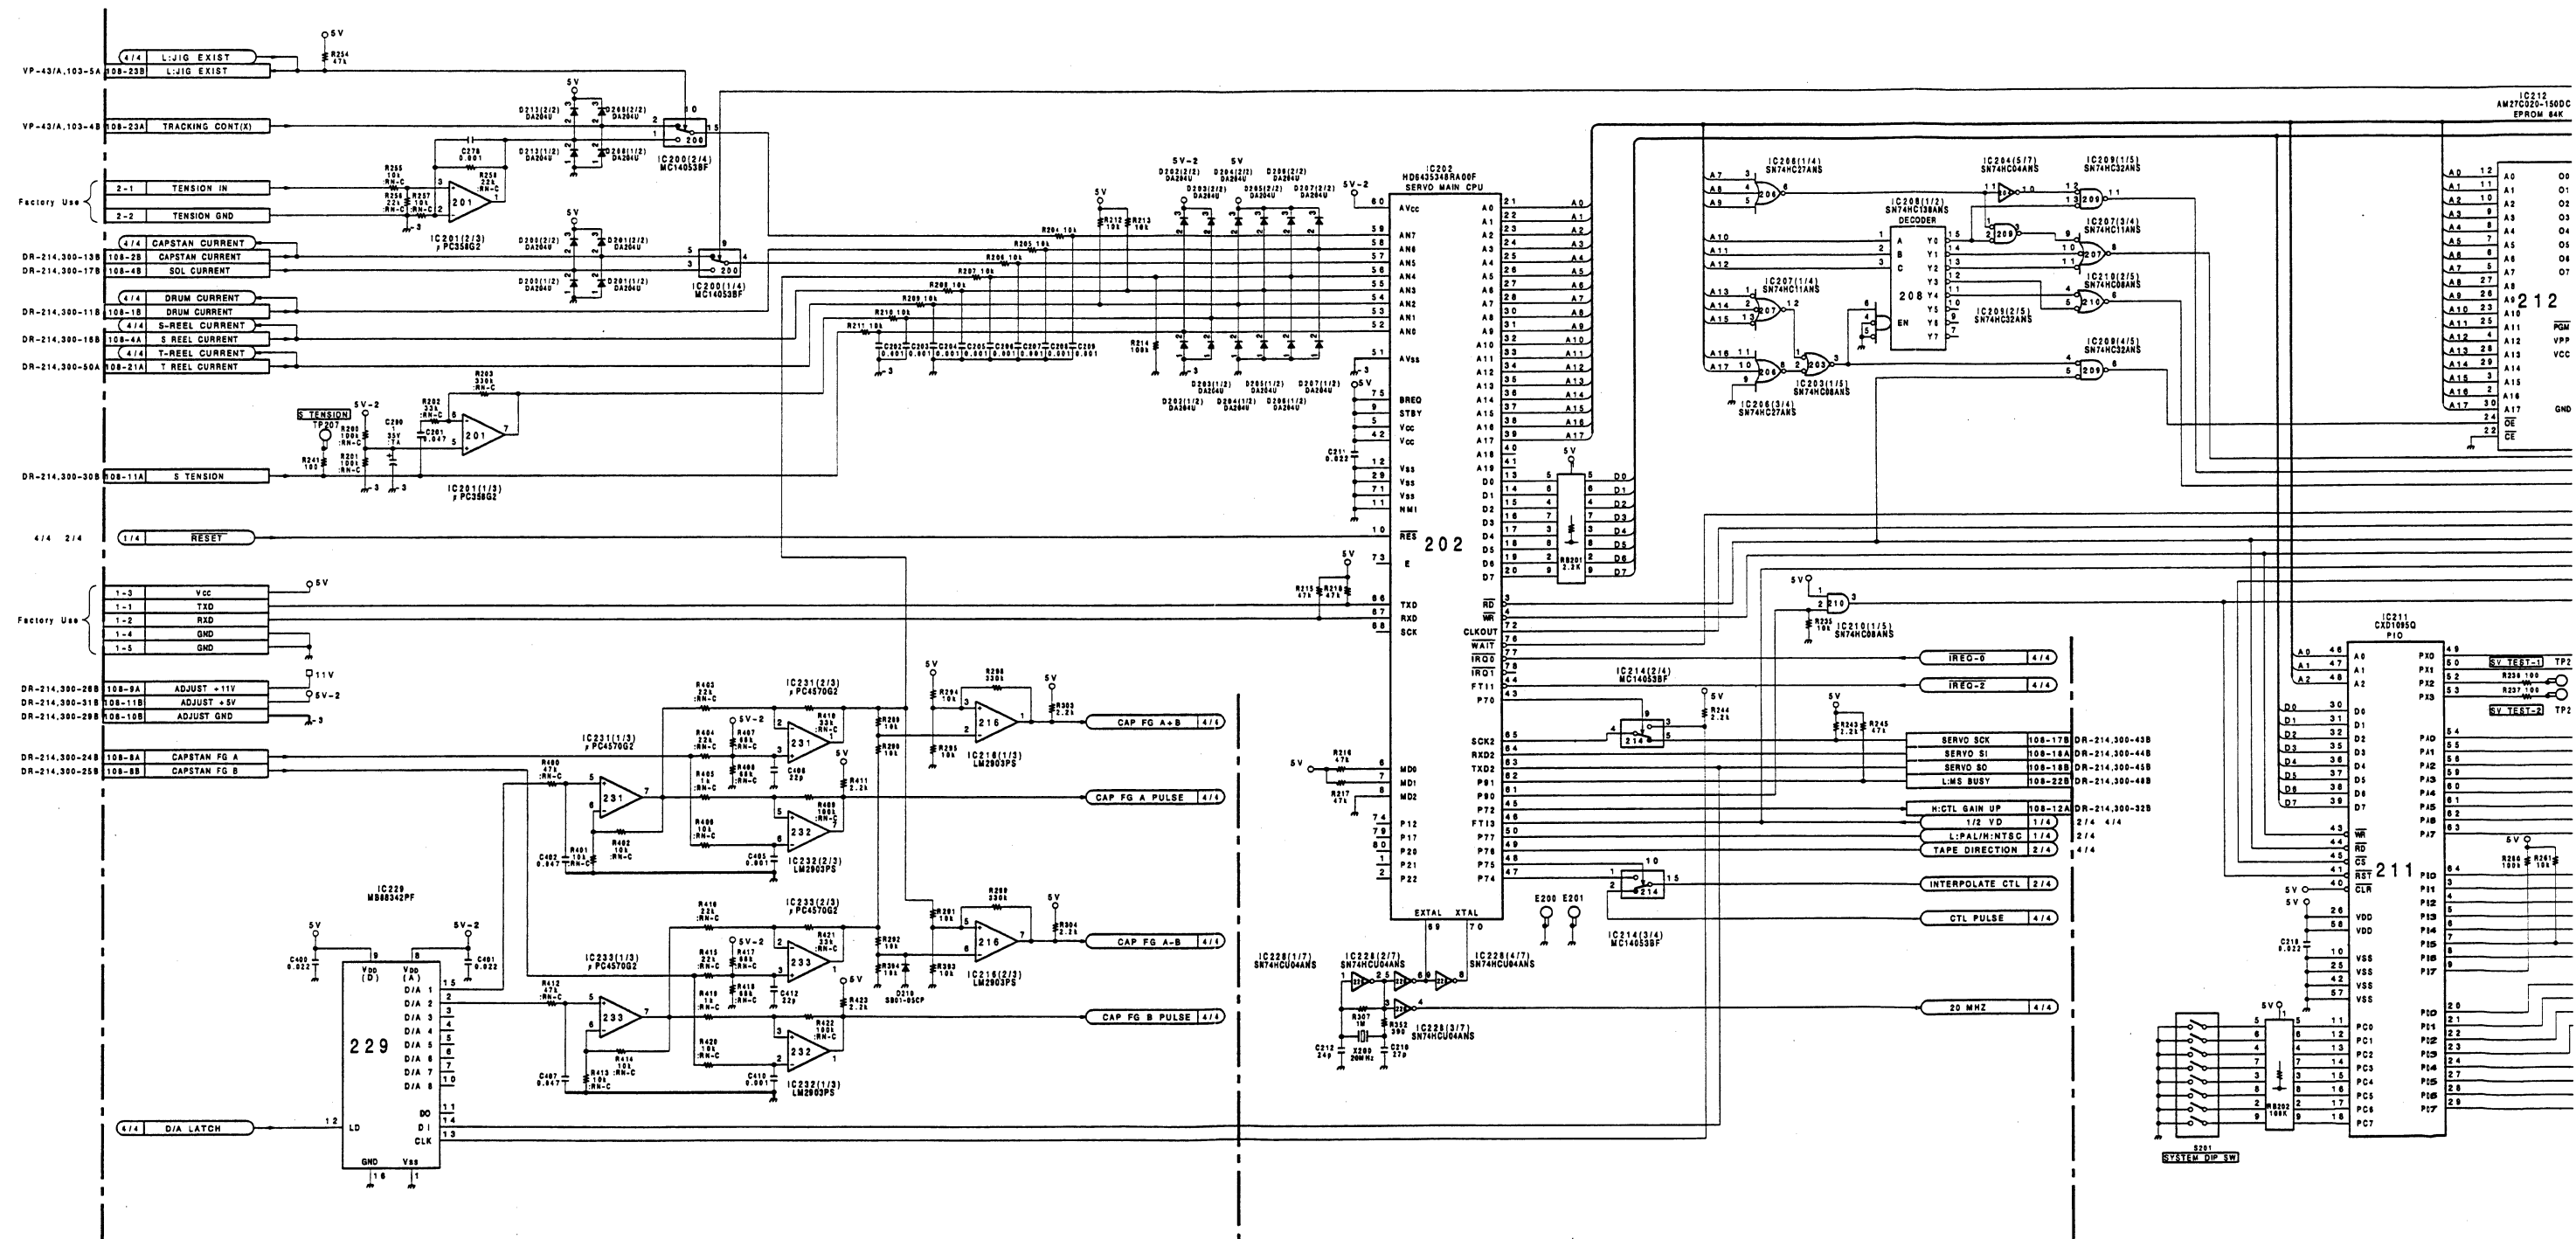

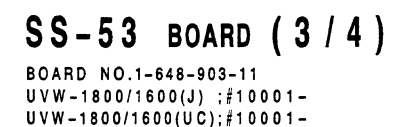


SS-53(1-648-903-11)


CN14	K-3	IC223	J-4
CN1212	C-2	IC224	J-3
		IC225	J-3
CN1	E-1	IC226	C-4
CN2	F-1	IC227	A-2
CN3	P-1	IC228	F-2
CN107	N-6	IC229	L-3
CN108	K-6	IC230	H-3
CN109	C-6	IC231	L-3
		IC232	L-4
CV1	N-1	IC233	M-3
*D100	A-5	PS1	L-5
*D101	A-5	PS2	M-5
*D102	A-5		
*D103	A-5	*Q105	B-5
*D104	A-5	*Q106	B-5
*D105	B-4	*Q107	B-4
*D200	E-3	*Q108	B-5
*D201	E-3	*Q204	D-5
*D202	E-3	*Q205	D-5
*D203	E-3	*Q206	D-5
*D204	E-3	*Q207	D-5
*D205	E-2	*Q208	D-5
*D206	F-3	*Q209	D-5
*D207	F-3	*Q210	J-3
*D208	E-3	*Q211	J-3
*D210	G-4		
*D211	E-2	*RB1	P-3
*D213	E-3	*RB2	R-2
*D214	J-6	*RB201	E-1
*D215	J-5	*RB202	B-1
		*RB203	K-4
E1	N-1		
E200	E-4	S1	R-4
E201	D-1	S201	B-1
E202	J-1		
IC1	P-3	TP1	R-2
IC2	N-3	TP100	A-4
IC3	N-3	TP103	B-4
IC4	K-3	TP201	A-2
IC5	L-1	TP202	A-2
IC6	M-2	TP203	D-1
IC7	R-1	TP205	H-3
IC8	R-5	TP206	G-3
IC9	P-5	TP207	F-4
IC10	R-2	TP211	G-2
IC11	P-2	TP216	H-2
IC12	N-2	TP217	G-3
IC15	N-2	TP219	D-1
IC100	A-3	TP223	H-2
IC101	A-5	TP224	J-2
IC102	A-5	TP225	C-1
IC103	B-5		
IC200	E-3	X1	R-2
IC201	F-4	X101	A-3
IC202	E-2	X200	G-1
IC203	E-3		
IC204	D-4		
IC206	E-3		
IC207	D-3		
IC208	D-3		
IC209	D-3		
IC210	D-3		
IC211	B-2		
IC212	C-2		
IC213	C-3		
IC214	E-3		
IC215	G-3		
IC216	G-3		
IC217	G-3		
IC219	H-1		
IC220	J-3		
IC221	J-4		
IC222	J-3		

*: B SIDE


① TP219 EE/REC/PB




② TP225 PB



SS-53(4/4);SERVO

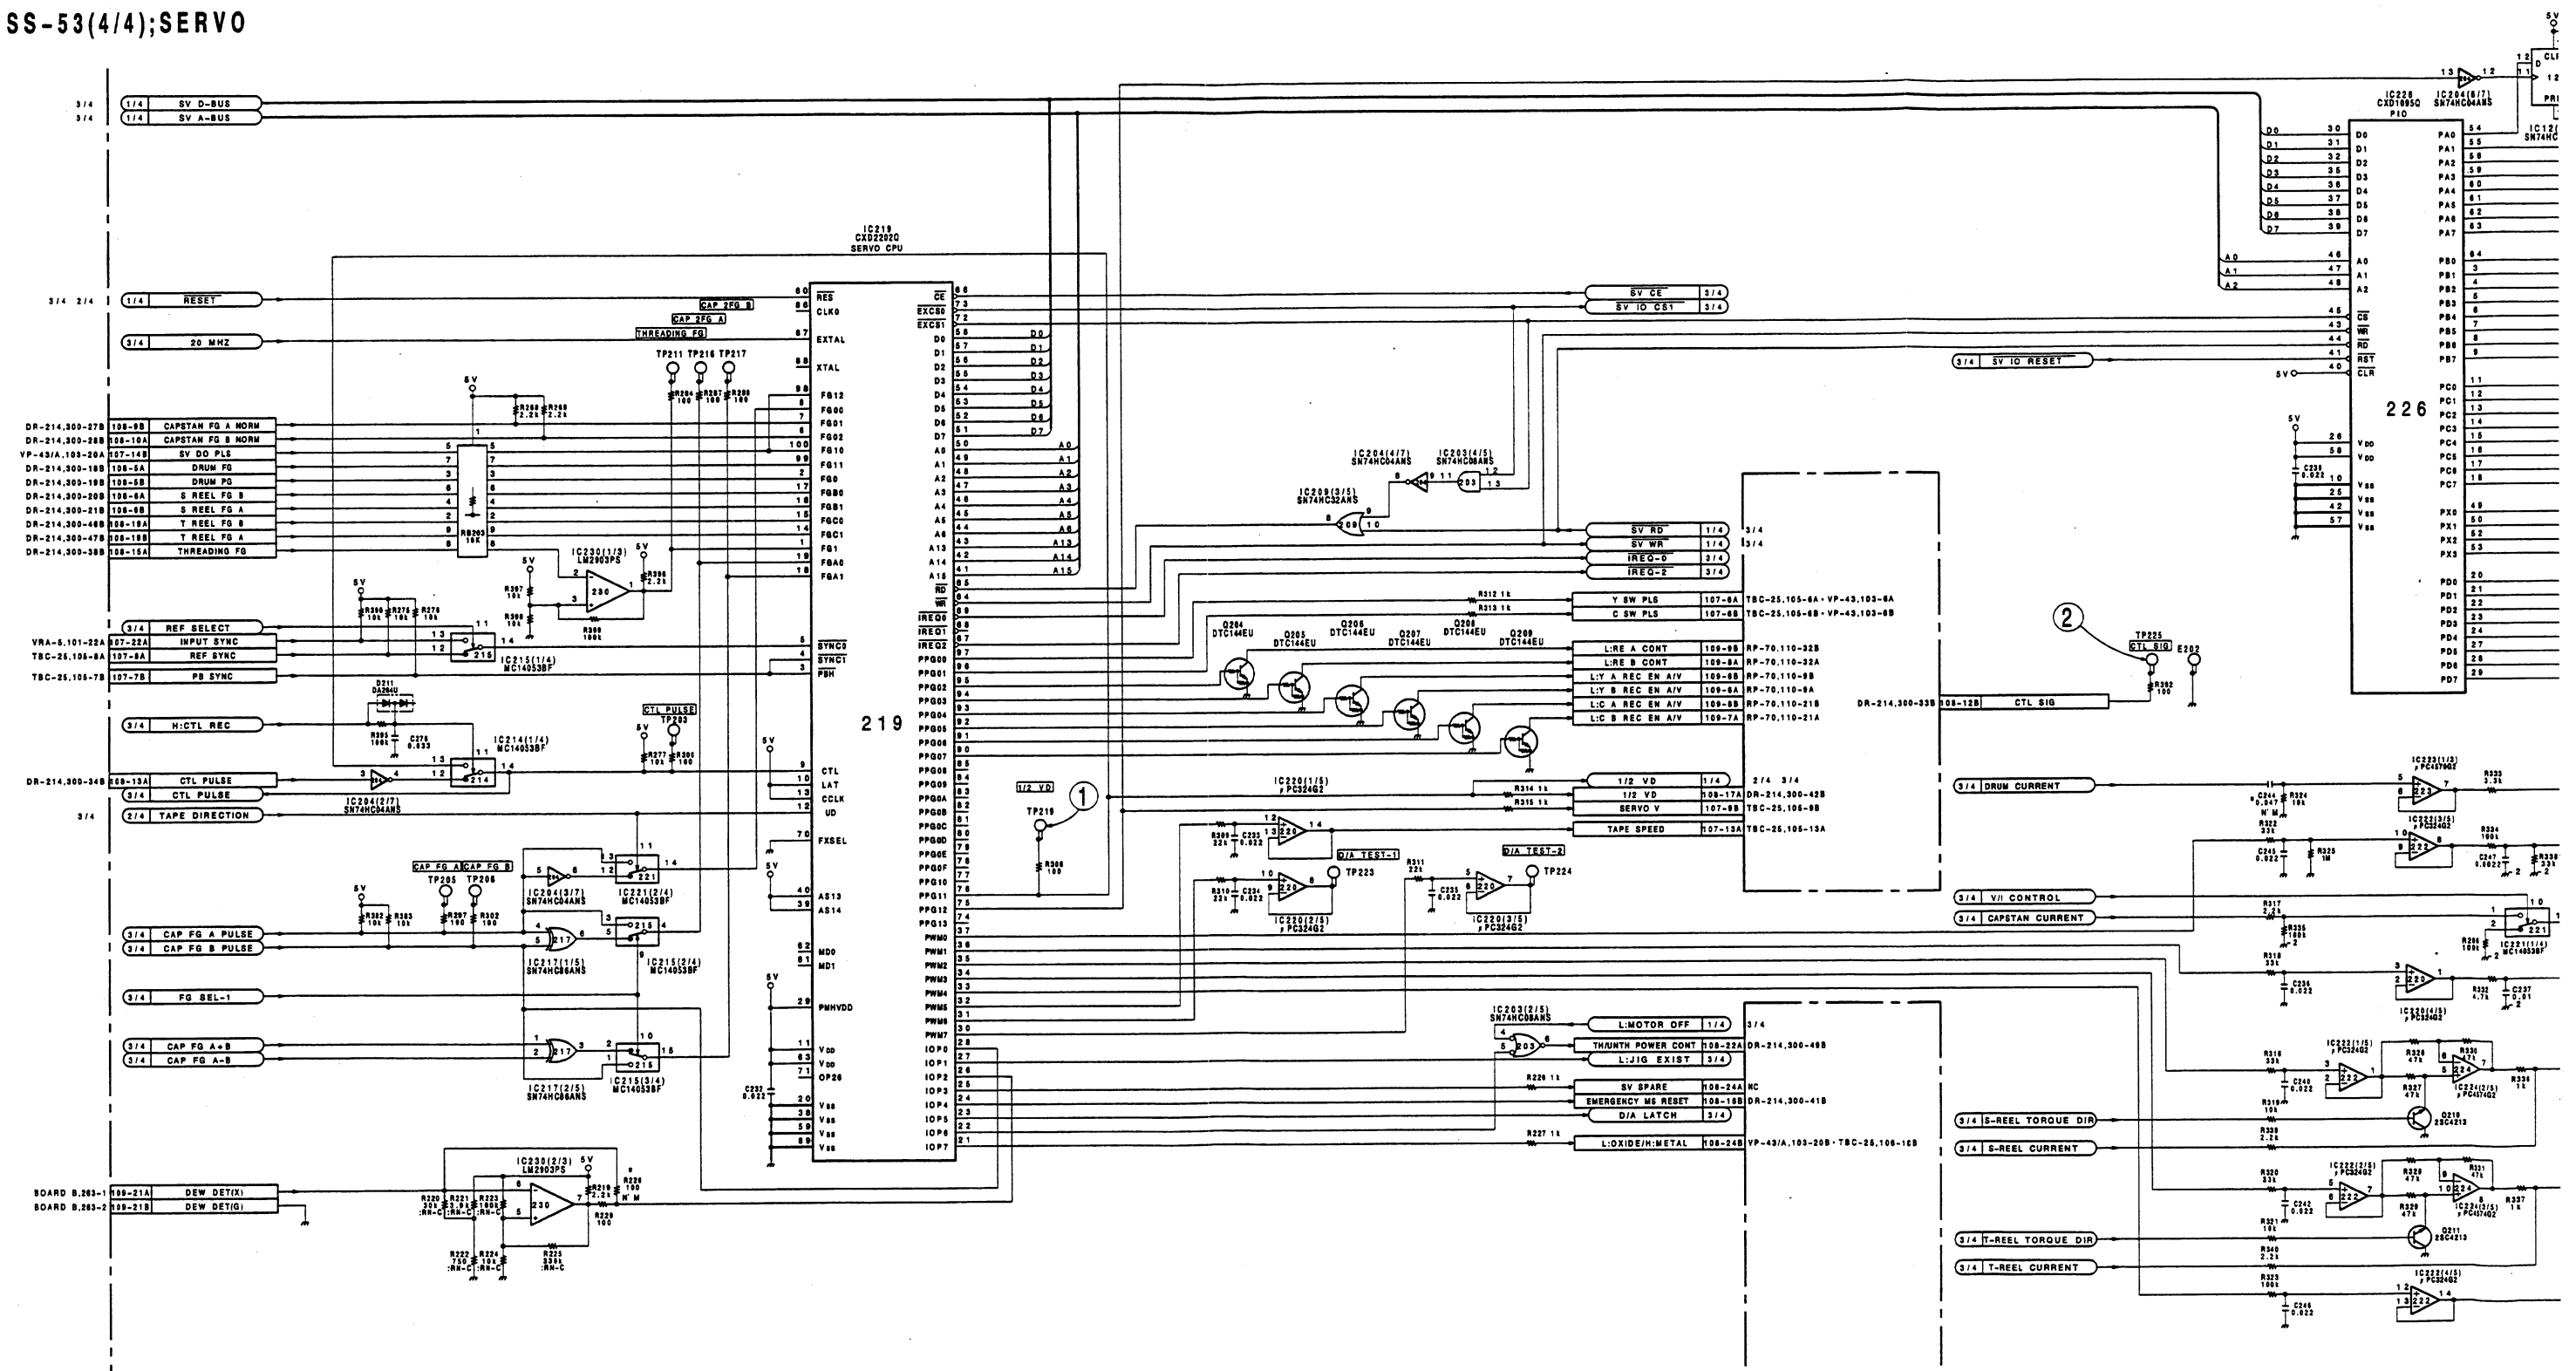

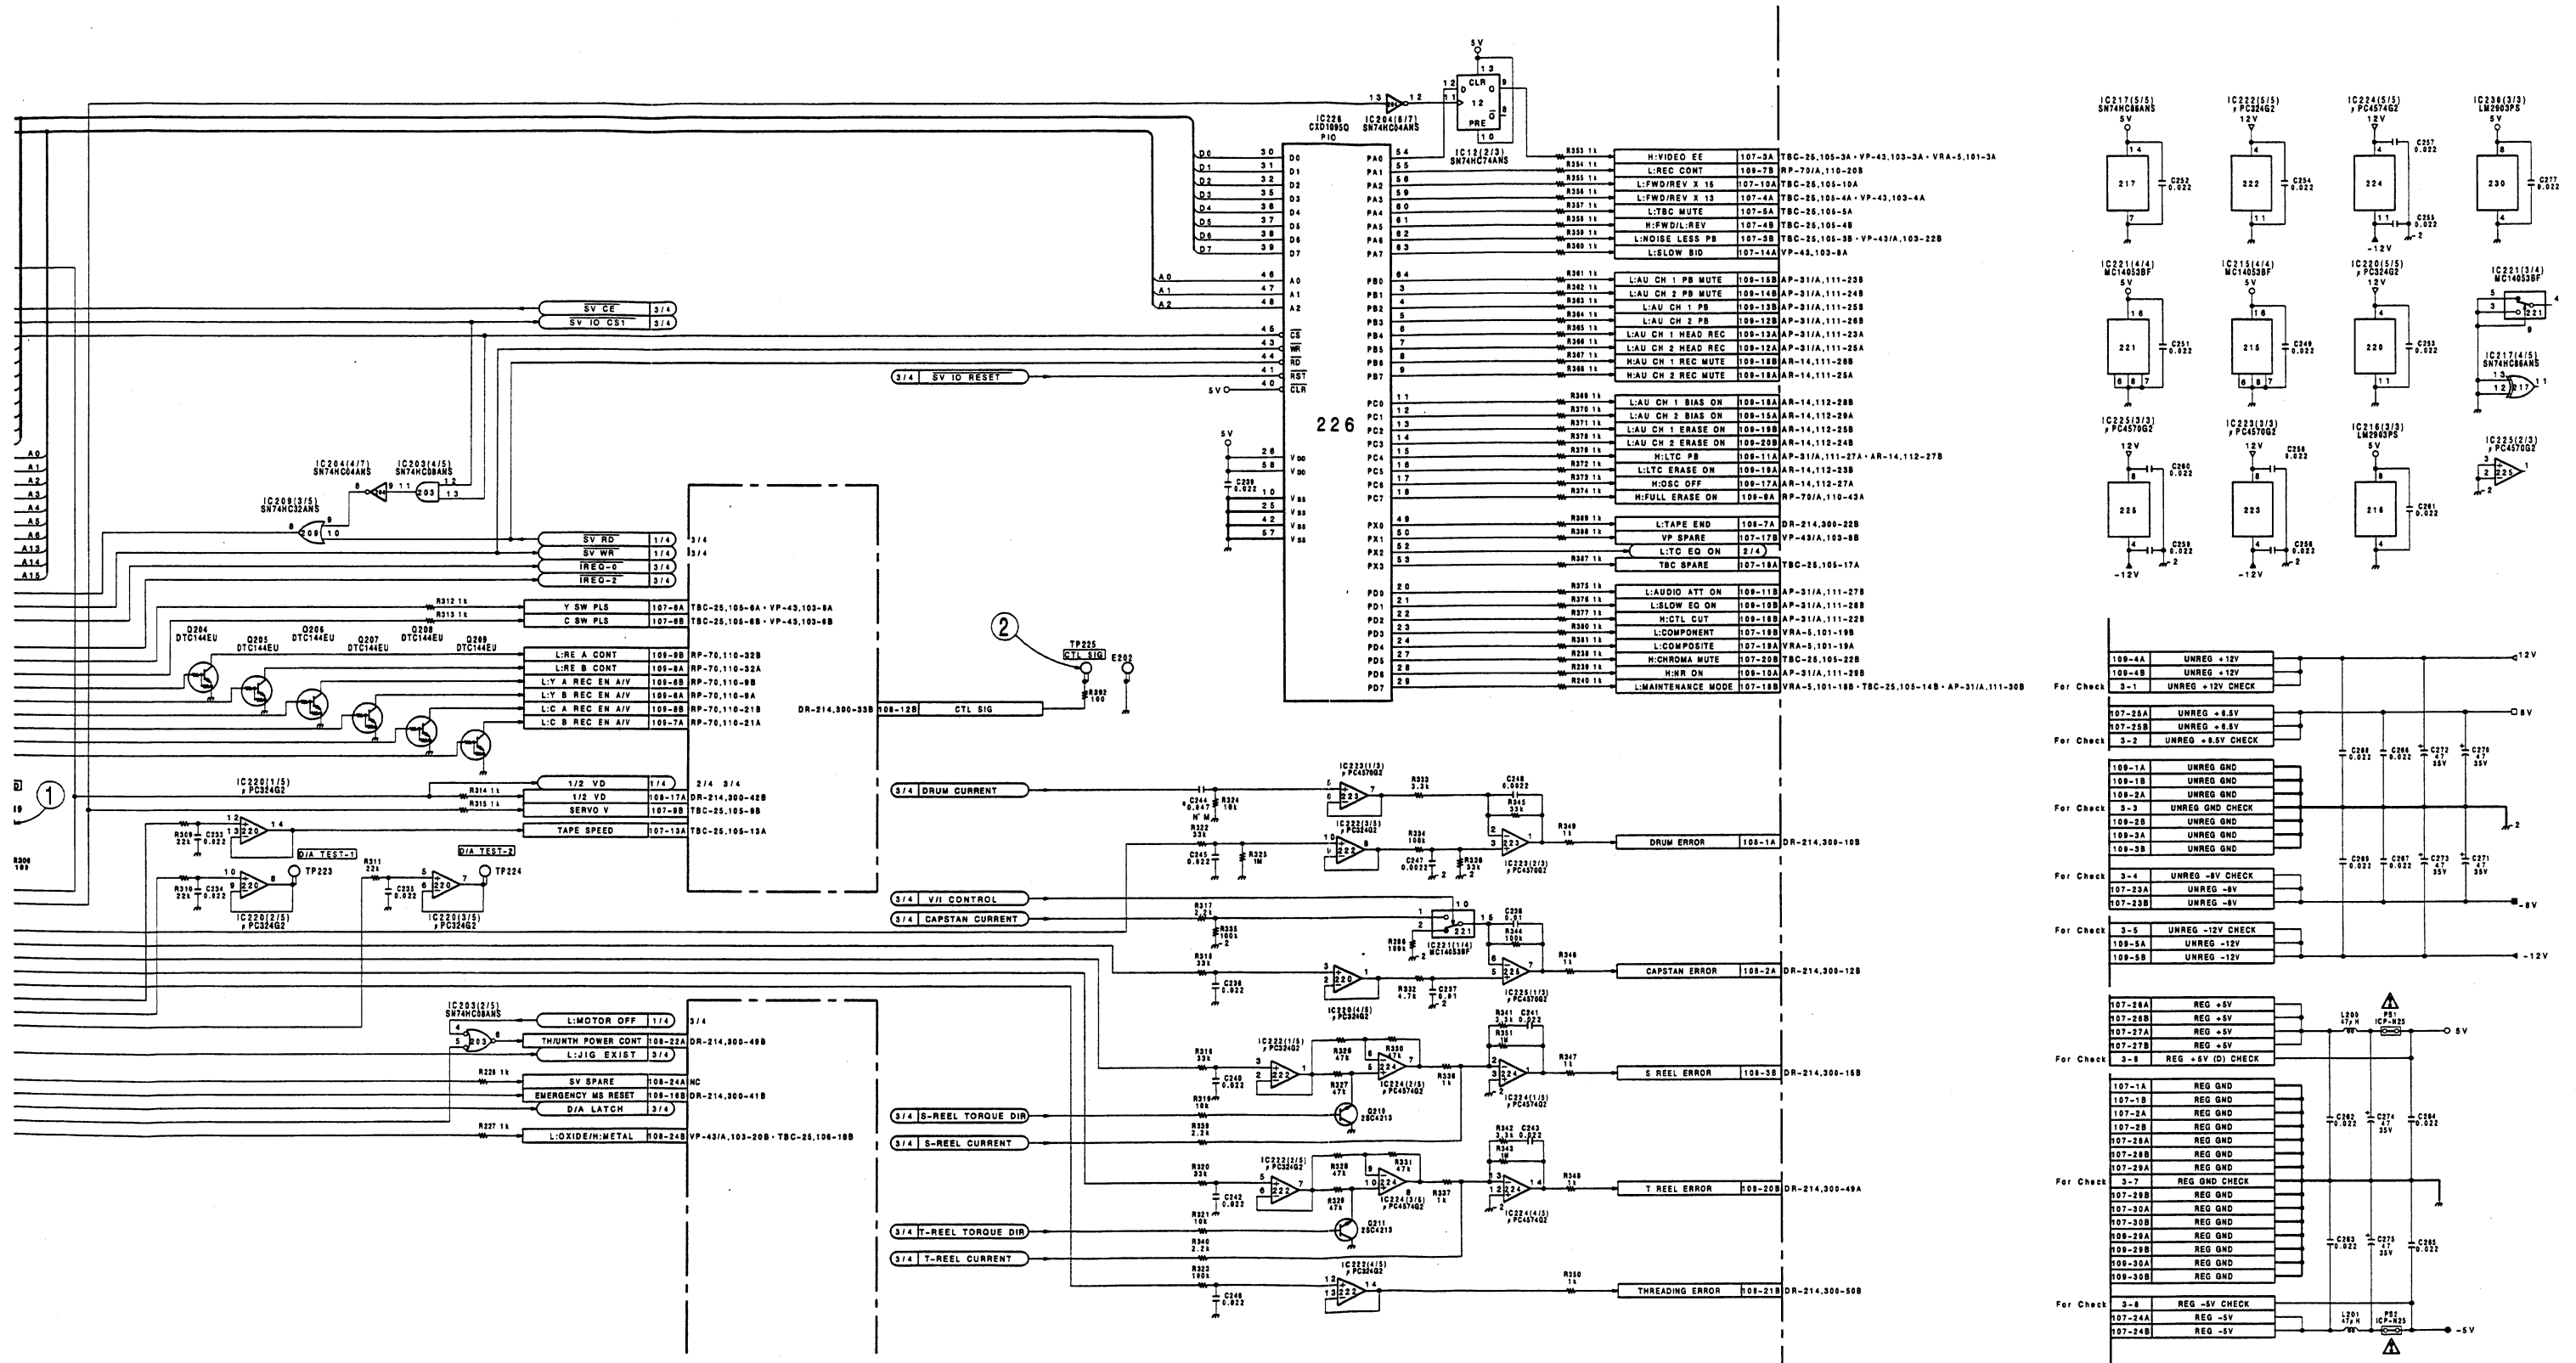

SS-53 BOARD (4/4)


BOARD NO.1-648-903-11
UVW-1800/1600(J);#10001-
UVW-1800/1600(UC);#10001-

TBC-25(1-648-901-11)


CN1	E-1	IC503	J-2	*Q303	P-1
CN2	C-6	IC504	J-4	*Q304	N-2
CN105	N-6	IC505	H-2	*Q305	N-2
CN106	C-6	IC506	H-3	*Q306	R-2
		IC507	G-6	*Q400	P-5
CV700	C-2	IC508	H-4	*Q401	P-5
CV701	C-2	IC509	G-3	*Q402	R-5
		IC510	F-6	*Q403	P-5
*D1	M-2	IC511	H-1	*Q404	M-4
*D2	M-3	IC512	F-3	*Q405	R-4
*D100	M-3	IC513	F-4	*Q406	R-5
*D101	N-3	IC514	H-1	*Q407	N-4
*D102	R-3	IC515	G-2	*Q500	F-2
*D200	M-3	IC516	F-1	*Q501	F-1
*D301	N-2	IC517	G-1	*Q502	E-1
*D302	R-2	IC518	F-3	*Q503	D-1
*D303	R-2	IC519	E-2	*Q700	C-5
*D304	R-2	IC520	D-2	*Q701	C-4
*D401	P-4	IC521	G-1	*Q702	A-2
*D402	N-4	IC522	G-2	*Q703	C-1
*D403	M-4	IC523	F-4	*Q704	C-2
*D404	M-4	IC524	E-3	*Q705	C-2
*D502	K-2	IC525	E-3	*Q706	C-2
*D503	K-2	IC526	D-3	*Q707	C-5
*D504	G-1	IF527	D-3	*Q708	B-5
*D505	G-1	IC528	H-3	*Q709	D-5
*D506	M-5	IC529	F-2	*Q710	D-5
*D701	A-2	IC530	G-2	*Q711	D-5
*D702	C-2	IC531	G-2		
*D703	C-2	IC532	G-2	RV100	R-3
		IC533	G-1	RV200	R-3
E200	N-3	IC534	G-1	RV300	M-1
E300	M-1	IC700	A-2	RV301	N-1
E400	R-5	IC701	A-1	RV400	P-1
E500	D-1	IC702	A-2	RV401	P-5
E501	J-3	IC703	C-4	RV500	F-1
E700	E-4	IC704	A-2	RV501	F-1
E701	B-2	IC705	A-3	RV502	D-1
		IC706	D-4	RV700	A-1
FL500	F-2	IC707	E-5	RV701	B-1
FL501	E-1	IC708	F-5	RV702	B-1
FL502	D-1	IC709	A-3	RV703	B-1
		IC710	E-5		
IC1	M-2	IC711	D-3	S500	J-1
IC2	M-3	IC712	C-3		
IC3	L-1	IC713	C-3	TH400	R-5
IC4	L-4	IC714	A-4		
IC5	E-6	IC715	D-2	TP100	R-3
IC6	L-1	IC716	A-3	TP101	N-3
IC7	L-5	IC717	A-5	TP200	R-3
IC100	P-3	IC718	B-2	TP201	N-3
IC101	P-3	IC719	B-2	TP300	R-1
IC102	M-3	IC720	B-3	TP301	P-2
IC103	M-2	IC721	B-2	TP303	P-2
IC200	P-3	IC722	B-4	TP400	M-5
IC203	M-3	IC723	C-5	TP401	N-4
IC300	P-1	IC724	B-5	TP402	N-4
IC301	P-2	IC725	D-5	TP500	E-1
IC302	R-1	IC726	F-4	TP501	E-1
IC303	M-1	IC727	E-4	TP502	D-1
IC304	M-2			TP700	C-5
IC305	N-2	LV300	R-2	TP701	C-4
IC306	M-2	LV400	M-4	TP702	C-1
IC307	R-2			TP703	C-3
IC308	R-2	*Q100	R-3	TP704	C-1
IC400	R-5	*Q101	R-3		
IC401	N-5	*Q102	P-3	X700	C-2
IC402	R-5	*Q103	P-3	X701	C-2
IC403	R-5	*Q104	R-3		
IC404	R-4	*Q200	R-3		
IC405	R-4	*Q201	R-3		
IC406	M-5	*Q202	P-3		
IC407	N-4	*Q203	P-3		
IC408	M-4	*Q300	P-1		
IC501	L-2	*Q301	P-1		
IC502	L-4	*Q302	P-1		

*: B SIDE


① TP101 PB




② TP201 PB




③ TP500 PB




④ TP501 PB




⑤ TP502 PB



TBC-25(1/4);A/D, MEMORY, D/A, SEQUENCER

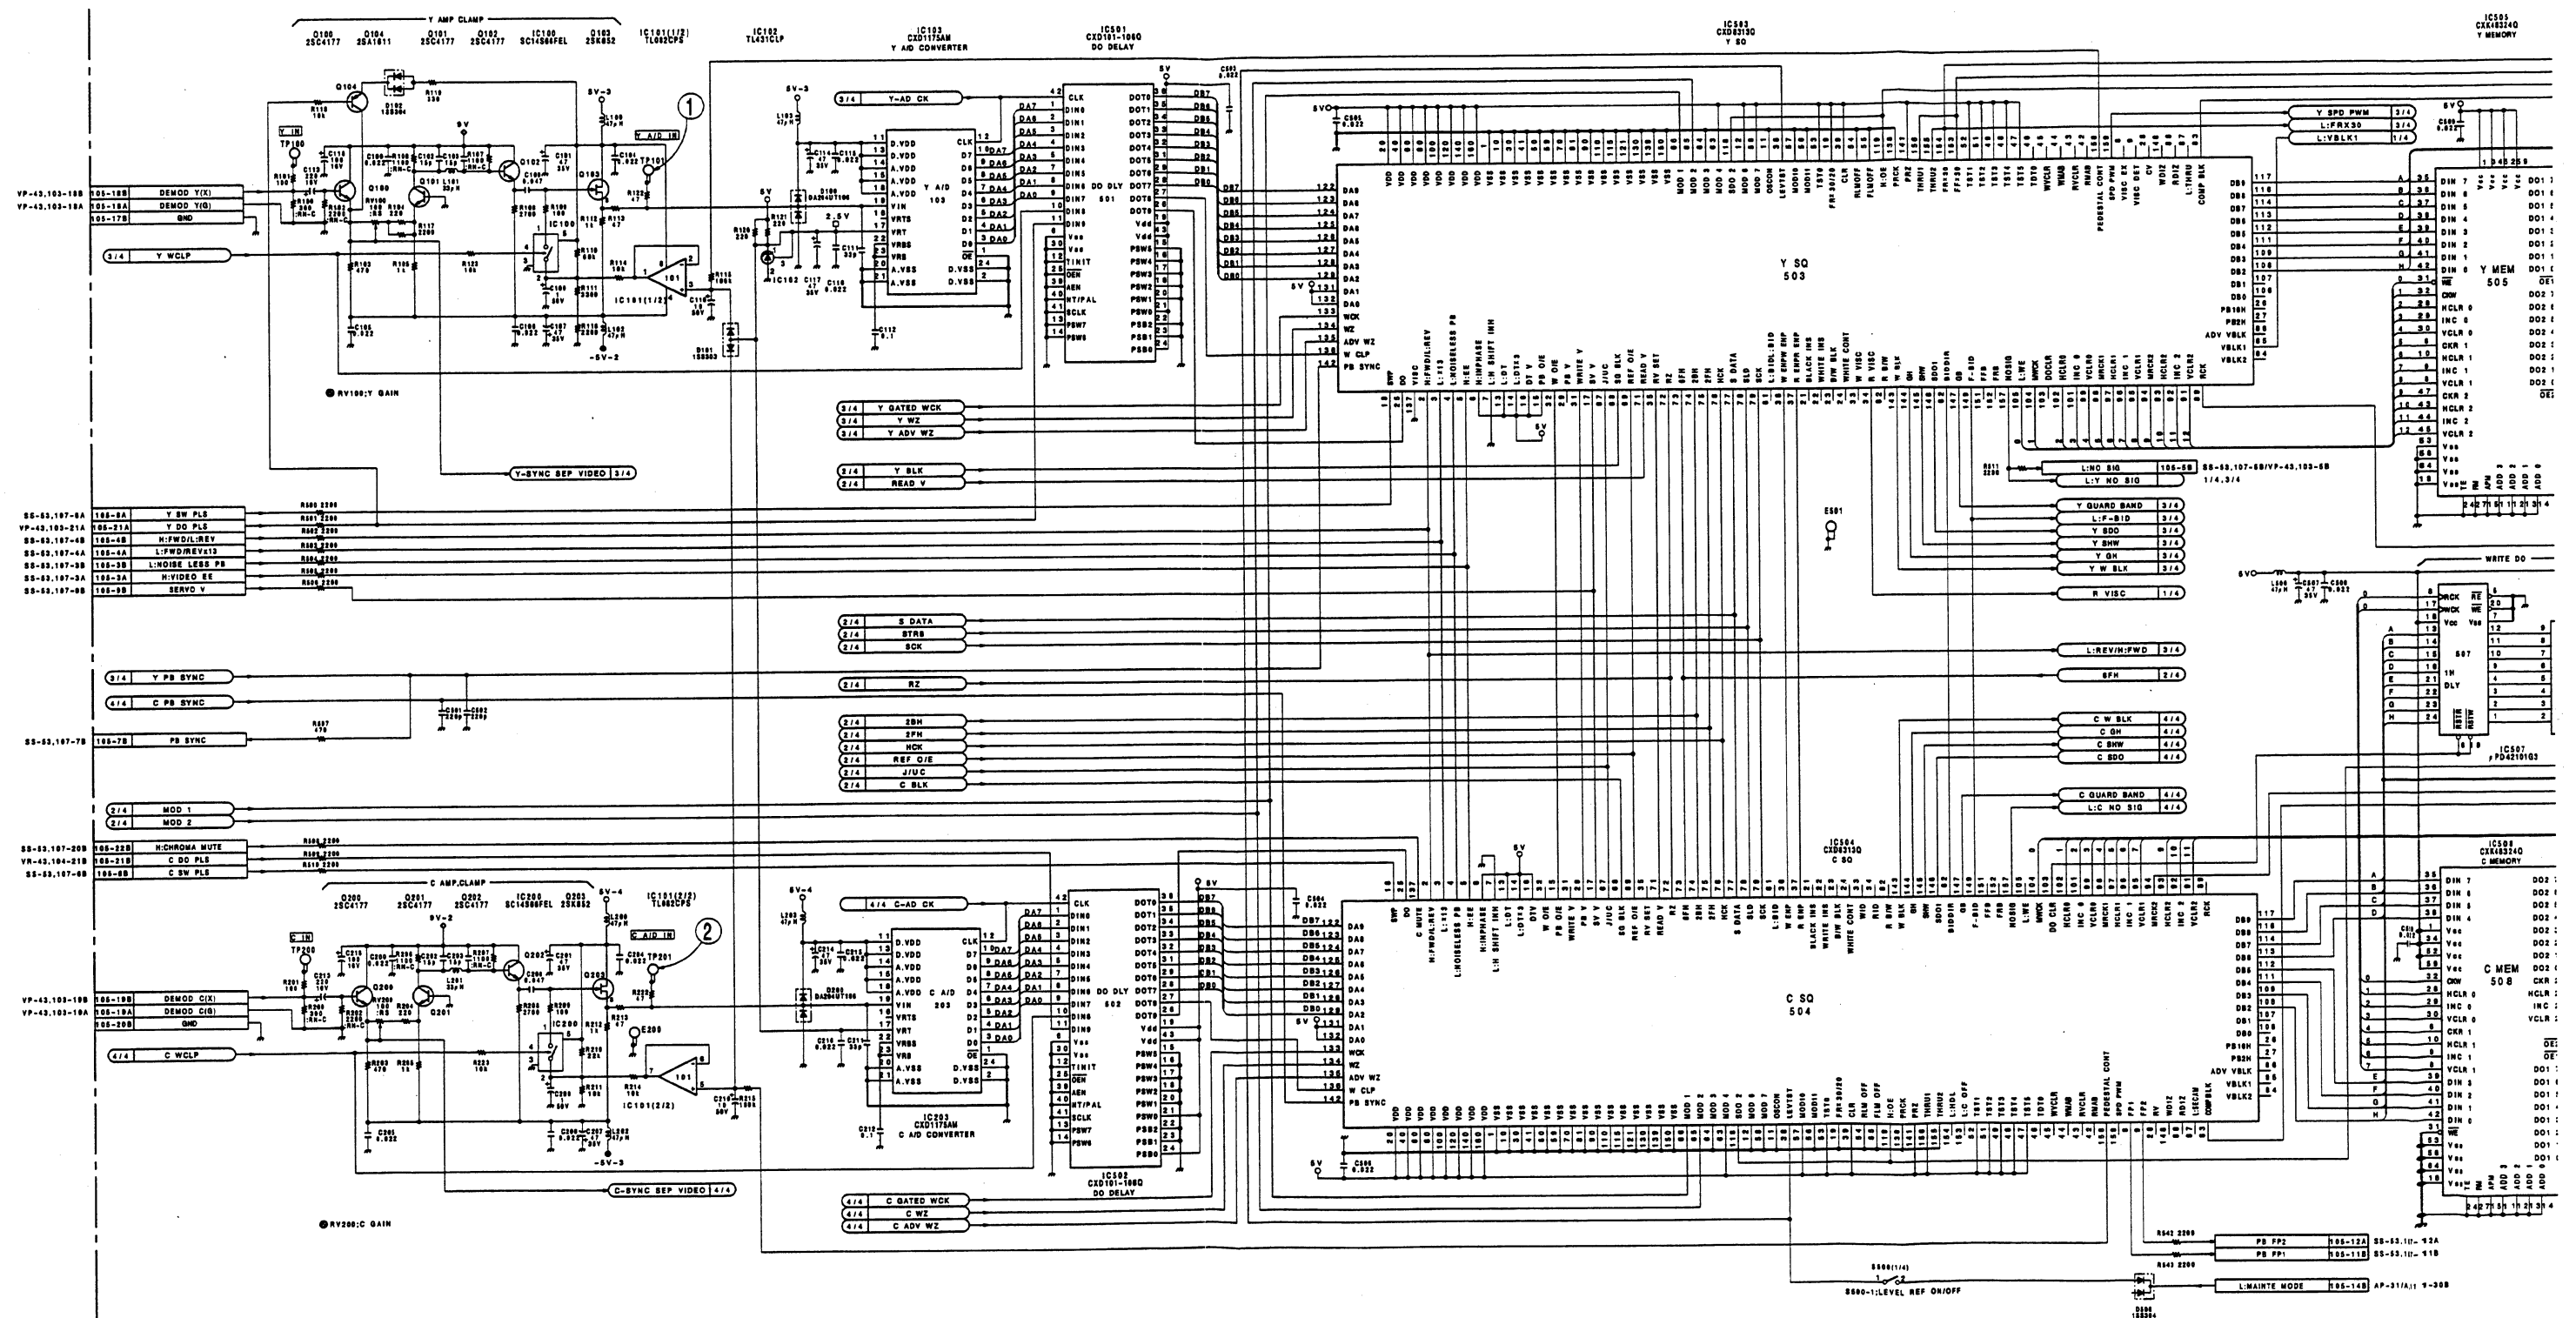

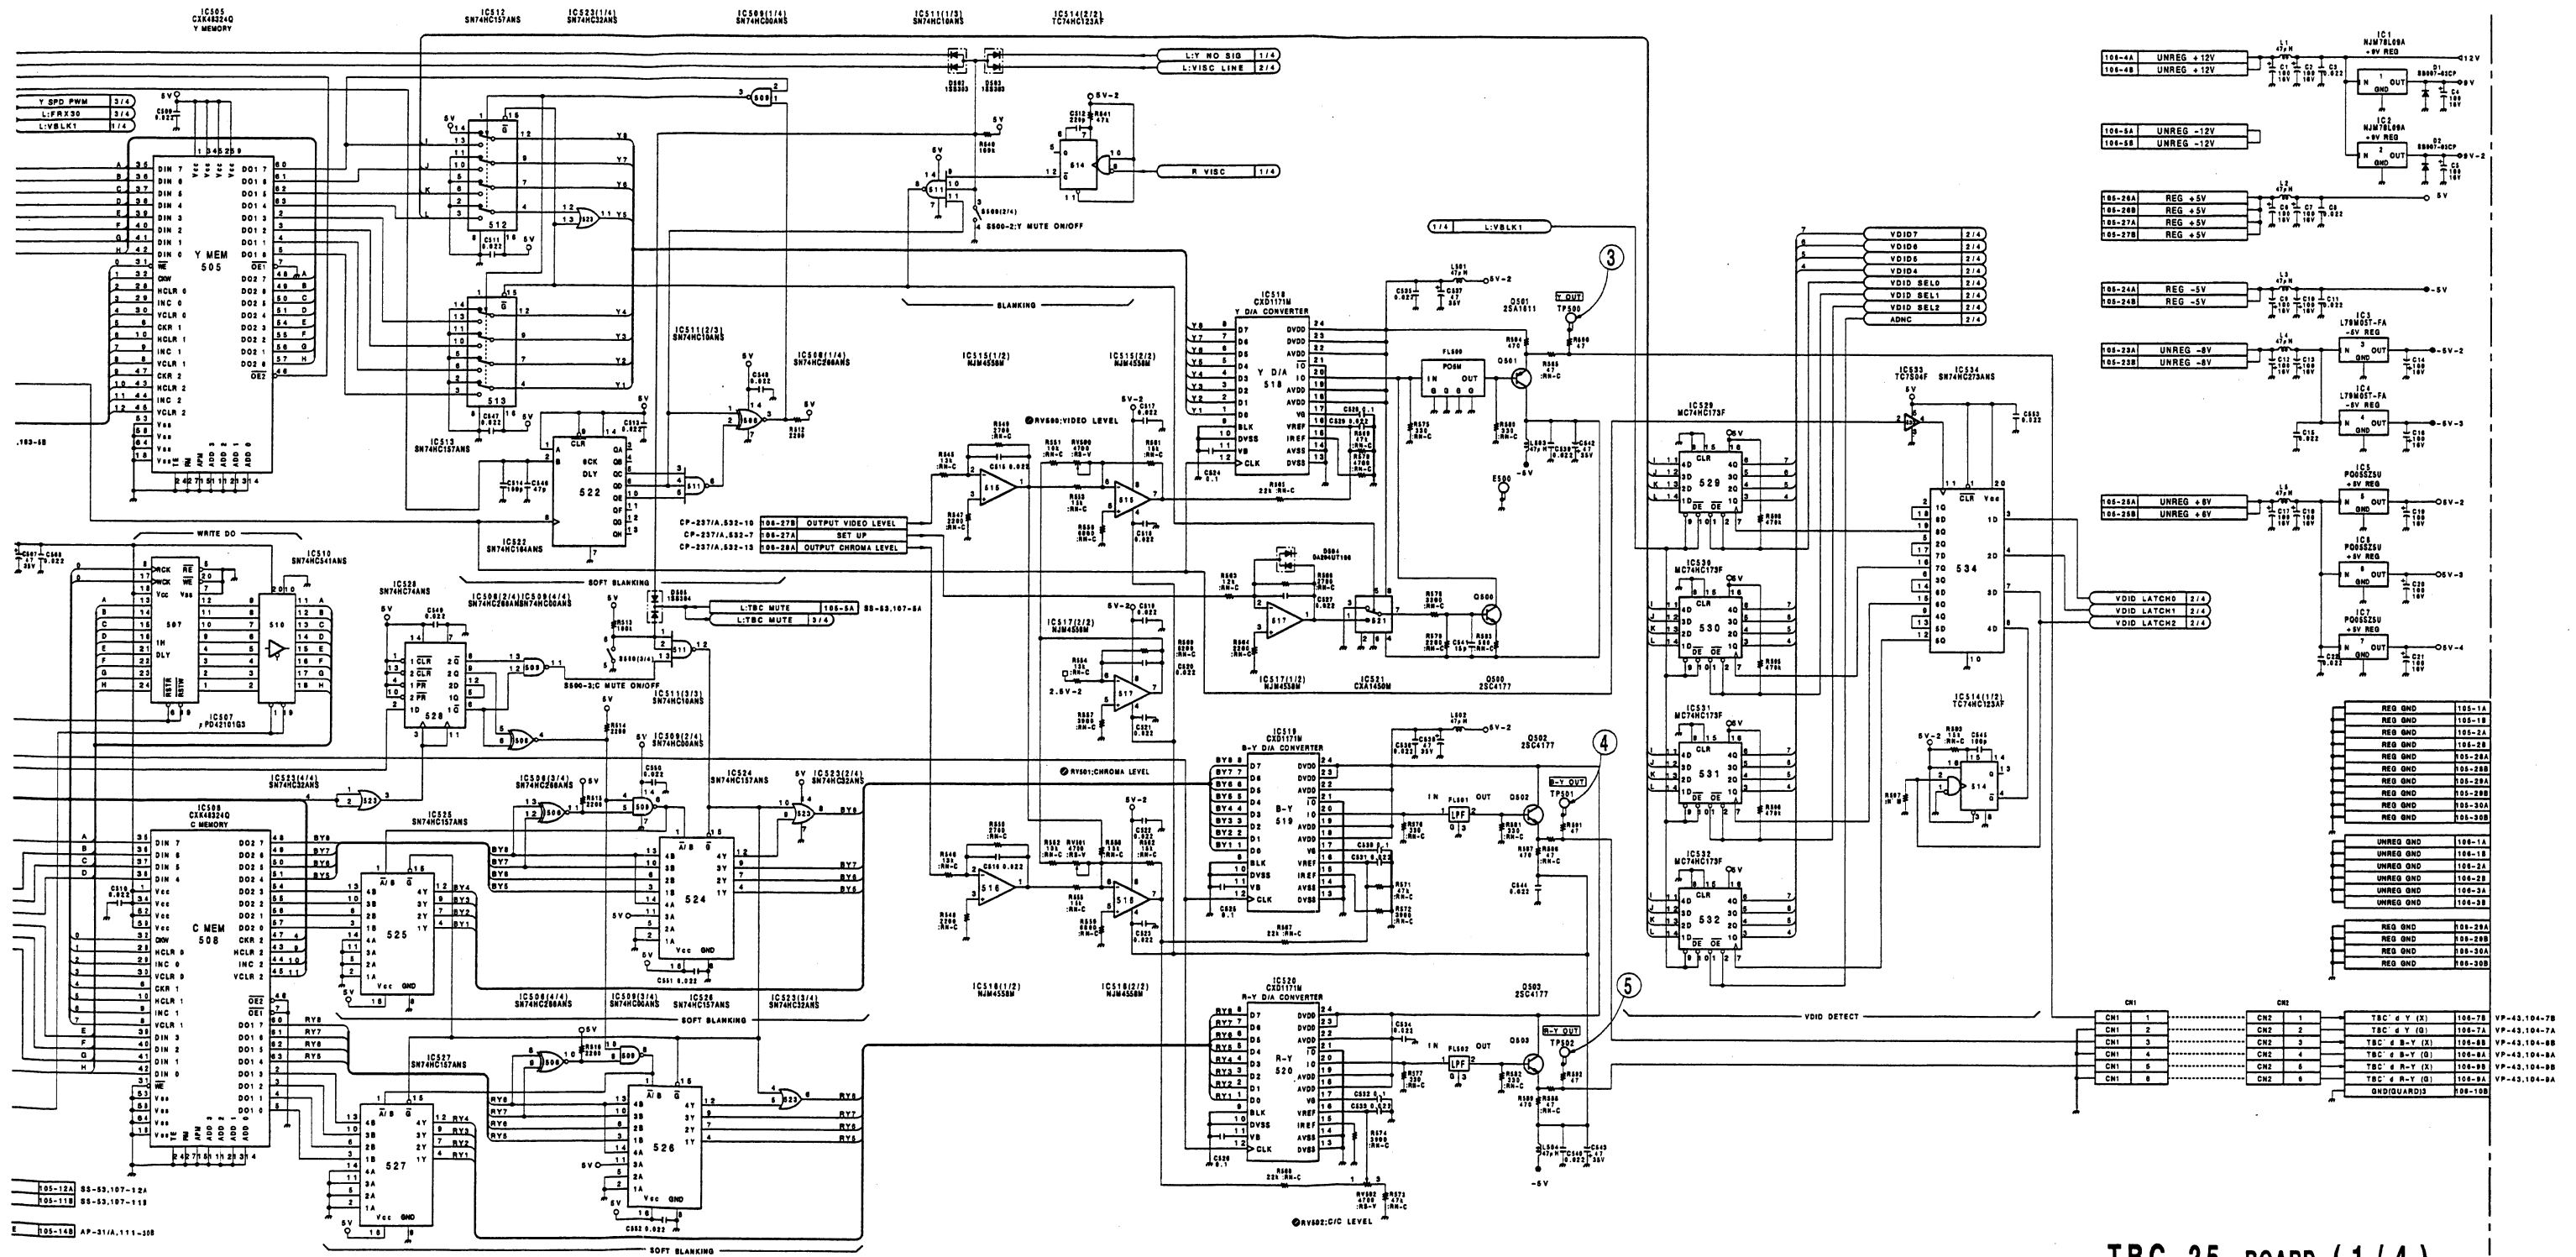

TBC-25 BOARD (1 / 4)


BOARD NO.1-648-901-11
UVW-1800/1600(J) ;#10001-
UVW-1800/1600(UC);#10001-

TBC-25(1-648-901-11)


CN1	E-1	IC503	J-2	*Q303	P-1
CN2	C-6	IC504	J-4	*Q304	N-2
CN105	N-6	IC505	H-2	*Q305	N-2
CN106	C-6	IC506	H-3	*Q306	R-2
		IC507	G-6	*Q400	P-5
CV700	C-2	IC508	H-4	*Q401	P-5
CV701	C-2	IC509	G-3	*Q402	R-5
		IC510	F-6	*Q403	P-5
*D1	M-2	IC511	H-1	*Q404	M-4
*D2	M-3	IC512	F-3	*Q405	R-4
*D100	M-3	IC513	F-4	*Q406	R-5
*D101	N-3	IC514	H-1	*Q407	N-4
*D102	R-3	IC515	G-2	*Q500	F-2
*D200	M-3	IC516	F-1	*Q501	F-1
*D301	N-2	IC517	G-1	*Q502	E-1
*D302	R-2	IC518	F-3	*Q503	D-1
*D303	R-2	IC519	E-2	*Q700	C-5
*D304	R-2	IC520	D-2	*Q701	C-4
*D401	P-4	IC521	G-1	*Q702	A-2
*D402	N-4	IC522	G-2	*Q703	C-1
*D403	M-4	IC523	F-4	*Q704	C-2
*D404	M-4	IC524	E-3	*Q705	C-2
*D502	K-2	IC525	E-3	*Q706	C-2
*D503	K-2	IC526	D-3	*Q707	C-5
*D504	G-1	IF527	D-3	*Q708	B-5
*D505	G-1	IC528	H-3	*Q709	D-5
*D506	M-5	IC529	F-2	*Q710	D-5
*D701	A-2	IC530	G-2	*Q711	D-5
*D702	C-2	IC531	G-2		
*D703	C-2	IC532	G-2	RV100	R-3
		IC533	G-1	RV200	R-3
E200	N-3	IC534	G-1	RV300	M-1
E300	M-1	IC700	A-2	RV301	N-1
E400	R-5	IC701	A-1	RV400	P-1
E500	D-1	IC702	A-2	RV401	P-5
E501	J-3	IC703	C-4	RV500	F-1
E700	E-4	IC704	A-2	RV501	F-1
E701	B-2	IC705	A-3	RV502	D-1
		IC706	D-4	RV700	A-1
FL500	F-2	IC707	E-5	RV701	B-1
FL501	E-1	IC708	F-5	RV702	B-1
FL502	D-1	IC709	A-3	RV703	B-1
		IC710	E-5		
IC1	M-2	IC711	D-3	S500	J-1
IC2	M-3	IC712	C-3		
IC3	L-1	IC713	C-3	TH400	R-5
IC4	L-4	IC714	A-4		
IC5	E-6	IC715	D-2	TP100	R-3
IC6	L-1	IC716	A-3	TP101	N-3
IC7	L-5	IC717	A-5	TP200	R-3
IC100	P-3	IC718	B-2	TP201	N-3
IC101	P-3	IC719	B-2	TP300	R-1
IC102	M-3	IC720	B-3	TP301	P-2
IC103	M-2	IC721	B-2	TP303	P-2
IC200	P-3	IC722	B-4	TP400	M-5
IC203	M-3	IC723	C-5	TP401	N-4
IC300	P-1	IC724	B-5	TP402	N-4
IC301	P-2	IC725	D-5	TP500	E-1
IC302	R-1	IC726	F-4	TP501	E-1
IC303	M-1	IC727	E-4	TP502	D-1
IC304	M-2			TP700	C-5
IC305	N-2	LV300	R-2	TP701	C-4
IC306	M-2	LV400	M-4	TP702	C-1
IC307	R-2			TP703	C-3
IC308	R-2	*Q100	R-3	TP704	C-1
IC400	R-5	*Q101	R-3		
IC401	N-5	*Q102	P-3	X700	C-2
IC402	R-5	*Q103	P-3	X701	C-2
IC403	R-5	*Q104	R-3		
IC404	R-4	*Q200	R-3		
IC405	R-4	*Q201	R-3		
IC406	M-5	*Q202	P-3		
IC407	N-4	*Q203	P-3		
IC408	M-4	*Q300	P-1		
IC501	L-2	*Q301	P-1		
IC502	L-4	*Q302	P-1		

*: B SIDE


① TP701 PB




② TP703 PB



TBC-25(2/4);SYNC/SC PROCESS,TBC MPU

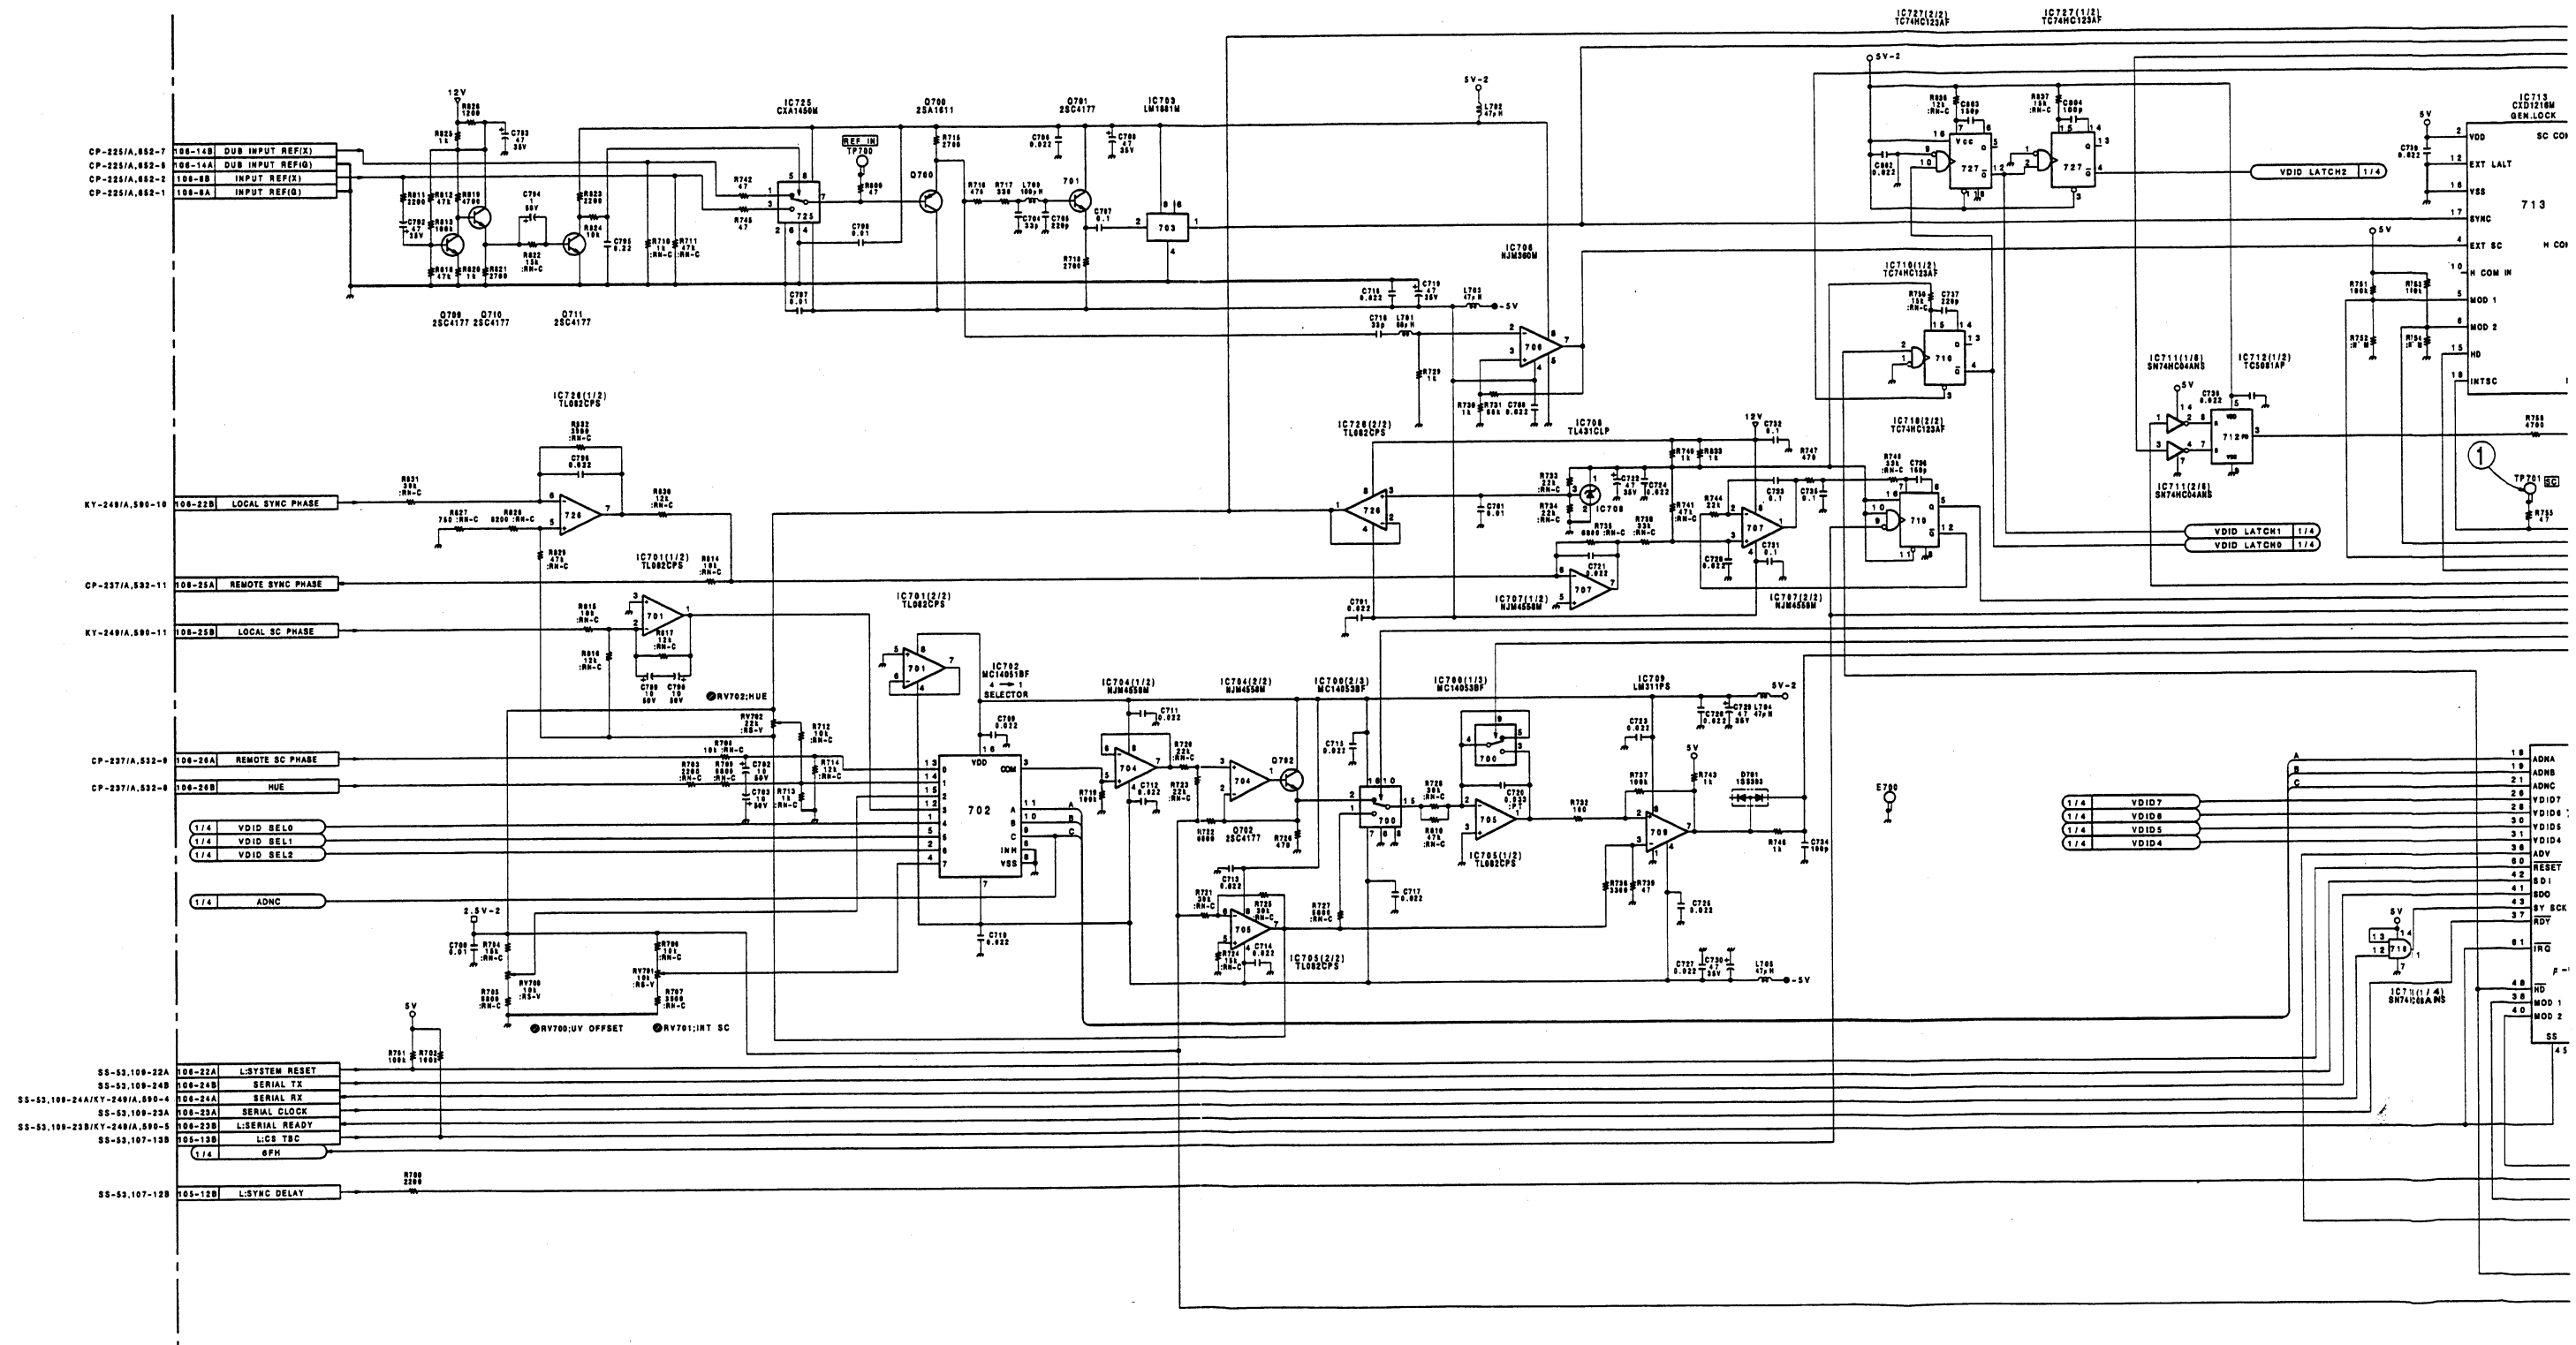

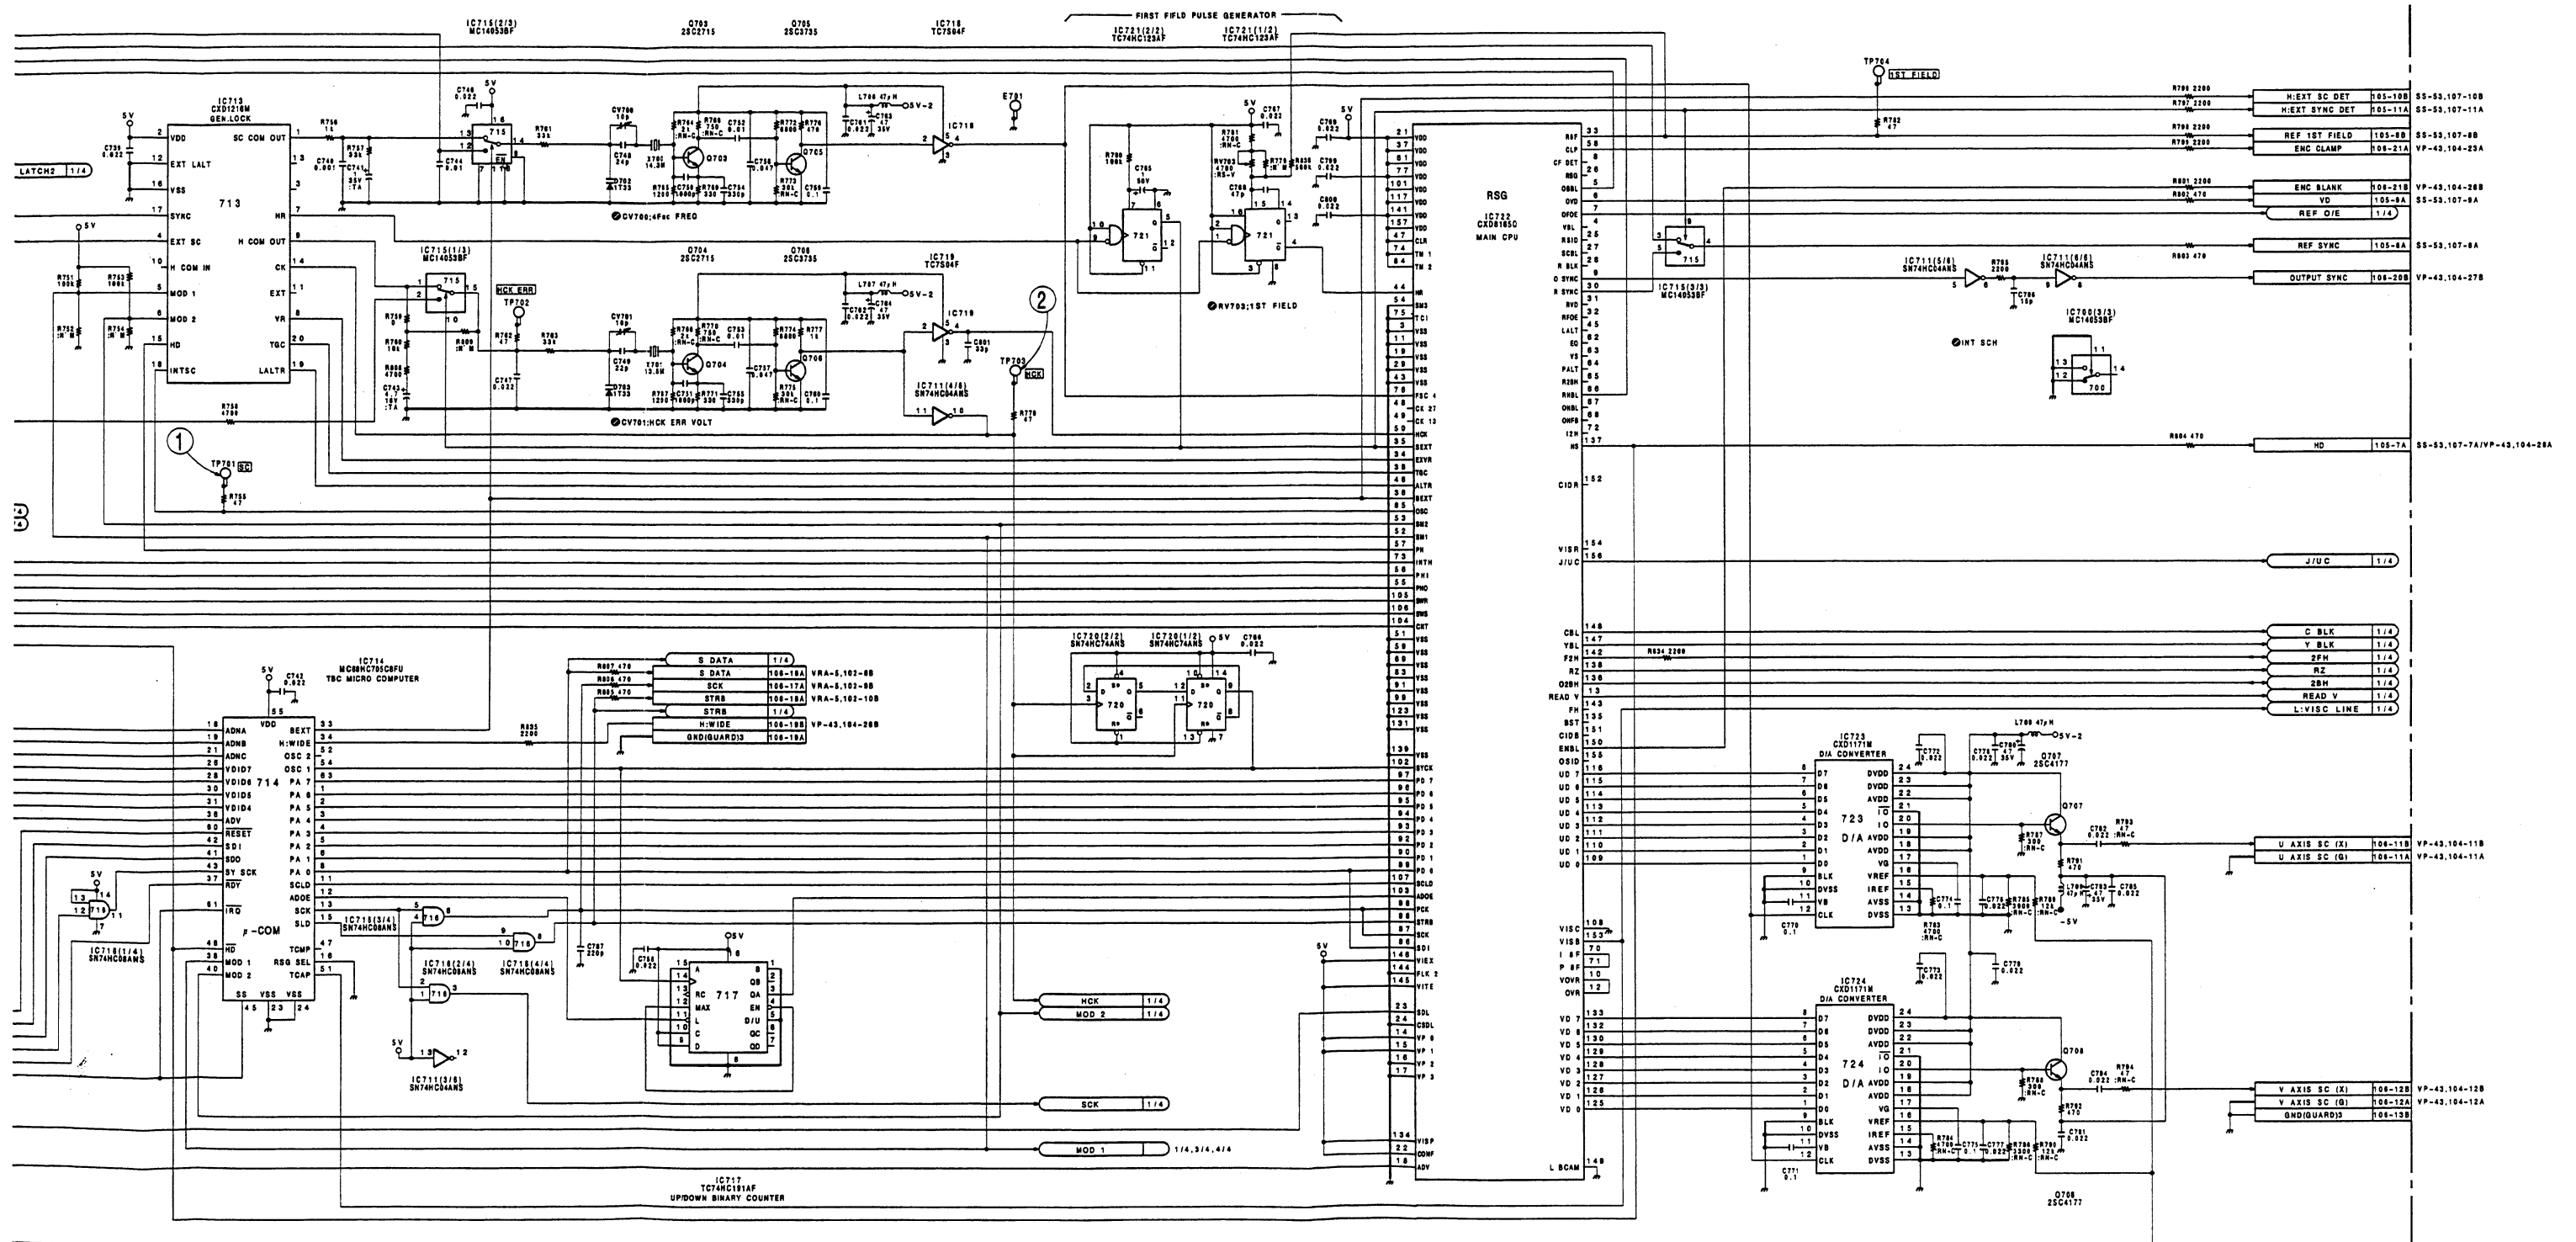

TBC-25 BOARD (2/4)


BOARD NO.1-648-901-11
UVW-1800/1600(J);#10001-
UVW-1800/1600(UC);#10001-

TBC-25(1-648-901-11)


CN1	E-1	IC503	J-2	*Q303	P-1
CN2	C-6	IC504	J-4	*Q304	N-2
CN105	N-6	IC505	H-2	*Q305	N-2
CN106	C-6	IC506	H-3	*Q306	R-2
		IC507	G-6	*Q400	P-5
CV700	C-2	IC508	H-4	*Q401	P-5
CV701	C-2	IC509	G-3	*Q402	R-5
		IC510	F-6	*Q403	P-5
*D1	M-2	IC511	H-1	*Q404	M-4
*D2	M-3	IC512	F-3	*Q405	R-4
*D100	M-3	IC513	F-4	*Q406	R-5
*D101	N-3	IC514	H-1	*Q407	N-4
*D102	R-3	IC515	G-2	*Q500	F-2
*D200	M-3	IC516	F-1	*Q501	F-1
*D301	N-2	IC517	G-1	*Q502	E-1
*D302	R-2	IC518	F-3	*Q503	D-1
*D303	R-2	IC519	E-2	*Q700	C-5
*D304	R-2	IC520	D-2	*Q701	C-4
*D401	P-4	IC521	G-1	*Q702	A-2
*D402	N-4	IC522	G-2	*Q703	C-1
*D403	M-4	IC523	F-4	*Q704	C-2
*D404	M-4	IC524	E-3	*Q705	C-2
*D502	K-2	IC525	E-3	*Q706	C-2
*D503	K-2	IC526	D-3	*Q707	C-5
*D504	G-1	IC527	D-3	*Q708	B-5
*D505	G-1	IC528	H-3	*Q709	D-5
*D506	M-5	IC529	F-2	*Q710	D-5
*D701	A-2	IC530	G-2	*Q711	D-5
*D702	C-2	IC531	G-2		
*D703	C-2	IC532	G-2	RV100	R-3
		IC533	G-1	RV200	R-3
E200	N-3	IC534	G-1	RV300	M-1
E300	M-1	IC700	A-2	RV301	N-1
E400	R-5	IC701	A-1	RV400	P-1
E500	D-1	IC702	A-2	RV401	P-5
E501	J-3	IC703	C-4	RV500	F-1
E700	E-4	IC704	A-2	RV501	F-1
E701	B-2	IC705	A-3	RV502	D-1
		IC706	D-4	RV700	A-1
FL500	F-2	IC707	E-5	RV701	B-1
FL501	E-1	IC708	F-5	RV702	B-1
FL502	D-1	IC709	A-3	RV703	B-1
		IC710	E-5		
IC1	M-2	IC711	D-3	S500	J-1
IC2	M-3	IC712	C-3		
IC3	L-1	IC713	C-3	TH400	R-5
IC4	L-4	IC714	A-4		
IC5	E-6	IC715	D-2	TP100	R-3
IC6	L-1	IC716	A-3	TP101	N-3
IC7	L-5	IC717	A-5	TP200	R-3
IC100	P-3	IC718	B-2	TP201	N-3
IC101	P-3	IC719	B-2	TP300	R-1
IC102	M-3	IC720	B-3	TP301	P-2
IC103	M-2	IC721	B-2	TP303	P-2
IC200	P-3	IC722	B-4	TP400	M-5
IC203	M-3	IC723	C-5	TP401	N-4
IC300	P-1	IC724	B-5	TP402	N-4
IC301	P-2	IC725	D-5	TP500	E-1
IC302	R-1	IC726	F-4	TP501	E-1
IC303	M-1	IC727	E-4	TP502	D-1
IC304	M-2			TP700	C-5
IC305	N-2	LV300	R-2	TP701	C-4
IC306	M-2	LV400	M-4	TP702	C-1
IC307	R-2			TP703	C-3
IC308	R-2	*Q100	R-3	TP704	C-1
IC400	R-5	*Q101	R-3		
IC401	N-5	*Q102	P-3	X700	C-2
IC402	R-5	*Q103	P-3	X701	C-2
IC403	R-5	*Q104	R-3		
IC404	R-4	*Q200	R-3		
IC405	R-4	*Q201	R-3		
IC406	M-5	*Q202	P-3		
IC407	N-4	*Q203	P-3		
IC408	M-4	*Q300	P-1		
IC501	L-2	*Q301	P-1		
IC502	L-4	*Q302	P-1		


*: B SIDE

① TP303 PB



TBC-25(3/4);Y WRITE CLOCK

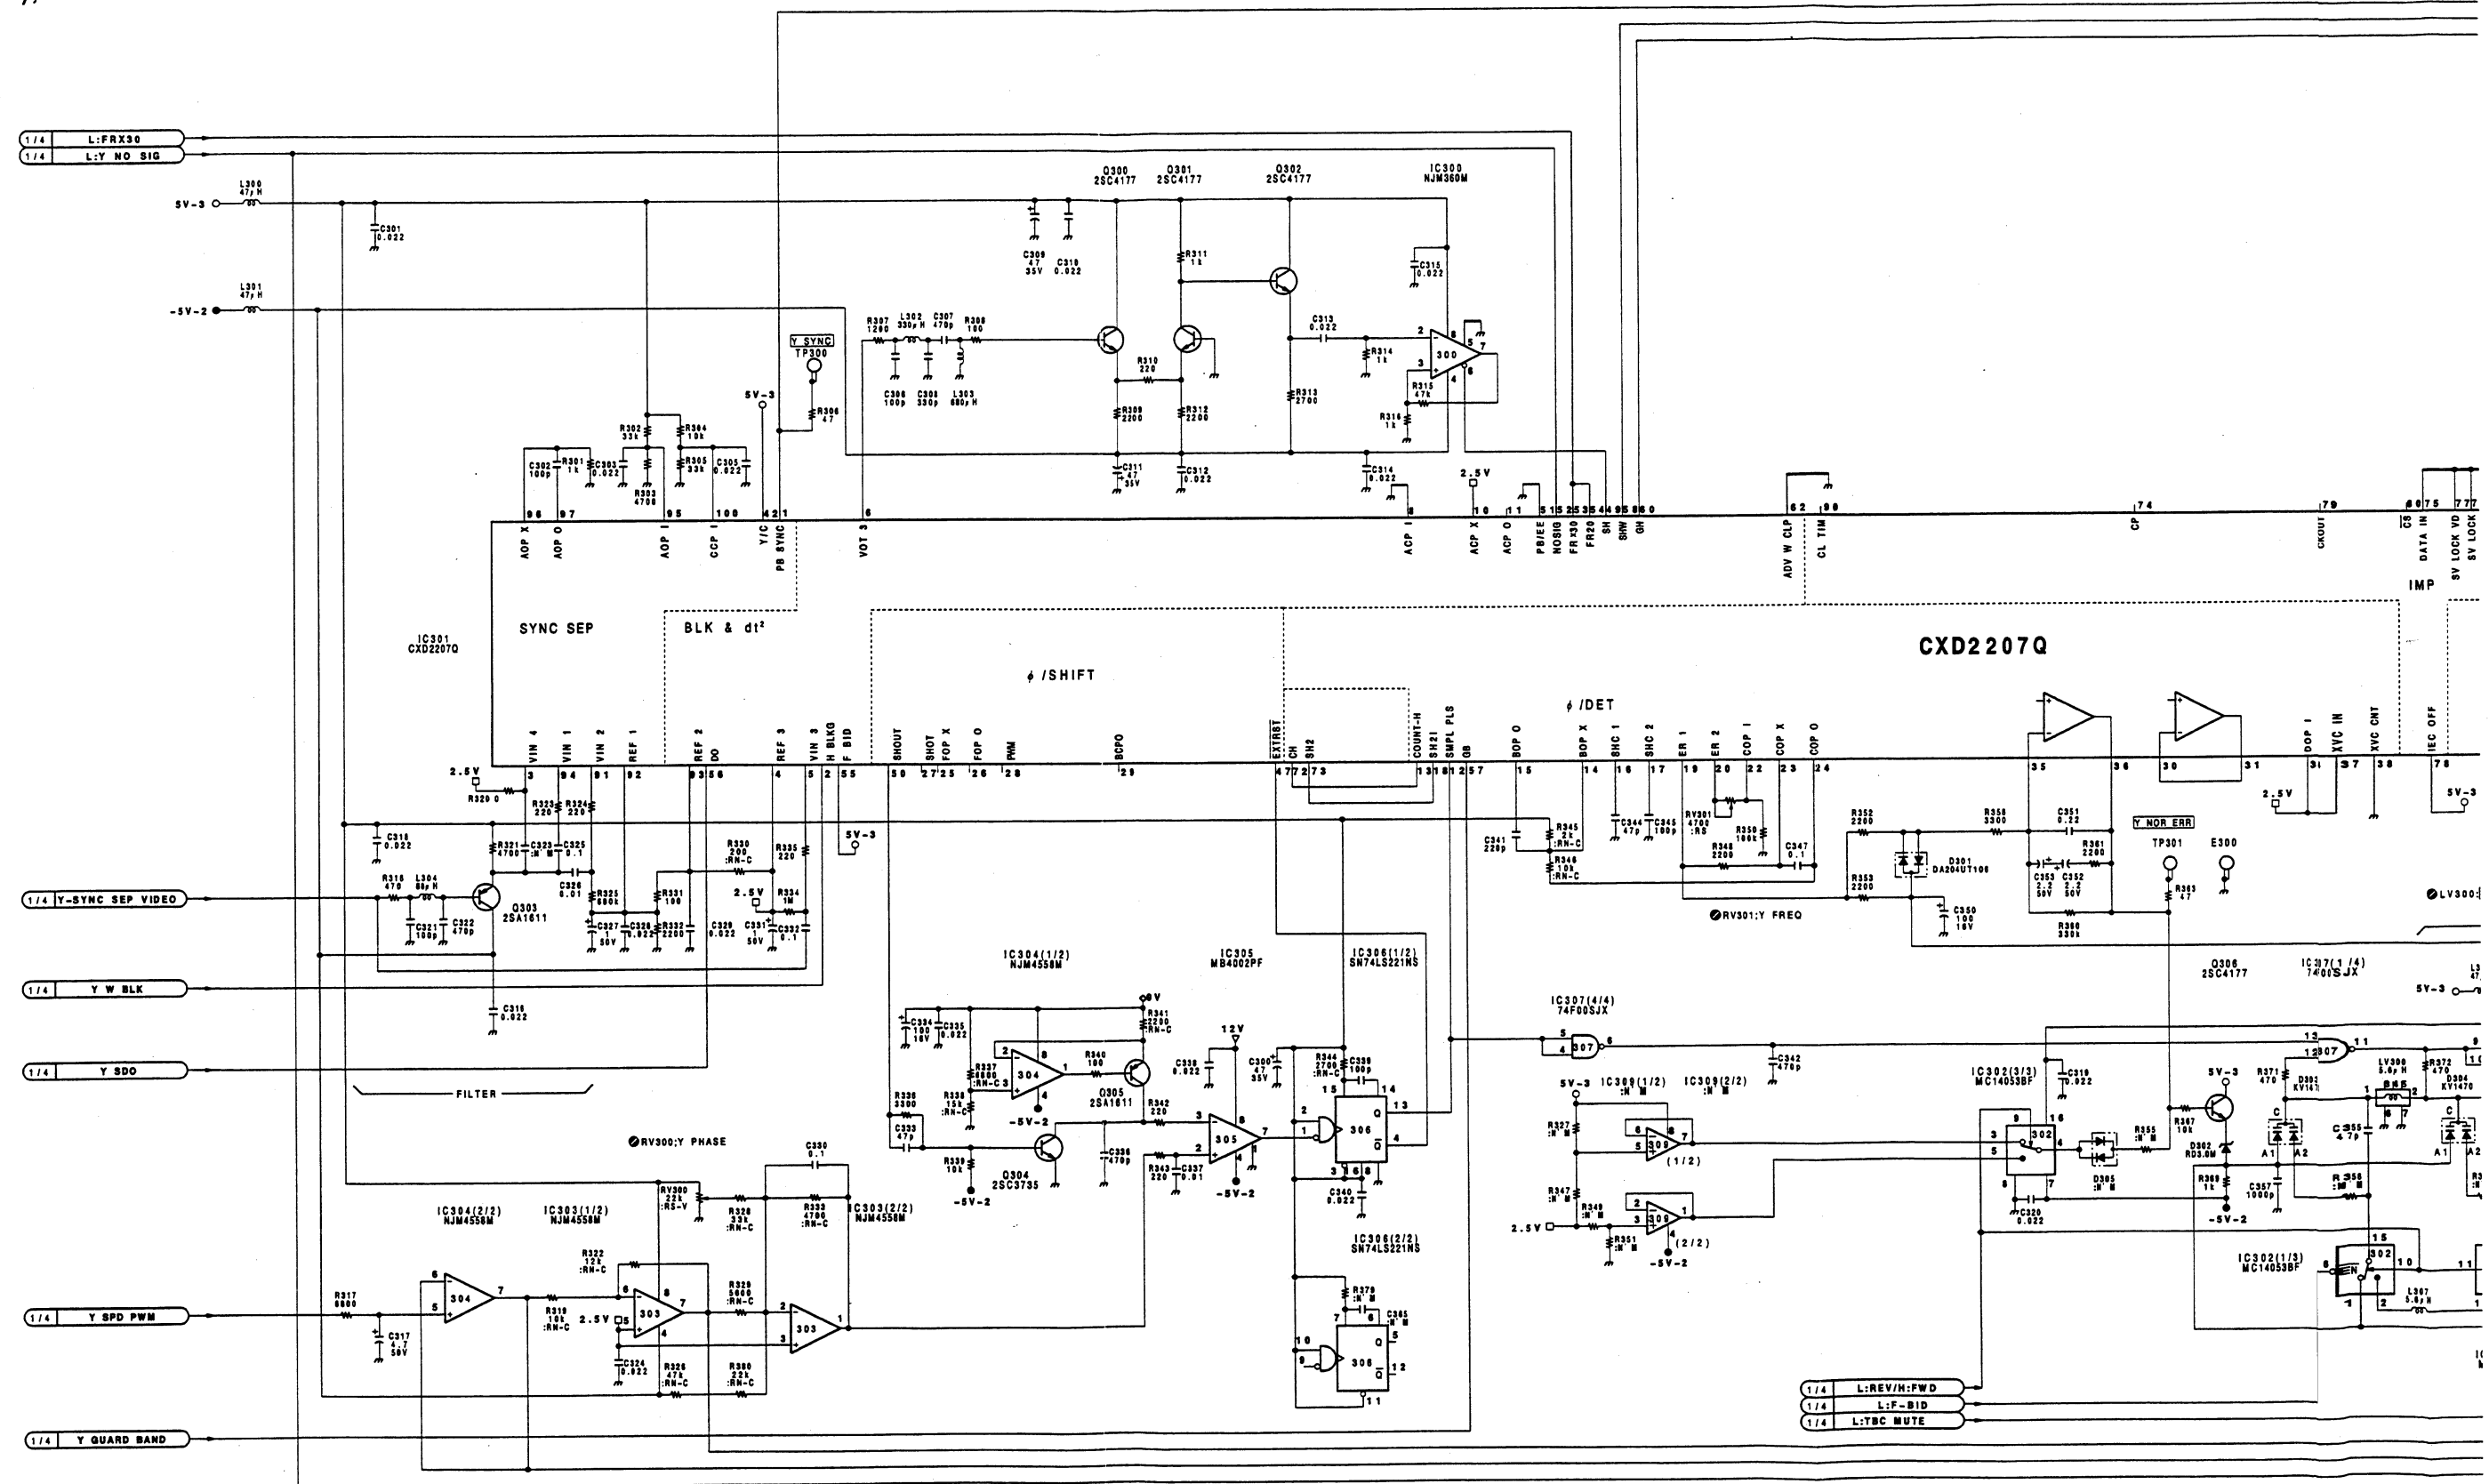




TBC-25(1-648-901-11)


CN1	E-1	IC503	J-2	*Q303	P-1
CN2	C-6	IC504	J-4	*Q304	N-2
CN105	N-6	IC505	H-2	*Q305	N-2
CN106	C-6	IC506	H-3	*Q306	R-2
		IC507	G-6	*Q400	P-5
CV700	C-2	IC508	H-4	*Q401	P-5
CV701	C-2	IC509	G-3	*Q402	R-5
		IC510	F-6	*Q403	P-5
*D1	M-2	IC511	H-1	*Q404	M-4
*D2	M-3	IC512	F-3	*Q405	R-4
*D100	M-3	IC513	F-4	*Q406	R-5
*D101	N-3	IC514	H-1	*Q407	N-4
*D102	R-3	IC515	G-2	*Q500	F-2
*D200	M-3	IC516	F-1	*Q501	F-1
*D301	N-2	IC517	G-1	*Q502	E-1
*D302	R-2	IC518	F-3	*Q503	D-1
*D303	R-2	IC519	E-2	*Q700	C-5
*D304	R-2	IC520	D-2	*Q701	C-4
*D401	P-4	IC521	G-1	*Q702	A-2
*D402	N-4	IC522	G-2	*Q703	C-1
*D403	M-4	IC523	F-4	*Q704	C-2
*D404	M-4	IC524	E-3	*Q705	C-2
*D502	K-2	IC525	E-3	*Q706	C-2
*D503	K-2	IC526	D-3	*Q707	C-5
*D504	G-1	IF527	D-3	*Q708	B-5
*D505	G-1	IC528	H-3	*Q709	D-5
*D506	M-5	IC529	F-2	*Q710	D-5
*D701	A-2	IC530	G-2	*Q711	D-5
*D702	C-2	IC531	G-2		
*D703	C-2	IC532	G-2	RV100	R-3
		IC533	G-1	RV200	R-3
E200	N-3	IC534	G-1	RV300	M-1
E300	M-1	IC700	A-2	RV301	N-1
E400	R-5	IC701	A-1	RV400	P-1
E500	D-1	IC702	A-2	RV401	P-5
E501	J-3	IC703	C-4	RV500	F-1
E700	E-4	IC704	A-2	RV501	F-1
E701	B-2	IC705	A-3	RV502	D-1
		IC706	D-4	RV700	A-1
FL500	F-2	IC707	E-5	RV701	B-1
FL501	E-1	IC708	F-5	RV702	B-1
FL502	D-1	IC709	A-3	RV703	B-1
		IC710	E-5		
IC1	M-2	IC711	D-3	S500	J-1
IC2	M-3	IC712	C-3		
IC3	L-1	IC713	C-3	TH400	R-5
IC4	L-4	IC714	A-4		
IC5	E-6	IC715	D-2	TP100	R-3
IC6	L-1	IC716	A-3	TP101	N-3
IC7	L-5	IC717	A-5	TP200	R-3
IC100	P-3	IC718	B-2	TP201	N-3
IC101	P-3	IC719	B-2	TP300	R-1
IC102	M-3	IC720	B-3	TP301	P-2
IC103	M-2	IC721	B-2	TP303	P-2
IC200	P-3	IC722	B-4	TP400	M-5
IC203	M-3	IC723	C-5	TP401	N-4
IC300	P-1	IC724	B-5	TP402	N-4
IC301	P-2	IC725	D-5	TP500	E-1
IC302	R-1	IC726	F-4	TP501	E-1
IC303	M-1	IC727	E-4	TP502	D-1
IC304	M-2			TP700	C-5
IC305	N-2	LV300	R-2	TP701	C-4
IC306	M-2	LV400	M-4	TP702	C-1
IC307	R-2			TP703	C-3
IC308	R-2	*Q100	R-3	TP704	C-1
IC400	R-5	*Q101	R-3		
IC401	N-5	*Q102	P-3	X700	C-2
IC402	R-5	*Q103	P-3	X701	C-2
IC403	R-5	*Q104	R-3		
IC404	R-4	*Q200	R-3		
IC405	R-4	*Q201	R-3		
IC406	M-5	*Q202	P-3		
IC407	N-4	*Q203	P-3		
IC408	M-4	*Q300	P-1		
IC501	L-2	*Q301	P-1		
IC502	L-4	*Q302	P-1		


*: B SIDE

① TP402 PB



TBC-25(4/4);C WRITE CLOCK

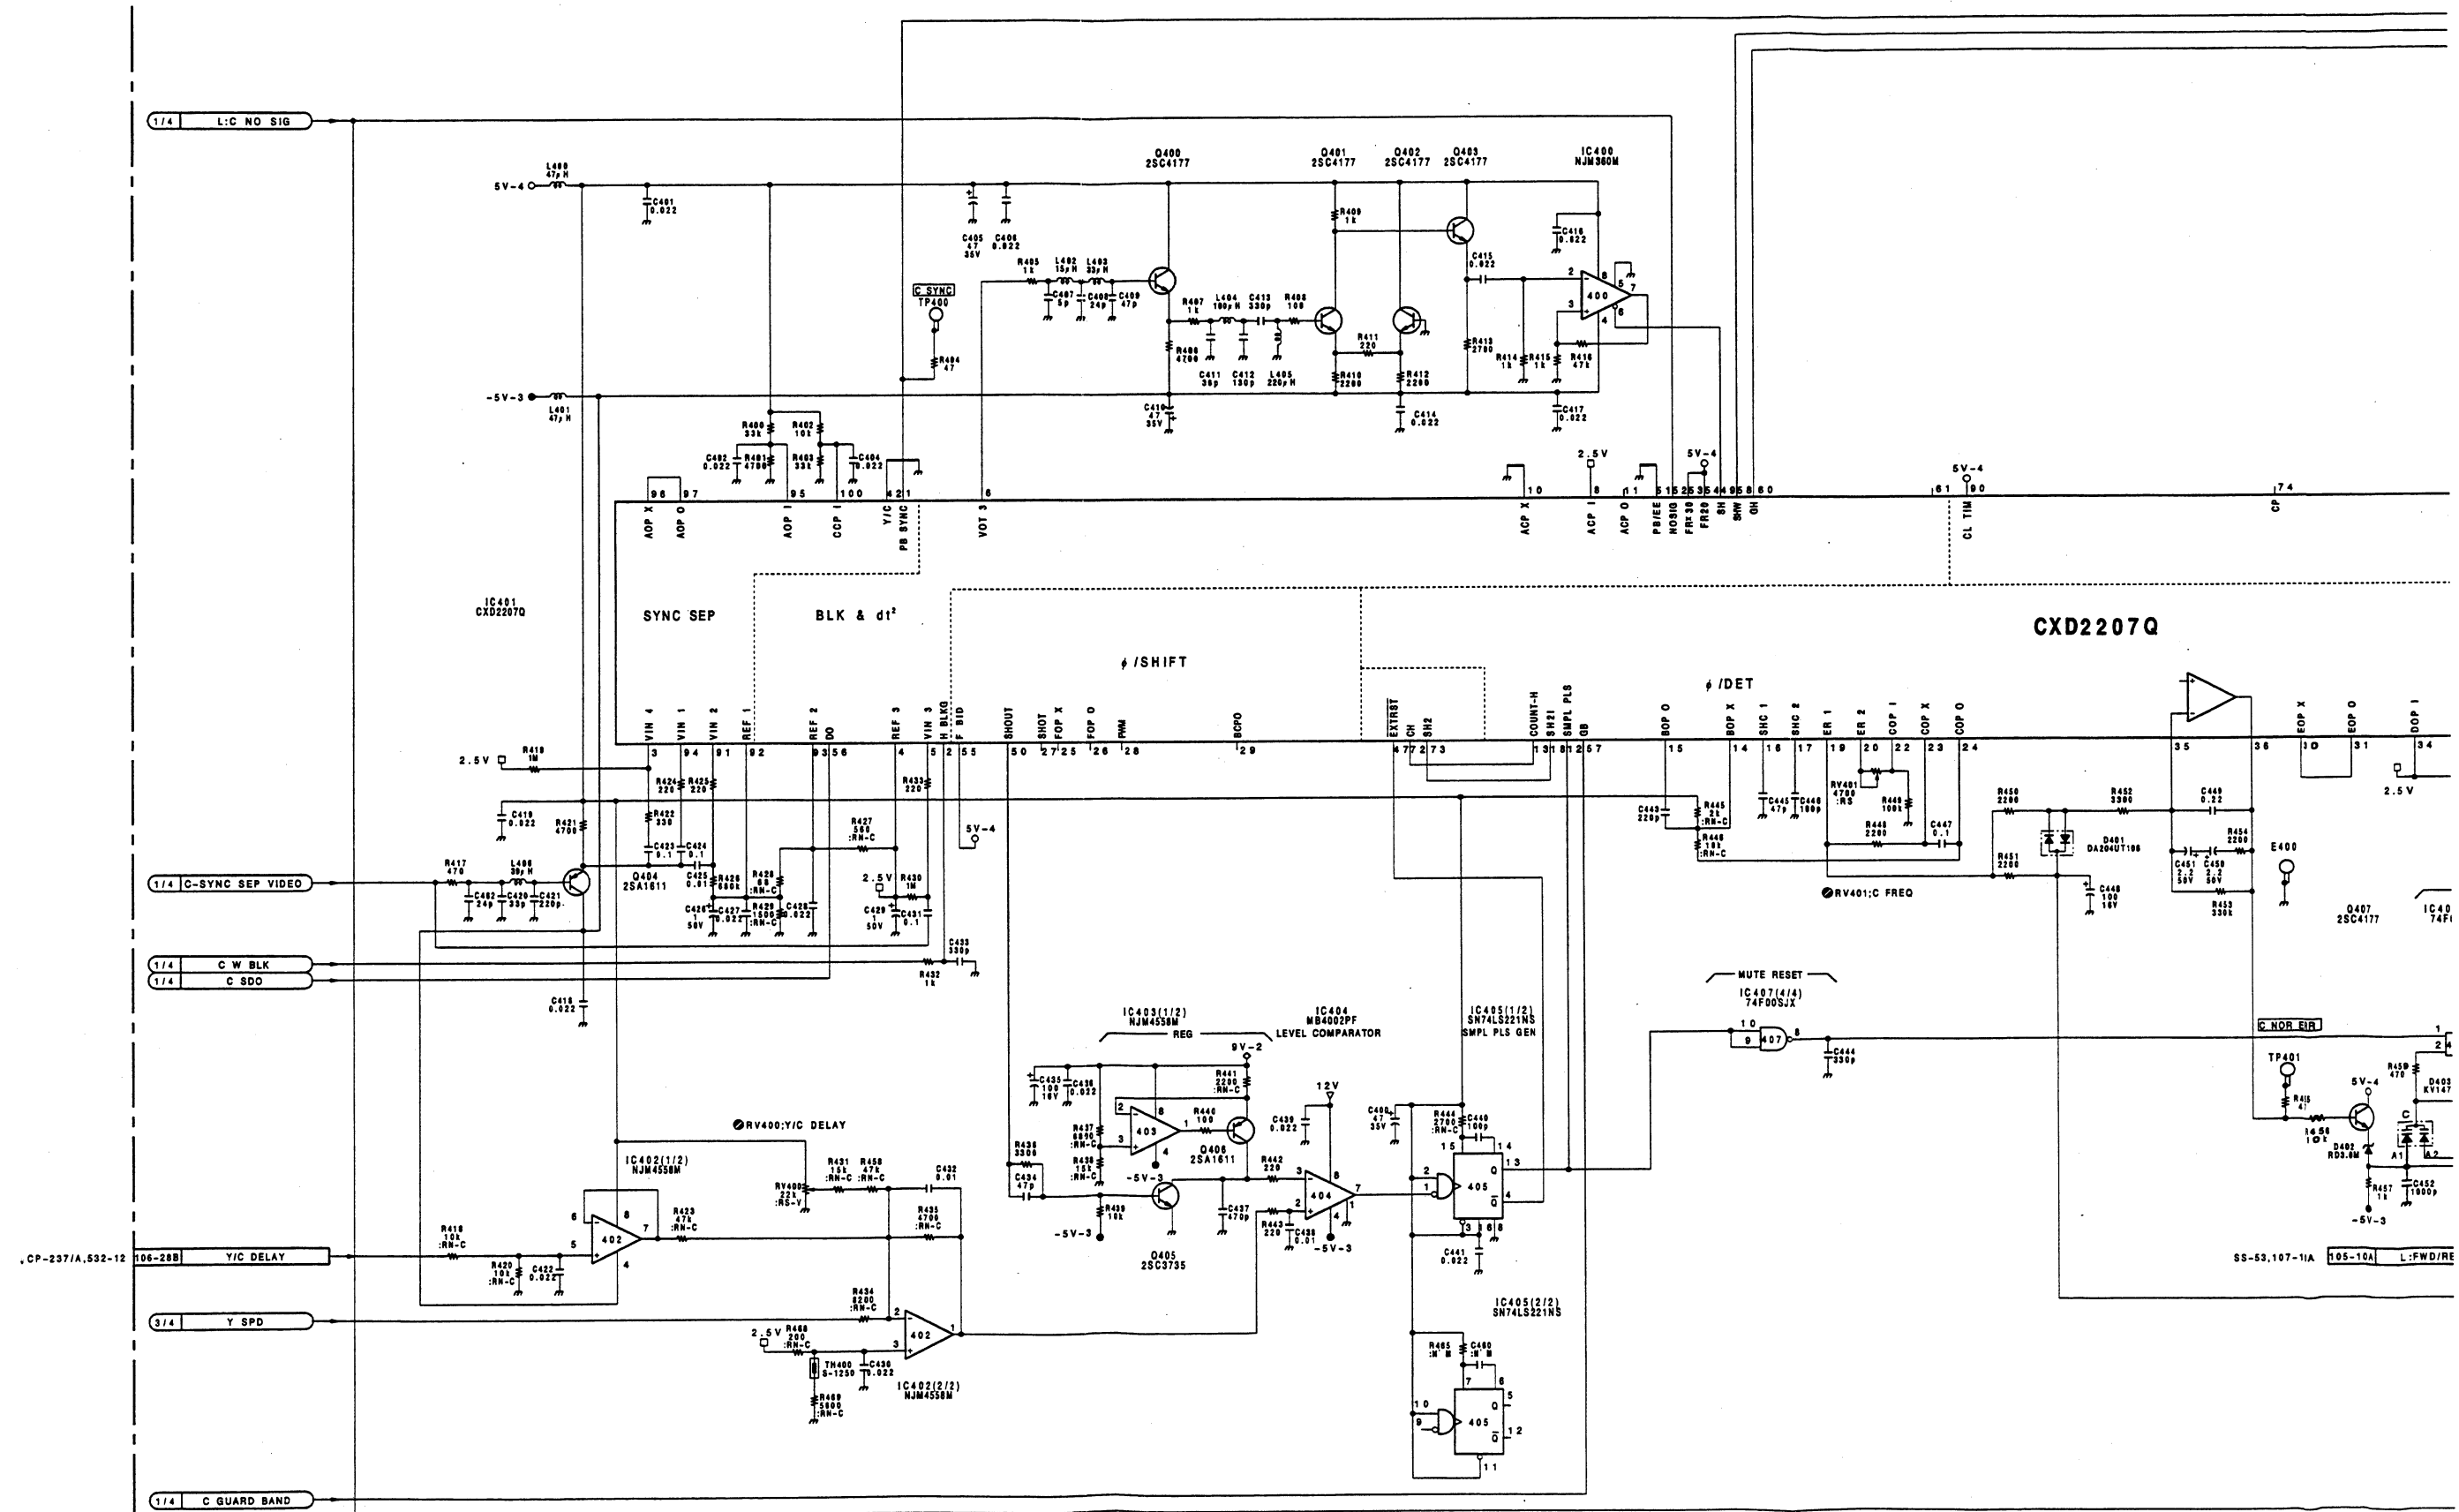

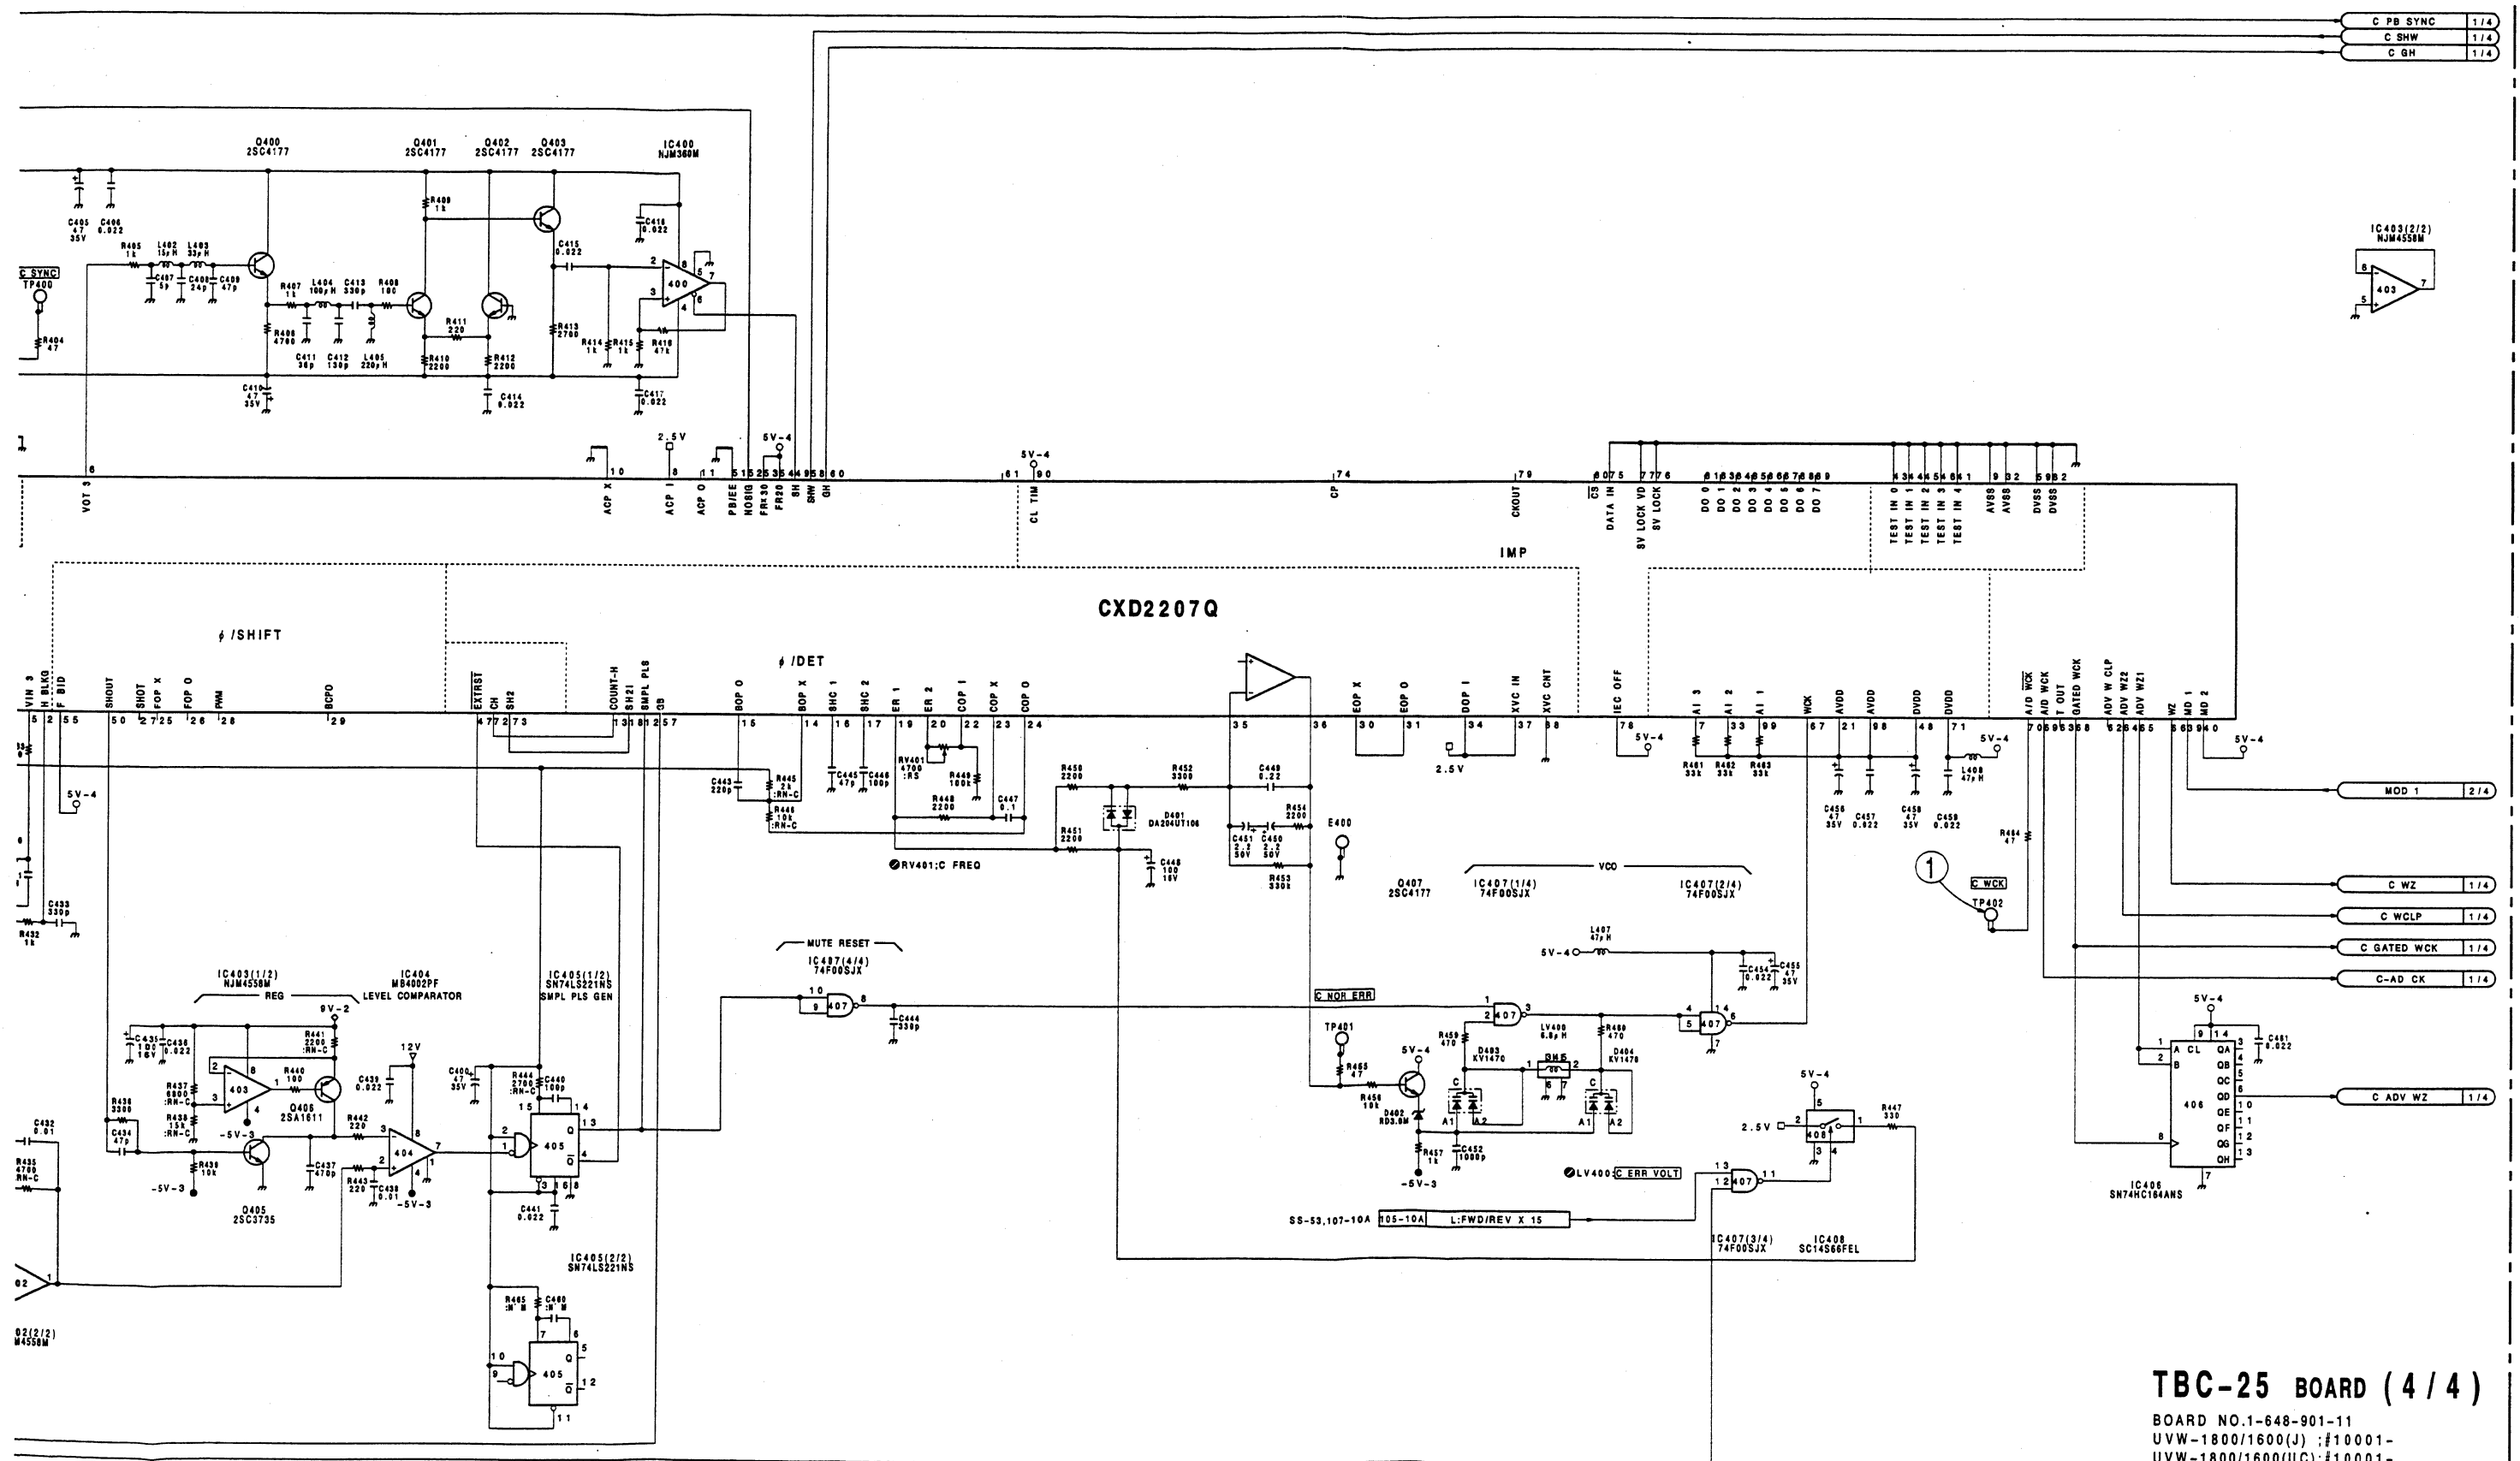

TBC-25 BOARD (4 / 4)

BOARD NO.1-648-901-11
UVW-1800/1600(J) ;#10001-
UVW-1800/1600(UC);#10001-


VP-43/43A(1-648-899-11)


CN103	N-6	IC705	R-4	Q514	B-3	TP102	P-1
CN104	C-6			*Q515	B-2	TP103	L-1
CN105	R-5	*Q101	N-5	*Q516	B-2	TP104	P-3
		*Q102	N-4	Q517	B-3	TP201	P-1
DL101	N-4	*Q103	N-5	*Q601	F-5	TP301	H-1
DL301	J-4	*Q104	N-4	*Q602	F-5	TP302	J-3
		*Q105	N-4	Q603	E-5	TP401	L-1
*D201	N-2	*Q106	N-3	Q604	F-5		
*D401	J-2	*Q107	N-3	Q605	F-5		
*D501	A-2	*Q108	N-4	Q606	F-5		
*D502	B-2	*Q109	N-4	Q607	E-5		
*D503	B-3	*Q110	P-4	Q608	F-5		
*D504	B-4	*Q111	P-5	Q609	E-4		
*D601	D-2	*Q112	P-5	Q610	F-4		
*D602	E-2	*Q201	M-2	Q611	F-5		
*D701	R-4	*Q202	N-1	Q612	F-5		
		*Q203	P-2	*Q613	D-4		
E101	P-6	*Q204	N-2	*Q614	D-3		
E102	N-1	*Q205	P-2	*Q615	D-3		
E201	R-1	*Q206	P-2	*Q616	C-3		
E301	K-5	*Q207	N-2	*Q617	C-3		
E401	G-2	*Q208	N-1	*Q618	F-2		
E501	B-2	*Q209	N-1	*Q619	F-2		
E502	B-6	*Q210	N-1	*Q620	F-3		
E601	E-4	*Q211	P-2	*Q621	F-3		
E602	D-1	*Q212	P-1	*Q622	E-3		
E701	F-2	*Q213	R-2	*Q623	D-3		
		*Q214	R-2	*Q624	D-1		
FL201	M-1	*Q215	P-1	*Q625	E-4		
FL401	H-1	*Q216	N-2	*Q626	D-4		
FL601	E-2	*Q217	M-2	*Q627	D-1		
		*Q218	M-2	*Q628	D-1		
IC101	P-4	*Q219	M-2	*Q701	E-2		
IC102	M-5	*Q220	M-2	*Q702	F-2		
IC103	N-5	*Q301	J-4	*Q703	E-2		
IC104	L-5	*Q302	J-4	*Q704	F-2		
IC201	L-3	*Q303	H-4	*Q705	E-2		
IC202	M-2	*Q304	H-5	*Q706	F-2		
IC203	M-1	*Q305	H-4	*Q707	E-1		
IC204	P-1	*Q306	H-3	*Q708	F-1		
IC205	L-2	*Q307	J-3	*Q709	F-2		
IC301	K-4	*Q308	J-4	*Q710	F-1		
IC302	G-5	*Q309	J-4	*Q711	F-2		
IC303	H-5	*Q310	K-3	*Q712	F-2		
IC401	H-2	*Q311	K-5	*Q713	F-1		
IC402	H-1	*Q401	H-2	*Q714	E-1		
IC403	K-1	*Q402	J-1				
IC404	G-2	*Q403	J-1	RV101	L-1		
IC501	A-5	*Q404	J-2	RV102	K-1		
IC502	A-2	*Q405	J-1	RV103	P-4		
IC503	A-2	*Q406	J-1	RV201	M-3		
IC504	B-2	*Q407	J-1	RV301	J-1		
IC505	B-2	*Q408	J-1	RV302	H-1		
IC506	A-3	*Q409	J-2	RV303	K-4		
IC507	B-5	*Q410	J-1	RV401	H-3		
IC508	C-4	*Q411	J-2	RV501	A-4		
IC509	B-5	*Q412	J-2	RV502	A-4		
IC510	B-4	*Q413	K-2	RV503	B-4		
IC511	J-6	*Q414	K-2	RV504	B-4		
IC512	G-6	*Q415	K-2	RV505	B-4		
IC601	D-4	*Q416	J-2	RV506	B-4		
IC602	D-4	*Q417	H-2	RV601	D-1		
IC603	F-4	*Q418	H-2	RV602	F-1		
IC604	F-3	*Q501	A-1	RV603	D-1		
IC605	F-3	Q502	A-1	RV604	D-1		
IC606	E-3	Q503	A-1	RV605	F-1		
IC607	F-3	Q504	A-1	RV606	C-1		
IC608	D-2	*Q505	A-5	RV701	E-1		
IC609	E-2	*Q506	A-4	RV702	E-1		
IC610	D-2	Q507	B-1	RV703	E-1		
IC611	D-2	Q508	B-1	RV704	G-1		
IC612	C-2	*Q509	A-4				
IC701	F-1	*Q510	A-4	TH201	P-2		
IC702	F-1	*Q511	A-4	TH401	J-2		
IC703	R-4	*Q512	A-4				
IC704	R-4	*Q513	B-2	TP101	L-2		


*: B SIDE

_: UVW-1800 ONLY

VP-43/A(1/7);Y RF AGC/EQ,Y DO DET.

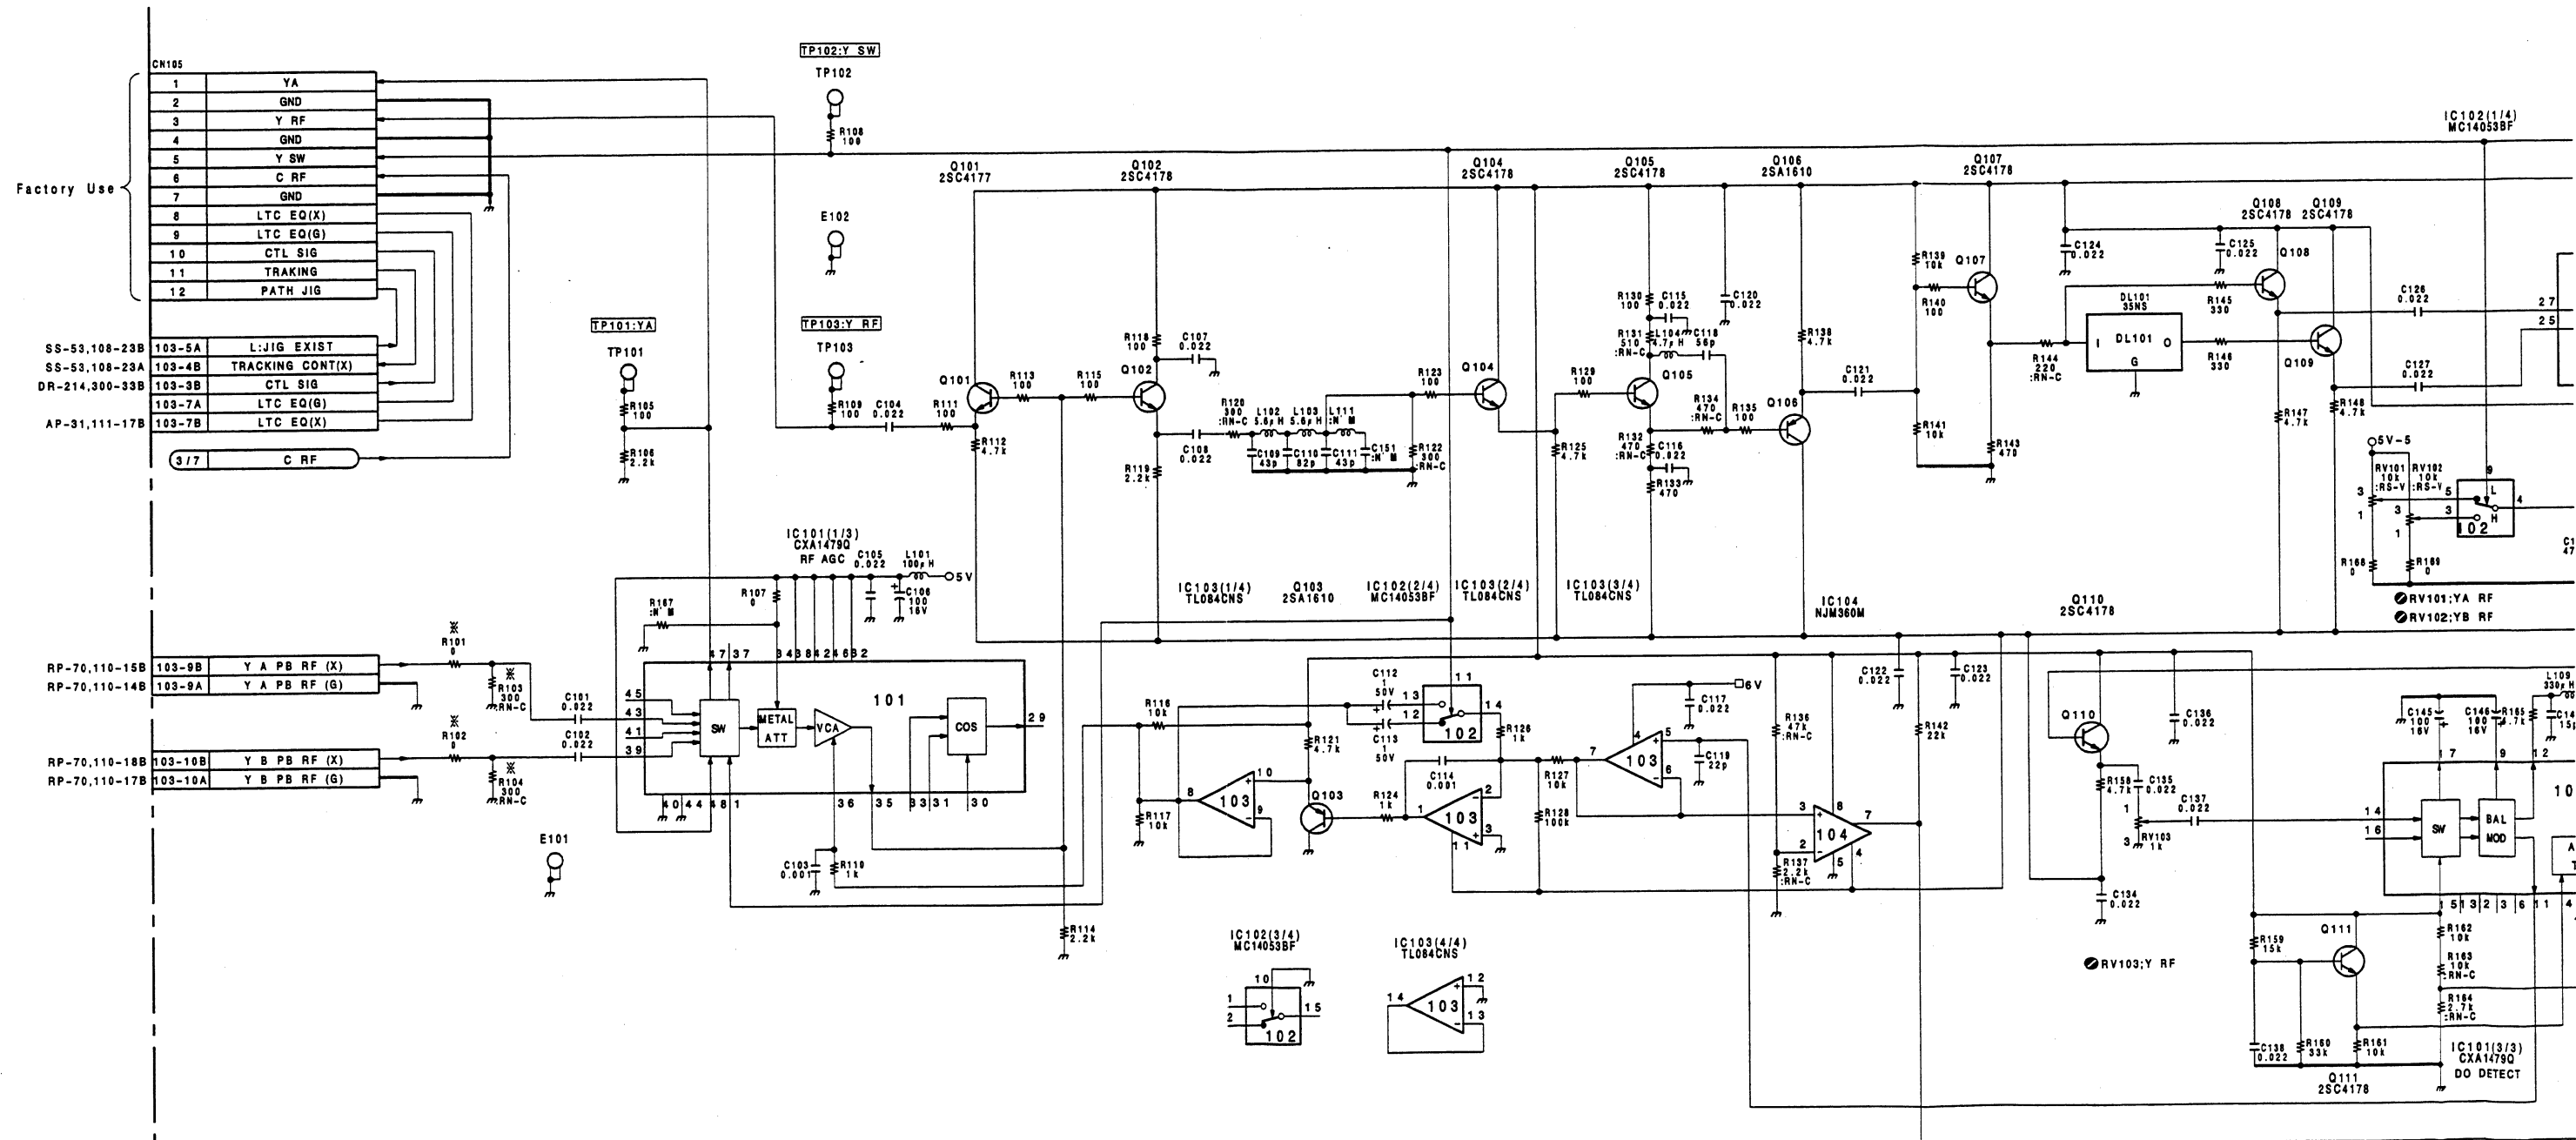

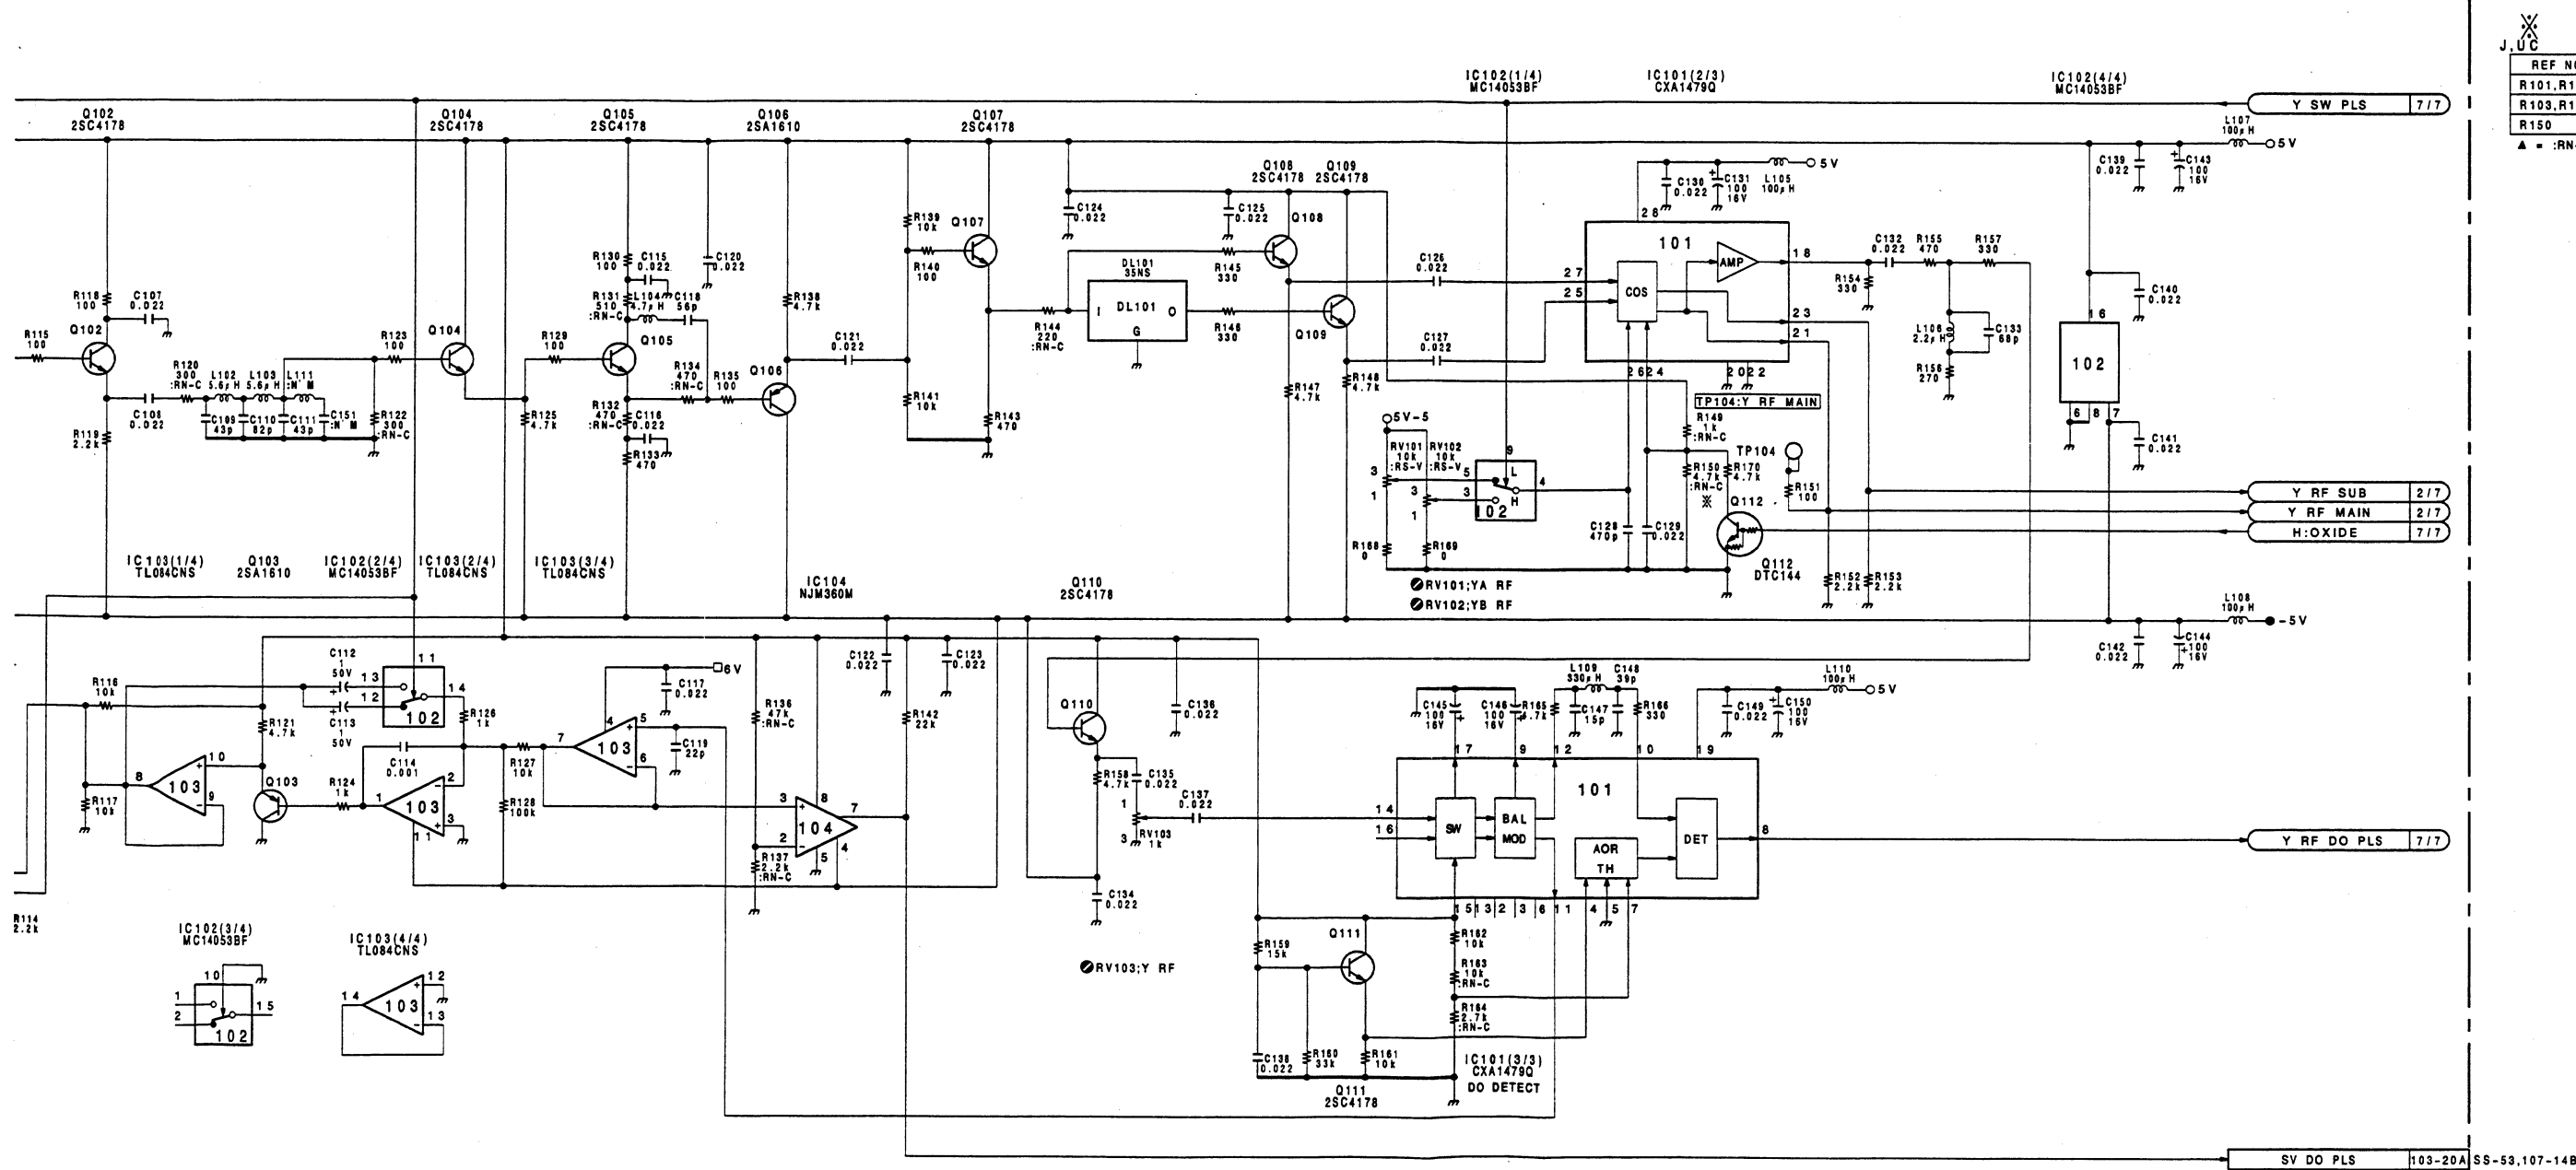



REF NO.	EDITOR	FEEDER
R101,R102	0	▲100
R103,R104	▲300	▲200
R150	▲10K	▲10K

▲ = :RN-C

VP-43/A BOARD (1 / 7)


BOARD NO.1-648-899-11
UVW-1800/1600(J) ;#10001-
UVW-1800/1600(UC);#10001-

VP-43/43A(1-648-899-11)


CN103	N-6	IC705	R-4	Q514	B-3	TP102	P-1
CN104	C-6			*Q515	B-2	TP103	L-1
CN105	R-5	*Q101	N-5	*Q516	B-2	TP104	P-3
		*Q102	N-4	Q517	B-3	TP201	P-1
DL101	N-4	*Q103	N-5	*Q601	F-5	TP301	H-1
DL301	J-4	*Q104	N-4	*Q602	F-5	TP302	J-3
		*Q105	N-4	Q603	E-5	TP401	L-1
*D201	N-2	*Q106	N-3	Q604	F-5		
*D401	J-2	*Q107	N-3	Q605	F-5		
*D501	A-2	*Q108	N-4	Q606	F-5		
*D502	B-2	*Q109	N-4	Q607	E-5		
*D503	B-3	*Q110	P-4	Q608	F-5		
*D504	B-4	*Q111	P-5	Q609	E-4		
*D601	D-2	*Q112	P-5	Q610	F-4		
*D602	E-2	*Q201	M-2	Q611	F-5		
*D701	R-4	*Q202	N-1	Q612	F-5		
		*Q203	P-2	*Q613	D-4		
E101	P-6	*Q204	N-2	*Q614	D-3		
E102	N-1	*Q205	P-2	*Q615	D-3		
E201	R-1	*Q206	P-2	*Q616	C-3		
E301	K-5	*Q207	N-2	*Q617	C-3		
E401	G-2	*Q208	N-1	*Q618	F-2		
E501	B-2	*Q209	N-1	*Q619	F-2		
E502	B-6	*Q210	N-1	*Q620	F-3		
E601	E-4	*Q211	P-2	*Q621	F-3		
E602	D-1	*Q212	P-1	*Q622	E-3		
E701	F-2	*Q213	R-2	*Q623	D-3		
		*Q214	R-2	*Q624	D-1		
FL201	M-1	*Q215	P-1	*Q625	E-4		
FL401	H-1	*Q216	N-2	*Q626	D-4		
FL601	E-2	*Q217	M-2	*Q627	D-1		
		*Q218	M-2	*Q628	D-1		
IC101	P-4	*Q219	M-2	*Q701	E-2		
IC102	M-5	*Q220	M-2	*Q702	F-2		
IC103	N-5	*Q301	J-4	*Q703	E-2		
IC104	L-5	*Q302	J-4	*Q704	F-2		
IC201	L-3	*Q303	H-4	*Q705	E-2		
IC202	M-2	*Q304	H-5	*Q706	F-2		
IC203	M-1	*Q305	H-4	*Q707	E-1		
IC204	P-1	*Q306	H-3	*Q708	F-1		
IC205	L-2	*Q307	J-3	*Q709	F-2		
IC301	K-4	*Q308	J-4	*Q710	F-1		
IC302	G-5	*Q309	J-4	*Q711	F-2		
IC303	H-5	*Q310	K-3	*Q712	F-2		
IC401	H-2	*Q311	K-5	*Q713	F-1		
IC402	H-1	*Q401	H-2	*Q714	E-1		
IC403	K-1	*Q402	J-1				
IC404	G-2	*Q403	J-1	RV101	L-1		
IC501	A-5	*Q404	J-2	RV102	K-1		
IC502	A-2	*Q405	J-1	RV103	P-4		
IC503	A-2	*Q406	J-1	RV201	M-3		
IC504	B-2	*Q407	J-1	RV301	J-1		
IC505	B-2	*Q408	J-1	RV302	H-1		
IC506	A-3	*Q409	J-2	RV303	K-4		
IC507	B-5	*Q410	J-1	RV401	H-3		
IC508	C-4	*Q411	J-2	RV501	A-4		
IC509	B-5	*Q412	J-2	RV502	A-4		
IC510	B-4	*Q413	K-2	RV503	B-4		
IC511	J-6	*Q414	K-2	RV504	B-4		
IC512	G-6	*Q415	K-2	RV505	B-4		
IC601	D-4	*Q416	J-2	RV506	B-4		
IC602	D-4	*Q417	H-2	RV601	D-1		
IC603	F-4	*Q418	H-2	RV602	F-1		
IC604	F-3	*Q501	A-1	RV603	D-1		
IC605	F-3	Q502	A-1	RV604	D-1		
IC606	E-3	Q503	A-1	RV605	F-1		
IC607	F-3	Q504	A-1	RV606	C-1		
IC608	D-2	*Q505	A-5	RV701	E-1		
IC609	E-2	*Q506	A-4	RV702	E-1		
IC610	D-2	Q507	B-1	RV703	E-1		
IC611	D-2	Q508	B-1	RV704	G-1		
IC612	C-2	*Q509	A-4				
IC701	F-1	*Q510	A-4	TH201	P-2		
IC702	F-1	*Q511	A-4	TH401	J-2		
IC703	R-4	*Q512	A-4				
IC704	R-4	*Q513	B-2	TP101	L-2		


*: B SIDE
—: UVW-1800 ONLY

① TP201 PB



VP-43/A(2/7);Y OMC,Y DEM,Y NL DE-EMPH.

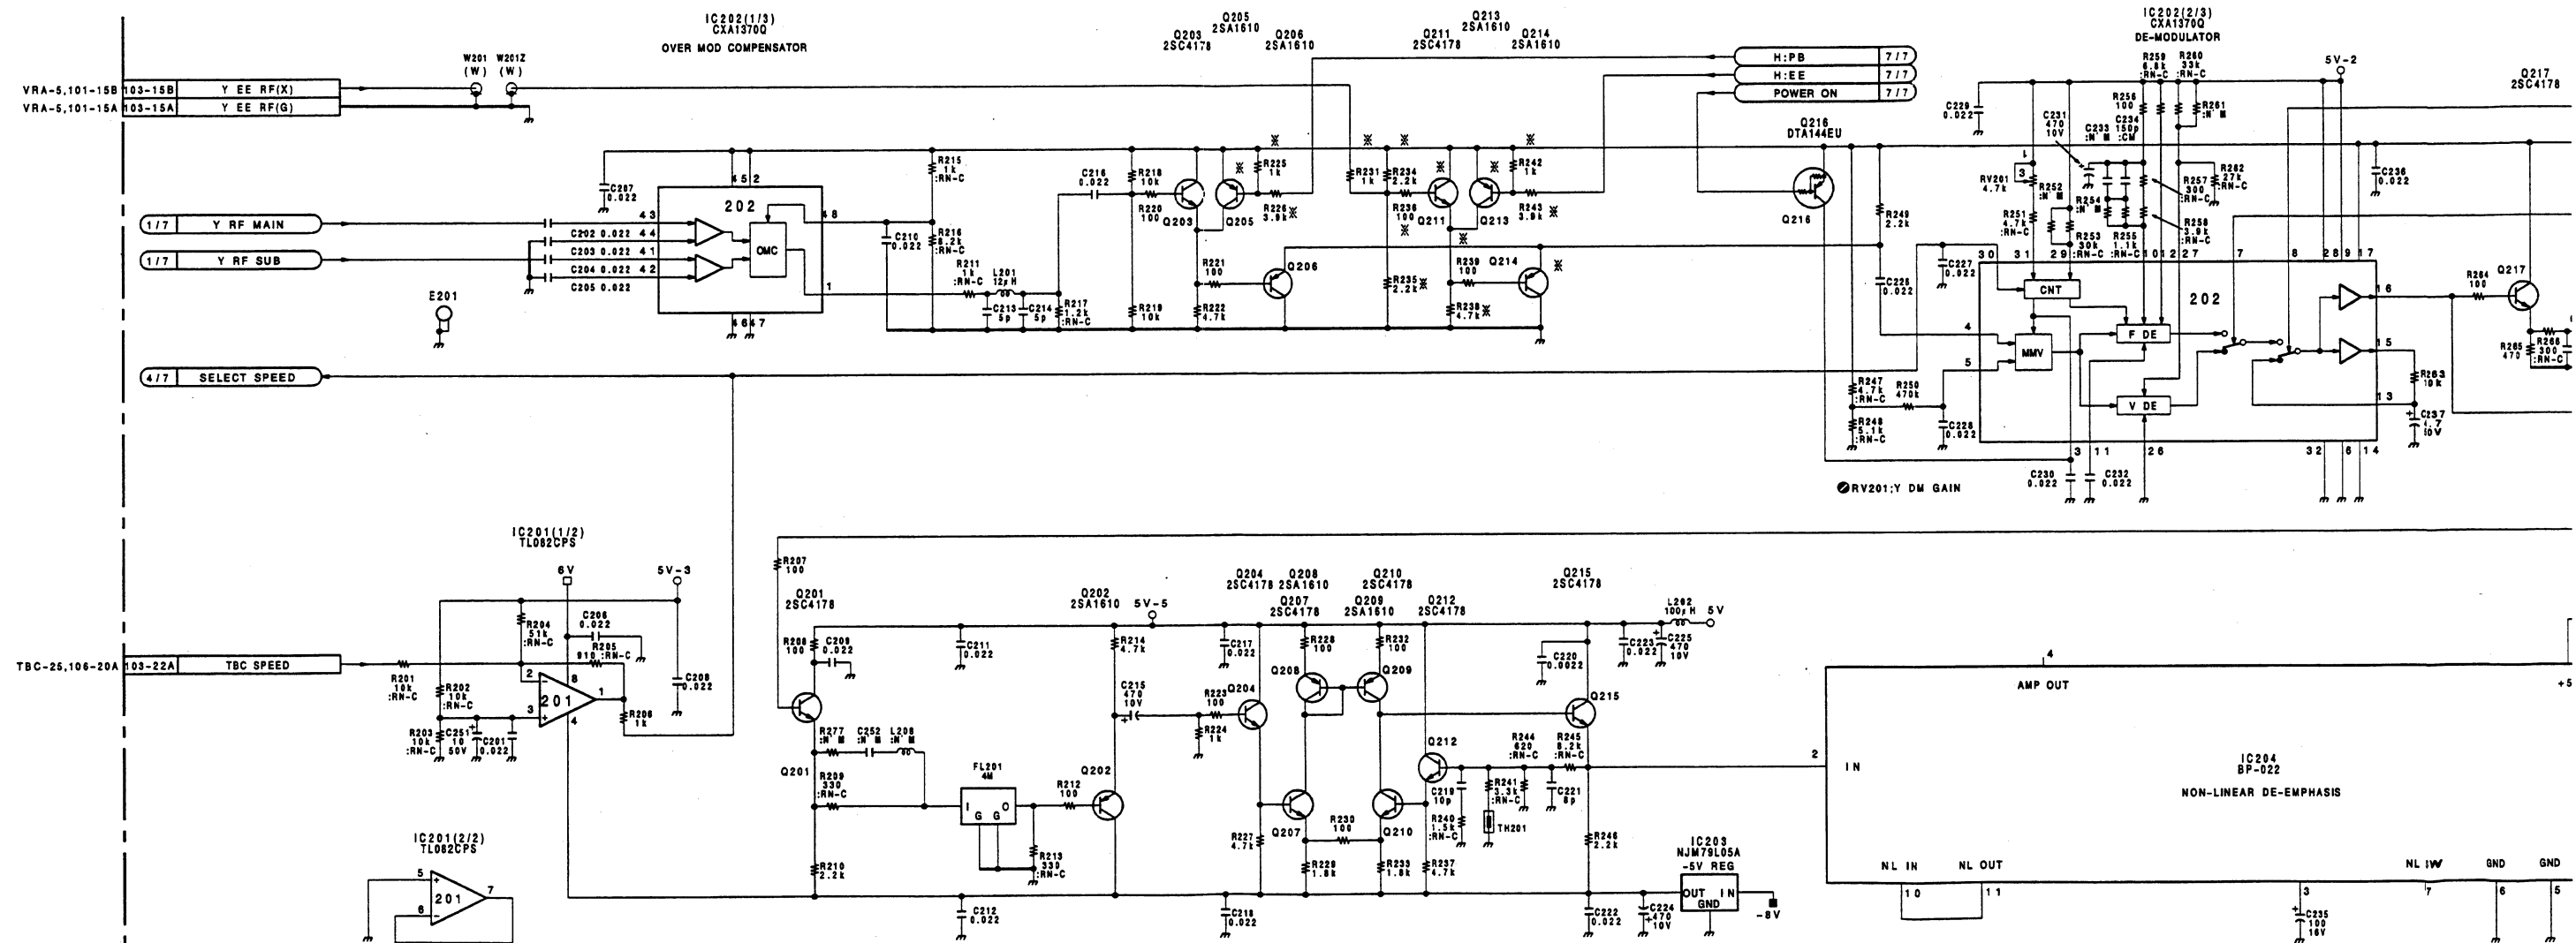

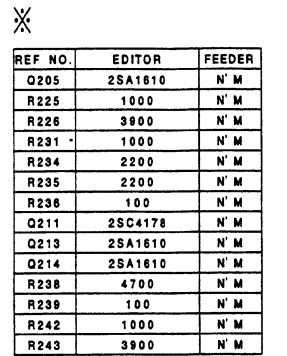

BOARD NO.1-648-899-11
UVW-1800/1600(J) ;#10001-
UVW-1800/1600(UC);#10001-




VP-43/43A(1-648-899-11)


CN103	N-6	IC705	R-4	Q514	B-3	TP102	P-1
CN104	C-6			*Q515	B-2	TP103	L-1
CN105	R-5	*Q101	N-5	*Q516	B-2	TP104	P-3
		*Q102	N-4	Q517	B-3	TP201	P-1
DL101	N-4	*Q103	N-5	*Q601	F-5	TP301	H-1
DL301	J-4	*Q104	N-4	*Q602	F-5	TP302	J-3
		*Q105	N-4	Q603	E-5	TP401	L-1
*D201	N-2	*Q106	N-3	Q604	F-5		
*D401	J-2	*Q107	N-3	Q605	F-5		
*D501	A-2	*Q108	N-4	Q606	F-5		
*D502	B-2	*Q109	N-4	Q607	E-5		
*D503	B-3	*Q110	P-4	Q608	F-5		
*D504	B-4	*Q111	P-5	Q609	E-4		
*D601	D-2	*Q112	P-5	Q610	F-4		
*D602	E-2	*Q201	M-2	Q611	F-5		
*D701	R-4	*Q202	N-1	Q612	F-5		
		*Q203	P-2	*Q613	D-4		
E101	P-6	*Q204	N-2	*Q614	D-3		
E102	N-1	*Q205	P-2	*Q615	D-3		
E201	R-1	*Q206	P-2	*Q616	C-3		
E301	K-5	*Q207	N-2	*Q617	C-3		
E401	G-2	*Q208	N-1	*Q618	F-2		
E501	B-2	*Q209	N-1	*Q619	F-2		
E502	B-6	*Q210	N-1	*Q620	F-3		
E601	E-4	*Q211	P-2	*Q621	F-3		
E602	D-1	*Q212	P-1	*Q622	E-3		
E701	F-2	*Q213	R-2	*Q623	D-3		
		*Q214	R-2	*Q624	D-1		
FL201	M-1	*Q215	P-1	*Q625	E-4		
FL401	H-1	*Q216	N-2	*Q626	D-4		
FL601	E-2	*Q217	M-2	*Q627	D-1		
		*Q218	M-2	*Q628	D-1		
IC101	P-4	*Q219	M-2	*Q701	E-2		
IC102	M-5	*Q220	M-2	*Q702	F-2		
IC103	N-5	*Q301	J-4	*Q703	E-2		
IC104	L-5	*Q302	J-4	*Q704	F-2		
IC201	L-3	*Q303	H-4	*Q705	E-2		
IC202	M-2	*Q304	H-5	*Q706	F-2		
IC203	M-1	*Q305	H-4	*Q707	E-1		
IC204	P-1	*Q306	H-3	*Q708	F-1		
IC205	L-2	*Q307	J-3	*Q709	F-2		
IC301	K-4	*Q308	J-4	*Q710	F-1		
IC302	G-5	*Q309	J-4	*Q711	F-2		
IC303	H-5	*Q310	K-3	*Q712	F-2		
IC401	H-2	*Q311	K-5	*Q713	F-1		
IC402	H-1	*Q401	H-2	*Q714	E-1		
IC403	K-1	*Q402	J-1				
IC404	G-2	*Q403	J-1	RV101	L-1		
IC501	A-5	*Q404	J-2	RV102	K-1		
IC502	A-2	*Q405	J-1	RV103	P-4		
IC503	A-2	*Q406	J-1	RV201	M-3		
IC504	B-2	*Q407	J-1	RV301	J-1		
IC505	B-2	*Q408	J-1	RV302	H-1		
IC506	A-3	*Q409	J-2	RV303	K-4		
IC507	B-5	*Q410	J-1	RV401	H-3		
IC508	C-4	*Q411	J-2	RV501	A-4		
IC509	B-5	*Q412	J-2	RV502	A-4		
IC510	B-4	*Q413	K-2	RV503	B-4		
IC511	J-6	*Q414	K-2	RV504	B-4		
IC512	G-6	*Q415	K-2	RV505	B-4		
IC601	D-4	*Q416	J-2	RV506	B-4		
IC602	D-4	*Q417	H-2	RV601	D-1		
IC603	F-4	*Q418	H-2	RV602	F-1		
IC604	F-3	*Q501	A-1	RV603	D-1		
IC605	F-3	Q502	A-1	RV604	D-1		
IC606	E-3	Q503	A-1	RV605	F-1		
IC607	F-3	Q504	A-1	RV606	C-1		
IC608	D-2	*Q505	A-5	RV701	E-1		
IC609	E-2	*Q506	A-4	RV702	E-1		
IC610	D-2	Q507	B-1	RV703	E-1		
IC611	D-2	Q508	B-1	RV704	G-1		
IC612	C-2	*Q509	A-4				
IC701	F-1	*Q510	A-4	TH201	P-2		
IC702	F-1	*Q511	A-4	TH401	J-2		
IC703	R-4	*Q512	A-4				
IC704	R-4	*Q513	B-2	TP101	L-2		

*: B SIDE

_: UVW-1800 ONLY

VP-43/A(3/7);C RF AGC/EQ,C DO DET.

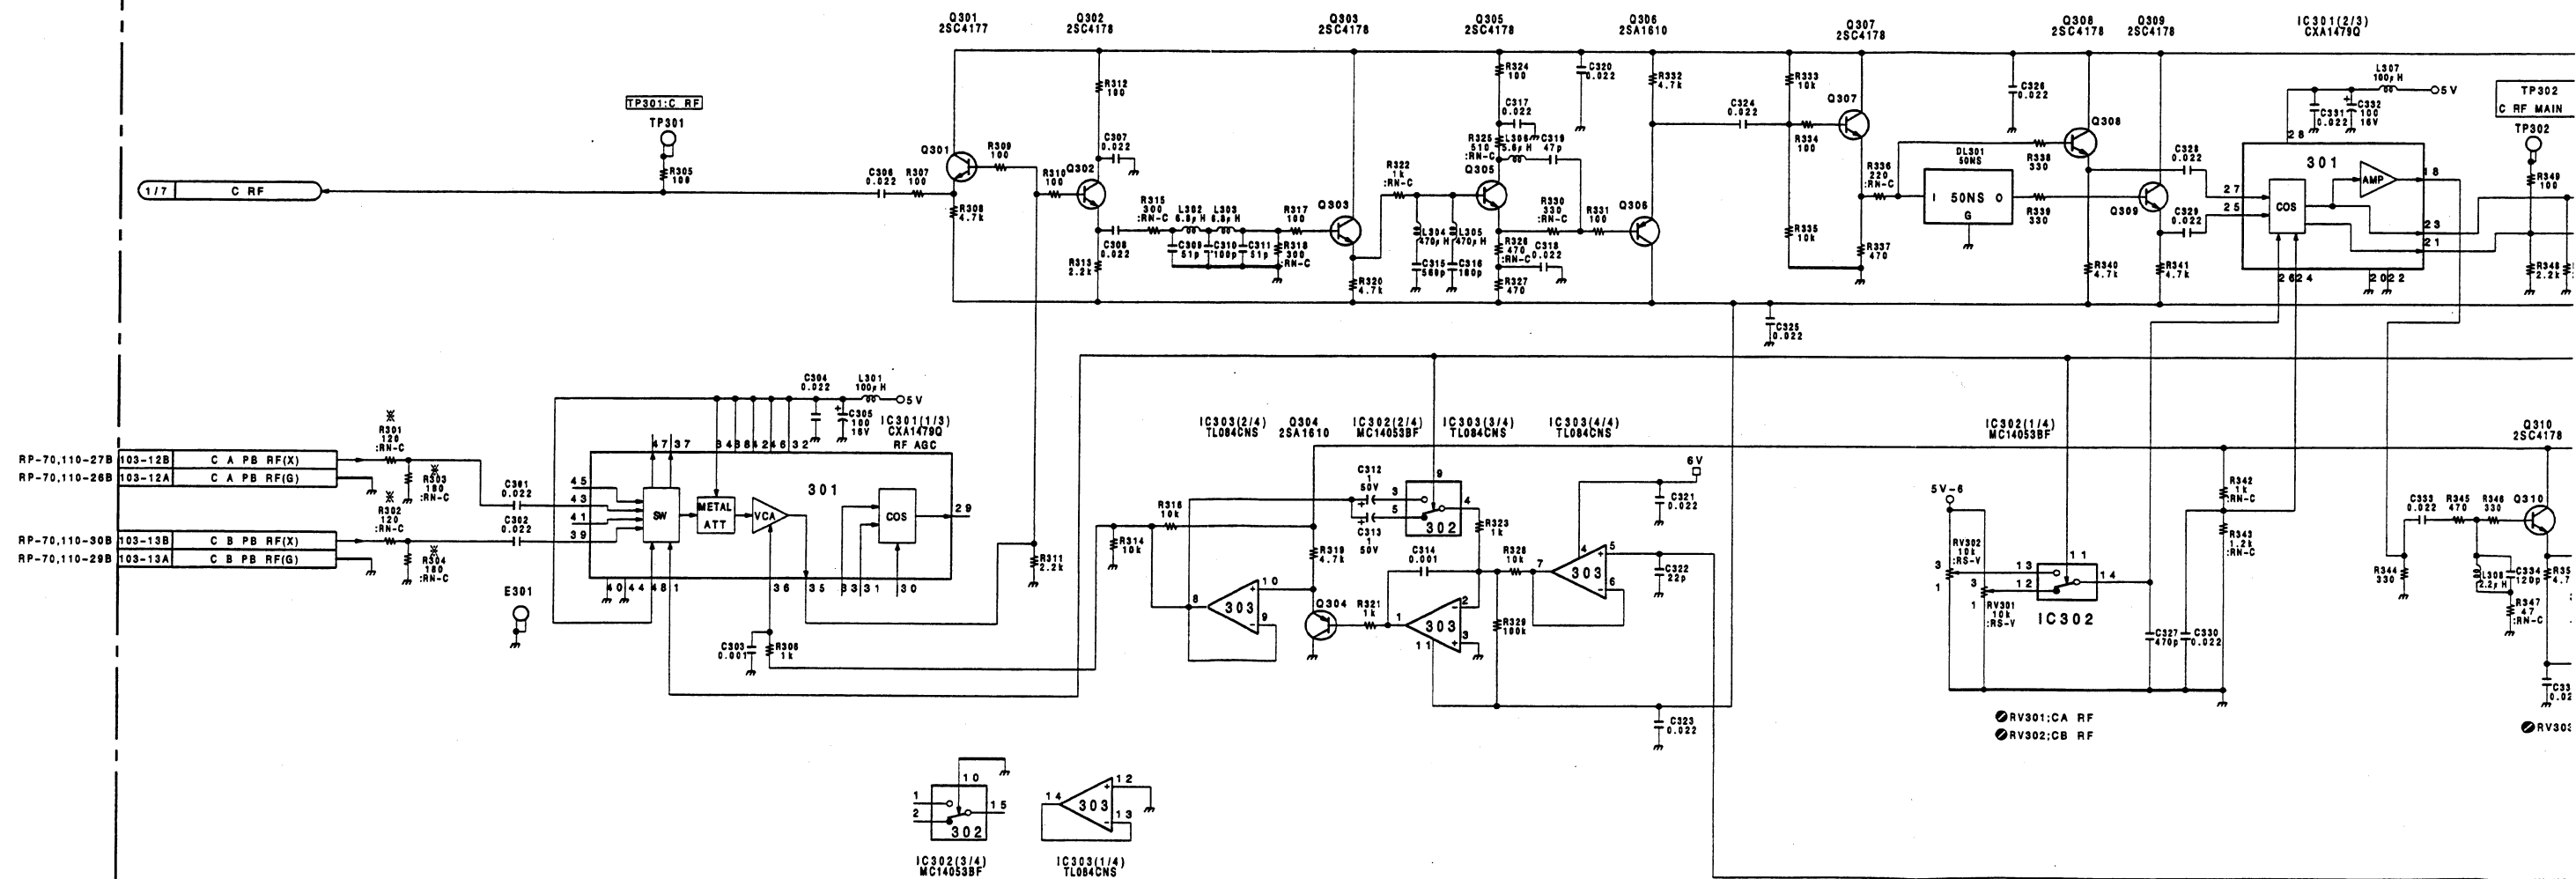

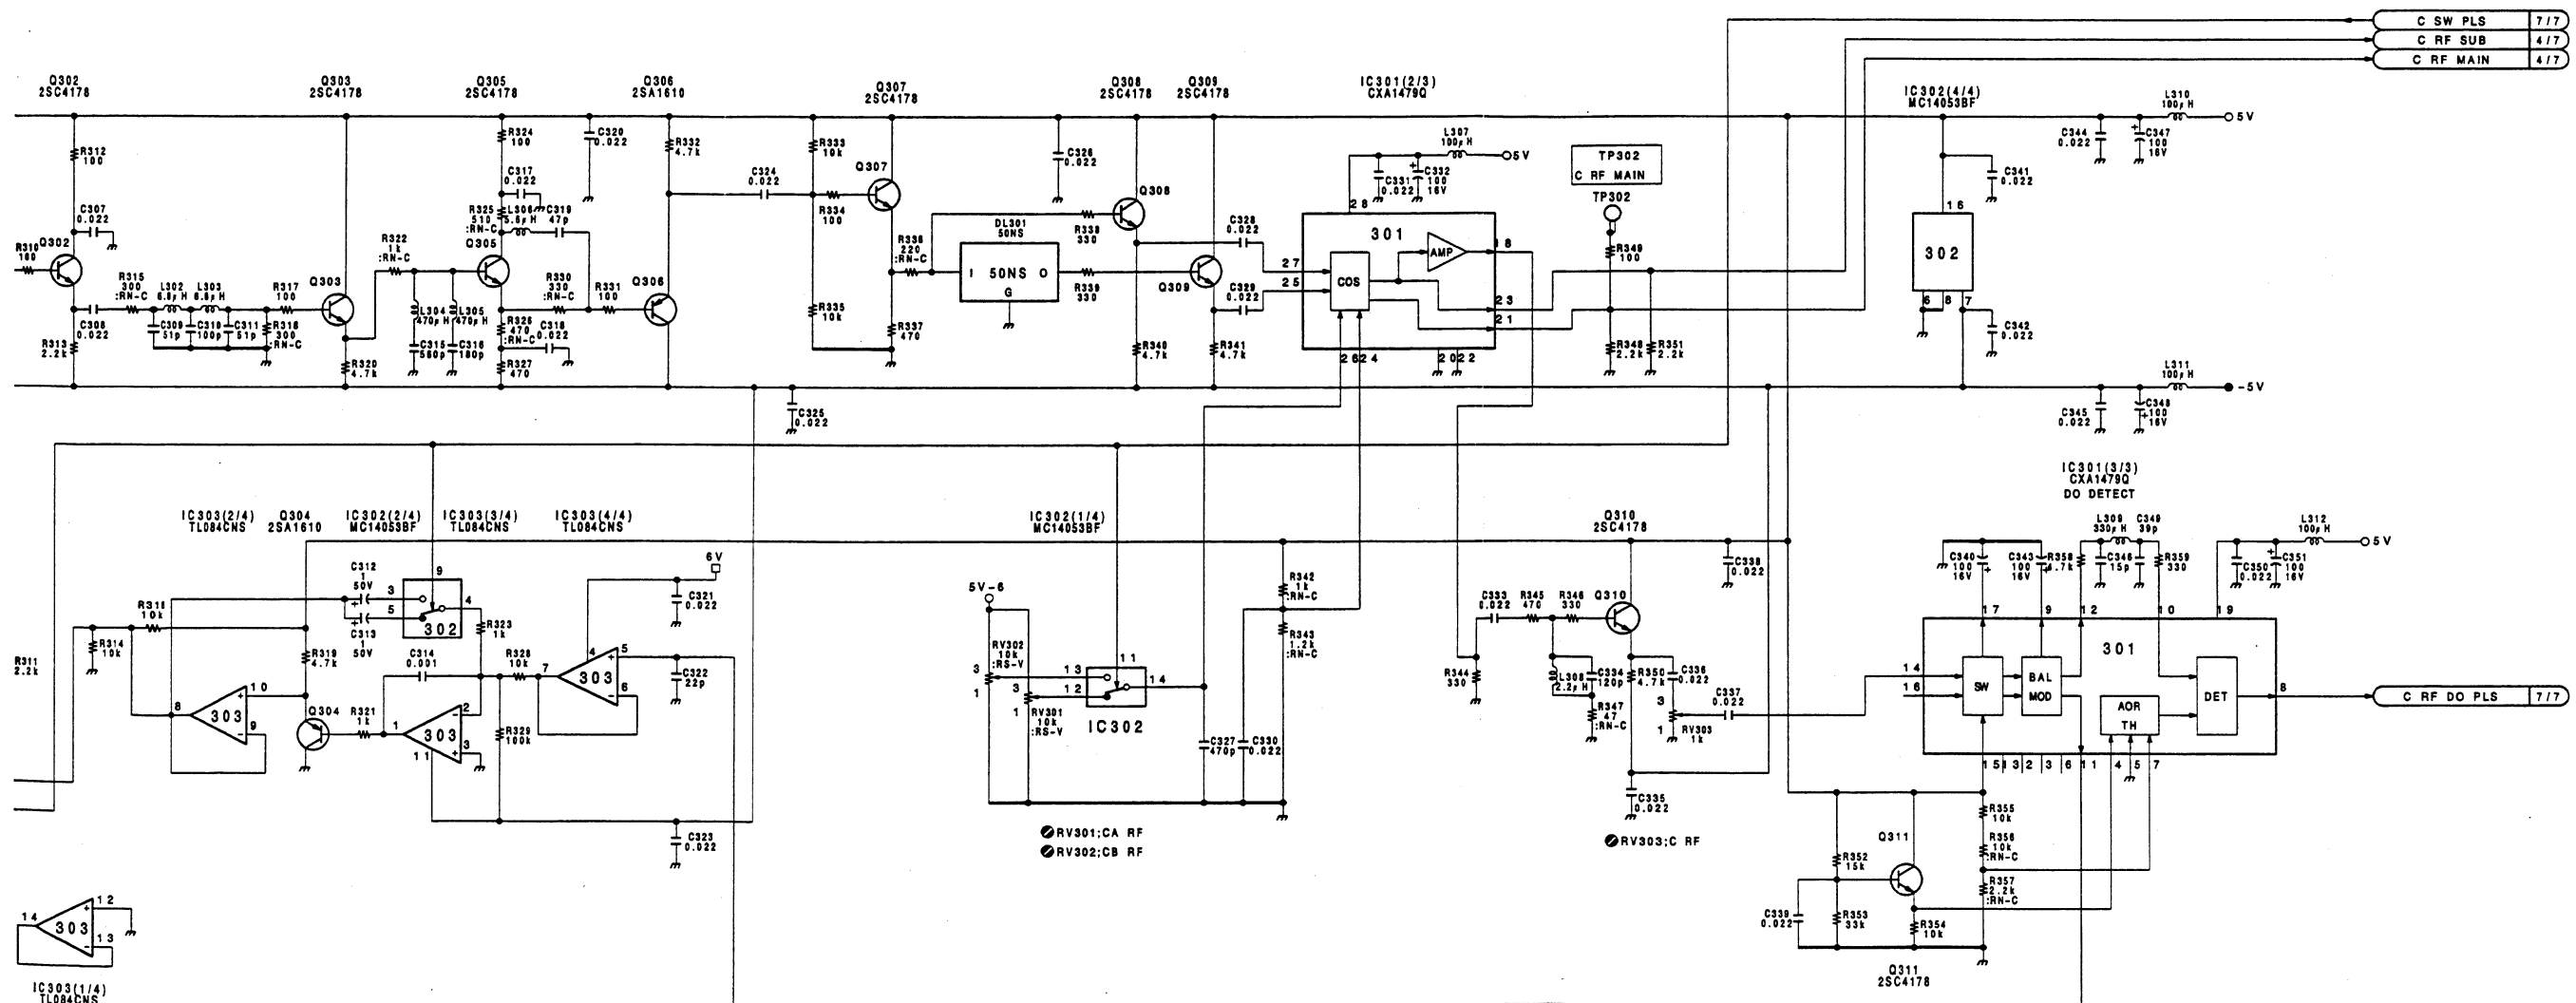

✱ J.U.C

REF NO.	EDITOR	FEEDER
R301, R302	▲120	▲180
R303, R304	▲180	▲120

▲ = -RN-C

VP-43/A BOARD (3/7)

BOARD NO.1-648-899-11
UVW-1800/1600(J) ;#10001-
UVW-1800/1600(UC);#10001-




VP-43/43A(1-648-899-11)


CN103	N-6	IC705	R-4	Q514	B-3	TP102	P-1
CN104	C-6			*Q515	B-2	TP103	L-1
CN105	R-5	*Q101	N-5	*Q516	B-2	TP104	P-3
		*Q102	N-4	Q517	B-3	TP201	P-1
DL101	N-4	*Q103	N-5	*Q601	F-5	TP301	H-1
DL301	J-4	*Q104	N-4	*Q602	F-5	TP302	J-3
		*Q105	N-4	Q603	E-5	TP401	L-1
*D201	N-2	*Q106	N-3	Q604	F-5		
*D401	J-2	*Q107	N-3	Q605	F-5		
*D501	A-2	*Q108	N-4	Q606	F-5		
*D502	B-2	*Q109	N-4	Q607	E-5		
*D503	B-3	*Q110	P-4	Q608	F-5		
*D504	B-4	*Q111	P-5	Q609	E-4		
*D601	D-2	*Q112	P-5	Q610	F-4		
*D602	E-2	*Q201	M-2	Q611	F-5		
*D701	R-4	*Q202	N-1	Q612	F-5		
		*Q203	P-2	*Q613	D-4		
E101	P-6	*Q204	N-2	*Q614	D-3		
E102	N-1	*Q205	P-2	*Q615	D-3		
E201	R-1	*Q206	P-2	*Q616	C-3		
E301	K-5	*Q207	N-2	*Q617	C-3		
E401	G-2	*Q208	N-1	*Q618	F-2		
E501	B-2	*Q209	N-1	*Q619	F-2		
E502	B-6	*Q210	N-1	*Q620	F-3		
E601	E-4	*Q211	P-2	*Q621	F-3		
E602	D-1	*Q212	P-1	*Q622	E-3		
E701	F-2	*Q213	R-2	*Q623	D-3		
		*Q214	R-2	*Q624	D-1		
FL201	M-1	*Q215	P-1	*Q625	E-4		
FL401	H-1	*Q216	N-2	*Q626	D-4		
FL601	E-2	*Q217	M-2	*Q627	D-1		
		*Q218	M-2	*Q628	D-1		
IC101	P-4	*Q219	M-2	*Q701	E-2		
IC102	M-5	*Q220	M-2	*Q702	F-2		
IC103	N-5	*Q301	J-4	*Q703	E-2		
IC104	L-5	*Q302	J-4	*Q704	F-2		
IC201	L-3	*Q303	H-4	*Q705	E-2		
IC202	M-2	*Q304	H-5	*Q706	F-2		
IC203	M-1	*Q305	H-4	*Q707	E-1		
IC204	P-1	*Q306	H-3	*Q708	F-1		
IC205	L-2	*Q307	J-3	*Q709	F-2		
IC301	K-4	*Q308	J-4	*Q710	F-1		
IC302	G-5	*Q309	J-4	*Q711	F-2		
IC303	H-5	*Q310	K-3	*Q712	F-2		
IC401	H-2	*Q311	K-5	*Q713	F-1		
IC402	H-1	*Q401	H-2	*Q714	E-1		
IC403	K-1	*Q402	J-1				
IC404	G-2	*Q403	J-1	RV101	L-1		
IC501	A-5	*Q404	J-2	RV102	K-1		
IC502	A-2	*Q405	J-1	RV103	P-4		
IC503	A-2	*Q406	J-1	RV201	M-3		
IC504	B-2	*Q407	J-1	RV301	J-1		
IC505	B-2	*Q408	J-1	RV302	H-1		
IC506	A-3	*Q409	J-2	RV303	K-4		
IC507	B-5	*Q410	J-1	RV401	H-3		
IC508	C-4	*Q411	J-2	RV501	A-4		
IC509	B-5	*Q412	J-2	RV502	A-4		
IC510	B-4	*Q413	K-2	RV503	B-4		
IC511	J-6	*Q414	K-2	RV504	B-4		
IC512	G-6	*Q415	K-2	RV505	B-4		
IC601	D-4	*Q416	J-2	RV506	B-4		
IC602	D-4	*Q417	H-2	RV601	D-1		
IC603	F-4	*Q418	H-2	RV602	F-1		
IC604	F-3	*Q501	A-1	RV603	D-1		
IC605	F-3	Q502	A-1	RV604	D-1		
IC606	E-3	Q503	A-1	RV605	F-1		
IC607	F-3	Q504	A-1	RV606	C-1		
IC608	D-2	*Q505	A-5	RV701	E-1		
IC609	E-2	*Q506	A-4	RV702	E-1		
IC610	D-2	Q507	B-1	RV703	E-1		
IC611	D-2	Q508	B-1	RV704	G-1		
IC612	C-2	*Q509	A-4				
IC701	F-1	*Q510	A-4	TH201	P-2		
IC702	F-1	*Q511	A-4	TH401	J-2		
IC703	R-4	*Q512	A-4				
IC704	R-4	*Q513	B-2	TP101	L-2		


*: B SIDE
_: UVW-1800 ONLY

① TP401 PB




VP-43/A(4/7);C OMC,C DEM,C NL DE-EMPH.

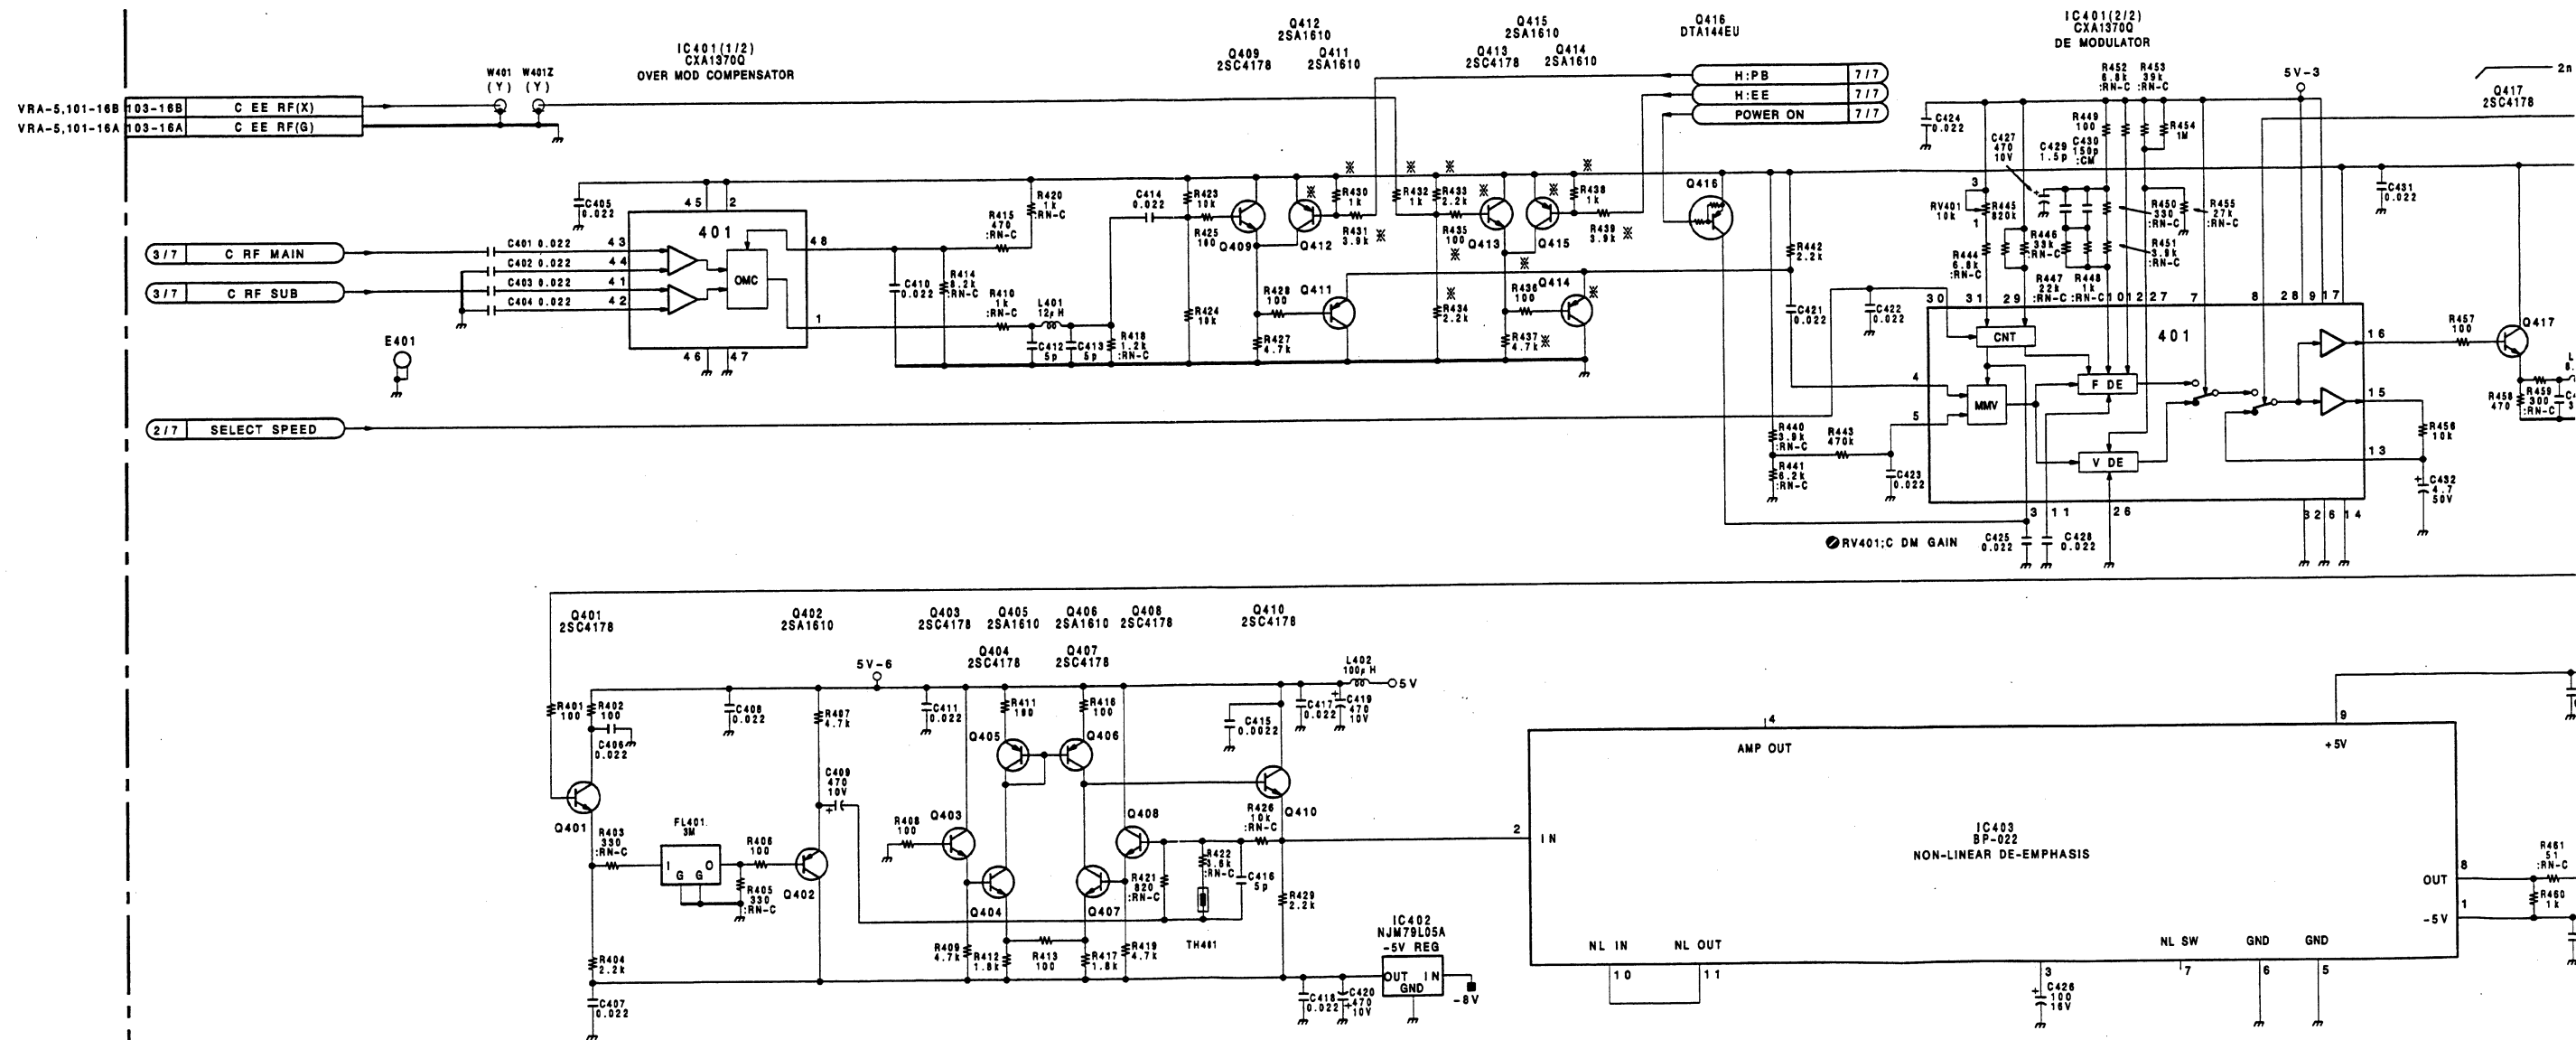

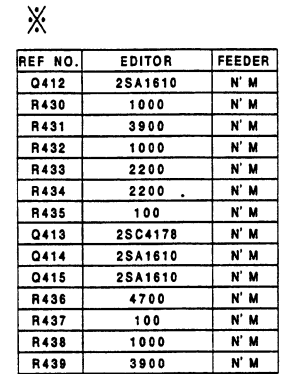

BOARD NO.1-648-899-11
UVW-1800/1600(J) ;#10001-
UVW-1800/1600(UC);#10001-




VP-43/43A(1-648-899-11)

CN103	N-6	IC705	R-4	Q514	B-3	TP102	P-1
CN104	C-6			*Q515	B-2	TP103	L-1
CN105	R-5	*Q101	N-5	*Q516	B-2	TP104	P-3
		*Q102	N-4	Q517	B-3	TP201	P-1
DL101	N-4	*Q103	N-5	*Q601	F-5	TP301	H-1
DL301	J-4	*Q104	N-4	*Q602	F-5	TP302	J-3
		*Q105	N-4	Q603	E-5	TP401	L-1
*D201	N-2	*Q106	N-3	Q604	F-5		
*D401	J-2	*Q107	N-3	Q605	F-5		
*D501	A-2	*Q108	N-4	Q606	F-5		
*D502	B-2	*Q109	N-4	Q607	E-5		
*D503	B-3	*Q110	P-4	Q608	F-5		
*D504	B-4	*Q111	P-5	Q609	E-4		
*D601	D-2	*Q112	P-5	Q610	F-4		
*D602	E-2	*Q201	M-2	Q611	F-5		
*D701	R-4	*Q202	N-1	Q612	F-5		
		*Q203	P-2	*Q613	D-4		
E101	P-6	*Q204	N-2	*Q614	D-3		
E102	N-1	*Q205	P-2	*Q615	D-3		
E201	R-1	*Q206	P-2	*Q616	C-3		
E301	K-5	*Q207	N-2	*Q617	C-3		
E401	G-2	*Q208	N-1	*Q618	F-2		
E501	B-2	*Q209	N-1	*Q619	F-2		
E502	B-6	*Q210	N-1	*Q620	F-3		
E601	E-4	*Q211	P-2	*Q621	F-3		
E602	D-1	*Q212	P-1	*Q622	E-3		
E701	F-2	*Q213	R-2	*Q623	D-3		
		*Q214	R-2	*Q624	D-1		
FL201	M-1	*Q215	P-1	*Q625	E-4		
FL401	H-1	*Q216	N-2	*Q626	D-4		
FL601	E-2	*Q217	M-2	*Q627	D-1		
		*Q218	M-2	*Q628	D-1		
IC101	P-4	*Q219	M-2	*Q701	E-2		
IC102	M-5	*Q220	M-2	*Q702	F-2		
IC103	N-5	*Q301	J-4	*Q703	E-2		
IC104	L-5	*Q302	J-4	*Q704	F-2		
IC201	L-3	*Q303	H-4	*Q705	E-2		
IC202	M-2	*Q304	H-5	*Q706	F-2		
IC203	M-1	*Q305	H-4	*Q707	E-1		
IC204	P-1	*Q306	H-3	*Q708	F-1		
IC205	L-2	*Q307	J-3	*Q709	F-2		
IC301	K-4	*Q308	J-4	*Q710	F-1		
IC302	G-5	*Q309	J-4	*Q711	F-2		
IC303	H-5	*Q310	K-3	*Q712	F-2		
IC401	H-2	*Q311	K-5	*Q713	F-1		
IC402	H-1	*Q401	H-2	*Q714	E-1		
IC403	K-1	*Q402	J-1				
IC404	G-2	*Q403	J-1	RV101	L-1		
IC501	A-5	*Q404	J-2	RV102	K-1		
IC502	A-2	*Q405	J-1	RV103	P-4		
IC503	A-2	*Q406	J-1	RV201	M-3		
IC504	B-2	*Q407	J-1	RV301	J-1		
IC505	B-2	*Q408	J-1	RV302	H-1		
IC506	A-3	*Q409	J-2	RV303	K-4		
IC507	B-5	*Q410	J-1	RV401	H-3		
IC508	C-4	*Q411	J-2	RV501	A-4		
IC509	B-5	*Q412	J-2	RV502	A-4		
IC510	B-4	*Q413	K-2	RV503	B-4		
IC511	J-6	*Q414	K-2	RV504	B-4		
IC512	G-6	*Q415	K-2	RV505	B-4		
IC601	D-4	*Q416	J-2	RV506	B-4		
IC602	D-4	*Q417	H-2	RV601	D-1		
IC603	F-4	*Q418	H-2	RV602	F-1		
IC604	F-3	*Q501	A-1	RV603	D-1		
IC605	F-3	Q502	A-1	RV604	D-1		
IC606	E-3	Q503	A-1	RV605	F-1		
IC607	F-3	Q504	A-1	RV606	C-1		
IC608	D-2	*Q505	A-5	RV701	E-1		
IC609	E-2	*Q506	A-4	RV702	E-1		
IC610	D-2	Q507	B-1	RV703	E-1		
IC611	D-2	Q508	B-1	RV704	G-1		
IC612	C-2	*Q509	A-4				
IC701	F-1	*Q510	A-4	TH201	P-2		
IC702	F-1	*Q511	A-4	TH401	J-2		
IC703	R-4	*Q512	A-4				
IC704	R-4	*Q513	B-2	TP101	L-2		

*: B SIDE

_: UVW-1800 ONLY

VP-43/A(5/7);Y/S-Y OUT DRIVE,COMPOSITE OUT DRIVE CHA/SYNC MIX

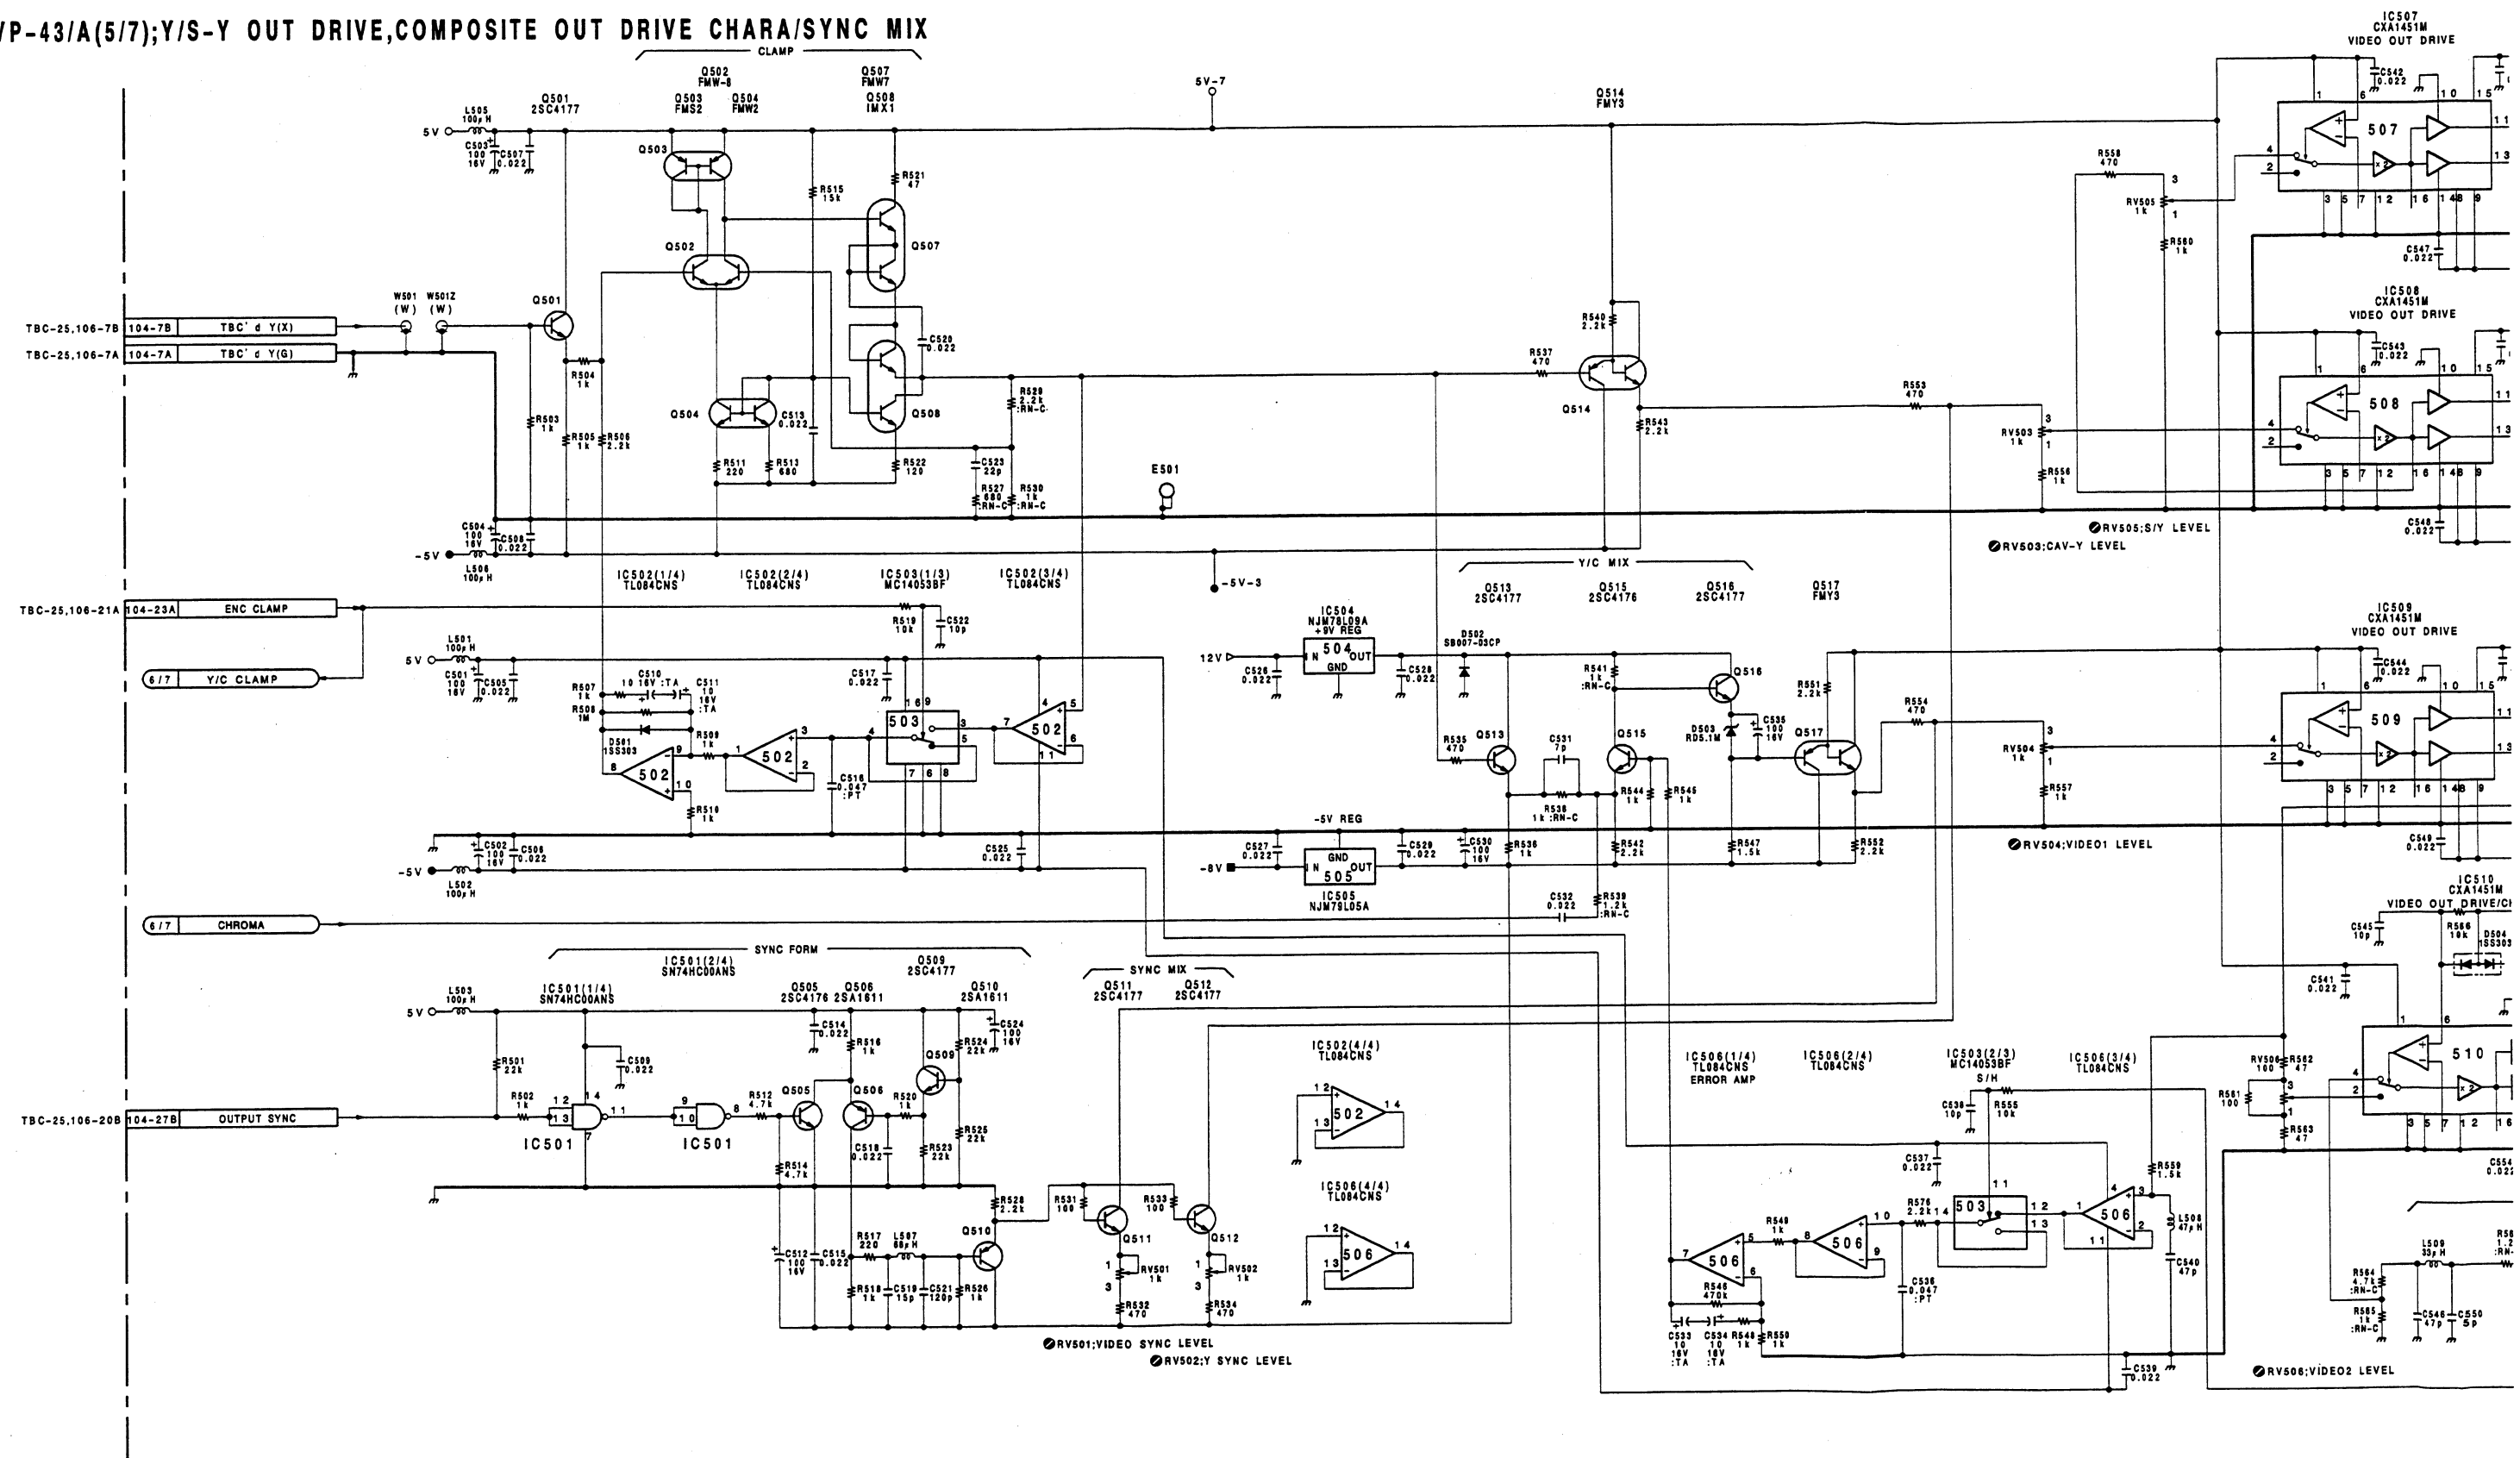


VP-43/43A(1-648-899-11)


CN103	N-6	IC705	R-4	Q514	B-3	TP102	P-1
CN104	C-6			*Q515	B-2	TP103	L-1
CN105	R-5	*Q101	N-5	*Q516	B-2	TP104	P-3
		*Q102	N-4	Q517	B-3	TP201	P-1
DL101	N-4	*Q103	N-5	*Q601	F-5	TP301	H-1
DL301	J-4	*Q104	N-4	*Q602	F-5	TP302	J-3
		*Q105	N-4	Q603	E-5	TP401	L-1
*D201	N-2	*Q106	N-3	Q604	F-5		
*D401	J-2	*Q107	N-3	Q605	F-5		
*D501	A-2	*Q108	N-4	Q606	F-5		
*D502	B-2	*Q109	N-4	Q607	E-5		
*D503	B-3	*Q110	P-4	Q608	F-5		
*D504	B-4	*Q111	P-5	Q609	E-4		
*D601	D-2	*Q112	P-5	Q610	F-4		
*D602	E-2	*Q201	M-2	Q611	F-5		
*D701	R-4	*Q202	N-1	Q612	F-5		
		*Q203	P-2	*Q613	D-4		
E101	P-6	*Q204	N-2	*Q614	D-3		
E102	N-1	*Q205	P-2	*Q615	D-3		
E201	R-1	*Q206	P-2	*Q616	C-3		
E301	K-5	*Q207	N-2	*Q617	C-3		
E401	G-2	*Q208	N-1	*Q618	F-2		
E501	B-2	*Q209	N-1	*Q619	F-2		
E502	B-6	*Q210	N-1	*Q620	F-3		
E601	E-4	*Q211	P-2	*Q621	F-3		
E602	D-1	*Q212	P-1	*Q622	E-3		
E701	F-2	*Q213	R-2	*Q623	D-3		
		*Q214	R-2	*Q624	D-1		
FL201	M-1	*Q215	P-1	*Q625	E-4		
FL401	H-1	*Q216	N-2	*Q626	D-4		
FL601	E-2	*Q217	M-2	*Q627	D-1		
		*Q218	M-2	*Q628	D-1		
IC101	P-4	*Q219	M-2	*Q701	E-2		
IC102	M-5	*Q220	M-2	*Q702	F-2		
IC103	N-5	*Q301	J-4	*Q703	E-2		
IC104	L-5	*Q302	J-4	*Q704	F-2		
IC201	L-3	*Q303	H-4	*Q705	E-2		
IC202	M-2	*Q304	H-5	*Q706	F-2		
IC203	M-1	*Q305	H-4	*Q707	E-1		
IC204	P-1	*Q306	H-3	*Q708	F-1		
IC205	L-2	*Q307	J-3	*Q709	F-2		
IC301	K-4	*Q308	J-4	*Q710	F-1		
IC302	G-5	*Q309	J-4	*Q711	F-2		
IC303	H-5	*Q310	K-3	*Q712	F-2		
IC401	H-2	*Q311	K-5	*Q713	F-1		
IC402	H-1	*Q401	H-2	*Q714	E-1		
IC403	K-1	*Q402	J-1				
IC404	G-2	*Q403	J-1	RV101	L-1		
IC501	A-5	*Q404	J-2	RV102	K-1		
IC502	A-2	*Q405	J-1	RV103	P-4		
IC503	A-2	*Q406	J-1	RV201	M-3		
IC504	B-2	*Q407	J-1	RV301	J-1		
IC505	B-2	*Q408	J-1	RV302	H-1		
IC506	A-3	*Q409	J-2	RV303	K-4		
IC507	B-5	*Q410	J-1	RV401	H-3		
IC508	C-4	*Q411	J-2	RV501	A-4		
IC509	B-5	*Q412	J-2	RV502	A-4		
IC510	B-4	*Q413	K-2	RV503	B-4		
IC511	J-6	*Q414	K-2	RV504	B-4		
IC512	G-6	*Q415	K-2	RV505	B-4		
IC601	D-4	*Q416	J-2	RV506	B-4		
IC602	D-4	*Q417	H-2	RV601	D-1		
IC603	F-4	*Q418	H-2	RV602	F-1		
IC604	F-3	*Q501	A-1	RV603	D-1		
IC605	F-3	Q502	A-1	RV604	D-1		
IC606	E-3	Q503	A-1	RV605	F-1		
IC607	F-3	Q504	A-1	RV606	C-1		
IC608	D-2	*Q505	A-5	RV701	E-1		
IC609	E-2	*Q506	A-4	RV702	E-1		
IC610	D-2	Q507	B-1	RV703	E-1		
IC611	D-2	Q508	B-1	RV704	G-1		
IC612	C-2	*Q509	A-4				
IC701	F-1	*Q510	A-4	TH201	P-2		
IC702	F-1	*Q511	A-4	TH401	J-2		
IC703	R-4	*Q512	A-4				
IC704	R-4	*Q513	B-2	TP101	L-2		

*: B SIDE

_: UVW-1800 ONLY

VP-43/A(6/7);ENCODE,S-C OUT DRIVE

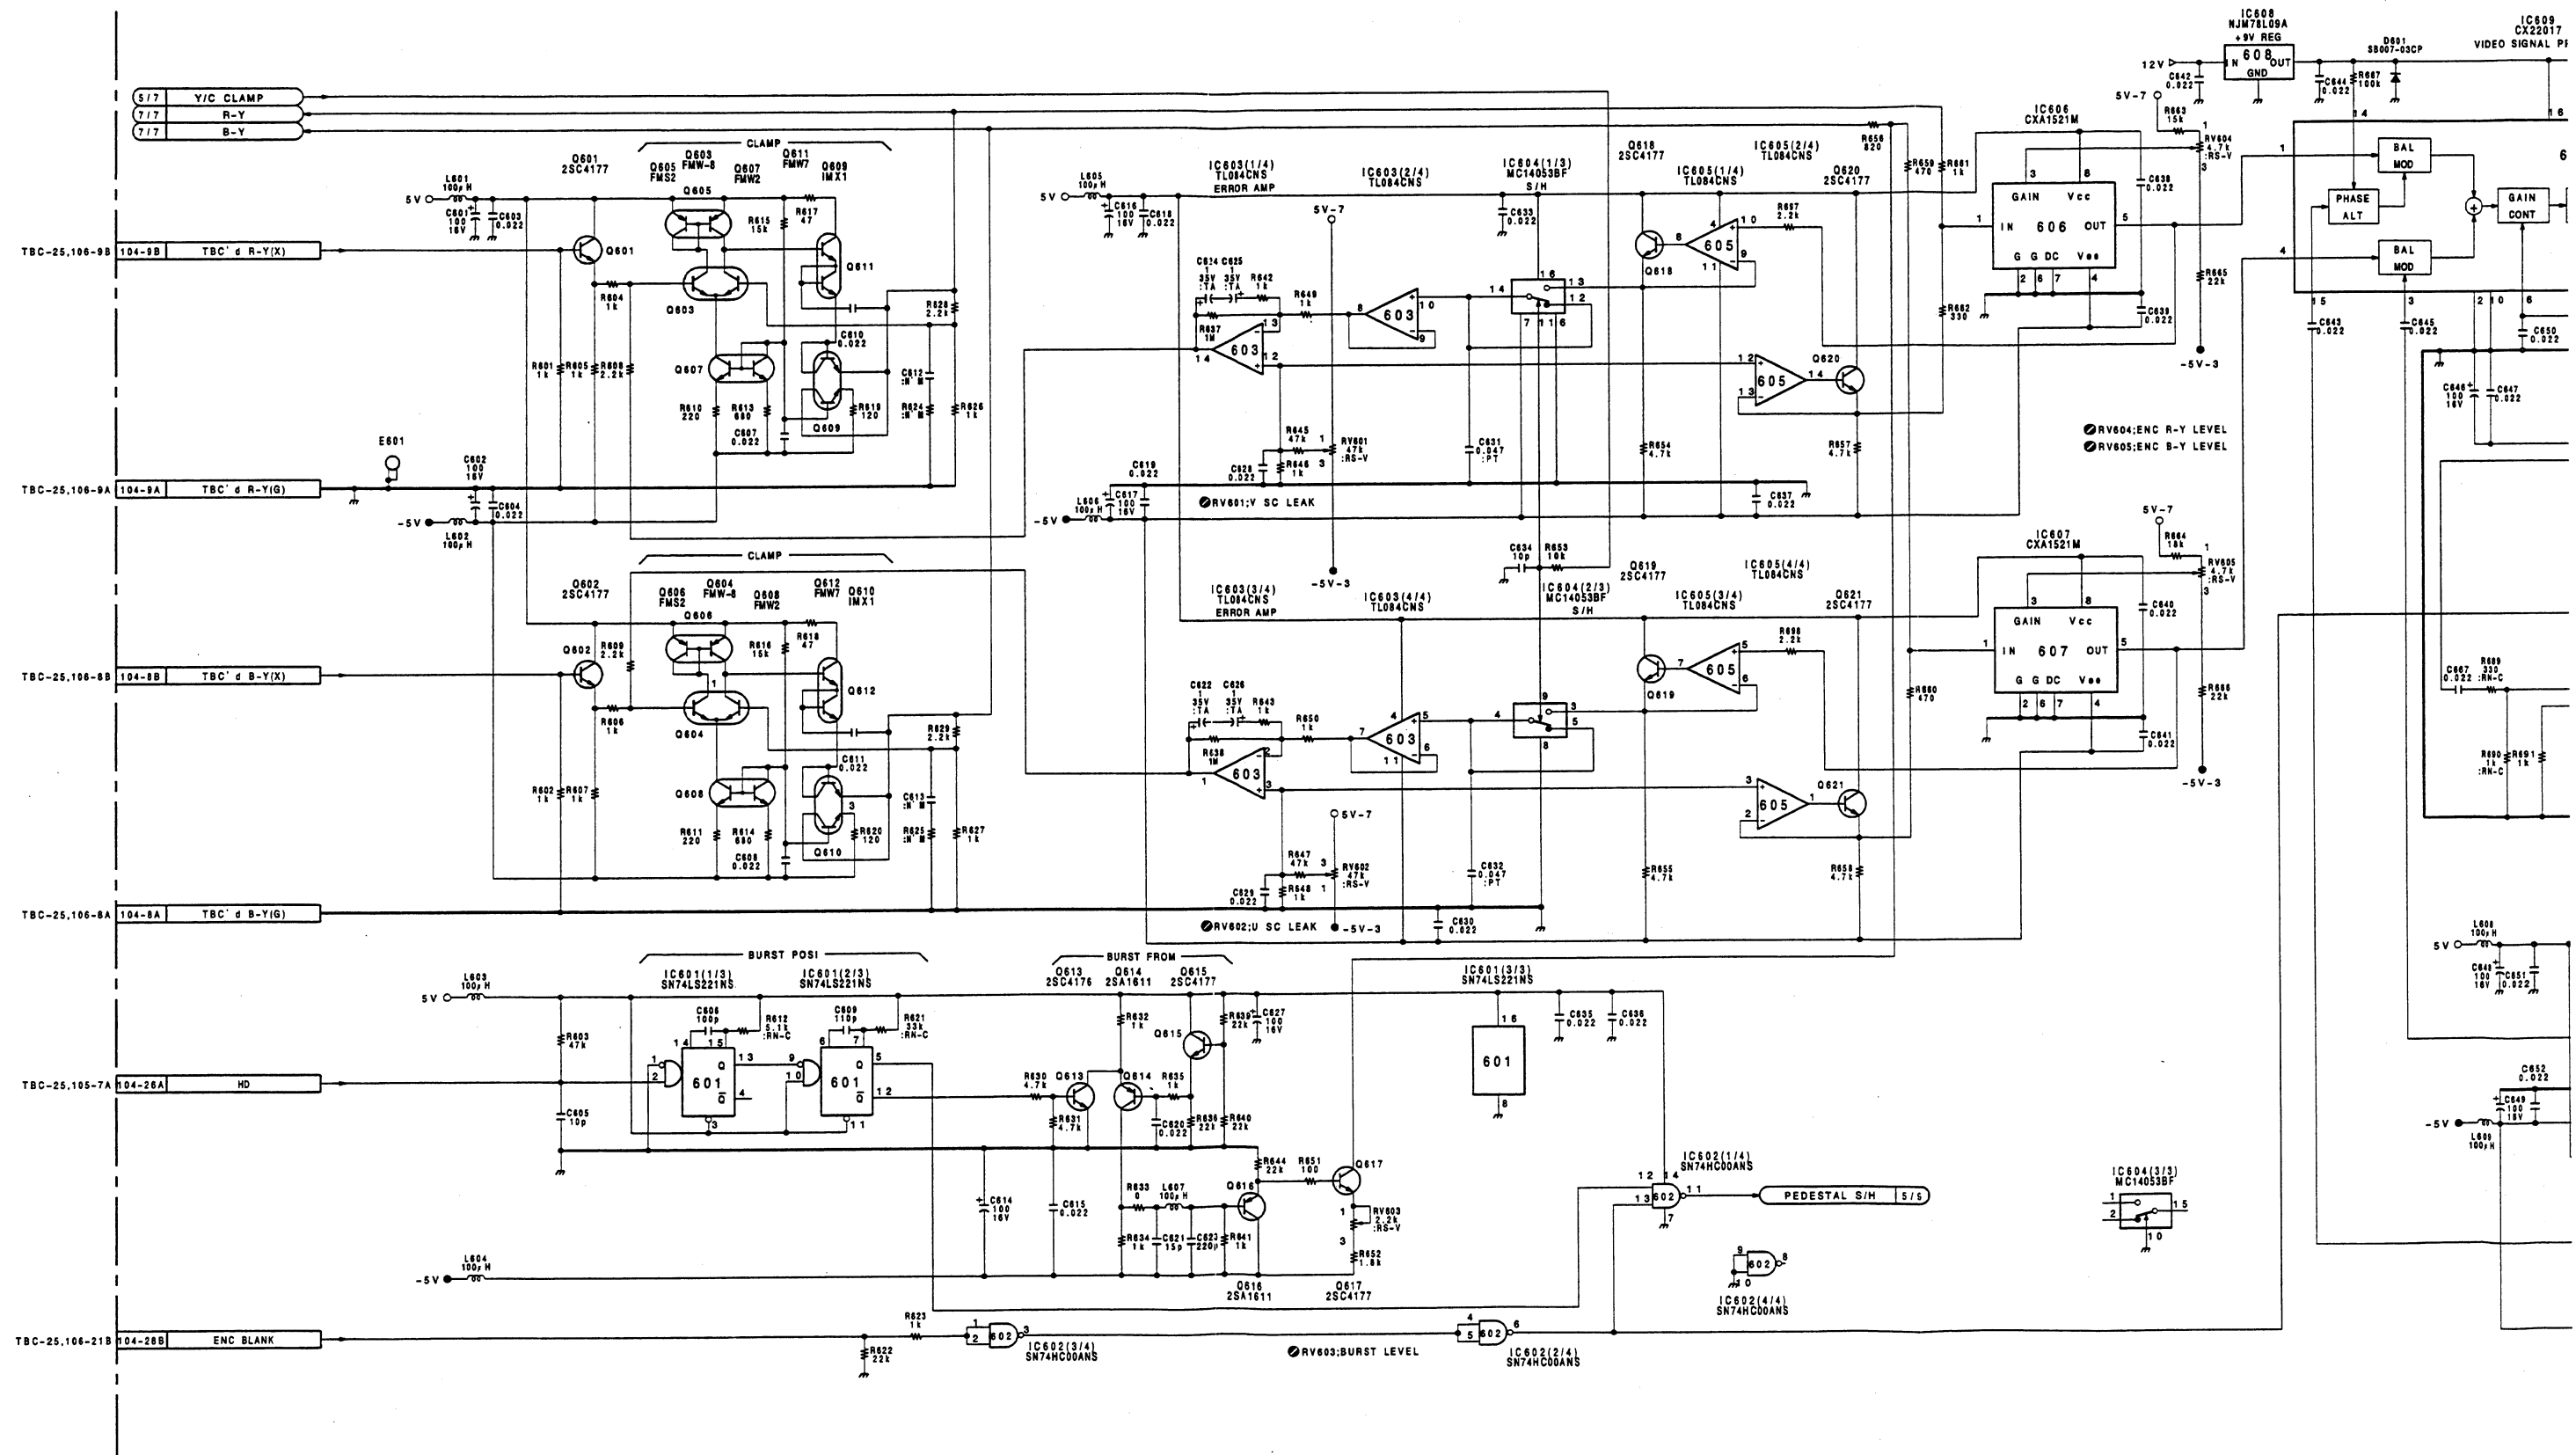

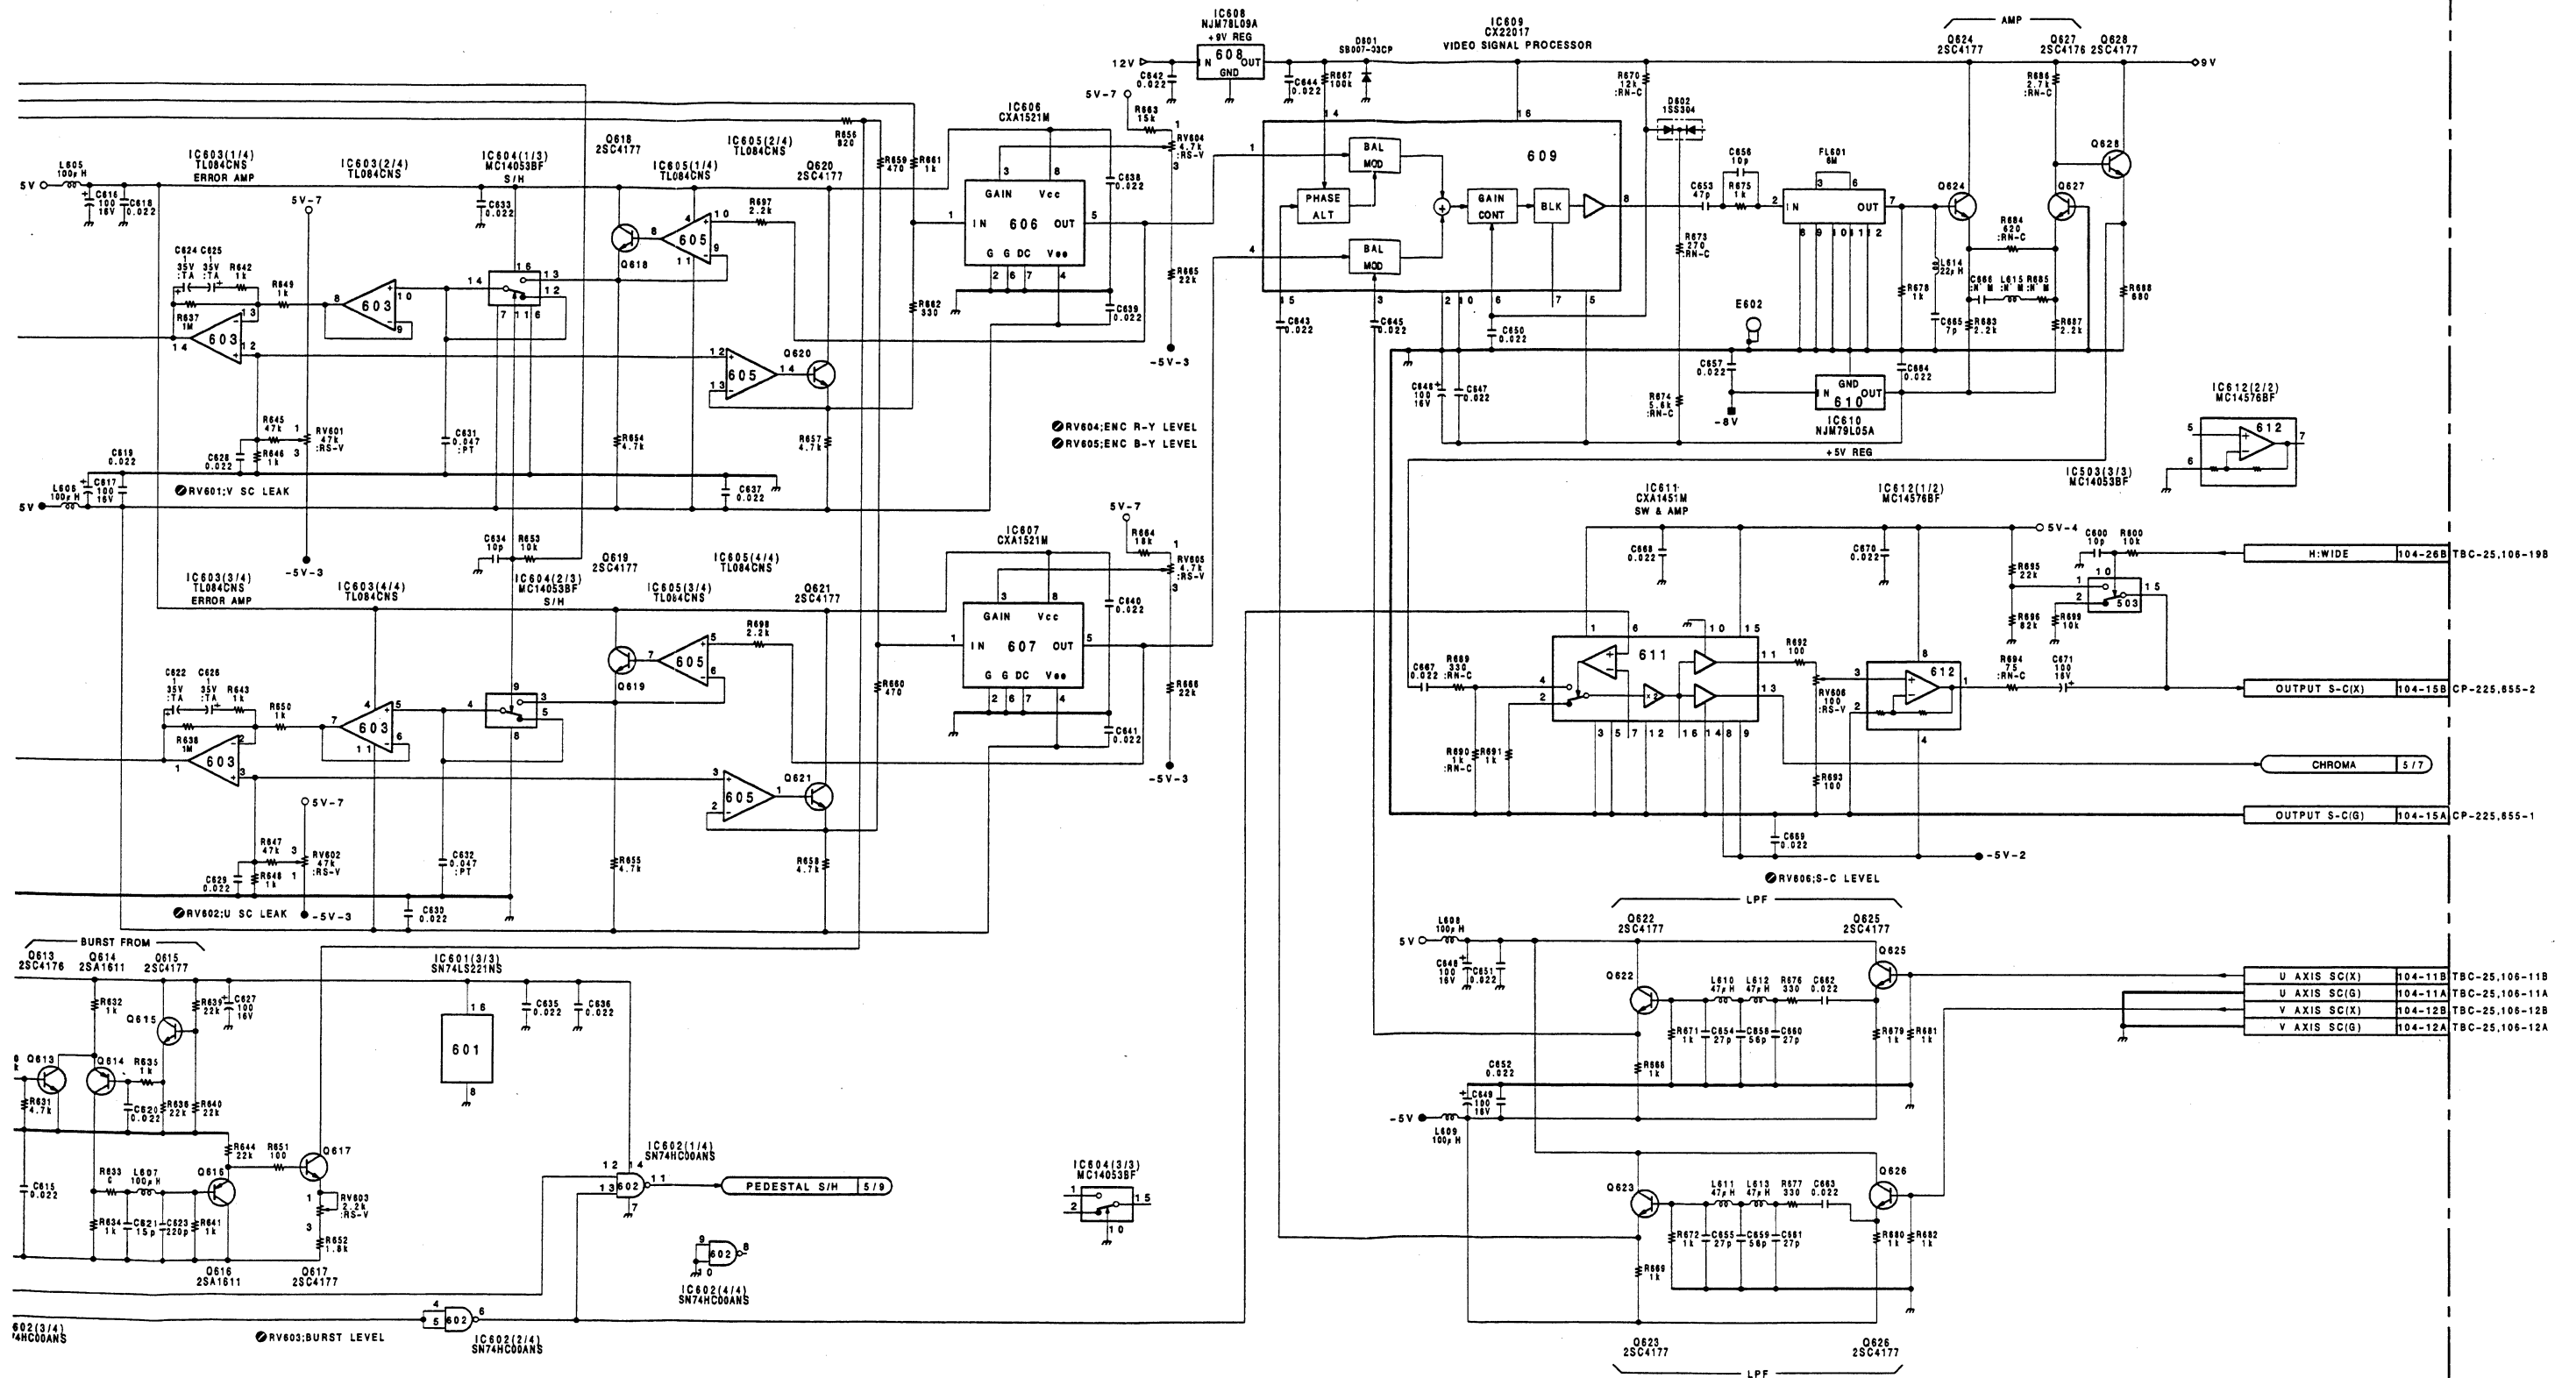

VP-43/A BOARD (6/7)

BOARD NO.1-648-899-11
 UVW-1800/1600(J);#10001-
 UVW-1800/1600(UC);#10001-


VP-43/43A(1-648-899-11)

CN103	N-6	IC705	R-4	Q514	B-3	TP102	P-1
CN104	C-6			*Q515	B-2	TP103	L-1
CN105	R-5	*Q101	N-5	*Q516	B-2	TP104	P-3
		*Q102	N-4	Q517	B-3	TP201	P-1
DL101	N-4	*Q103	N-5	*Q601	F-5	TP301	H-1
DL301	J-4	*Q104	N-4	*Q602	F-5	TP302	J-3
		*Q105	N-4	Q603	E-5	TP401	L-1
*D201	N-2	*Q106	N-3	Q604	F-5		
*D401	J-2	*Q107	N-3	Q605	F-5		
*D501	A-2	*Q108	N-4	Q606	F-5		
*D502	B-2	*Q109	N-4	Q607	E-5		
*D503	B-3	*Q110	P-4	Q608	F-5		
*D504	B-4	*Q111	P-5	Q609	E-4		
*D601	D-2	*Q112	P-5	Q610	F-4		
*D602	E-2	*Q201	M-2	Q611	F-5		
*D701	R-4	*Q202	N-1	Q612	F-5		
		*Q203	P-2	*Q613	D-4		
E101	P-6	*Q204	N-2	*Q614	D-3		
E102	N-1	*Q205	P-2	*Q615	D-3		
E201	R-1	*Q206	P-2	*Q616	C-3		
E301	K-5	*Q207	N-2	*Q617	C-3		
E401	G-2	*Q208	N-1	*Q618	F-2		
E501	B-2	*Q209	N-1	*Q619	F-2		
E502	B-6	*Q210	N-1	*Q620	F-3		
E601	E-4	*Q211	P-2	*Q621	F-3		
E602	D-1	*Q212	P-1	*Q622	E-3		
E701	F-2	*Q213	R-2	*Q623	D-3		
		*Q214	R-2	*Q624	D-1		
FL201	M-1	*Q215	P-1	*Q625	E-4		
FL401	H-1	*Q216	N-2	*Q626	D-4		
FL601	E-2	*Q217	M-2	*Q627	D-1		
		*Q218	M-2	*Q628	D-1		
IC101	P-4	*Q219	M-2	*Q701	E-2		
IC102	M-5	*Q220	M-2	*Q702	F-2		
IC103	N-5	*Q301	J-4	*Q703	E-2		
IC104	L-5	*Q302	J-4	*Q704	F-2		
IC201	L-3	*Q303	H-4	*Q705	E-2		
IC202	M-2	*Q304	H-5	*Q706	F-2		
IC203	M-1	*Q305	H-4	*Q707	E-1		
IC204	P-1	*Q306	H-3	*Q708	F-1		
IC205	L-2	*Q307	J-3	*Q709	F-2		
IC301	K-4	*Q308	J-4	*Q710	F-1		
IC302	G-5	*Q309	J-4	*Q711	F-2		
IC303	H-5	*Q310	K-3	*Q712	F-2		
IC401	H-2	*Q311	K-5	*Q713	F-1		
IC402	H-1	*Q401	H-2	*Q714	E-1		
IC403	K-1	*Q402	J-1				
IC404	G-2	*Q403	J-1	RV101	L-1		
IC501	A-5	*Q404	J-2	RV102	K-1		
IC502	A-2	*Q405	J-1	RV103	P-4		
IC503	A-2	*Q406	J-1	RV201	M-3		
IC504	B-2	*Q407	J-1	RV301	J-1		
IC505	B-2	*Q408	J-1	RV302	H-1		
IC506	A-3	*Q409	J-2	RV303	K-4		
IC507	B-5	*Q410	J-1	RV401	H-3		
IC508	C-4	*Q411	J-2	RV501	A-4		
IC509	B-5	*Q412	J-2	RV502	A-4		
IC510	B-4	*Q413	K-2	RV503	B-4		
IC511	J-6	*Q414	K-2	RV504	B-4		
IC512	G-6	*Q415	K-2	RV505	B-4		
IC601	D-4	*Q416	J-2	RV506	B-4		
IC602	D-4	*Q417	H-2	RV601	D-1		
IC603	F-4	*Q418	H-2	RV602	F-1		
IC604	F-3	*Q501	A-1	RV603	D-1		
IC605	F-3	Q502	A-1	RV604	D-1		
IC606	E-3	Q503	A-1	RV605	F-1		
IC607	F-3	Q504	A-1	RV606	C-1		
IC608	D-2	*Q505	A-5	RV701	E-1		
IC609	E-2	*Q506	A-4	RV702	E-1		
IC610	D-2	Q507	B-1	RV703	E-1		
IC611	D-2	Q508	B-1	RV704	G-1		
IC612	C-2	*Q509	A-4				
IC701	F-1	*Q510	A-4	TH201	P-2		
IC702	F-1	*Q511	A-4	TH401	J-2		
IC703	R-4	*Q512	A-4				
IC704	R-4	*Q513	B-2	TP101	L-2		


*: B SIDE

—: UVW-1800 ONLY

VP-43/A(7/7);R-Y/B-Y OUT DRIVE

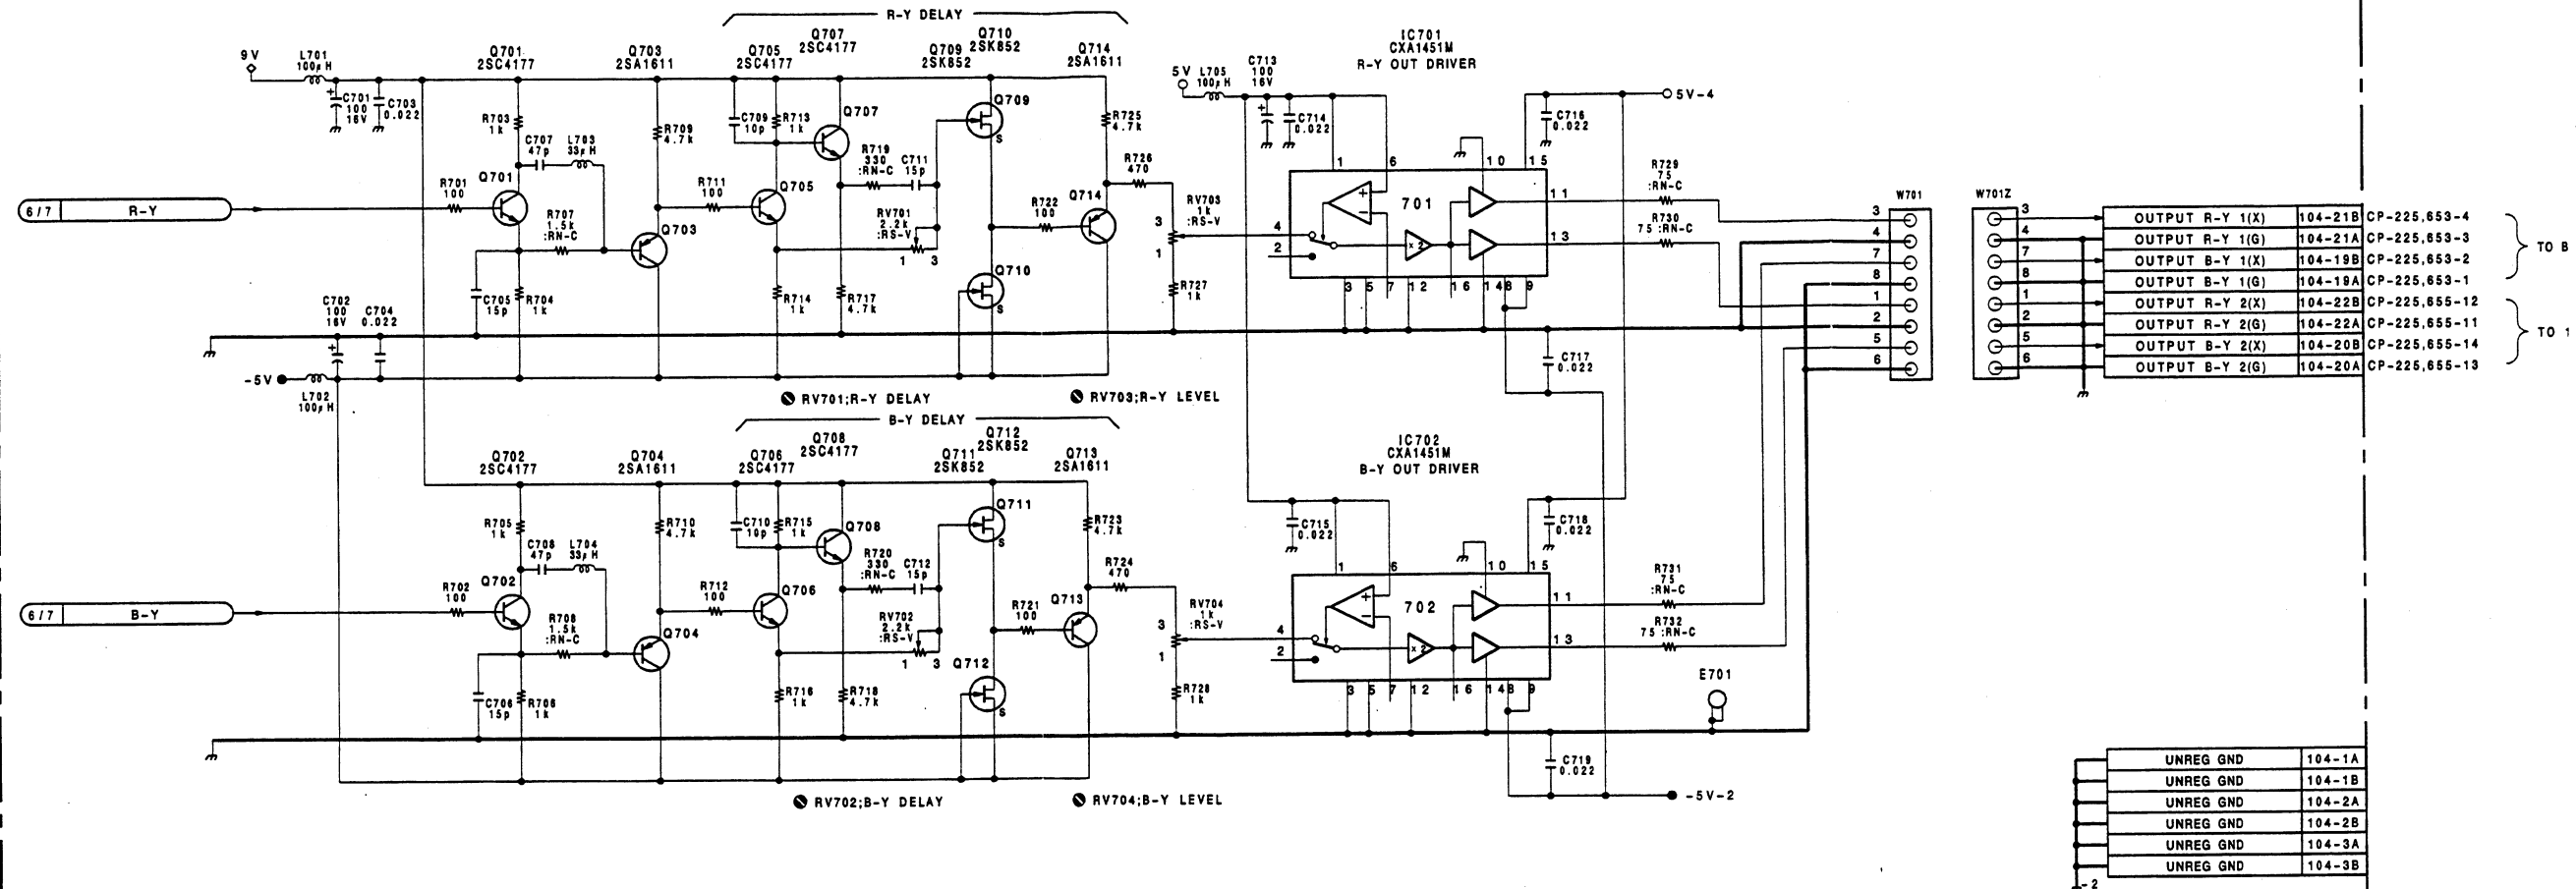

VP-43/A(7/7) VP-43/A(7/7)

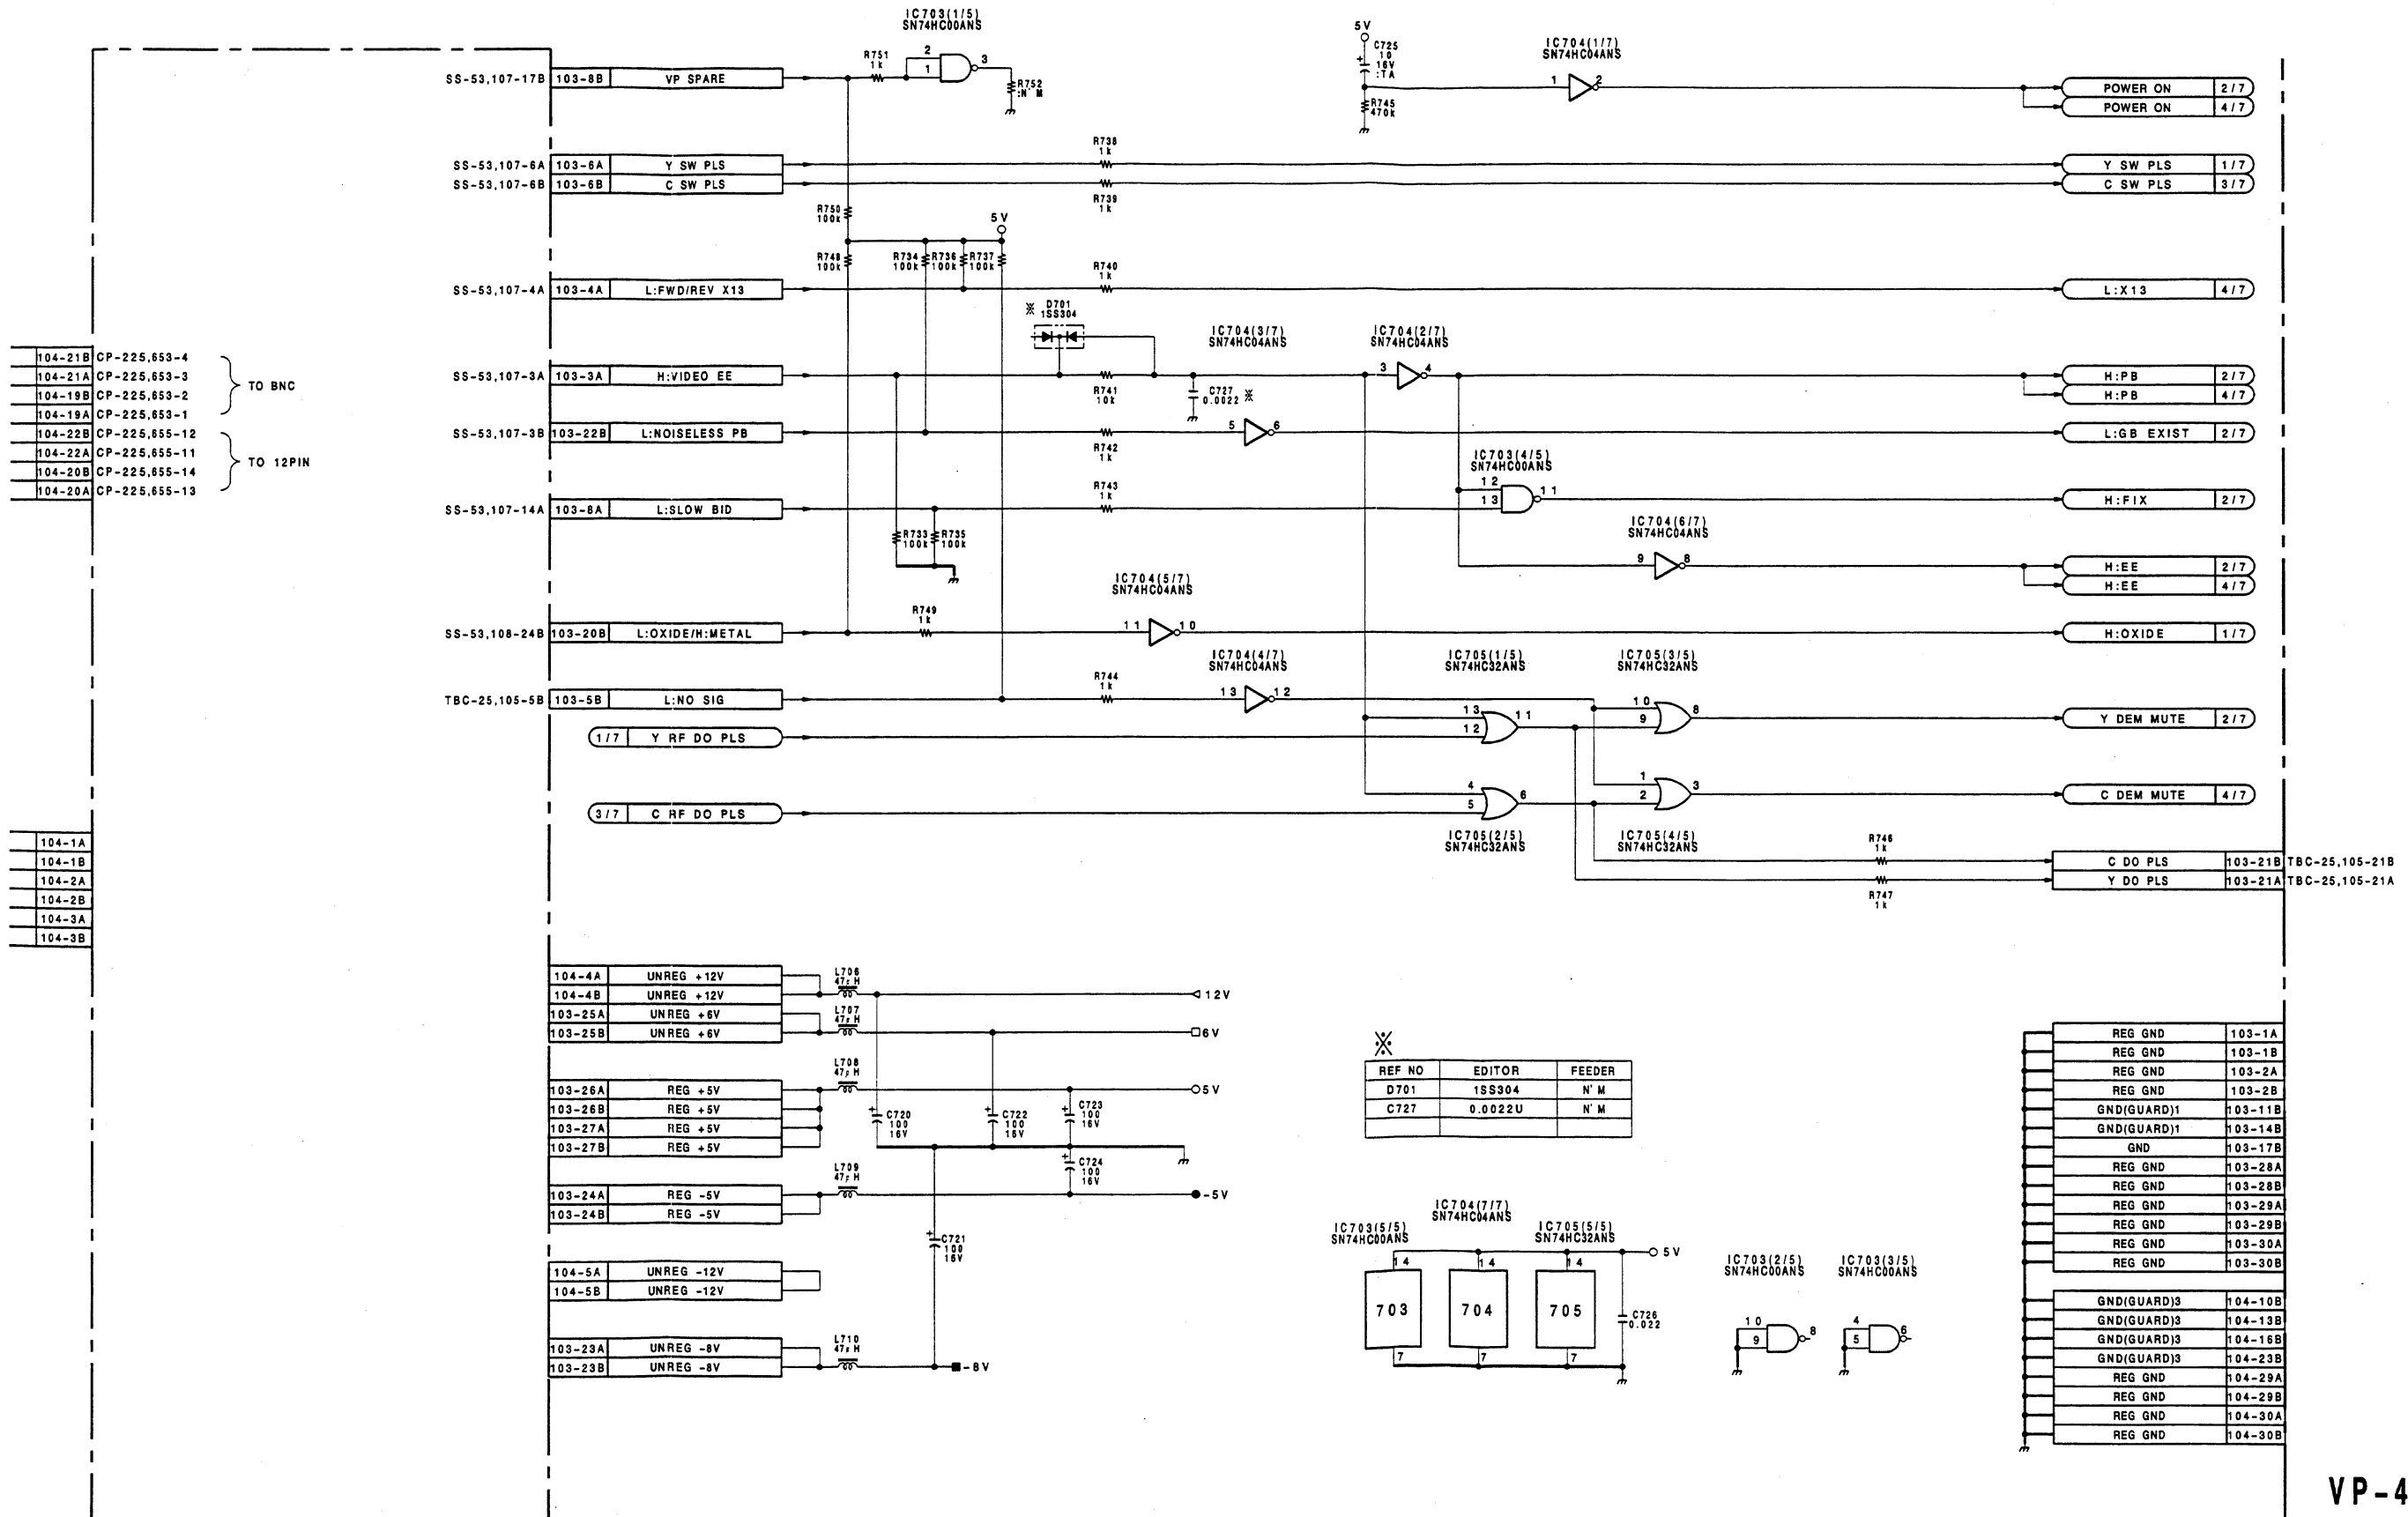

VP-43/A BOARD (7/7)


BOARD NO.1-648-899-11
UVW-1800/1600(J);#10001-
UVW-1800/1600(UC);#10001-

VRA-5(1-648-898-11)


CN101	N-6	IC901	K-6	*Q511	N-3
CN102	C-6	IC902	G-6	*Q512	P-4
		IC903	J-6	*Q513	P-4
CV301	F-5	IC904	E-6	*Q514	P-4
				*Q515	P-4
*D101	B-3	LV301	E-4	*Q516	N-4
*D102	C-3			*Q517	N-4
*D109	D-4	*Q101	A-3	*Q518	P-4
*D202	H-4	*Q102	A-5	*Q519	P-5
*D301	E-3	*Q103	A-3	*Q520	P-5
*D303	F-4	Q104	A-4	*Q601	L-2
D305	F-5	*Q105	A-4	*Q602	M-2
D801	A-2	*Q106	A-3	*Q603	N-4
		*Q107	A-3	*Q604	M-4
E101	B-4	*Q108	A-1	*Q605	M-4
E201	E-2	*Q109	B-2	*Q606	L-4
E301	K-3	*Q110	B-2	*Q607	M-4
E302	D-3	*Q111	B-1	*Q608	L-4
E303	H-1	*Q112	C-1	*Q609	M-5
E501	R-5	*Q113	C-2	*Q610	M-5
E502	N-1	*Q114	B-4	Q801	A-2
E601	M-1	*Q115	B-4	Q802	A-2
		*Q116	B-3	Q803	A-2
FB201	K-2	*Q117	B-3	Q804	D-3
		*Q118	B-3		
FL101	A-2	*Q119	B-3	RV101	B-2
FL102	B-3	*Q120	B-2	RV102	B-3
FL103	C-3	*Q121	C-4	RV103	C-4
FL201	R-2	*Q122	C-4	RV104	C-3
FL202	N-2	*Q123	C-4	RV105	A-2
		*Q124	C-3	RV201	P-1
IC101	A-3	*Q125	C-3	RV202	N-1
IC102	C-2	*Q126	C-3	RV203	M-1
IC103	D-4	*Q127	C-3	RV301	E-3
IC104	G-5	*Q128	C-3	RV302	K-1
IC201	A-1	*Q129	C-2	RV303	L-1
IC202	B-1	*Q130	C-2	RV304	L-1
IC205	D-2	*Q131	B-5	RV305	L-1
IC206	D-1	*Q132	C-5	RV306	K-5
IC207	H-1	*Q133	A-2	RV501	R-1
IC208	E-2	*Q201	C-1	RV502	R-4
IC209	E-2	*Q202	H-1	RV503	R-4
IC210	G-2	*Q203	H-4	RV602	M-4
IC211	H-1	*Q204	P-2	RV603	M-4
IC212	J-2	*Q207	R-2		
IC213	P-1	*Q209	N-2	S201	H-4
IC214	N-1	*Q210	R-2		
IC215	P-2	*Q211	K-2	TH201	M-1
IC216	K-2	*Q212	R-1		
IC217	K-2	*Q213	M-3	TP101	A-3
IC218	K-2	*Q301	D-3	TP201	C-2
IC219	J-1	*Q303	E-3	TP202	C-1
IC220	M-1	*Q305	E-3	TP301	E-3
IC301	E-4	*Q306	E-3	TP302	E-4
IC302	H-3	*Q307	E-3	TP303	H-1
IC303	E-4	*Q308	J-4	TP304	L-5
IC304	E-5	*Q309	J-4	TP305	K-4
IC305	F-4	*Q310	F-3	TP306	J-4
IC306	K-4	*Q311	F-3	TP307	J-5
IC307	F-3	*Q312	K-3	TP308	N-5
IC308	J-3	*Q313	E-4	TP309	N-5
IC309	J-3	*Q314	E-4	TP310	F-5
IC310	G-3	*Q315	J-3	TP501	R-4
IC311	J-4	*Q316	F-5	TP502	P-1
IC312	L-2	*Q317	F-5	TP503	P-5
IC313	G-5	*Q318	E-5	TP504	N-4
IC314	L-1	*Q319	K-3	TP601	N-4
IC315	K-5	*Q320	J-3	TP602	M-1
IC316	H-4	*Q321	J-4	TP603	P-5
IC317	F-4	*Q322	J-4		
IC501	P-4	*Q323	J-4	X301	F-4
IC502	R-5	*Q324	F-4	X302	H-4
IC601	L-4	*Q325	F-4		
IC602	M-4	*Q508	N-2		
IC801	D-3	*Q509	P-2		
IC802	D-2	*Q510	R-4		

*: B SIDE


① TP101 REC/EE
(COMPOSITE)




① TP101 REC/EE
(COMPONENT)




VRA-5(1/4);INPUT PROCESS

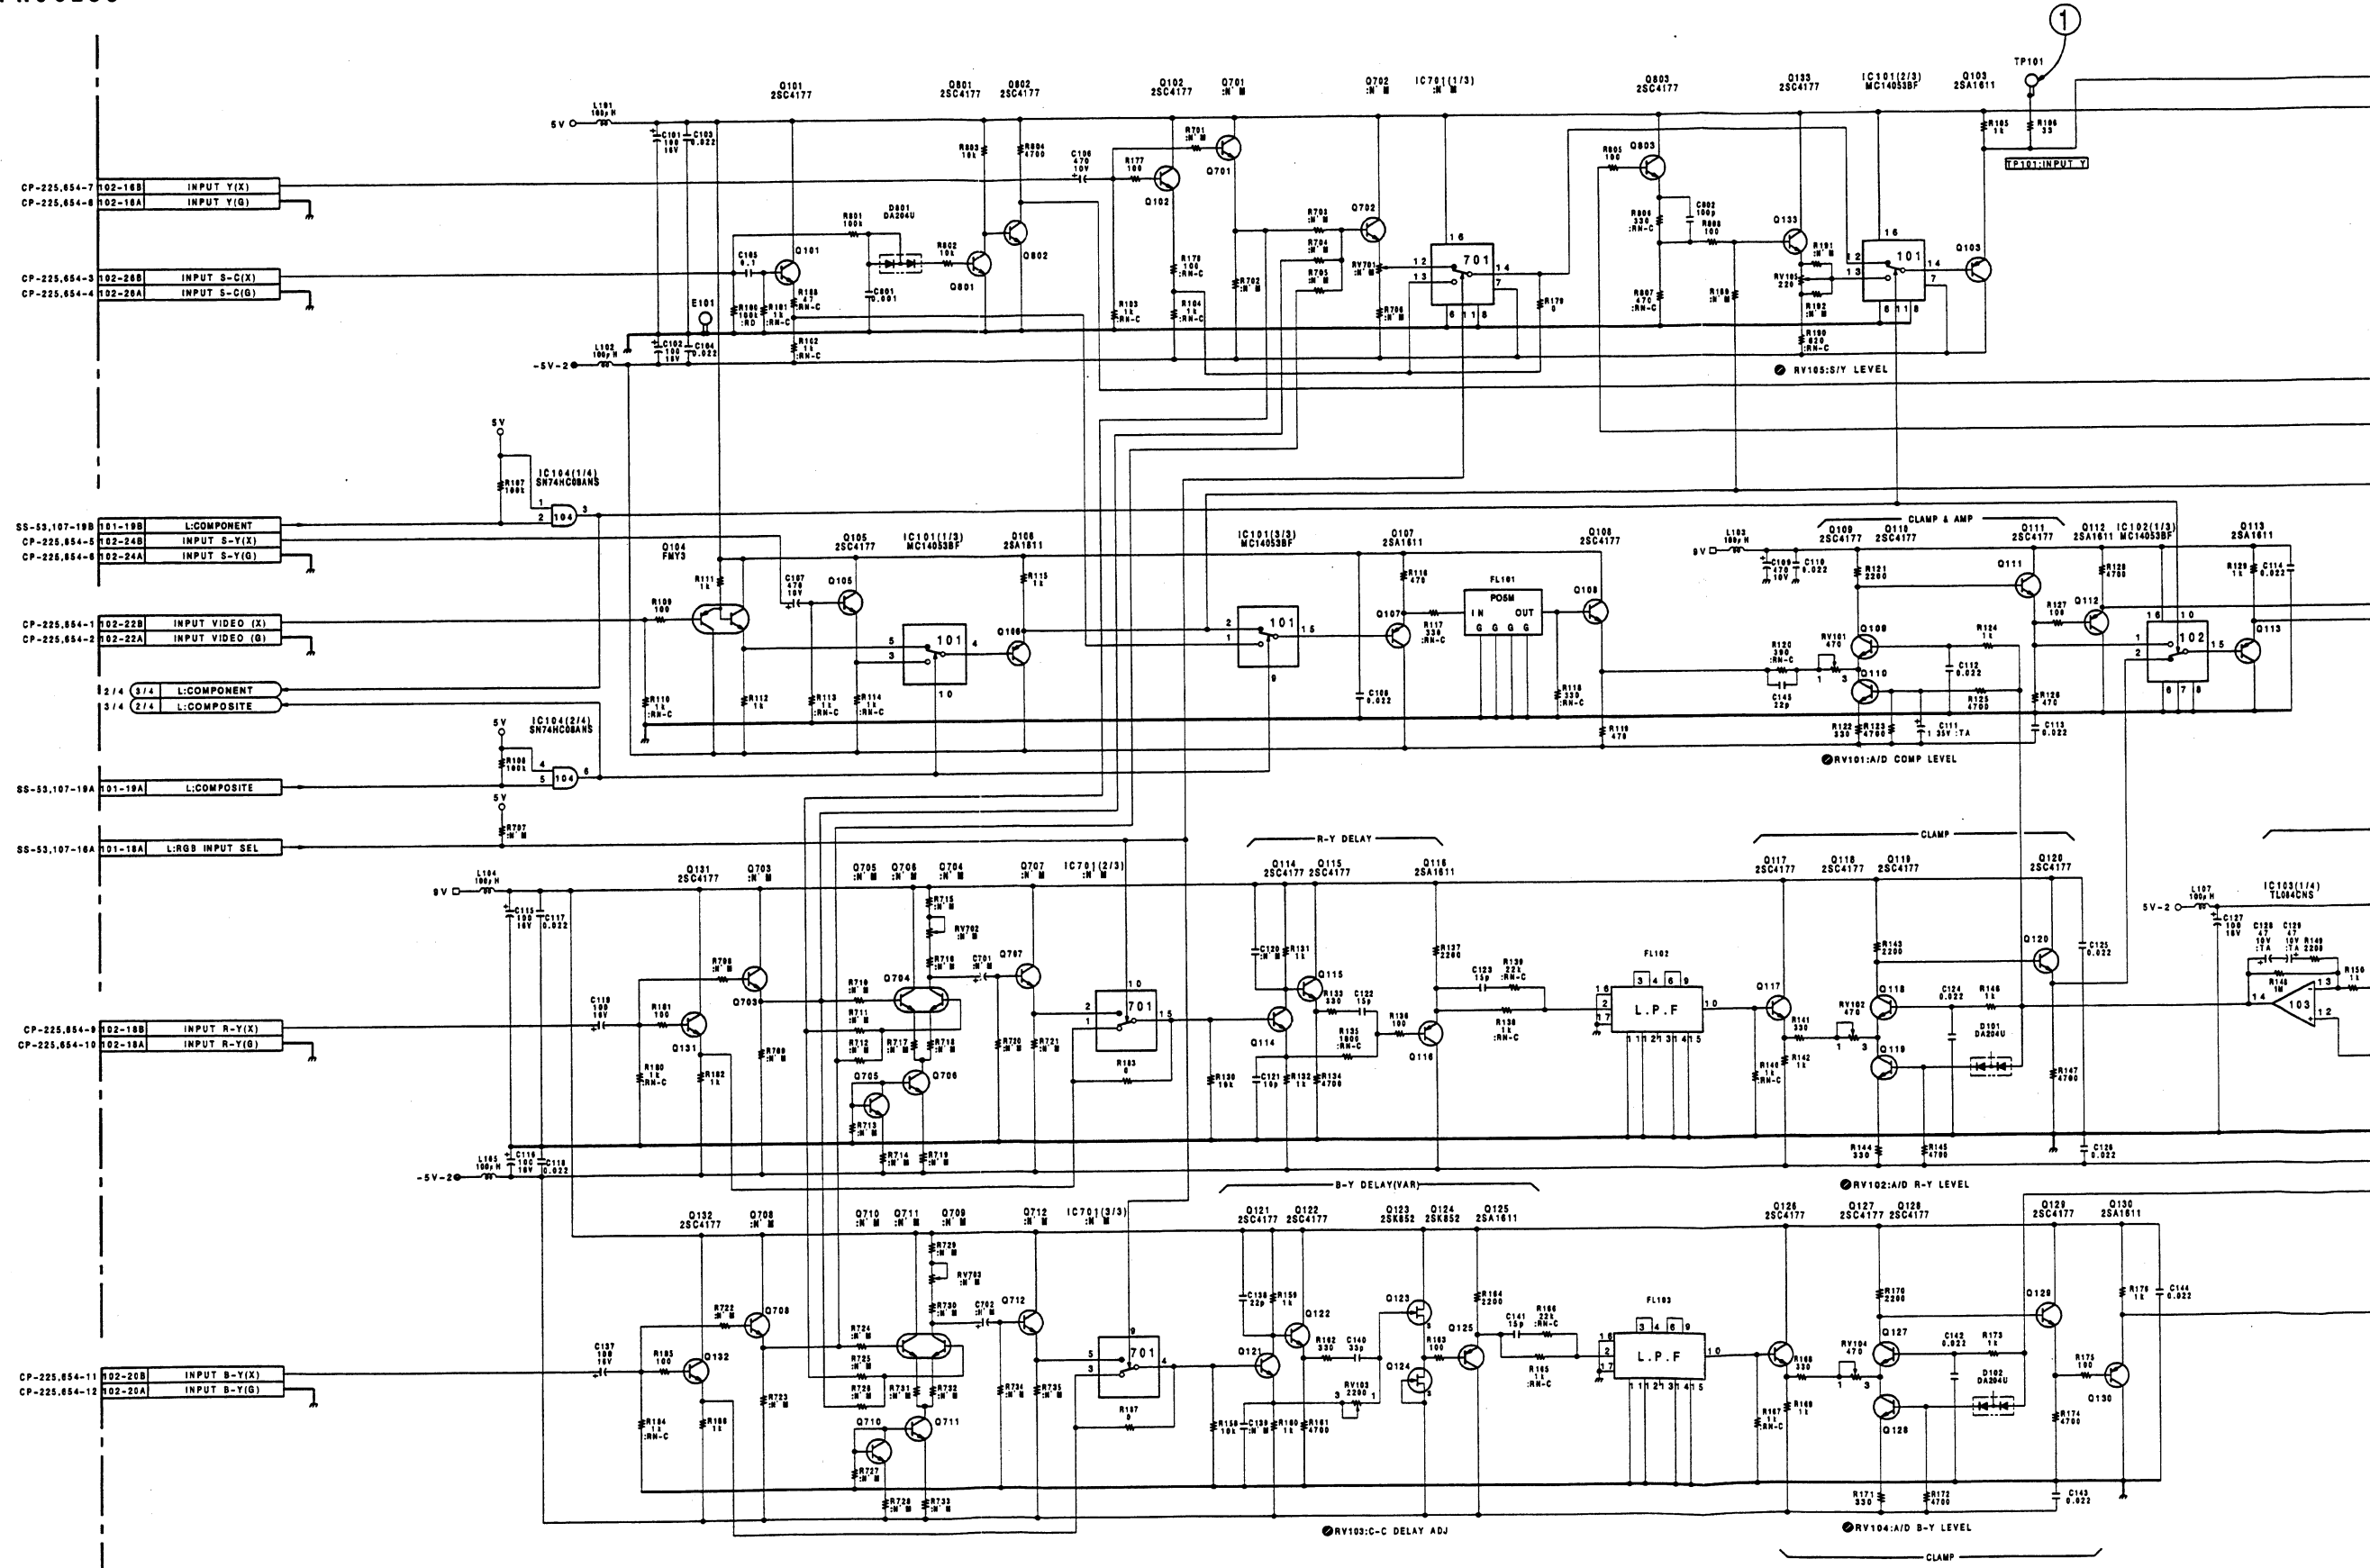

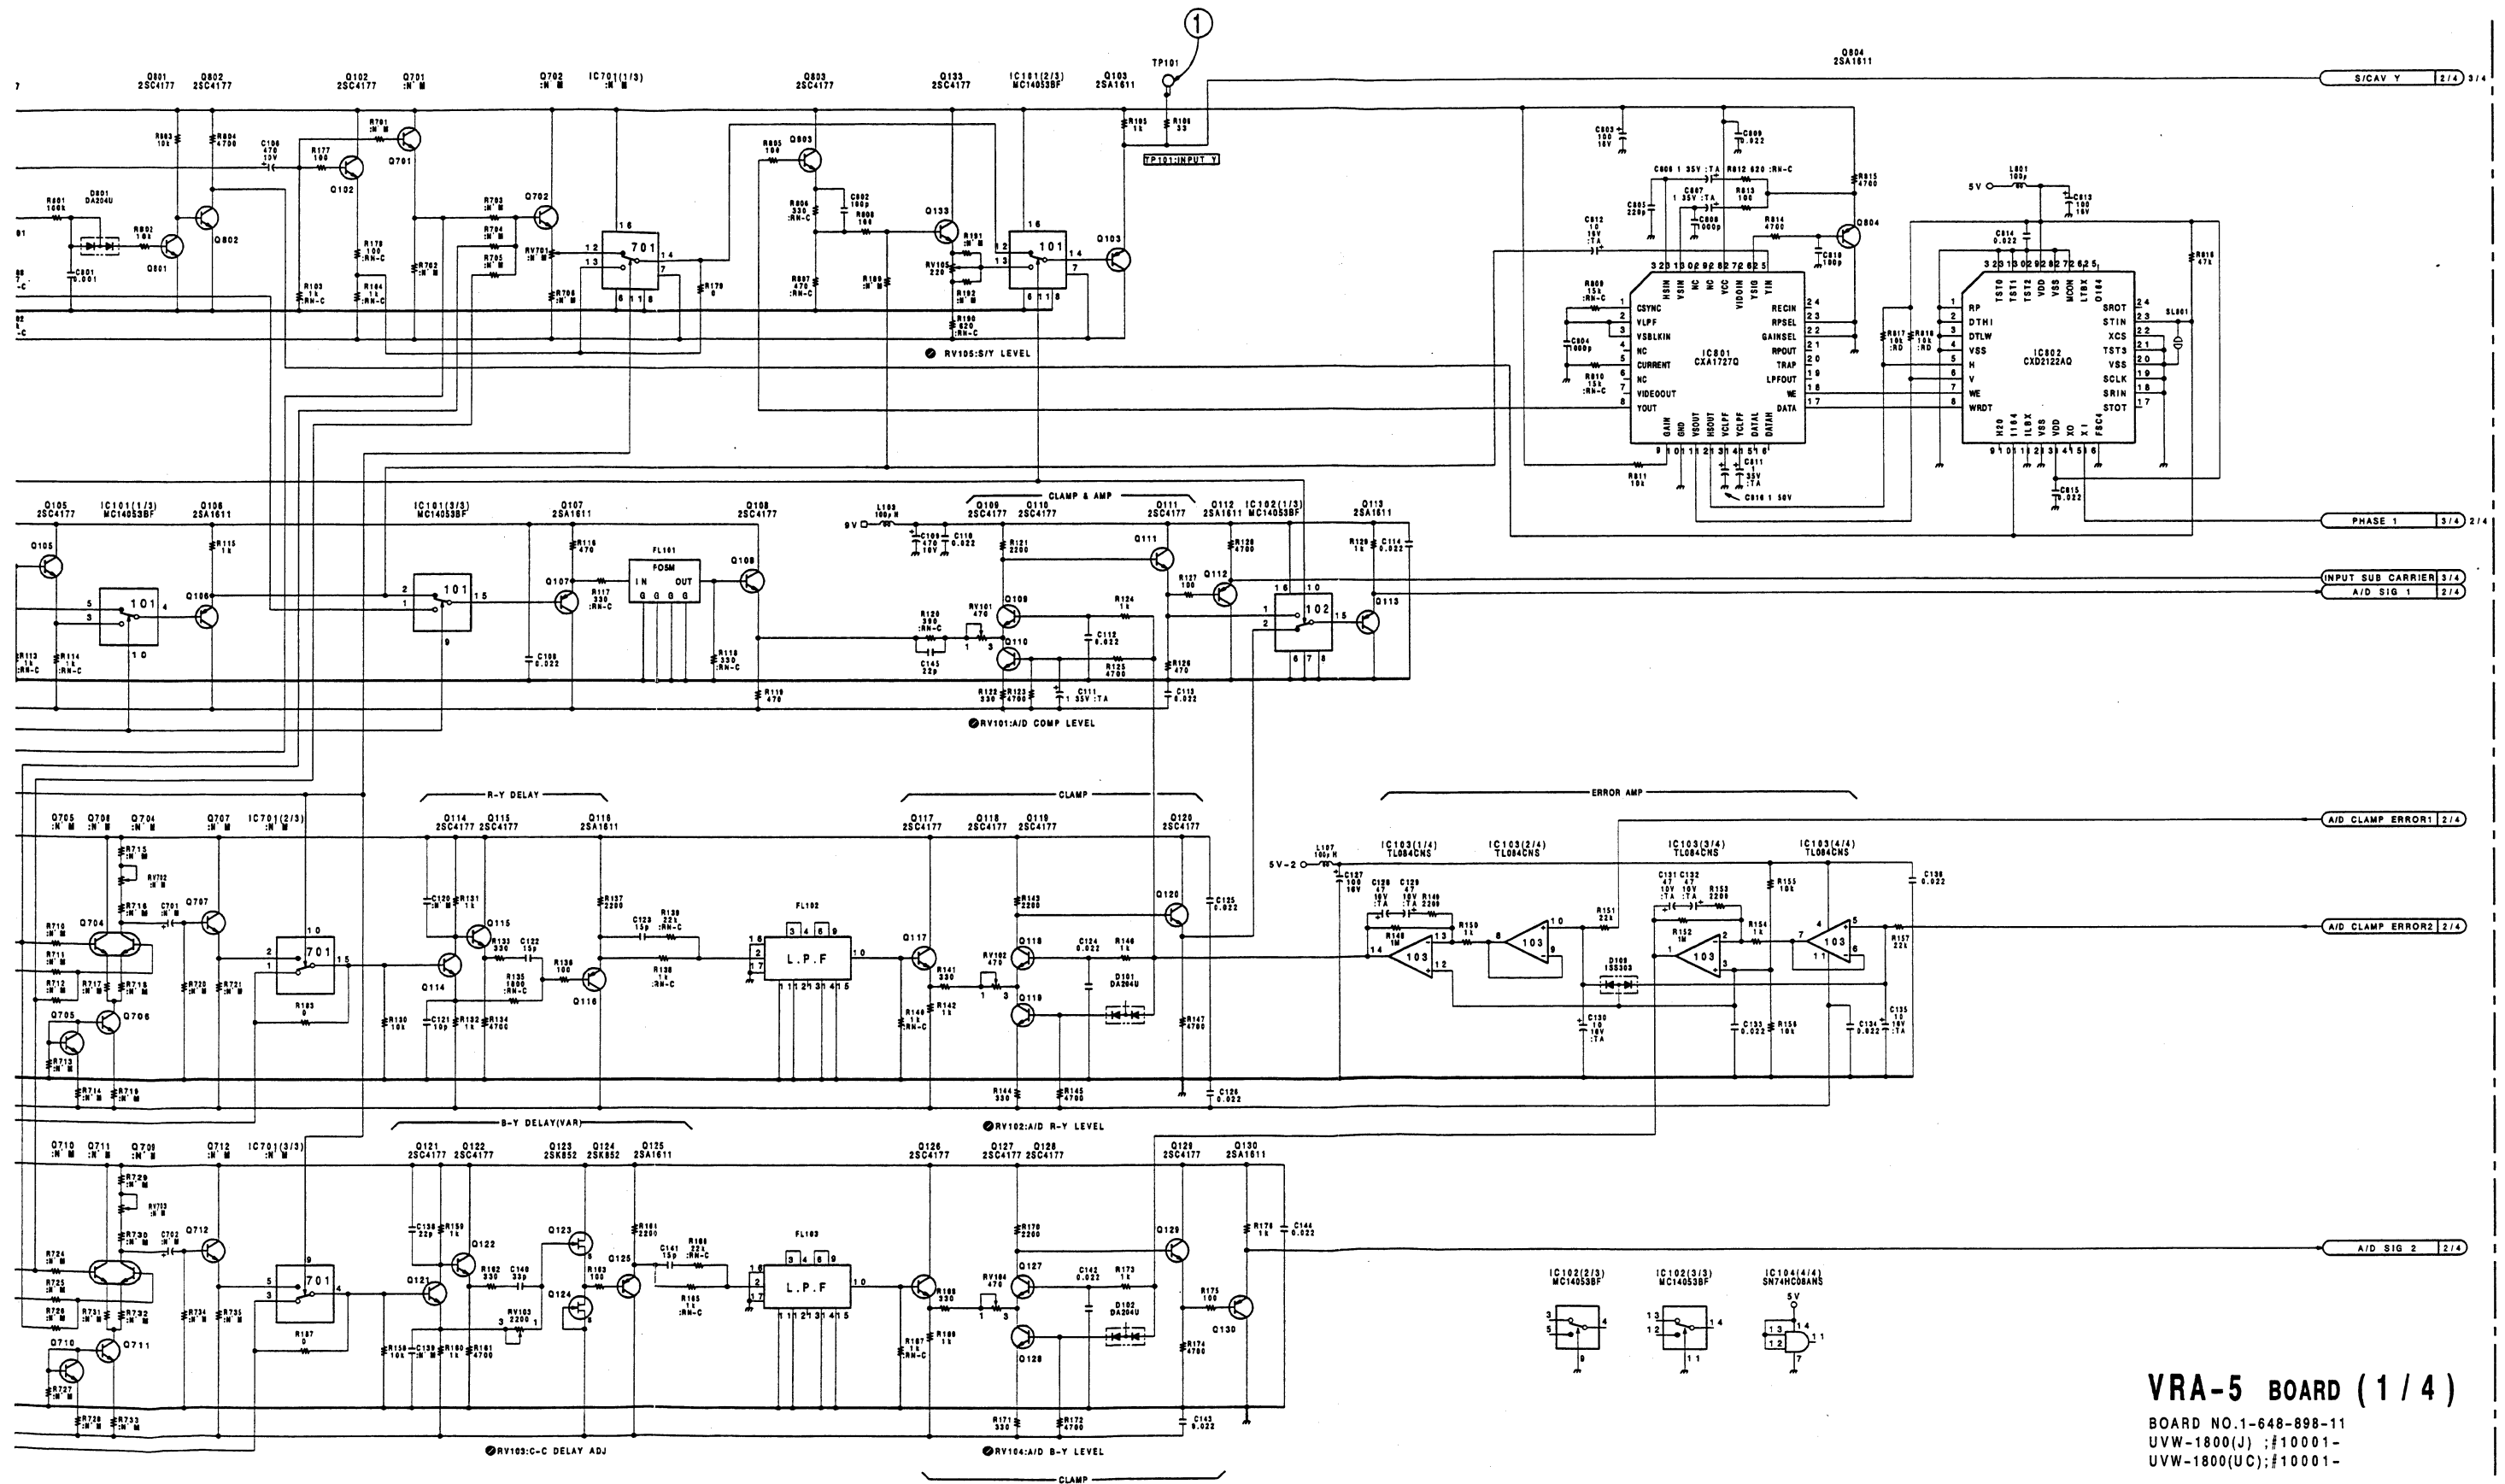

VRA-5 BOARD (1/4)




BOARD NO.1-648-898-11
UVW-1800(J);#10001-
UVW-1800(UC);#10001-

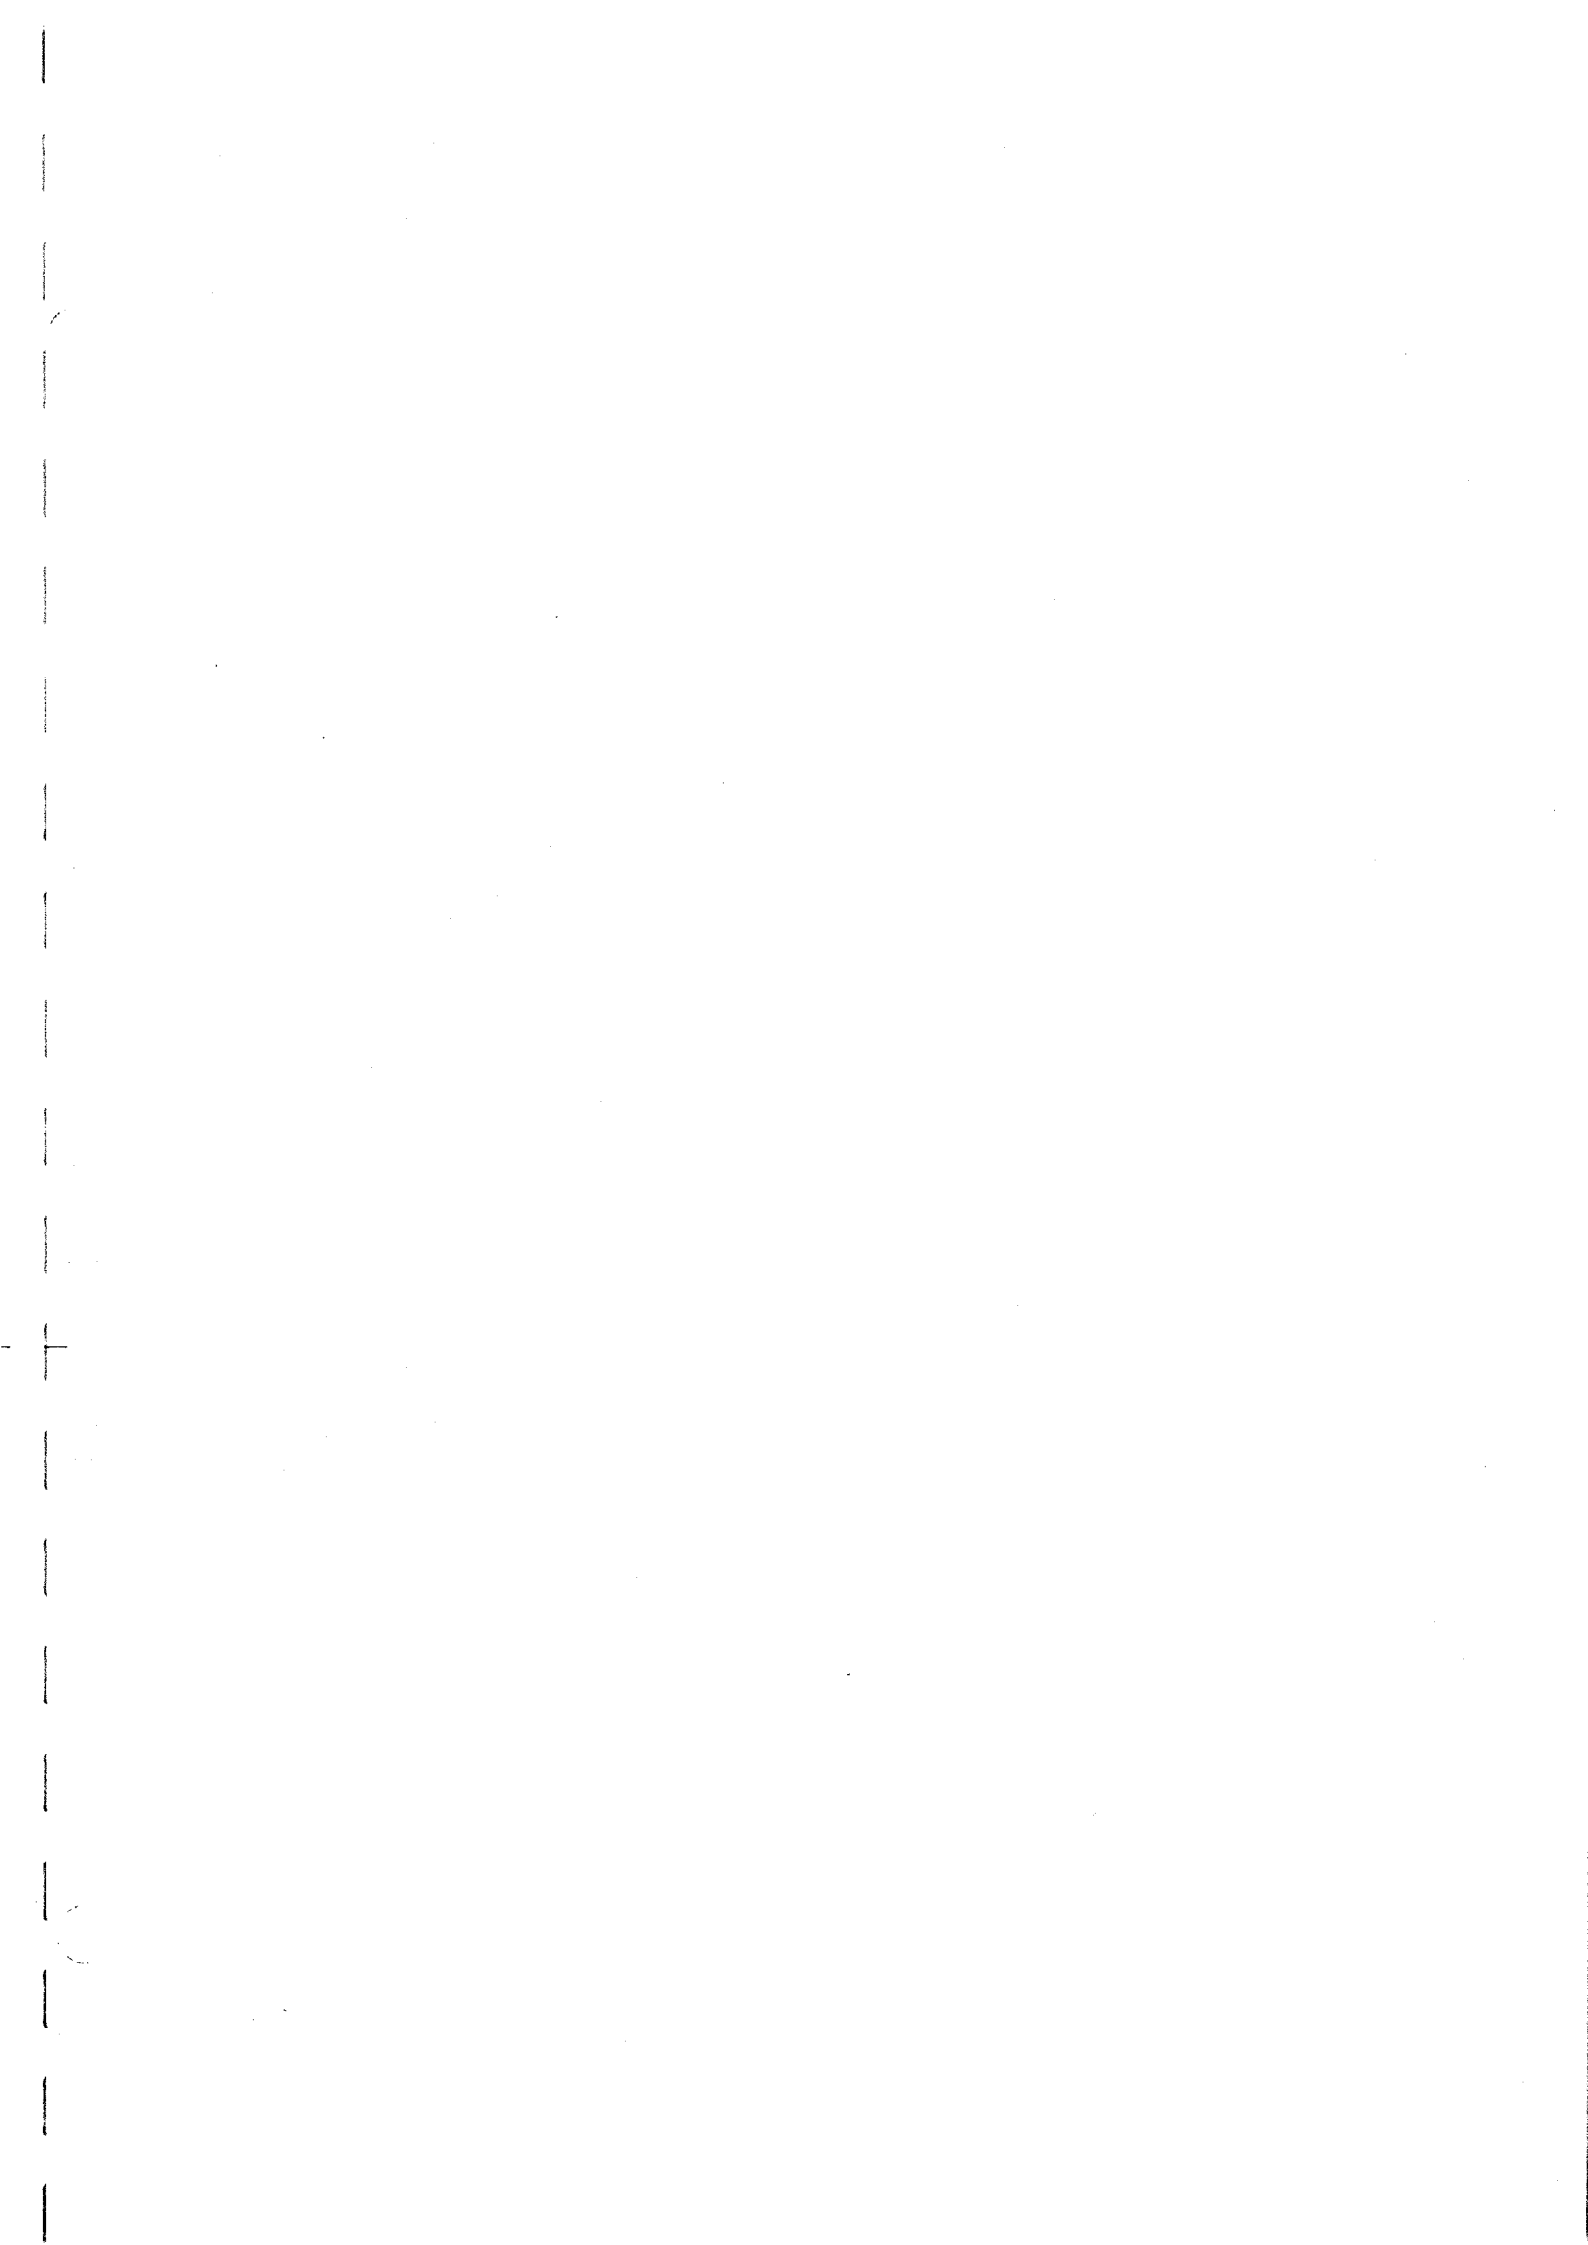

VRA-5(1-648-898-11)


CN101	N-6	IC901	K-6	*Q511	N-3
CN102	C-6	IC902	G-6	*Q512	P-4
		IC903	J-6	*Q513	P-4
CV301	F-5	IC904	E-6	*Q514	P-4
				*Q515	P-4
*D101	B-3	LV301	E-4	*Q516	N-4
*D102	C-3			*Q517	N-4
*D109	D-4	*Q101	A-3	*Q518	P-4
*D202	H-4	*Q102	A-5	*Q519	P-5
*D301	E-3	*Q103	A-3	*Q520	P-5
*D303	F-4	Q104	A-4	*Q601	L-2
D305	F-5	*Q105	A-4	*Q602	M-2
D801	A-2	*Q106	A-3	*Q603	N-4
		*Q107	A-3	*Q604	M-4
E101	B-4	*Q108	A-1	*Q605	M-4
E201	E-2	*Q109	B-2	*Q606	L-4
E301	K-3	*Q110	B-2	*Q607	M-4
E302	D-3	*Q111	B-1	*Q608	L-4
E303	H-1	*Q112	C-1	*Q609	M-5
E501	R-5	*Q113	C-2	*Q610	M-5
E502	N-1	*Q114	B-4	Q801	A-2
E601	M-1	*Q115	B-4	Q802	A-2
		*Q116	B-3	Q803	A-2
FB201	K-2	*Q117	B-3	Q804	D-3
		*Q118	B-3		
FL101	A-2	*Q119	B-3	RV101	B-2
FL102	B-3	*Q120	B-2	RV102	B-3
FL103	C-3	*Q121	C-4	RV103	C-4
FL201	R-2	*Q122	C-4	RV104	C-3
FL202	N-2	*Q123	C-4	RV105	A-2
		*Q124	C-3	RV201	P-1
IC101	A-3	*Q125	C-3	RV202	N-1
IC102	C-2	*Q126	C-3	RV203	M-1
IC103	D-4	*Q127	C-3	RV301	E-3
IC104	G-5	*Q128	C-3	RV302	K-1
IC201	A-1	*Q129	C-2	RV303	L-1
IC202	B-1	*Q130	C-2	RV304	L-1
IC205	D-2	*Q131	B-5	RV305	L-1
IC206	D-1	*Q132	C-5	RV306	K-5
IC207	H-1	*Q133	A-2	RV501	R-1
IC208	E-2	*Q201	C-1	RV502	R-4
IC209	E-2	*Q202	H-1	RV503	R-4
IC210	G-2	*Q203	H-4	RV602	M-4
IC211	H-1	*Q204	P-2	RV603	M-4
IC212	J-2	*Q207	R-2		
IC213	P-1	*Q209	N-2	S201	H-4
IC214	N-1	*Q210	R-2		
IC215	P-2	*Q211	K-2	TH201	M-1
IC216	K-2	*Q212	R-1		
IC217	K-2	*Q213	M-3	TP101	A-3
IC218	K-2	*Q301	D-3	TP201	C-2
IC219	J-1	*Q303	E-3	TP202	C-1
IC220	M-1	*Q305	E-3	TP301	E-3
IC301	E-4	*Q306	E-3	TP302	E-4
IC302	H-3	*Q307	E-3	TP303	H-1
IC303	E-4	*Q308	J-4	TP304	L-5
IC304	E-5	*Q309	J-4	TP305	K-4
IC305	F-4	*Q310	F-3	TP306	J-4
IC306	K-4	*Q311	F-3	TP307	J-5
IC307	F-3	*Q312	K-3	TP308	N-5
IC308	J-3	*Q313	E-4	TP309	N-5
IC309	J-3	*Q314	E-4	TP310	F-5
IC310	G-3	*Q315	J-3	TP501	R-4
IC311	J-4	*Q316	F-5	TP502	P-1
IC312	L-2	*Q317	F-5	TP503	P-5
IC313	G-5	*Q318	E-5	TP504	N-4
IC314	L-1	*Q319	K-3	TP601	N-4
IC315	K-5	*Q320	J-3	TP602	M-1
IC316	H-4	*Q321	J-4	TP603	P-5
IC317	F-4	*Q322	J-4		
IC501	P-4	*Q323	J-4	X301	F-4
IC502	R-5	*Q324	F-4	X302	H-4
IC601	L-4	*Q325	F-4		
IC602	M-4	*Q508	N-2		
IC801	D-3	*Q509	P-2		
IC802	D-2	*Q510	R-4		

*: B SIDE

① TP201 REC/EE
(COMPOSITE)① TP201 REC/EE
(COMPONENT)② TP202 REC/EE
(COMPONENT)

VRA-5(2 / 4) VRA-5(2 / 4)

VRA-5(2/4);A/D,Y/C SEP.,DECODE,CTDM(COMP.),D/A

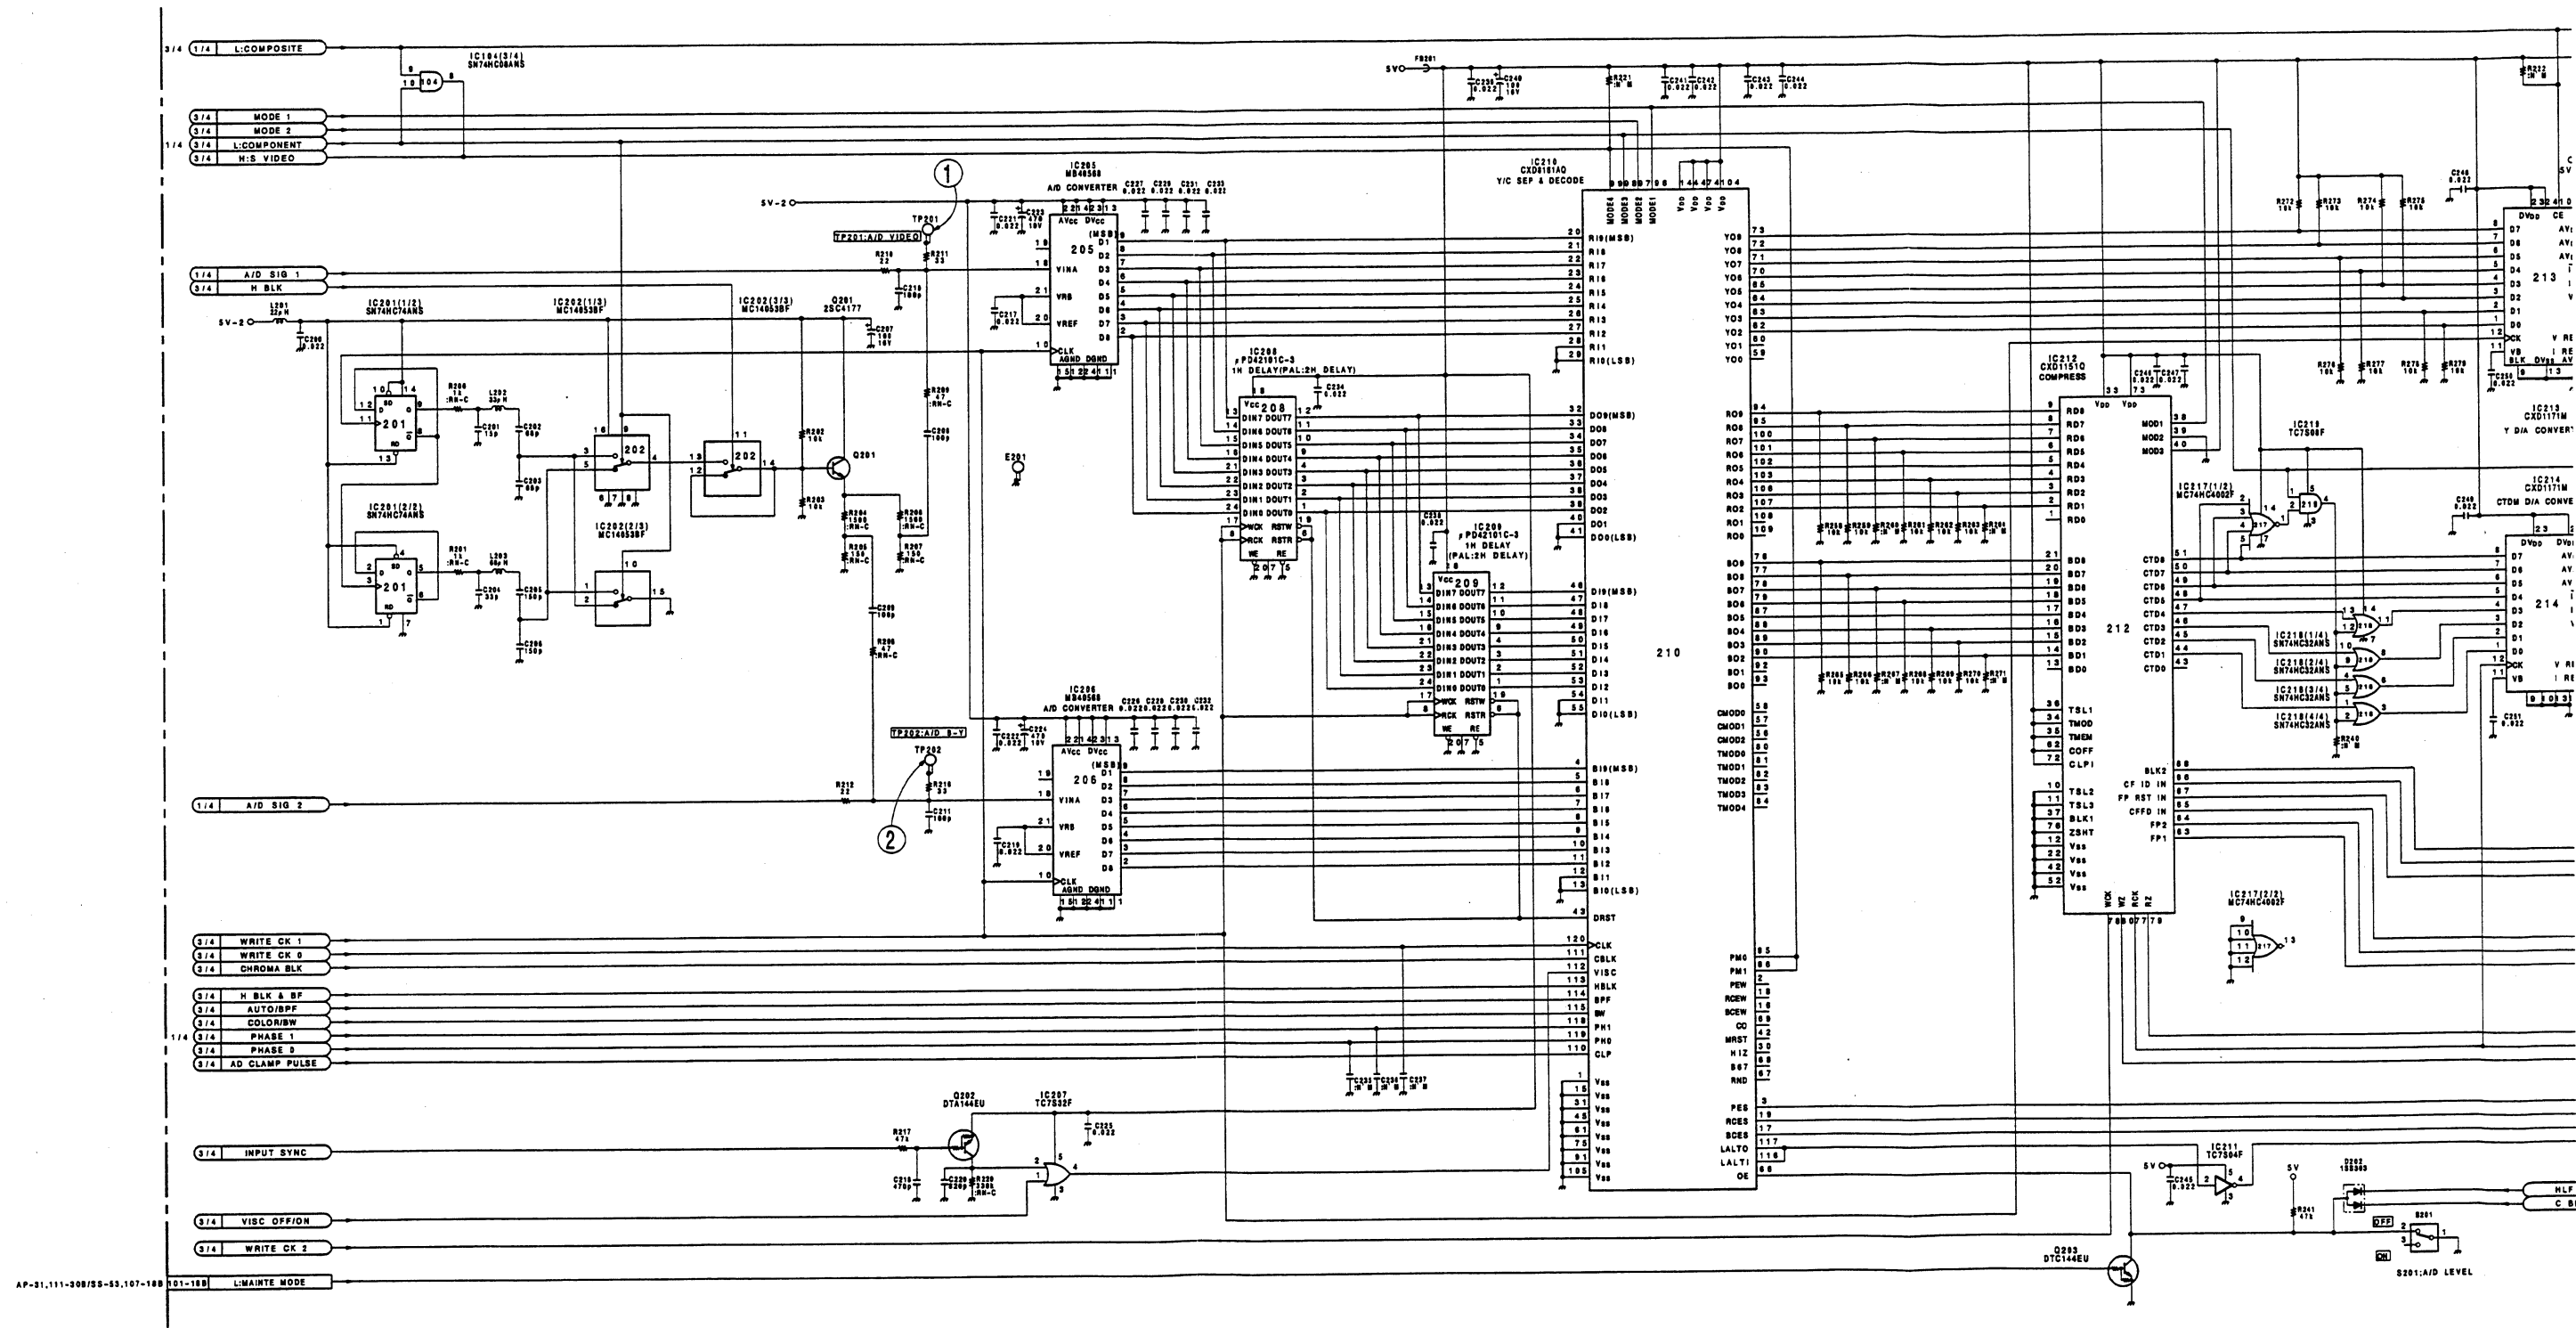


VRA-5(1-648-898-11)


CN101	N-6	IC901	K-6	*Q511	N-3
CN102	C-6	IC902	G-6	*Q512	P-4
		IC903	J-6	*Q513	P-4
CV301	F-5	IC904	E-6	*Q514	P-4
				*Q515	P-4
*D101	B-3	LV301	E-4	*Q516	N-4
*D102	C-3			*Q517	N-4
*D109	D-4	*Q101	A-3	*Q518	P-4
*D202	H-4	*Q102	A-5	*Q519	P-5
*D301	E-3	*Q103	A-3	*Q520	P-5
*D303	F-4	Q104	A-4	*Q601	L-2
D305	F-5	*Q105	A-4	*Q602	M-2
D801	A-2	*Q106	A-3	*Q603	N-4
		*Q107	A-3	*Q604	M-4
		*Q108	A-1	*Q605	M-4
E101	B-4	*Q109	B-2	*Q606	L-4
E201	E-2	*Q110	B-2	*Q607	M-4
E301	K-3	*Q111	B-1	*Q608	L-4
E302	D-3	*Q112	C-1	*Q609	M-5
E303	H-1	*Q113	C-2	*Q610	M-5
E501	R-5	*Q114	B-4	Q801	A-2
E502	N-1	*Q115	B-4	Q802	A-2
E601	M-1	*Q116	B-3	Q803	A-2
		*Q117	B-3	Q804	D-3
FB201	K-2	*Q118	B-3		
		*Q119	B-3	RV101	B-2
FL101	A-2	*Q120	B-2	RV102	B-3
FL102	B-3	*Q121	C-4	RV103	C-4
FL103	C-3	*Q122	C-4	RV104	C-3
FL201	R-2	*Q123	C-4	RV105	A-2
FL202	N-2	*Q124	C-3	RV201	P-1
		*Q125	C-3	RV202	N-1
IC101	A-3	*Q126	C-3	RV203	M-1
IC102	C-2	*Q127	C-3	RV301	E-3
IC103	D-4	*Q128	C-3	RV302	K-1
IC104	G-5	*Q129	C-2	RV303	L-1
IC201	A-1	*Q130	C-2	RV304	L-1
IC202	B-1	*Q131	B-5	RV305	L-1
IC205	D-2	*Q132	C-5	RV306	K-5
IC206	D-1	*Q133	A-2	RV501	R-1
IC207	H-1	*Q201	C-1	RV502	R-4
IC208	E-2	*Q202	H-1	RV503	R-4
IC209	E-2	*Q203	H-4	RV602	M-4
IC210	G-2	*Q204	P-2	RV603	M-4
IC211	H-1	*Q207	R-2		
IC212	J-2	*Q209	N-2	S201	H-4
IC213	P-1	*Q210	R-2		
IC214	N-1	*Q211	K-2	TH201	M-1
IC215	P-2	*Q212	R-1		
IC216	K-2	*Q213	M-3	TP101	A-3
IC217	K-2	*Q301	D-3	TP201	C-2
IC218	K-2	*Q303	E-3	TP202	C-1
IC219	J-1	*Q305	E-3	TP301	E-3
IC220	M-1	*Q306	E-3	TP302	E-4
IC301	E-4	*Q307	E-3	TP303	H-1
IC302	H-3	*Q308	J-4	TP304	L-5
IC303	E-4	*Q309	J-4	TP305	K-4
IC304	E-5	*Q310	F-3	TP306	J-4
IC305	F-4	*Q311	F-3	TP307	J-5
IC306	K-4	*Q312	K-3	TP308	N-5
IC307	F-3	*Q313	E-4	TP309	N-5
IC308	J-3	*Q314	E-4	TP310	F-5
IC309	J-3	*Q315	J-3	TP501	R-4
IC310	G-3	*Q316	F-5	TP502	P-1
IC311	J-4	*Q317	F-5	TP503	P-5
IC312	L-2	*Q318	E-5	TP504	N-4
IC313	G-5	*Q319	K-3	TP601	N-4
IC314	L-1	*Q320	J-3	TP602	M-1
IC315	K-5	*Q321	J-4	TP603	P-5
IC316	H-4	*Q322	J-4		
IC317	F-4	*Q323	J-4	X301	F-4
IC501	P-4	*Q324	F-4	X302	H-4
IC502	R-5	*Q325	F-4		
IC601	L-4	*Q508	N-2		
IC602	M-4	*Q509	P-2		
IC801	D-3	*Q510	R-4		
IC802	D-2				


*: B SIDE

① TP305 REC/EE




VRA-5(3/4);Y/C REF SYNC,TIMING PULSE

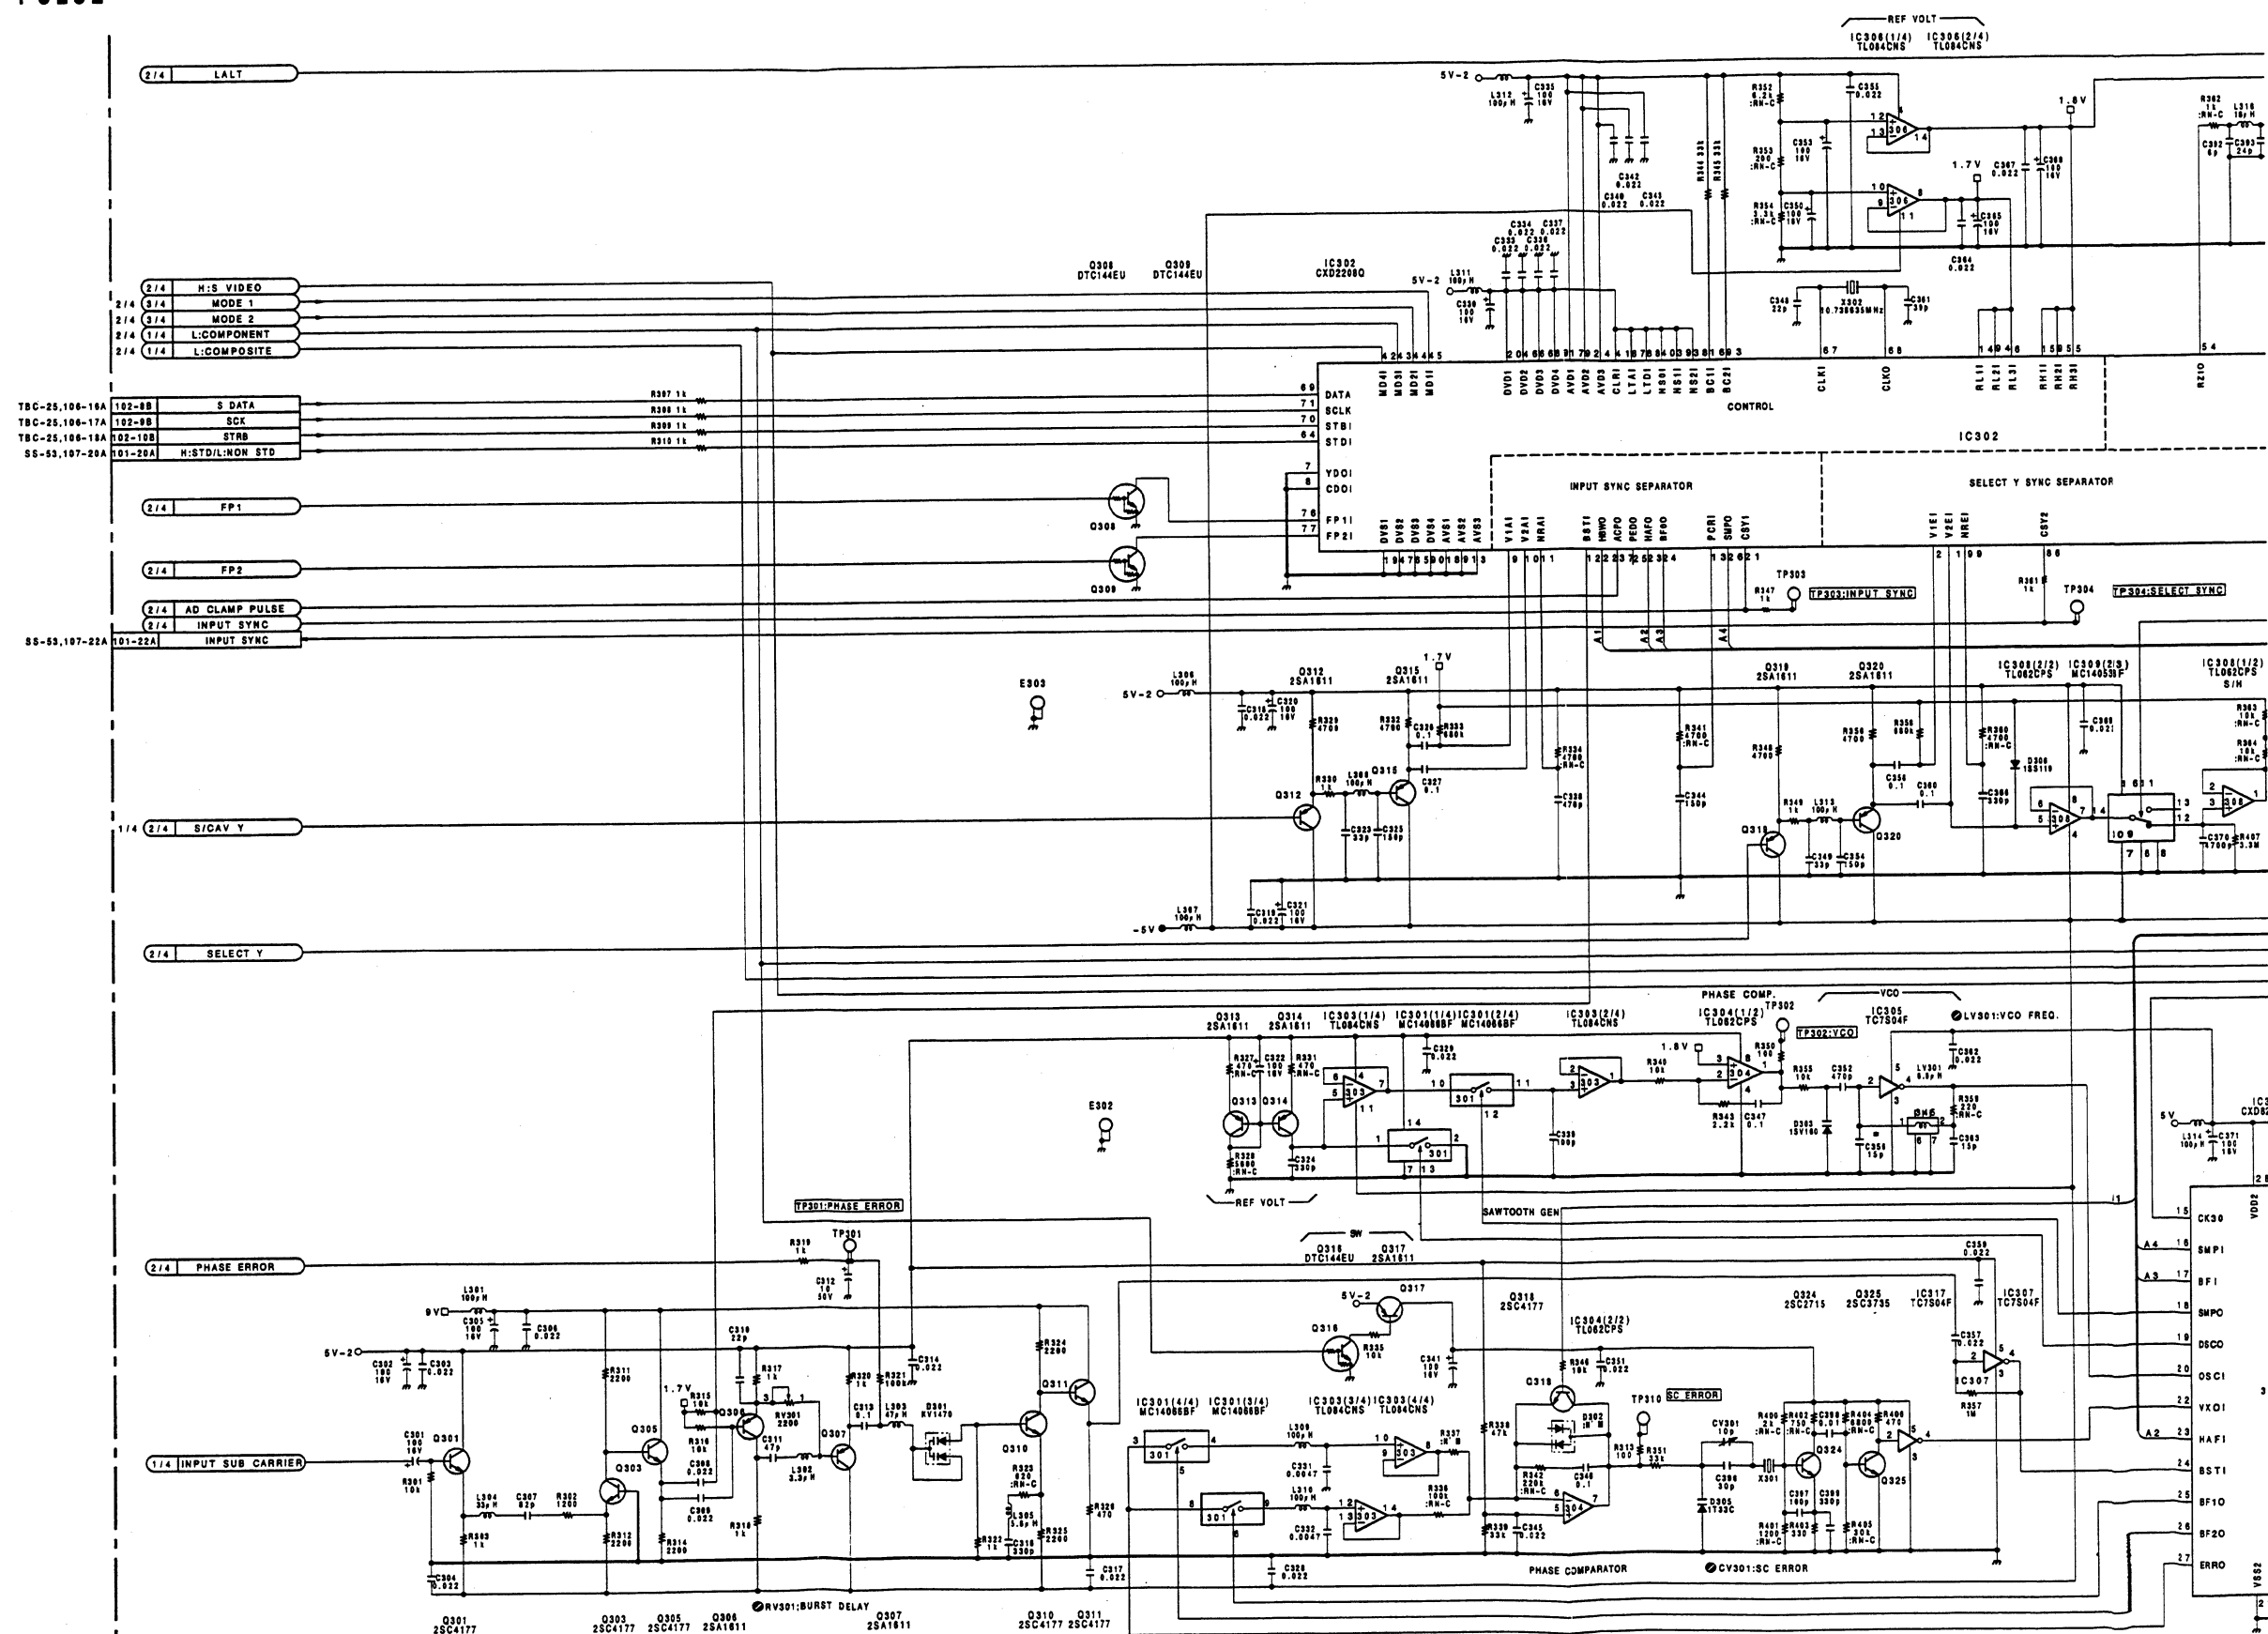

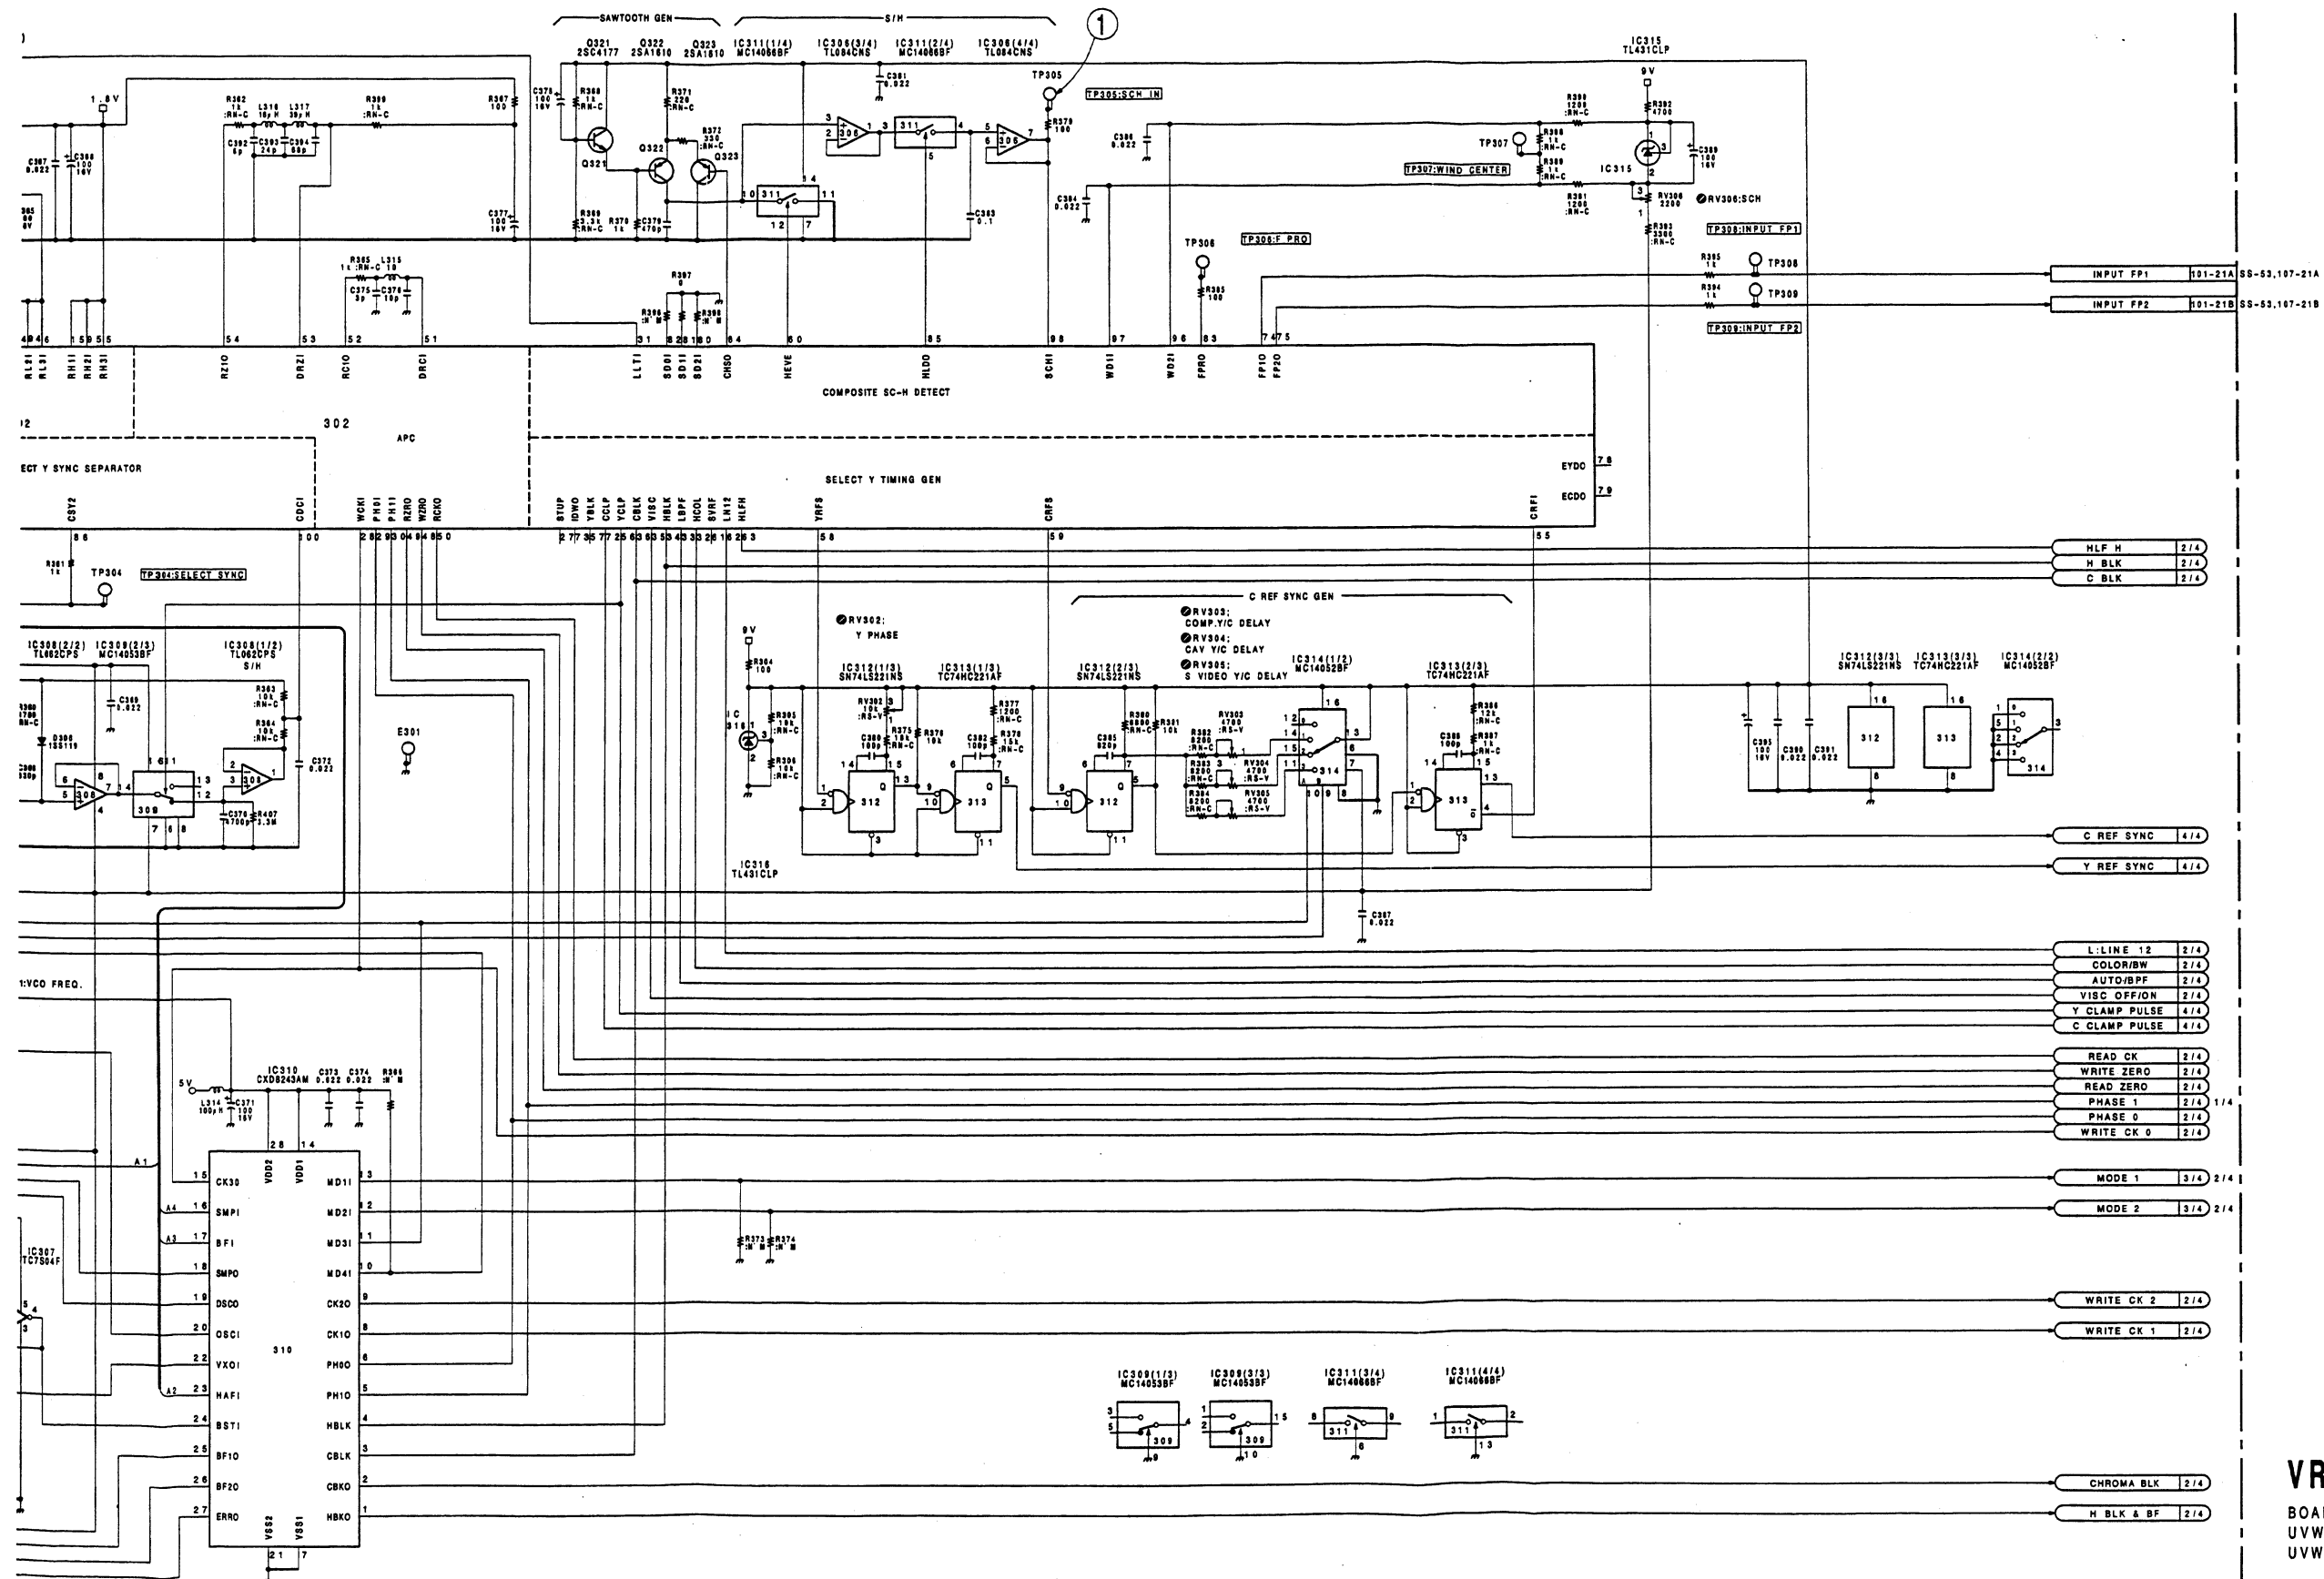

VRA-5 BOARD (3/4)

BOARD NO.1-648-898-11
UVW-1800(J) ;#10001-
UVW-1800(UC);#10001-




VRA-5(1-648-898-11)



CN101	N-6	IC901	K-6	*Q511	N-3
CN102	C-6	IC902	G-6	*Q512	P-4
		IC903	J-6	*Q513	P-4
CV301	F-5	IC904	E-6	*Q514	P-4
				*Q515	P-4
*D101	B-3	LV301	E-4	*Q516	N-4
*D102	C-3			*Q517	N-4
*D109	D-4	*Q101	A-3	*Q518	P-4
*D202	H-4	*Q102	A-5	*Q519	P-5
*D301	E-3	*Q103	A-3	*Q520	P-5
*D303	F-4	Q104	A-4	*Q601	L-2
D305	F-5	*Q105	A-4	*Q602	M-2
D801	A-2	*Q106	A-3	*Q603	N-4
		*Q107	A-3	*Q604	M-4
		*Q108	A-1	*Q605	M-4
E101	B-4	*Q109	B-2	*Q606	L-4
E201	E-2	*Q110	B-2	*Q607	M-4
E301	K-3	*Q111	B-1	*Q608	L-4
E302	D-3	*Q112	C-1	*Q609	M-5
E303	H-1	*Q113	C-2	*Q610	M-5
E501	R-5	*Q114	B-4	Q801	A-2
E502	N-1	*Q115	B-4	Q802	A-2
E601	M-1	*Q116	B-3	Q803	A-2
		*Q117	B-3	Q804	D-3
FB201	K-2	*Q118	B-3		
		*Q119	B-3	RV101	B-2
FL101	A-2	*Q120	B-2	RV102	B-3
FL102	B-3	*Q121	C-4	RV103	C-4
FL103	C-3	*Q122	C-4	RV104	C-3
FL201	R-2	*Q123	C-4	RV105	A-2
FL202	N-2	*Q124	C-3	RV201	P-1
		*Q125	C-3	RV202	N-1
IC101	A-3	*Q126	C-3	RV203	M-1
IC102	C-2	*Q127	C-3	RV301	E-3
IC103	D-4	*Q128	C-3	RV302	K-1
IC104	G-5	*Q129	C-2	RV303	L-1
IC201	A-1	*Q130	C-2	RV304	L-1
IC202	B-1	*Q131	B-5	RV305	L-1
IC205	D-2	*Q132	C-5	RV306	K-5
IC206	D-1	*Q133	A-2	RV501	R-1
IC207	H-1	*Q201	C-1	RV502	R-4
IC208	E-2	*Q202	H-1	RV503	R-4
IC209	E-2	*Q203	H-4	RV602	M-4
IC210	G-2	*Q204	P-2	RV603	M-4
IC211	H-1	*Q207	R-2		
IC212	J-2	*Q209	N-2	S201	H-4
IC213	P-1	*Q210	R-2		
IC214	N-1	*Q211	K-2	TH201	M-1
IC215	P-2	*Q212	R-1		
IC216	K-2	*Q213	M-3	TP101	A-3
IC217	K-2	*Q301	D-3	TP201	C-2
IC218	K-2	*Q303	E-3	TP202	C-1
IC219	J-1	*Q305	E-3	TP301	E-3
IC220	M-1	*Q306	E-3	TP302	E-4
IC301	E-4	*Q307	E-3	TP303	H-1
IC302	H-3	*Q308	J-4	TP304	L-5
IC303	E-4	*Q309	J-4	TP305	K-4
IC304	E-5	*Q310	F-3	TP306	J-4
IC305	F-4	*Q311	F-3	TP307	J-5
IC306	K-4	*Q312	K-3	TP308	N-5
IC307	F-3	*Q313	E-4	TP309	N-5
IC308	J-3	*Q314	E-4	TP310	F-5
IC309	J-3	*Q315	J-3	TP501	R-4
IC310	G-3	*Q316	F-5	TP502	P-1
IC311	J-4	*Q317	F-5	TP503	P-5
IC312	L-2	*Q318	E-5	TP504	N-4
IC313	G-5	*Q319	K-3	TP601	N-4
IC314	L-1	*Q320	J-3	TP602	M-1
IC315	K-5	*Q321	J-4	TP603	P-5
IC316	H-4	*Q322	J-4		
IC317	F-4	*Q323	J-4	X301	F-4
IC501	P-4	*Q324	F-4	X302	H-4
IC502	R-5	*Q325	F-4		
IC601	L-4	*Q508	N-2		
IC602	M-4	*Q509	P-2		
IC801	D-3	*Q510	R-4		
IC802	D-2				

*: B SIDE


① TP502 REC/EE



② TP602 REC/EE

③ TP503 REC/EE
TP603 REC/EE


VRA-5(4/4);Y/C MOD,Y REC HF

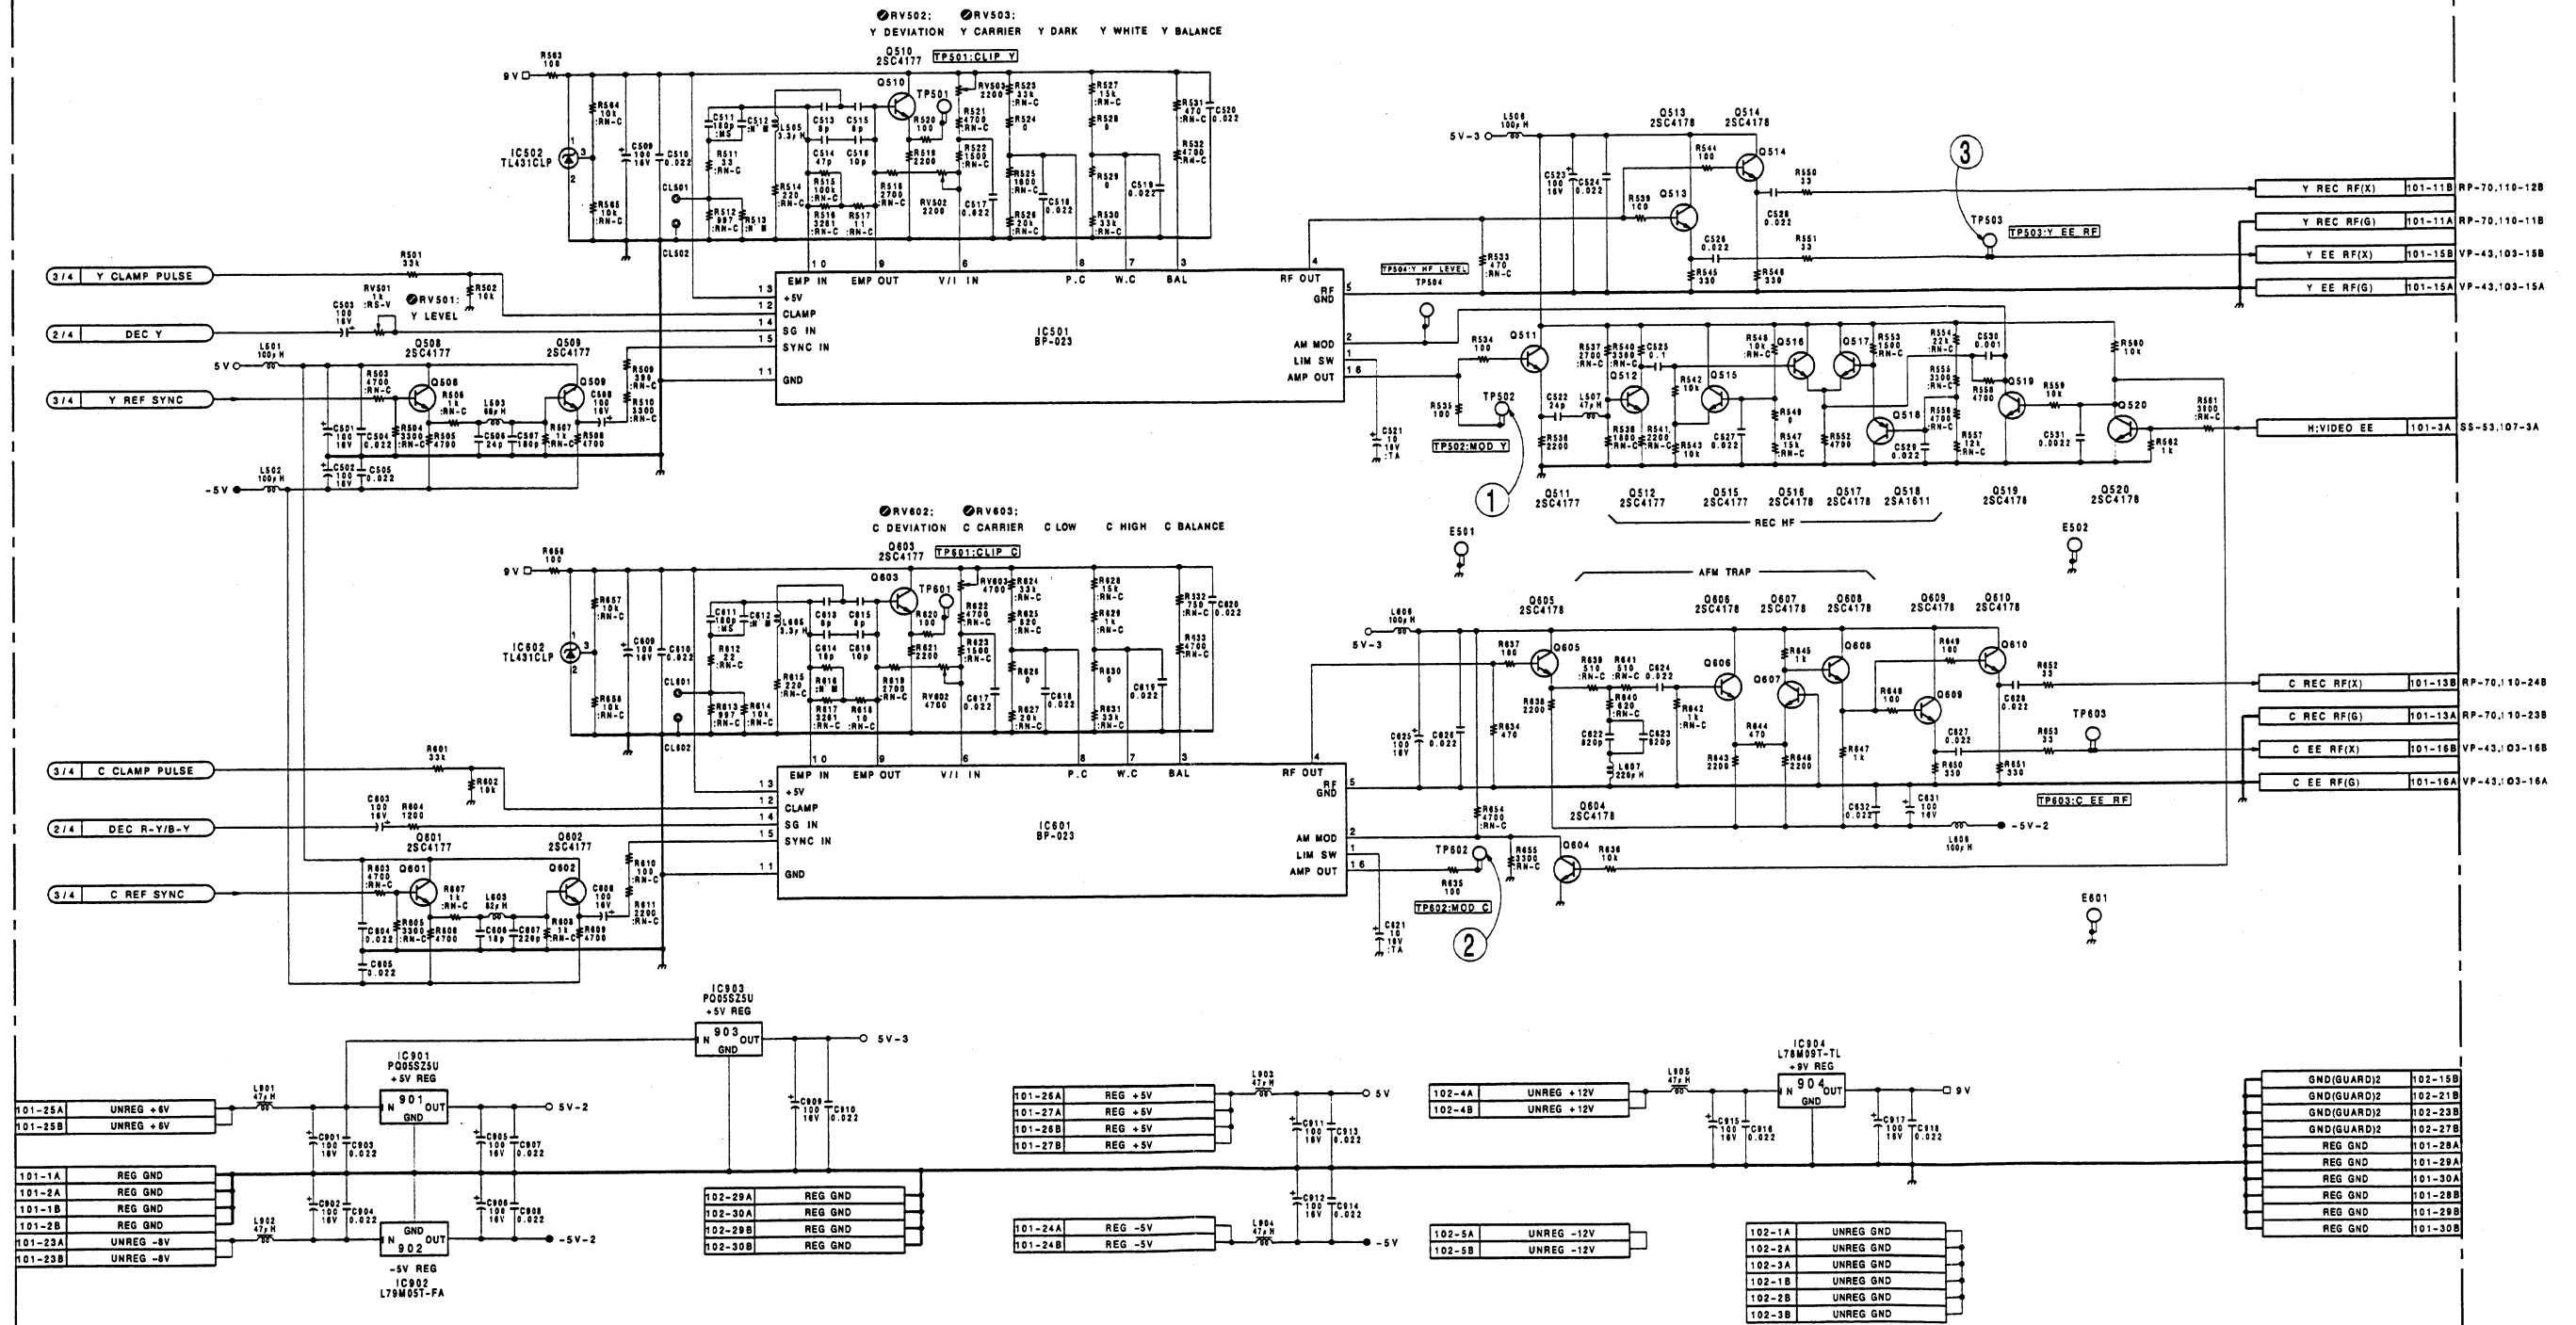

VRA-5 BOARD (4 / 4)

BOARD NO.1-648-898-11
UVW-1800(J) ;#10001-
UVW-1800(UC);#10001-

SOPS-1045AC/1045M;POWER SUPPLY(SWITCHING REGULATOR)

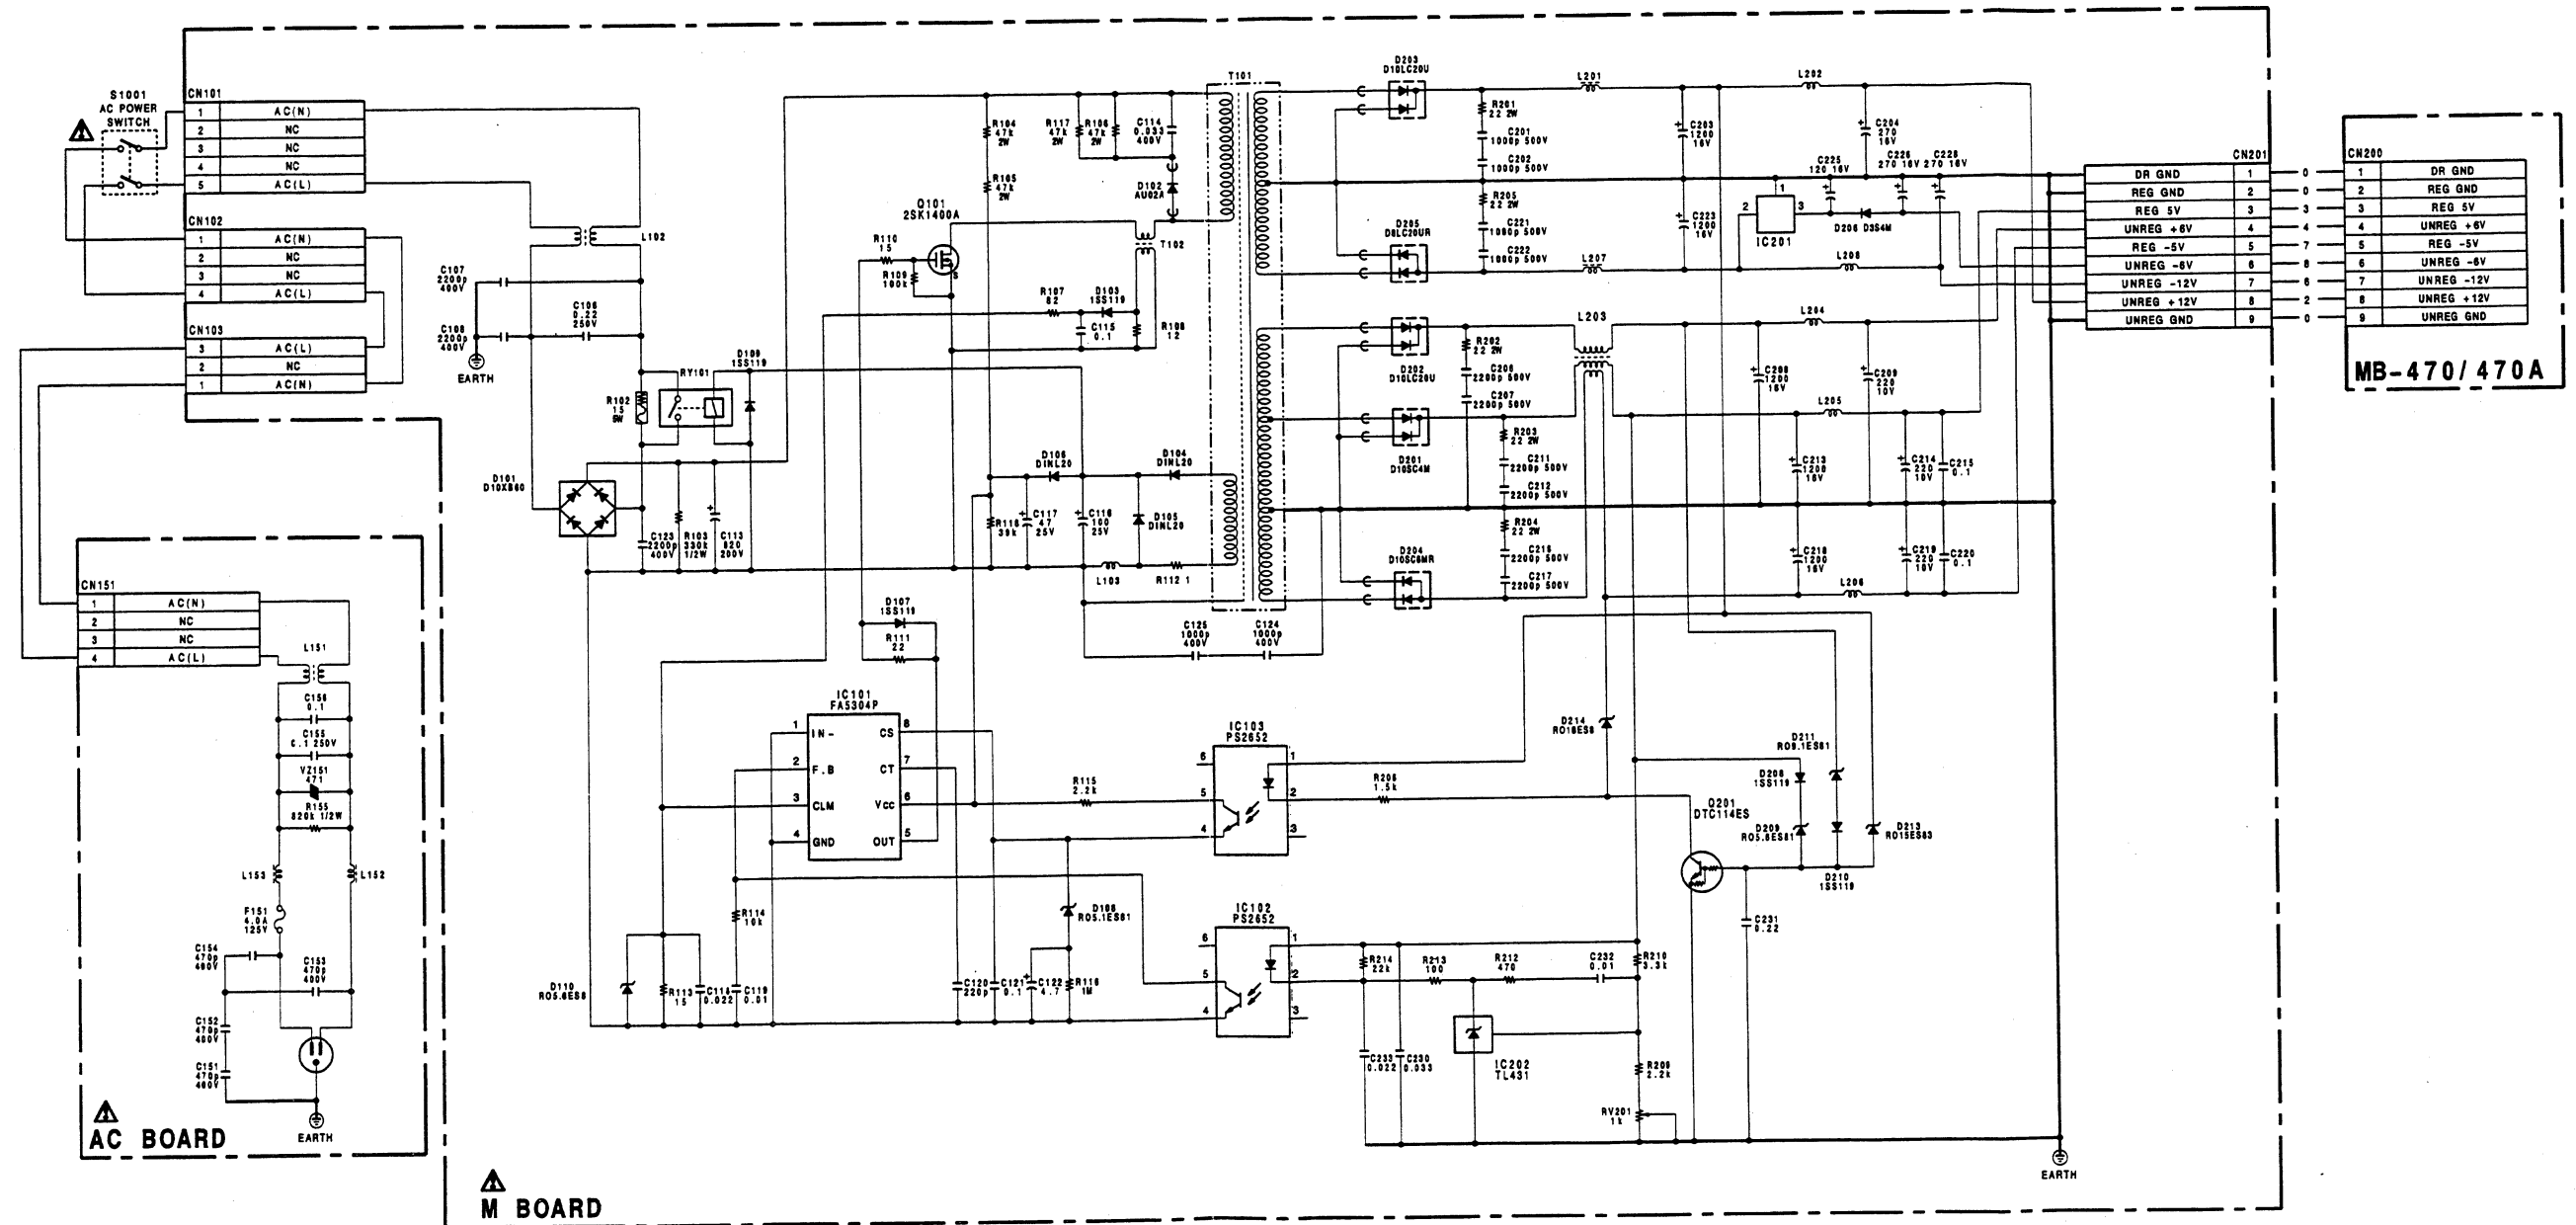

SOPS-1045AC BOARD

BOARD NO.1-649-934-11

SOPS-1045M BOARD

BOARD NO.1-649-935-11
UVW-1800/1600(J);#10001-
UVW-1800/1600(UC);#10001-

MB-470/470A(1/4);MOTHER BOARD

VRA-5

VRA-5 CN101			
A	B		
200-2	REG GND	1	REG GND
200-1	REG GND	2	REG GND
100-3A,105-3A	H:VIDEO EE	3	NC
	NC	4	NC
	NC	5	NC
	NC	6	NC
	NC	7	NC
	NC	8	NC
	NC	9	NC
	NC	10	NC
211-12	Y REC RF(G)	11	Y REC RF(X)
	NC	12	NC
211-6	C REC RF(G)	13	C REC RF(X)
	NC	14	NC
103-15A	Y EE RF(G)	15	Y EE RF(X)
103-16A	C EE RF(G)	16	C EE RF(X)
	NC	17	NC
107-18A	L:RGB INPUT SEL	18	L:MAINT MODE
107-19A	L:COMPOSITE	19	L:COMPONENT
107-20A	H:STD/L:NON STD	20	NC
107-21A	INPUT FP1	21	INPUT FP2
107-22A	INPUT SYNC	22	REC CF ID
200-8	UNREG -5V	23	UNREG -5V
200-5	REG -5V	24	REG -5V
200-4	UNREG +5V	25	UNREG +5V
200-3	REG +5V	26	REG +5V
200-2	REG GND	27	REG +5V
200-2	REG GND	28	REG GND
200-2	REG GND	29	REG GND
200-2	REG GND	30	REG GND

VRA-5 CN102			
A	B		
200-8	UNREG GND	1	UNREG GND
200-9	UNREG GND	2	UNREG GND
200-8	UNREG GND	3	UNREG GND
200-8	UNREG +12V	4	UNREG +12V
200-7	UNREG -12V	5	UNREG -12V
	NC	6	NC
	NC	7	NC
	NC	8	B DATA
	NC	9	SCK
	NC	10	STRB
	NC	11	GND(GUARD)
	NC	12	NC
	NC	13	NC
	NC	14	NC
	NC	15	GND(GUARD)2
271-8	INPUT Y(G)	16	INPUT Y(X)
	NC	17	NC
271-10	INPUT R-Y(G)	18	INPUT R-Y(X)
	NC	19	NC
271-12	INPUT B-Y(G)	20	INPUT B-Y(X)
	NC	21	GND(GUARD)2
271-2	INPUT VIDEO(G)	22	INPUT VIDEO(X)
	NC	23	GND(GUARD)2
271-8	INPUT S-Y(G)	24	INPUT S-Y(X)
	NC	25	NC
	NC	26	INPUT S-C(X)
271-4	INPUT S-C(G)	27	GND(GUARD)2
	NC	28	NC
	REG GND	29	REG GND
	REG GND	30	REG GND

VP-43/A

VP-43/A CN103			
A	B		
101-1-2	REG GND	1	REG GND
101-1-2	REG GND	2	REG GND
105-3A,101-3A	H:VIDEO EE	3	CTL SIG
105-4A,107-4A	L:FWD/REV X13	4	TRACKING CONT(X)
108-23B	L:JIG EXIST	5	L:IND SIG
105-6A,107-6A	Y SW PLS	6	C SW PLS
231-12	LTC EQ(G)	7	LTC EQ(X)
107-14A	L:SLOW BID	8	VP SPARE
211-10	Y A PB RF(G)	9	Y A PB RF(X)
211-8	Y B PB RF(G)	10	Y B PB RF(X)
	NC	11	GND(GUARD)
211-4	C A PB RF(G)	12	C A PB RF(X)
211-2	C B PB RF(G)	13	C B PB RF(X)
	NC	14	GND(GUARD)
101-18A	Y EE RF(G)	15	Y EE RF(X)
101-16A	C EE RF(G)	16	C EE RF(X)
	NC	17	GND
105-18A	DEMODO Y(G)	18	DEMODO Y(X)
105-19A	DEMODO C(G)	19	DEMODO C(X)
107-14B	SV DO PLS	20	L:OXIDE/H:METAL
105-21A	Y DO PLS	21	C DO PLS
108-20A	TBC SPEED	22	L:NOISE LESS PB
101-23	UNREG -5V	23	UNREG -5V
101-24	REG -5V	24	REG -5V
101-25	UNREG +5V	25	UNREG +5V
101-26-27	REG +5V	26	REG +5V
101-26-27	REG +5V	27	REG +5V
101-26-27	REG +5V	28	REG +5V
101-26-27	REG +5V	29	REG +5V
101-26-27	REG +5V	30	REG +5V
101-26-27	REG +5V	31	REG +5V
101-26-27	REG +5V	32	REG +5V
101-26-27	REG +5V	33	REG +5V
101-26-27	REG +5V	34	REG +5V

CN100	
1	DR GND
2	REG GND
3	REG +5V
4	UNREG +5V
5	REG -5V
6	UNREG -5V
7	UNREG +12V
8	UNREG -12V
9	UNREG GND

CN101	
1	REG GND
2	REG GND
3	REG +5V
4	UNREG +5V
5	REG -5V
6	UNREG -5V
7	UNREG +12V
8	UNREG -12V
9	UNREG GND

CN111	
1	C B PB RF(X)
2	C B PB RF(X)
3	C A PB RF(X)
4	C A PB RF(X)
5	C REC RF(X)
6	C REC RF(X)
7	Y B PB RF(X)
8	Y B PB RF(X)
9	Y A PB RF(X)
10	Y A PB RF(X)
11	Y REC RF(X)
12	Y REC RF(X)

CN121	
1	L:TC ERASE ON
2	REC LTC
3	L:AU CH 2 ERASE ON
4	L:AU CH 1 ERASE ON
5	L:AU CH 2 REC MUTE
6	L:AU CH 1 REC MUTE
7	H:OBC OFF
8	L:AU CH 1 BIAS ON
9	L:AU CH 2 BIAS ON
10	PB LTC
11	LTC EQ(X)
12	LTC EQ(G)
13	H:CTL OUT
14	L:AU CH 1 HEAD REC
15	L:AU CH 1 PB MUTE
16	L:AU CH 2 PB MUTE
17	L:AU CH 2 HEAD REC
18	L:AU CH 1 PB
19	L:AU CH 2 PB
20	H:LTG PB
21	L:AUDIO ATT ON
22	L:SLOW EQ ON
23	HNR ON
24	L:MAINT MODE
25	DEW DET(X)
26	DEW DET(G)
27	H:FULL ERASE ON
28	L:RE B CONT
29	L:RE A CONT
30	L:C B REC EN A/V
31	L:C A REC EN A/V
32	L:REC CONT
33	L:Y B REC EN A/V
34	L:Y A REC EN A/V

VP-43/A

VP-43/A		CN104	
		A	B
05-1-2	102-1-2-3	UNREG GND	1 UNREG GND
05-1-2	102-1-2-3	UNREG GND	2 UNREG GND
08-12B,214-33B	102-1-2-3	UNREG GND	3 UNREG GND
08-23A	102-4	UNREG +12V	4 UNREG +12V
05-5B,107-5B	102-5	UNREG -12V	5 UNREG -12V
05-5B,107-6B	102-5	UNREG -12V	5 UNREG -12V
31-11	107-16B	L:RGB OUTPUT SEL	6 NC
07-17B	106-7A	TBC' d Y(G)	7 TBC' d Y(X)
11-8	106-8A	TBC' d B-Y(G)	8 TBC' d B-Y(X)
11-7	106-9A	TBC' d R-Y(G)	9 TBC' d R-Y(X)
11-3	106-11A	NC	10 GND(GUARD)
11-1	106-12A	U AXIS SC(G)	11 U AXIS SC(X)
01-15B	106-12A	V AXIS SC(G)	12 V AXIS SC(X)
01-15B	106-12A	NC	13 GND(GUARD)
01-15B	268-3	OUTPUT S-Y(G)	14 OUTPUT S-Y(X)
01-15B	268-1	OUTPUT S-C(G)	15 OUTPUT S-C(X)
01-15B	268-1	NC	16 GND(GUARD)
01-15B	269-5	OUTPUT Y 1(G)	17 OUTPUT Y 1(X)
01-15B	269-9	OUTPUT Y 2(G)	18 OUTPUT Y 2(X)
01-15B	269-1	OUTPUT B-Y 1(G)	19 OUTPUT B-Y 1(X)
01-15B	268-13	OUTPUT B-Y 2(G)	20 OUTPUT B-Y 2(X)
01-15B	269-3	OUTPUT R-Y 1(G)	21 OUTPUT R-Y 1(X)
01-15B	268-11	OUTPUT R-Y 2(G)	22 OUTPUT R-Y 2(X)
01-15B	106-21A	ENC CLAMP	23 GND(GUARD)
01-15B	268-5	OUTPUT VIDEO 1(G)	24 OUTPUT VIDEO 1(X)
01-15B	268-7	OUTPUT VIDEO 2(G)	25 OUTPUT VIDEO 2(X)
01-15B	105-7A,107-7A	HD	26 H:WIDE
01-15B	107-15A	CHARA FRAME	27 OUTPUT SYNC
01-15B	107-15B	CHARA SIG	28 ENC BLANK
01-15B	102-29-30	REG GND	29 REG GND
01-15B	102-29-30	REG GND	30 REG GND

TBC-25

TBC-25		CN105	
		A	B
103-1-2	REG GND	1 REG GND	107-1-2
103-1-2	REG GND	2 REG GND	107-1-2
107-3A,103-3A	H:VIDEO EE	3 L:NOISE LESS PB	107-5B,103-22B
107-4A,103-4A	L:FWD/REV X13	4 H:FWD/REV	107-4B
107-5A	L:TBC MUTE	5 L:NO SIG	103-5B,107-5B
107-6A,103-6A	Y SW PLS	6 C SW PLS	103-5B,107-6B
107-7A,104-26A	HD	7 PB SYNC	107-7B
107-8A	REF SYNC	8 REF 1ST FIELD	107-8B
107-9A	VD	9 SERVO V	107-9B
107-10A	L:FWD/REV X15	10 H:EXT SC DET	107-10B
107-11A	H:EXT SYNC DET	11 PB FPI	107-11B
107-12A	PB FP2	12 L:SYNC DELAY	107-12B
107-13A	TAPE SPEED	13 L:CS TBC	107-13B
107-14A	NC	14 L:MAINT MODE	101-10B,107-10B,251-24
107-15A	NC	15 NC	
107-16A	NC	16 NC	
107-17A	TBC SPARE	17 GND	NC
107-18A	DEMOC Y(G)	18 DEMOC Y(X)	107-18B
107-19A	DEMOC C(G)	19 DEMOC C(X)	107-19B
107-20A	NC	20 GND	NC
107-21A	Y DO PLS	21 C DO PLS	107-21B
107-22A	NC	22 H:CHROMA MUTE	107-22B
107-23A	UNREG -5V	23 UNREG -5V	107-23B
107-24A	REG -5V	24 REG -5V	107-24B
107-25A	UNREG +5V	25 UNREG +5V	107-25B
107-26A	REG +5V	26 REG +5V	107-26B
107-27A	REG +5V	27 REG +5V	107-27B
107-28A	REG GND	28 REG GND	107-28B
107-29A	REG GND	29 REG GND	107-29B
107-30A	REG GND	30 REG GND	107-30B

TBC-25		CN106	
		A	B
104-1-2-3	UNREG GND	1 UNREG GND	109-1-2-3
104-1-2-3	UNREG GND	2 UNREG GND	109-1-2-3
104-1-2-3	UNREG GND	3 UNREG GND	109-1-2-3
104-4	UNREG +12V	4 UNREG +12V	109-4
104-5	UNREG -12V	5 UNREG -12V	109-5
267-1	INPUT REF(G)	6 INPUT REF(X)	267-2
104-7A	TBC' d Y(G)	7 TBC' d Y(X)	104-7B
104-8A	TBC' d B-Y(G)	8 TBC' d B-Y(X)	104-8B
104-9A	TBC' d R-Y(G)	9 TBC' d R-Y(X)	104-9B
104-10A	NC	10 GND(GUARD)	
104-11A	U AXIS SC(G)	11 U AXIS SC(X)	104-11B
104-12A	V AXIS SC(G)	12 V AXIS SC(X)	104-12B
104-13A	NC	13 GND(GUARD)	
267-6	DUB INPUT REF(G)	14 DUB INPUT REF(X)	267-7
102-8B	S DATA	15 NC	
102-9B	SKC	16 NC	
102-10B	STRB	17 NC	
103-22A	GND(GUARD)	18 H:WIDE	103-24B,103-20B
104-23A	TBC SPEED	19 OUTPUT SYNC	104-27B
104-24A	ENC CLAMP	20 ENC BLANK	104-28B
109-22A,262-6	L:SYSTEM RESET	21 LOCAL SYNC PHASE	262-10
109-23A,262-6	SERIAL CLOCK	22 L:SERIAL READY	109-23B,262-5
109-24A,262-4	SERIAL RX	23 SERIAL TX	109-24B
232-7	REMOTE SYNC PHASE	24 LOCAL SC PHASE	262-11
232-8	REMOTE SC PHASE	25 HUE	232-8
232-11	SET UP	26 OUTPUT VIDEO LEVEL	232-10
232-13	OUTPUT CHROMA LEVEL	27 Y/C DELAY	232-12
104-29-30	REG GND	28 REG GND	109-29-30
104-29-30	REG GND	29 REG GND	109-29-30


MB-470/470A	109-29-30
MB-470/470A	109-29-30
MB-470/470A	109-29-30
MB-470/470A	109-29-30
MB-470/470A	109-29-30

CN107	
1	FRAME GND
2	FRAME GND
3	RX(-)
4	RX(+)
5	TX(+)
6	TX(-)
7	REMOTE SYNC PHASE
8	HUE
9	REMOTE SC PHASE
10	OUTPUT VIDEO LEVEL
11	SET UP
12	Y/C DELAY
13	OUTPUT CHROMA LEVEL
14	REG -5V
15	REG +5V
16	REG GND
17	REG GND

CN108	
1	SIRCS VCC
2	SIRCS DATA
3	SIRCS GND

CN109	
1	REG GND
2	REG GND
3	SERIAL TX
4	SERIAL RX
5	L:SERIAL READY
6	SERIAL CLOCK
7	L:CS KEY
8	L:SYSTEM RESET
9	L:CS DOT
10	LOCAL SYNC PHASE
11	LOCAL SC PHASE
12	REG +5V
13	REG +5V
14	UNREG +12V
15	UNREG +12V

CN101,CN102...UVW-1800 ONLY

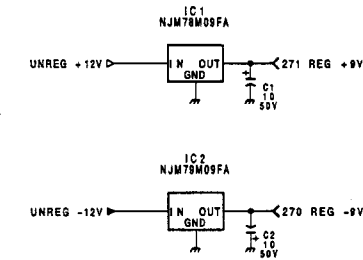

MB-470/470A BOARD (1/4)

BOARD NO.1-648-918-11,21
UVW-1800/1600(J);#10001-
UVW-1800/1600(UC);#10001-

MB-470/470A(2/4);MOTHER BOARD

SS-53

SS-53 CN107			
A		B	
105-1-2	REG GND	1	REG GND
105-1-2	REG GND	2	REG GND
105-3A,105-3A	H:VIDEO EE	3	L:NOISE LESS PB
105-4A,105-4A	L:FWD/REV X13	4	H:FWD/L:REV
105-5A	L:TBC MUTE	5	L:NO SIG
105-6A,105-6A	Y SW PLS	6	C SW PLS
105-7A,104-26A	HD	7	PB SYNC
105-8A	REF SYNC	8	REF 1ST FIELD
105-9A	VD	9	SERVO V
105-10A	L:FWD/REV X15	10	H:EXT SC DET
105-11A	H:EXT SYNC DET	11	PB FP1
105-12A	PB FP2	12	L:SYNC DELAY
105-13A	TAPE SPEED	13	L:CS TBC
105-14A	L:SLOW BID	14	SV DO PLS
104-27A	CHARA FRAME	15	CHARA SIG
101-18A	L:RGB INPUT SEL	16	L:RGB OUTPUT SEL
106-19B,104-26B	H:WIDE	17	VP SPARE
105-17A	TBC SPARE	18	L:MAINT MODE
101-19A	L:COMPOSITE	19	L:COMPONENT
101-20A	H:STD/L:NON STD	20	H:CHROMA MUTE
101-21A	INPUT FP1	21	INPUT FP2
101-22A	INPUT SYNC	22	REC CF ID
105-23	UNREG -5V	23	UNREG -5V
105-24	REG -5V	24	REG -5V
105-25	UNREG +6V	25	UNREG +6V
105-26-27	REG +5V	26	REG +5V
105-26-27	REG +5V	27	REG +5V
105-28-29-30	REG GND	28	REG GND
105-28-29-30	REG GND	29	REG GND
105-28-29-30	REG GND	30	REG GND

SS-53 CN108			
A		B	
277	214-10B	1	DRUM ERROR
278	214-12B	2	CAPSTAN ERROR
279	214-14B	3	S REEL POWER CONT
280	214-16B	4	S REEL CURRENT
281	214-18B	5	DRUM FG
282	214-20B	6	S REEL FG B
283	214-22B	7	L:TAPE END
284	214-24B	8	CAPSTAN FG A
285	214-26B	9	ADJUST +11V
286	214-28B	10	CAPSTAN FG B NORM
287	214-30B	11	S TENSION
288	214-32B	12	H:CTL GAIN UP
289	214-34B	13	CTL PULSE
290	214-36B	14	H:CTL REC
291	214-38B	15	THREADING FG
292	214-40B	16	H:TH END
293	214-42B	17	1/2 VD
294	214-44B	18	SERVO SI
295	214-46B	19	T REEL FG B
296	214-48A	20	T REEL POWER CONT
297	214-50A	21	T REEL CURRENT
298	214-49B	22	THUNTH POWER CONT
148	103-4B	23	TRACKING CONT(X)
NC	SV SPARE	24	L:OXIDE/H:METAL
235-1	SIRCS VCC	25	SIRCS DATA
235-3	SIRCS GND	26	NC
NC	NC	27	NC
NC	NC	28	NC
NC	NC	29	NC
NC	NC	30	NC

SS-53 CN109			
A		B	
106-1-2-3	UNREG GND	1	UNREG GND
106-1-2-3	UNREG GND	2	UNREG GND
106-1-2-3	UNREG GND	3	UNREG GND
106-4	UNREG +12V	4	UNREG +12V
106-5	UNREG -12V	5	UNREG -12V
231-33	L:Y B REC EN A/V	6	L:Y A REC EN A/V
231-30	L:C B REC EN A/V	7	L:REC CONT
231-28	L:RE B CONT	8	L:C A REC EN A/V
231-27	H:FULL ERASE ON	9	L:RE A CONT
231-23	H:NR ON	10	L:SLOW EQ ON
231-20	H:LTC PB	11	L:AUDIO ATT ON
231-17	L:AU CH 2 HEAD REC	12	L:AU CH 2 PB
231-14	L:AU CH 1 HEAD REC	13	L:AU CH 1 PB
231-10	PB LTC	14	L:AU CH 2 PB MUTE
231-9	L:AU CH 2 BIAS ON	15	L:AU CH 1 PB MUTE
231-8	L:AU CH 1 BIAS ON	16	H:CTL CUT
231-7	H:OSC OFF	17	L:CS DOT
231-5	L:AU CH 2 REC MUTE	18	L:AU CH 1 REC MUTE
231-1	L:LTC ERASE ON	19	L:AU CH 1 ERASE ON
231-2	REC LTC	20	L:AU CH 2 ERASE ON
231-25	DEW DET(X)	21	DEW DET(G)
262-8,106-22A	L:SYSTEM RESET	22	L:CS KEY
262-6,106-23A	SERIAL CLOCK	23	L:SERIAL READY
262-4,106-24A	SERIAL RX	24	SERIAL TX
232-6	TX(-)	25	TX(+)
232-3	RX(-)	26	RX(+)
266-3	OUTPUT LTC(G)	27	OUTPUT LTC(X)
266-1	EXT TC IN(G)	28	EXT TC IN(X)
106-29-30	REG GND	29	REG GND
106-29-30	REG GND	30	REG GND

CN266			
CP-225/A,651-1	1	EXT TC IN(G)	109-28A
CP-225/A,651-2	2	EXT TC IN(X)	109-28B
CP-225/A,651-3	3	OUTPUT LTC(G)	109-27A
CP-225/A,651-4	4	OUTPUT LTC(X)	109-27B

CN267			
CP-225/A,652-1	1	INPUT REF(G)	108-8A
CP-225/A,652-2	2	INPUT REF(X)	108-8B
CP-225/A,652-3	3	REG -5V	200-5
CP-225/A,652-4	4	REG GND	200-2
CP-225/A,652-5	5	REG +5V	200-3
CP-225/A,652-6	6	DUB INPUT REF(G)	108-14A
CP-225/A,652-7	7	DUB INPUT REF(X)	108-14B

CN268			
CP-225/A,655-1	1	OUTPUT S-C(G)	104-15A
CP-225/A,655-2	2	OUTPUT S-C(X)	104-15B
CP-225/A,655-3	3	OUTPUT S-Y(G)	104-14A
CP-225/A,655-4	4	OUTPUT S-Y(X)	104-14B
CP-225/A,655-5	5	OUTPUT VIDEO 1(G)	104-21A
CP-225/A,655-6	6	OUTPUT VIDEO 1(X)	104-21B
CP-225/A,655-7	7	OUTPUT VIDEO 2(G)	104-25A
CP-225/A,655-8	8	OUTPUT VIDEO 2(X)	104-25B
CP-225/A,655-9	9	OUTPUT Y 2(G)	104-19A
CP-225/A,655-10	10	OUTPUT Y 2(X)	104-19B
CP-225/A,655-11	11	OUTPUT R-Y 2(G)	104-22A
CP-225/A,655-12	12	OUTPUT R-Y 2(X)	104-22B
CP-225/A,655-13	13	OUTPUT B-Y 2(G)	104-20A
CP-225/A,655-14	14	OUTPUT B-Y 2(X)	104-20B

CN269			
CP-225/A,653-1	1	OUTPUT B-Y 1(G)	104-19A
CP-225/A,653-2	2	OUTPUT B-Y 1(X)	104-19B
CP-225/A,653-3	3	OUTPUT R-Y 1(G)	104-21A
CP-225/A,653-4	4	OUTPUT R-Y 1(X)	104-21B
CP-225/A,653-5	5	OUTPUT Y 1(G)	104-17A
CP-225/A,653-6	6	OUTPUT Y 1(X)	104-17B

CN271			
CP-225/A,654-1	1	INPUT VIDEO(X)	102-22B
CP-225/A,654-2	2	INPUT VIDEO(G)	102-22A
CP-225/A,654-3	3	INPUT S-C(X)	102-26B
CP-225/A,654-4	4	INPUT S-C(G)	102-26A
CP-225/A,654-5	5	INPUT S-Y(X)	102-24B
CP-225/A,654-6	6	INPUT S-Y(G)	102-24A
CP-225/A,654-7	7	INPUT Y(X)	102-16B
CP-225/A,654-8	8	INPUT Y(G)	102-16A
CP-225/A,654-9	9	INPUT R-Y(X)	102-18B
CP-225/A,654-10	10	INPUT R-Y(G)	102-18A
CP-225/A,654-11	11	INPUT B-Y(X)	102-20B
CP-225/A,654-12	12	INPUT B-Y(G)	102-20A

CN271...UVW-1800 ONLY

SS-53

SS-53 CN108			
A		B	
214-10B	DRUM ERROR	1	DRUM CURRENT
214-12B	CAPSTAN ERROR	2	CAPSTAN CURRENT
214-14B	S REEL POWER CONT	3	S REEL ERROR
214-16B	S REEL CURRENT	4	SOL CURRENT
214-18B	DRUM FG	5	DRUM PG
214-20B	S REEL FG B	6	S REEL FG A
214-22B	L:TAPE END	7	CAPSTAN DIR CONT
214-24B	CAPSTAN FG A	8	CAPSTAN FG B
214-26B	ADJUST +11V	9	CAPSTAN FG A NORM
214-28B	CAPSTAN FG B NORM	10	ADJUST GND
214-30B	S TENSION	11	ADJUST +5V
214-32B	H:CTL GAIN UP	12	CTL SIG
214-34B	CTL PULSE	13	REC CTL
214-36B	H:CTL REC	14	L:TAPE TOP
214-38B	THREADING FG	15	H:UNTH END
214-40B	H:TH END	16	EMERGENCY MS RESET
214-42B	1/2 VD	17	SERVO SCK
214-44B	SERVO SI	18	SERVO SO
214-46B	T REEL FG B	19	T REEL FG A
214-48A	T REEL POWER CONT	20	T REEL ERROR
214-50A	T REEL CURRENT	21	THREADING ERROR
214-48B	TH/UNTH POWER CONT	22	L:MS BUSY
103-4B	TRACKING CONT(X)	23	L:JIG EXIST
NC	SV SPARE	24	L:OXIDE/H:METAL
235-1	SIRCS VCC	25	SIRCS DATA
235-3	SIRCS GND	26	NC
	NC	27	NC
	NC	28	NC
	NC	29	NC
	NC	30	NC

SS-53 CN109			
A		B	
106-1-2-3	UNREG GND	1	UNREG GND
106-1-2-3	UNREG GND	2	UNREG GND
106-1-2-3	UNREG GND	3	UNREG GND
106-4	UNREG +12V	4	UNREG +12V
106-5	UNREG -12V	5	UNREG -12V
231-33	L:Y B REC EN A/V	6	L:Y A REC EN A/V
231-30	L:C B REC EN A/V	7	L:REC CONT
231-28	L:RE B CONT	8	L:C A REC EN A/V
231-27	H:FULL ERASE ON	9	L:RE A CONT
231-23	H:NR ON	10	L:SLOW EQ ON
231-20	H:LTC PB	11	L:AUDIO ATT ON
231-17	L:AU CH 2 HEAD REC	12	L:AU CH 2 PB
231-14	L:AU CH 1 HEAD REC	13	L:AU CH 1 PB
231-10	PB LTC	14	L:AU CH 2 PB MUTE
231-9	L:AU CH 2 BIAS ON	15	L:AU CH 1 PB MUTE
231-8	L:AU CH 1 BIAS ON	16	H:CTL CUT
231-7	H:OSC OFF	17	L:CS DOT
231-5	L:AU CH 2 REC MUTE	18	L:AU CH 1 REC MUTE
231-1	L:LTC ERASE ON	19	L:AU CH 1 ERASE ON
231-2	REC LTC	20	L:AU CH 2 ERASE ON
231-25	DEW DET(X)	21	DEW DET(G)
262-8,106-22A	L:SYSTEM RESET	22	L:CS KEY
262-6,106-23A	SERIAL CLOCK	23	L:SERIAL READY
262-4,106-24A	SERIAL RX	24	SERIAL TX
232-6	TX(-)	25	TX(+)
232-3	RX(-)	26	RX(+)
266-3	OUTPUT LTC(G)	27	OUTPUT LTC(X)
266-1	EXT TC IN(G)	28	EXT TC IN(X)
106-29-30	REG GND	29	REG GND
106-29-30	REG GND	30	REG GND

DR-214


CN214			
A		B	
REG GND	1	REG GND	107-28,29,30
REG -5V	2	REG -5V	107-24
UNREG +6V	3	UNREG +6V	107-25
REG +5V	4	REG +5V	107-26,27
DR GND	5	DR GND	200-1
UNREG +12V	6	UNREG +12V	200-8
UNREG +12V	7	UNREG +12V	200-8
UNREG -12V	8	UNREG -12V	200-7
NC	9	UNREG -12V	200-7
NC	10	DRUM ERROR	108-1A
NC	11	DRUM CURRENT	108-1B
NC	12	CAPSTAN ERROR	108-2A
NC	13	CAPSTAN CURRENT	108-2B
NC	14	S REEL POWER CONT	108-3A
NC	15	S REEL ERROR	108-3B
NC	16	S REEL CURRENT	108-4A
NC	17	SOL CURRENT	108-4B
NC	18	DRUM FG	108-5A
NC	19	DRUM PG	108-5B
NC	20	S REEL FG B	108-6A
NC	21	S REEL FG A	108-6B
NC	22	L:TAPE END	108-7A
NC	23	CAPSTAN DIR CONT	108-7B
NC	24	CAPSTAN FG A	108-8A
NC	25	CAPSTAN FG B	108-8B
NC	26	ADJUST +11V	108-9A
NC	27	CAPSTAN FG A NORM	108-9B
NC	28	CAPSTAN FG B NORM	108-10A
NC	29	ADJUST GND	108-10B
NC	30	S TENSION	108-11A
NC	31	ADJUST +5V	108-11B
NC	32	H:CTL GAIN UP	108-12A
NC	33	CTL SIG	108-12B,103-3B
NC	34	CTL PULSE	108-13A
NC	35	REC CTL	108-13B
NC	36	H:CTL REC	108-14A
NC	37	L:TAPE TOP	108-14B
NC	38	THREADING FG	108-15A
NC	39	H:UNTH END	108-15B
NC	40	H:TH END	108-16A
NC	41	EMERGENCY MS RESET	108-16B
NC	42	1/2 VD	108-17A
NC	43	SERVO SCK	108-17B
NC	44	SERVO SI	108-18A
NC	45	SERVO SO	108-18B
NC	46	T REEL FG B	108-19A
NC	47	T REEL FG A	108-19B
108-20A	T REEL POWER CONT	48	L:MS BUSY
108-20B	T REEL ERROR	49	TH/UNTH POWER CONT
108-21A	T REEL CURRENT	50	THREADING ERROR

CN271...UVW-1800 ONLY


MB-470/470A BOARD (2/4)


BOARD NO.1-648-918-11,21
UVW-1800/1600(J):#10001-
UVW-1800/1600(UC):#10001-

MB-470/470A(3/4);MOTHER BOARD

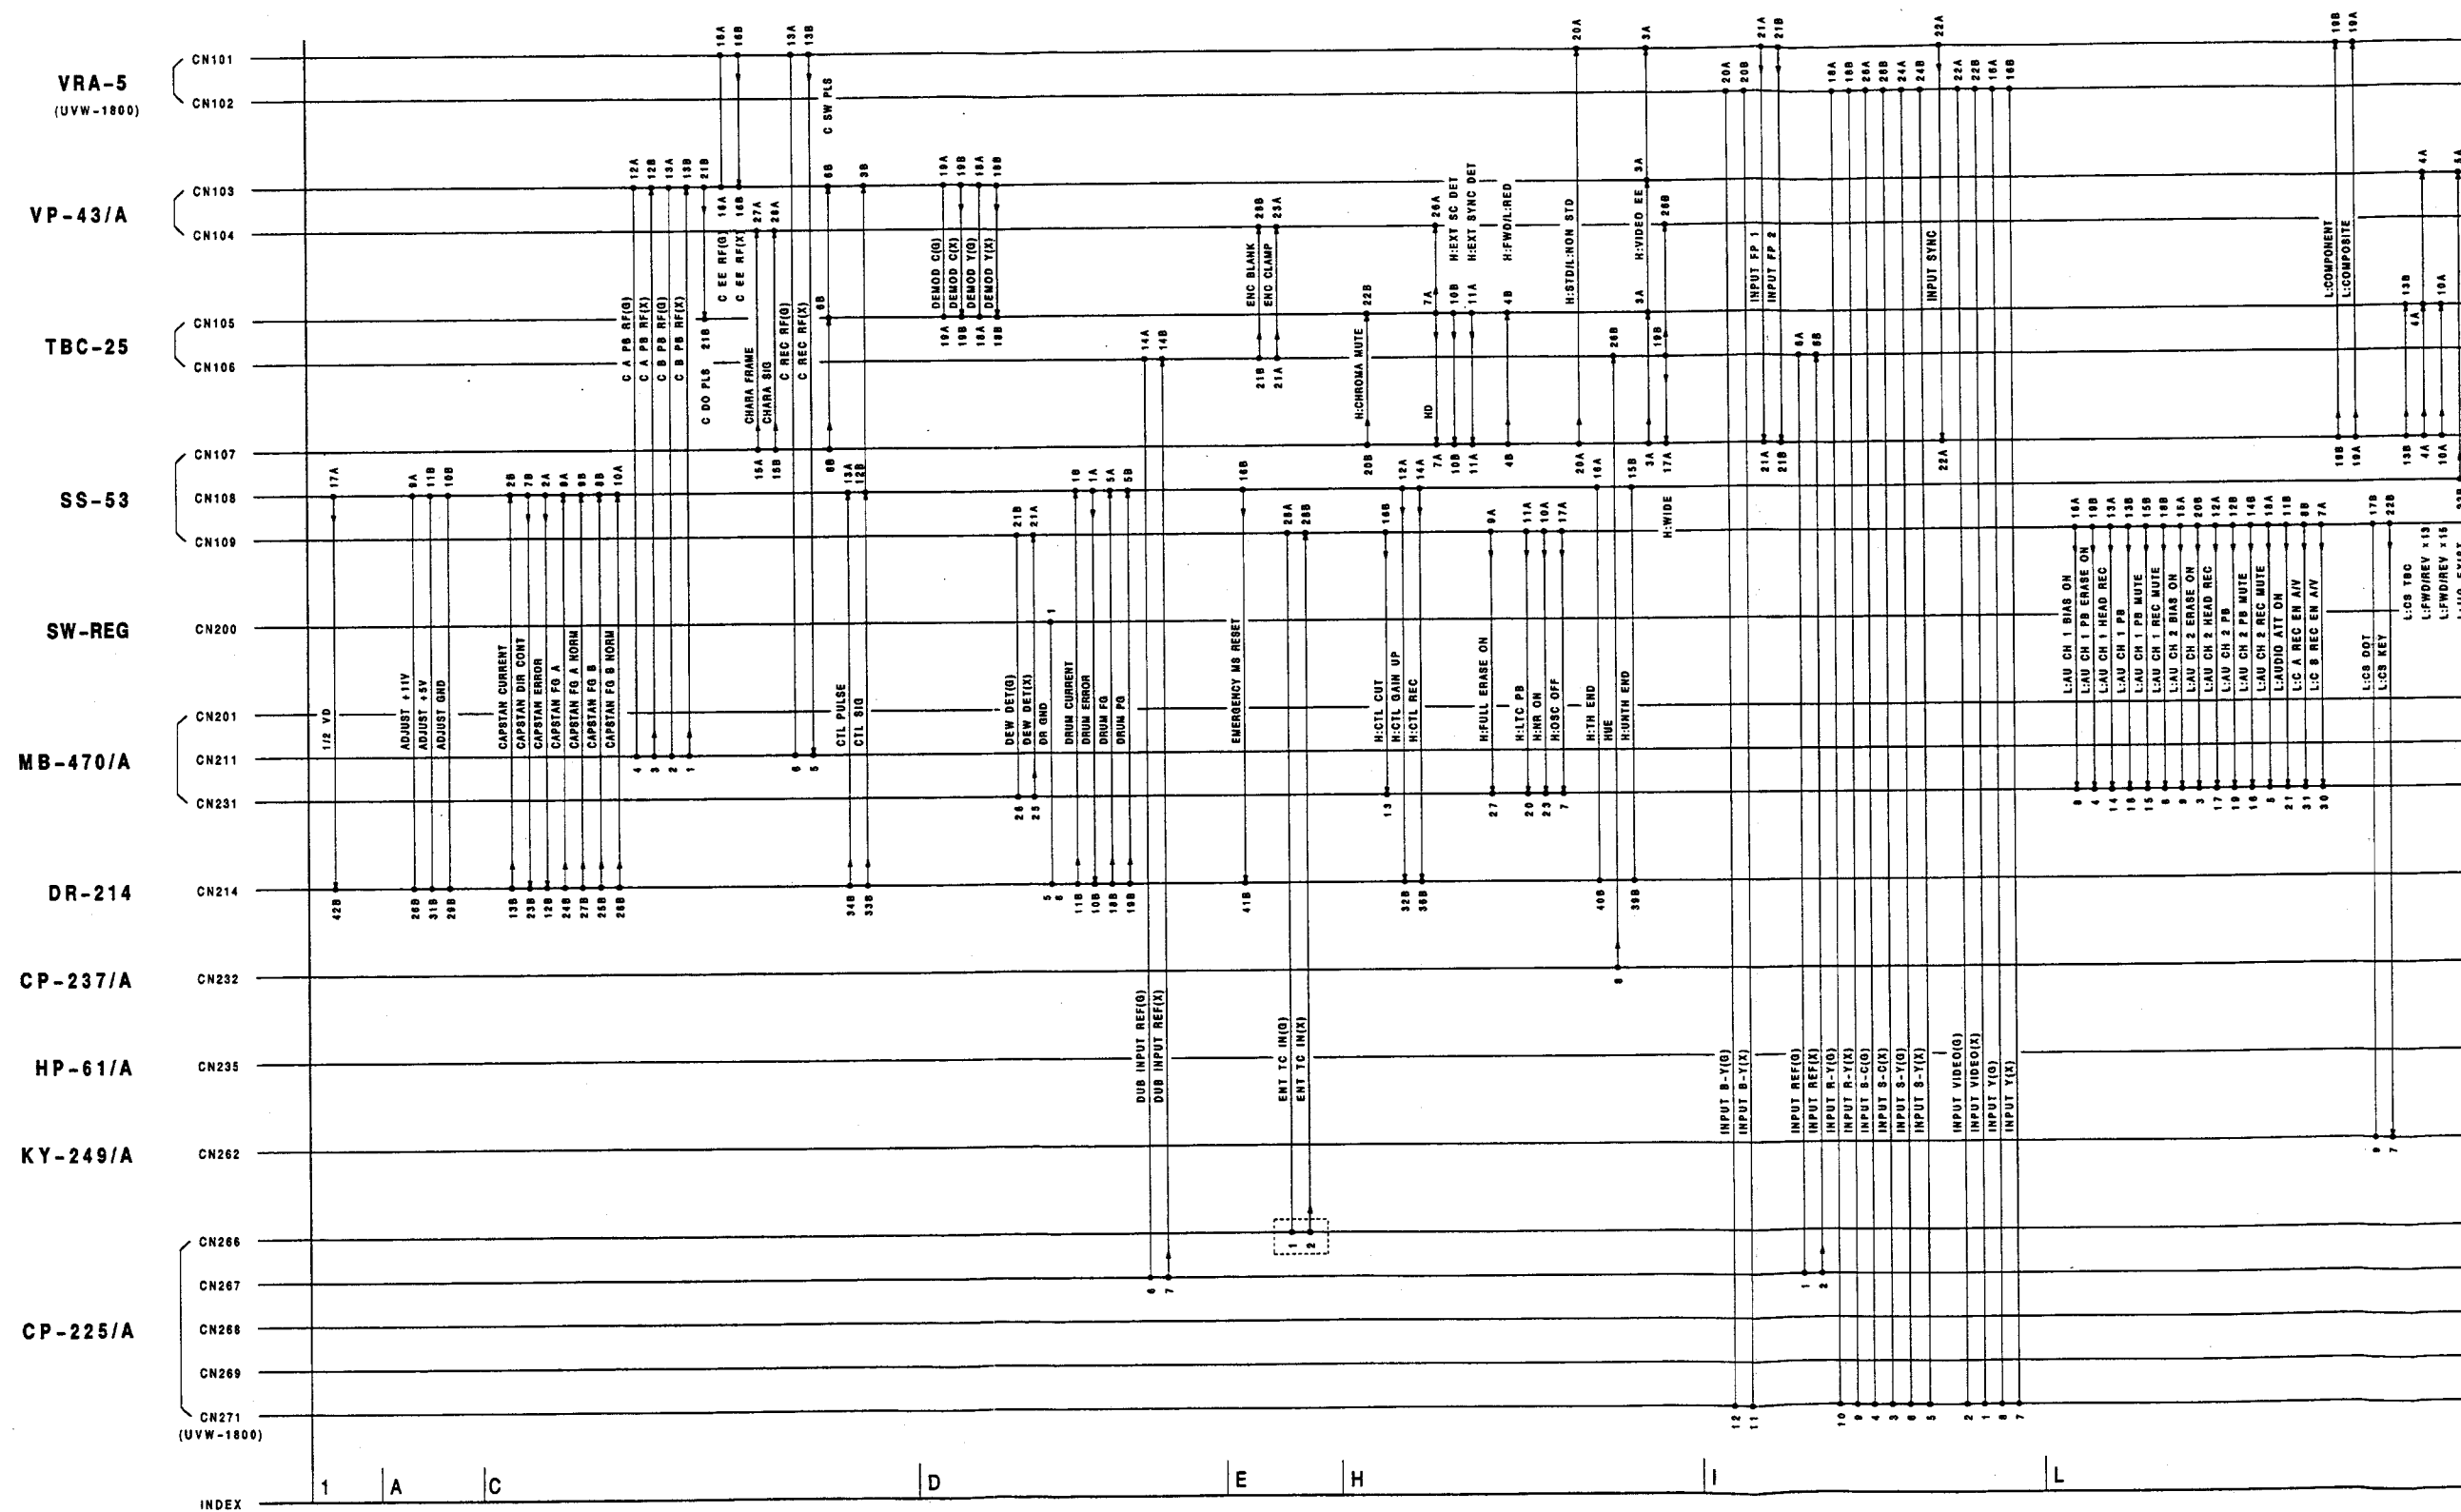

MB-470/470A(4/4);MOTHER BOARD

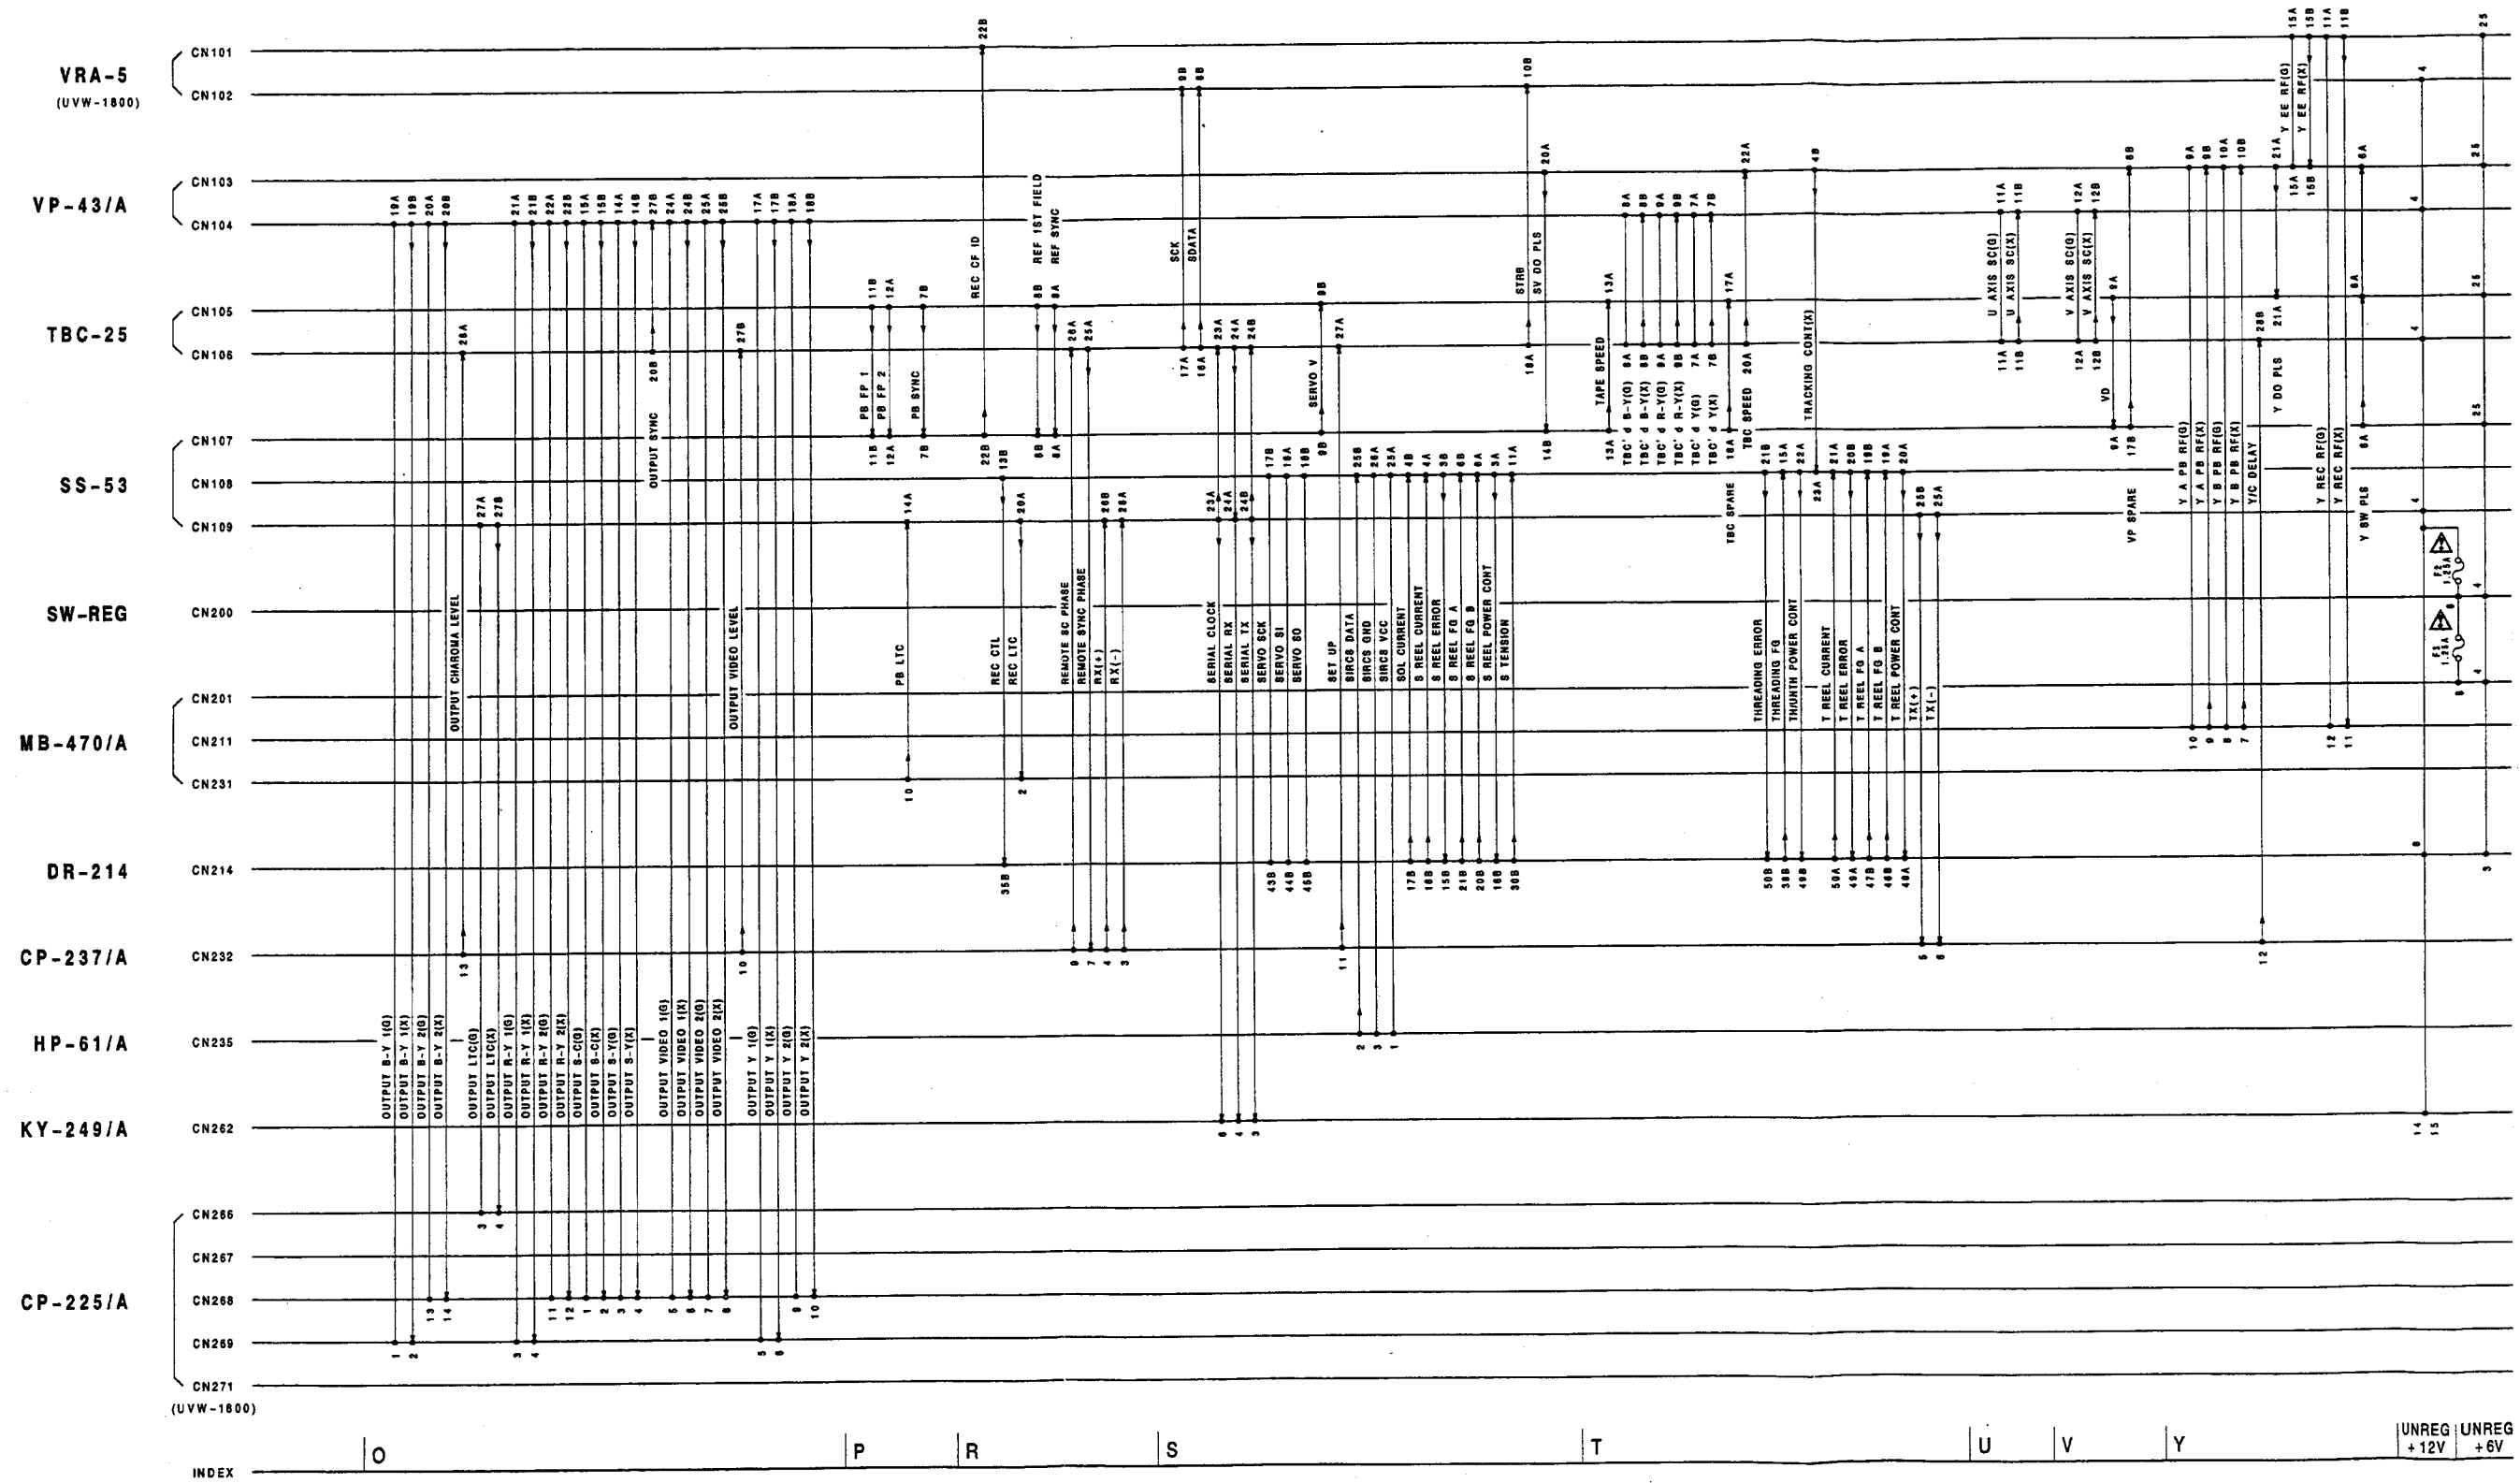

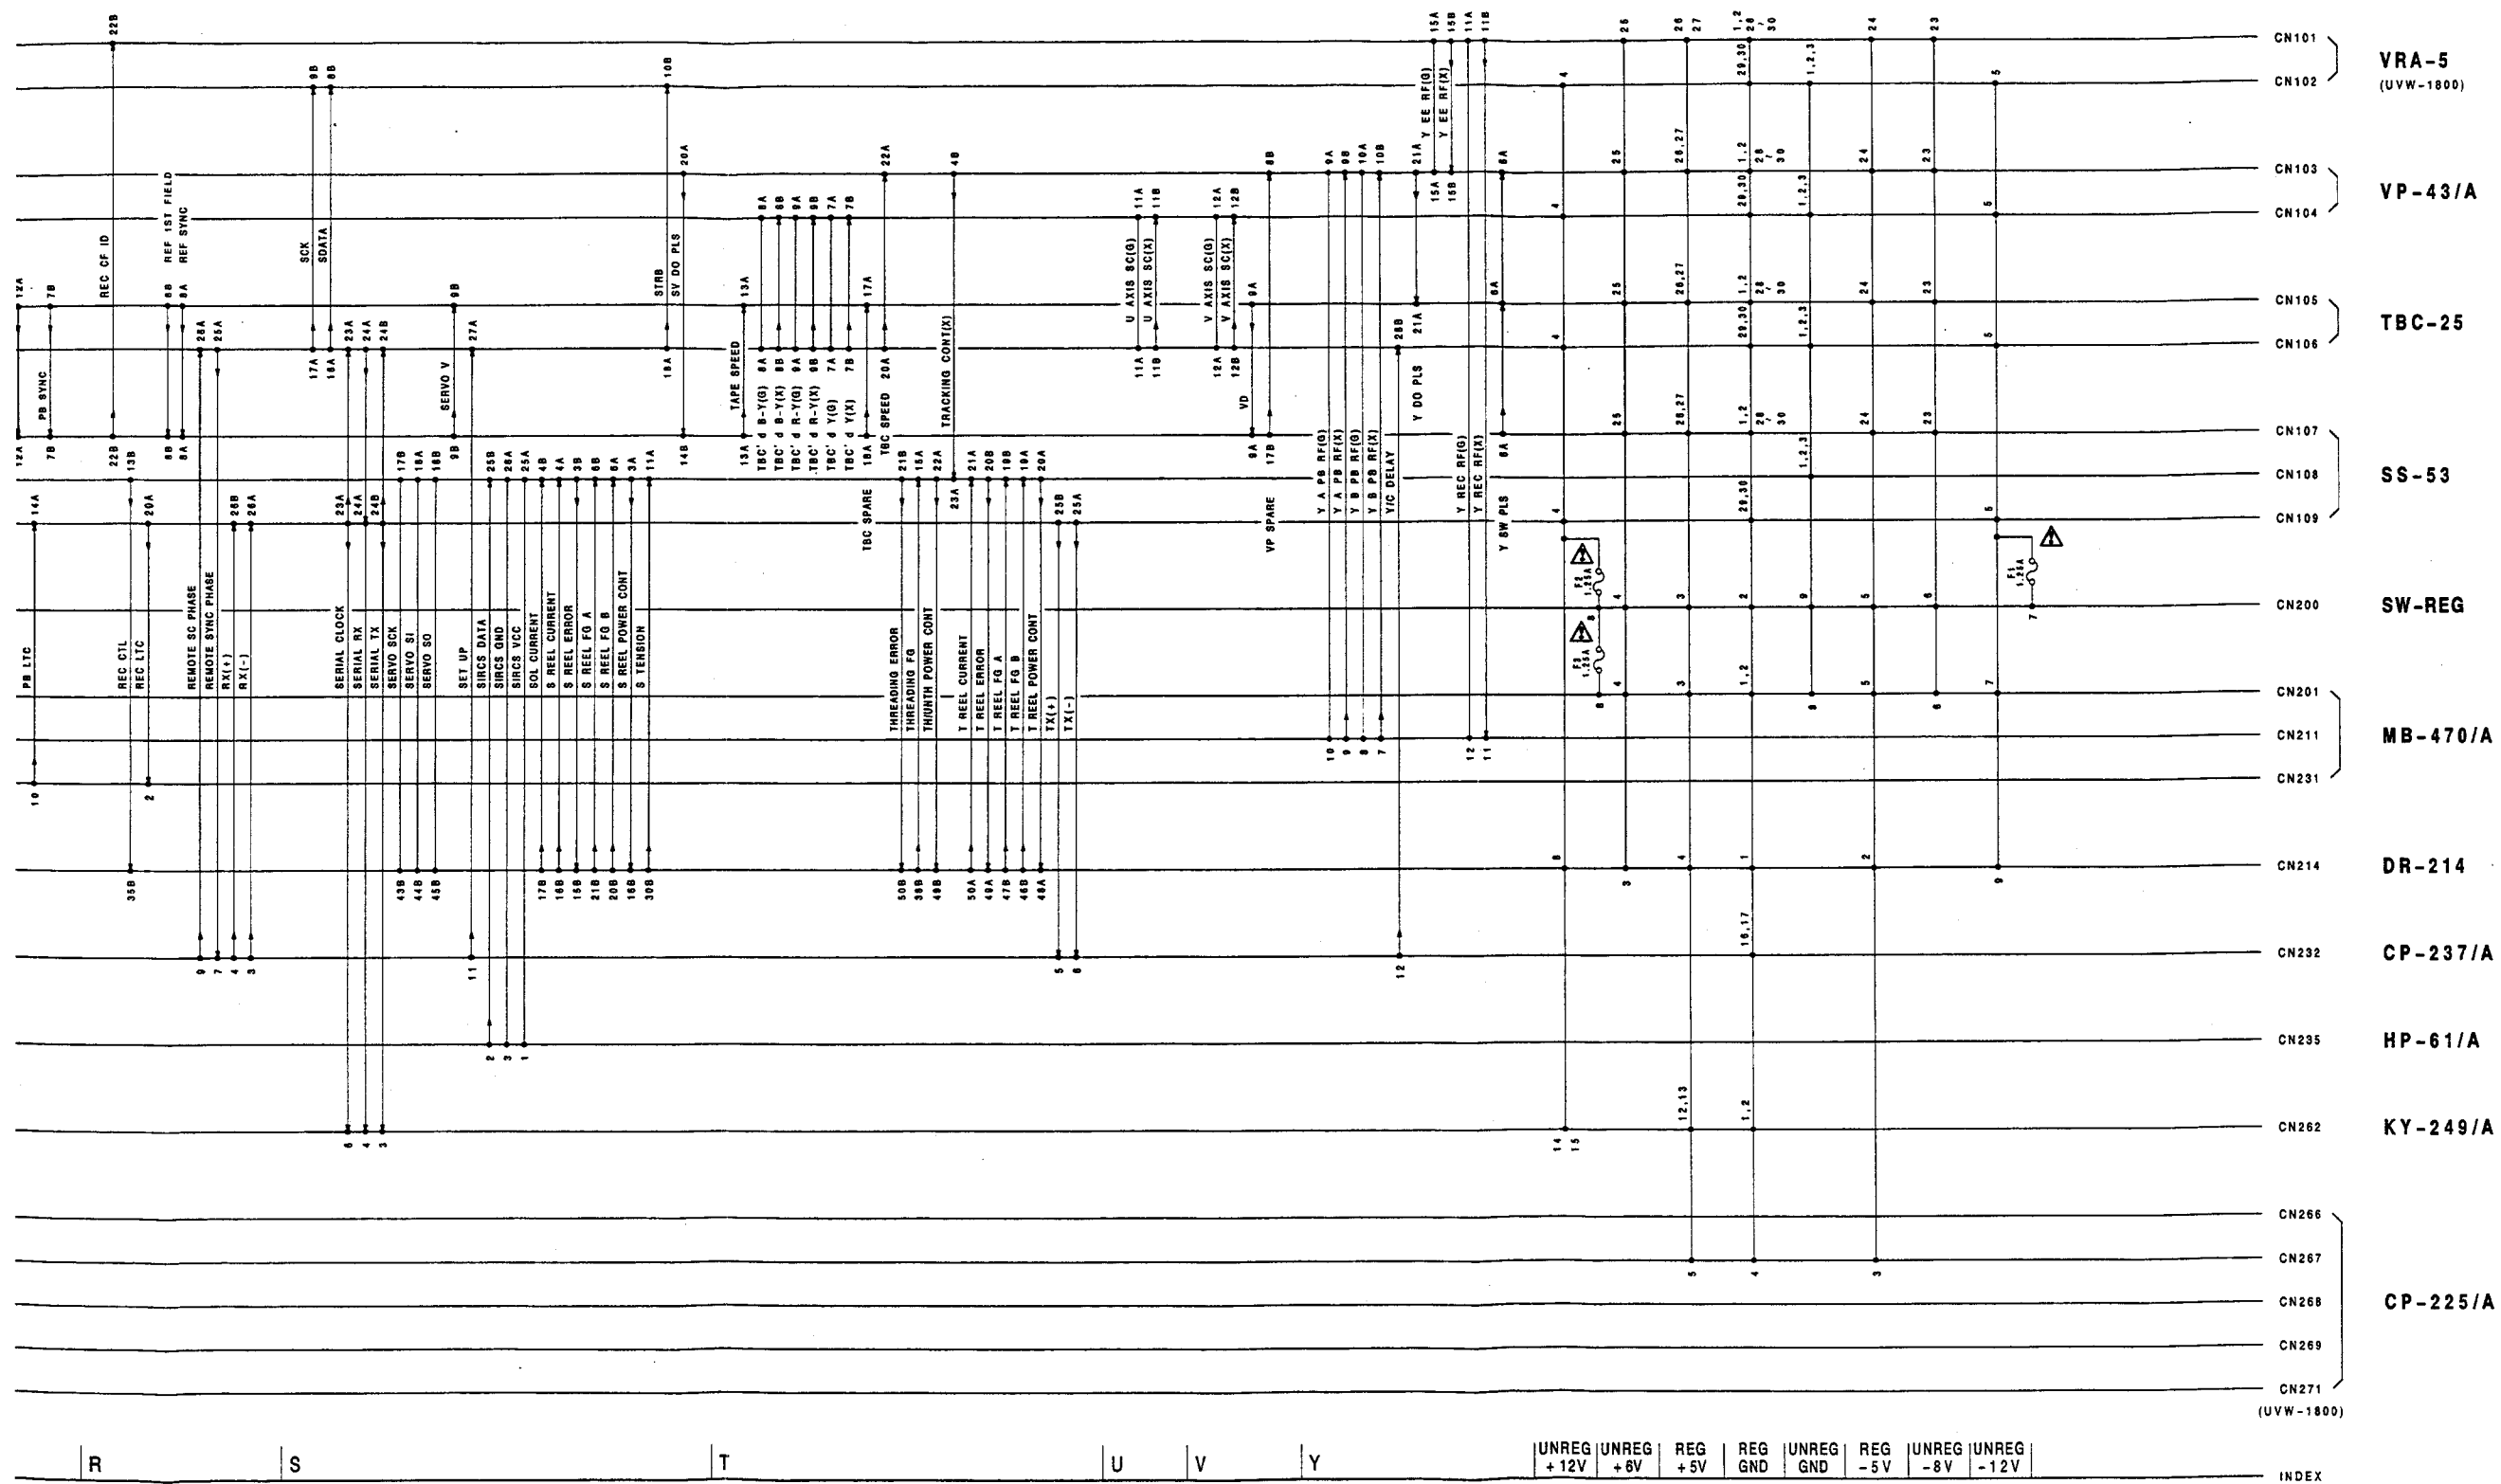

MB-470/470A BOARD (4 / 4)

BOARD NO.1-648-918-11,21
UVW-1800/1600(J) ;#10001-
UVW-1800/1600(UC);#10001-

MB-471/471A(1/2);MOTHER BOARD

RP-70/A									
CN10									
A					B				
111-1-2-3	REG GND	1	REG GND	251-1-2	111-1-2-3	REG GND	2	REG GND	251-1-2
111-1-2-3	REG GND	2	REG GND	251-1-2	111-1-2-3	REG GND	3	REG GND	251-1-2
111-1-2-3	REG GND	3	REG GND	251-1-2	111-1-2-3	REG GND	4	REG +5V	251-3
5V	111-4	REG +5V	4	REG +5V	251-3	REG +5V	5	UNREG +5V	251-4
5V	111-5	UNREG +5V	5	UNREG +5V	251-4	UNREG +5V	6	REG -5V	251-5
5V	111-6	REG -5V	6	REG -5V	251-5	REG -5V	7	UNREG -5V	251-6
5V	111-7	UNREG -5V	7	UNREG -5V	251-6	UNREG -5V	8	NC	251-7
100	251-2	L:Y B REC EN A/V	8	NC	251-7	NC	9	L:Y A REC EN A/V	251-8
	NC	9	NC	251-8	NC	10	GND(GUARD)	251-9	104
	NC	10	GND(GUARD)	251-9	NC	11	Y REC RF(X)	251-10	105
	NC	11	Y REC RF(X)	251-10	NC	12	Y REC RF(X)	251-11	106
	NC	12	Y REC RF(X)	251-11	NC	13	GND(GUARD)	251-12	107
	NC	13	GND(GUARD)	251-12	NC	14	Y A PB RF(X)	251-13	108
	NC	14	Y A PB RF(X)	251-13	NC	15	Y A PB RF(X)	251-14	109
	NC	15	Y A PB RF(X)	251-14	NC	16	GND(GUARD)	251-15	110
	NC	16	GND(GUARD)	251-15	NC	17	Y B PB RF(X)	251-16	111
	NC	17	Y B PB RF(X)	251-16	NC	18	Y B PB RF(X)	251-17	112
	NC	18	Y B PB RF(X)	251-17	NC	19	GND(GUARD)	251-18	113
	NC	19	GND(GUARD)	251-18	NC	20	L:REC CONT	251-19	114
101	251-5	L:IC B REC EN A/V	20	L:IC A REC EN A/V	251-19	L:IC A REC EN A/V	21	L:IC A REC EN A/V	251-20
	NC	21	L:IC A REC EN A/V	251-20	NC	22	GND(GUARD)	251-21	115
	NC	22	GND(GUARD)	251-21	NC	23	C REC RF(X)	251-22	116
	NC	23	C REC RF(X)	251-22	NC	24	C REC RF(X)	251-23	117
	NC	24	C REC RF(X)	251-23	NC	25	GND(GUARD)	251-24	118
	NC	25	GND(GUARD)	251-24	NC	26	C A PB RF(X)	251-25	119
	NC	26	C A PB RF(X)	251-25	NC	27	C A PB RF(X)	251-26	120
	NC	27	C A PB RF(X)	251-26	NC	28	GND(GUARD)	251-27	121
	NC	28	GND(GUARD)	251-27	NC	29	C B PB RF(X)	251-28	122
	NC	29	C B PB RF(X)	251-28	NC	30	C B PB RF(X)	251-29	123
	NC	30	C B PB RF(X)	251-29	NC	31	GND(GUARD)	251-30	124
	NC	31	GND(GUARD)	251-30	NC	32	L:REC CONT	251-31	125
102	251-7	L:REC B CONT	32	L:REC A CONT	251-31	L:REC A CONT	33	L:REC A CONT	251-32
	NC	33	L:REC A CONT	251-32	NC	34	CH-B RE(Y)	251-33	126
	NC	34	CH-B RE(Y)	251-33	NC	35	CH-B RE(X)	251-34	127
	NC	35	CH-B RE(X)	251-34	NC	36	CH-B RE(Y)	251-35	128
	NC	36	CH-B RE(Y)	251-35	NC	37	CH-A RE(X)	251-36	129
	NC	37	CH-A RE(X)	251-36	NC	38	CH-A RE(Y)	251-37	130
	NC	38	CH-A RE(Y)	251-37	NC	39	CH-A RE(X)	251-38	131
	NC	39	CH-A RE(X)	251-38	NC	40	NC	251-39	132
	NC	40	NC	251-39	NC	41	FULL ERASE(X)	251-40	133
	NC	41	FULL ERASE(X)	251-40	NC	42	FULL ERASE(Y)	251-41	134
	NC	42	FULL ERASE(Y)	251-41	NC	43	FULL ERASE(X)	251-42	135
103	251-8	H:FULL ERASE ON	43	FULL ERASE(X)	251-42	FULL ERASE(X)	44	UNREG -12V	251-43
	111-44-45	UNREG -12V	44	UNREG -12V	251-43	UNREG -12V	45	UNREG -12V	251-44
	111-44-45	UNREG -12V	45	UNREG -12V	251-44	UNREG -12V	46	UNREG +12V	251-45
	111-46-47	UNREG +12V	46	UNREG +12V	251-45	UNREG +12V	47	UNREG +12V	251-46
	111-46-47	UNREG +12V	47	UNREG +12V	251-46	UNREG +12V	48	UNREG GND	251-47
	111-48-49-50	UNREG GND	48	UNREG GND	251-47	UNREG GND	49	UNREG GND	251-48
	111-48-49-50	UNREG GND	49	UNREG GND	251-48	UNREG GND	50	UNREG GND	251-49
	111-48-49-50	UNREG GND	50	UNREG GND	251-49	UNREG GND			

AP-31/A									
CN11									
A					B				
112-1-2-3	REG GND	1	REG GND	110-1-2-3	112-1-2-3	REG GND	2	REG GND	110-1-2-3
112-1-2-3	REG GND	2	REG GND	110-1-2-3	112-1-2-3	REG GND	3	REG GND	110-1-2-3
112-1-2-3	REG GND	3	REG GND	110-1-2-3	112-1-2-3	REG GND	4	REG +5V	110-4
5V	112-4	REG +5V	4	REG +5V	110-4	REG +5V	5	UNREG +5V	110-5
5V	112-5	UNREG +5V	5	UNREG +5V	110-5	UNREG +5V	6	REG -5V	110-6
5V	112-6	REG -5V	6	REG -5V	110-6	REG -5V	7	UNREG -5V	110-7
5V	112-7	UNREG -5V	7	UNREG -5V	110-7	UNREG -5V	8	CH 1 LINE OUT(X)	274-3
100	274-4	CH 1 LINE OUT(X)	8	CH 1 LINE OUT(X)	274-3	CH 1 LINE OUT(X)	9	CH 1 HP OUT(X)	278-2
	NC	9	CH 1 HP OUT(X)	278-2	NC	10	CH 1 HP OUT(X)	278-3	148
	NC	10	CH 1 HP OUT(X)	278-3	NC	11	CH 1 HP VOL(X)	278-4	149
	NC	11	CH 1 HP VOL(X)	278-4	NC	12	CH 1 HP VOL(X)	278-5	150
	NC	12	CH 1 HP VOL(X)	278-5	NC	13	CH 1 METER OUT	277-1	151
	NC	13	CH 1 METER OUT	277-1	NC	14	CH 1 REC RET	278-5	152
	NC	14	CH 1 REC RET	278-5	NC	15	CH 1 ENC(X)	112-17A	153
	NC	15	CH 1 ENC(X)	112-17A	NC	16	CH 1 ENC(X)	112-17A	154
	NC	16	CH 1 ENC(X)	112-17A	NC	17	LTC EQ(X)	281-24	155
	NC	17	LTC EQ(X)	281-24	NC	18	LTC EQ(X)	281-24	156
	NC	18	LTC EQ(X)	281-24	NC	19	LTC REC I(X)	112-20B	157
	NC	19	LTC REC I(X)	112-20B	NC	20	LTC REC I(X)	112-20B	158
	NC	20	LTC REC I(X)	112-20B	NC	21	CH 1 INSERT CROSSTALK	112-10B	159
	NC	21	CH 1 INSERT CROSSTALK	112-10B	NC	22	CH 1 INSERT CROSSTALK	112-10B	160
	NC	22	CH 1 INSERT CROSSTALK	112-10B	NC	23	CH 1 INSERT CROSSTALK	112-10B	161
	NC	23	CH 1 INSERT CROSSTALK	112-10B	NC	24	CH 1 INSERT CROSSTALK	112-10B	162
	NC	24	CH 1 INSERT CROSSTALK	112-10B	NC	25	CH 1 INSERT CROSSTALK	112-10B	163
	NC	25	CH 1 INSERT CROSSTALK	112-10B	NC	26	CH 1 INSERT CROSSTALK	112-10B	164
	NC	26	CH 1 INSERT CROSSTALK	112-10B	NC	27	CH 1 INSERT CROSSTALK	112-10B	165
	NC	27	CH 1 INSERT CROSSTALK	112-10B	NC	28	CH 1 INSERT CROSSTALK	112-10B	166
	NC	28	CH 1 INSERT CROSSTALK	112-10B	NC	29	CH 1 INSERT CROSSTALK	112-10B	167
	NC	29	CH 1 INSERT CROSSTALK	112-10B	NC	30	CH 1 INSERT CROSSTALK	112-10B	168
	NC	30	CH 1 INSERT CROSSTALK	112-10B	NC	31	CH 1 INSERT CROSSTALK	112-10B	169
	NC	31	CH 1 INSERT CROSSTALK	112-10B	NC	32	CH 1 INSERT CROSSTALK	112-10B	170
	NC	32	CH 1 INSERT CROSSTALK	112-10B	NC	33	CH 1 INSERT CROSSTALK	112-10B	171
	NC	33	CH 1 INSERT CROSSTALK	112-10B	NC	34	CH 1 INSERT CROSSTALK	112-10B	172
	NC	34	CH 1 INSERT CROSSTALK	112-10B	NC	35	CH 1 INSERT CROSSTALK	112-10B	173
	NC	35	CH 1 INSERT CROSSTALK	112-10B	NC	36	CH 1 INSERT CROSSTALK	112-10B	174
	NC	36	CH 1 INSERT CROSSTALK	112-10B	NC	37	CH 1 INSERT CROSSTALK	112-10B	175
	NC	37	CH 1 INSERT CROSSTALK	112-10B	NC	38	CH 1 INSERT CROSSTALK	112-10B	176
	NC	38	CH 1 INSERT CROSSTALK	112-10B	NC	39	CH 1 INSERT CROSSTALK	112-10B	177
	NC	39	CH 1 INSERT CROSSTALK	112-10B	NC	40	CH 1 INSERT CROSSTALK	112-10B	178
	NC	40	CH 1 INSERT CROSSTALK	112-10B	NC	41	CH 1 INSERT CROSSTALK	112-10B	179
	NC	41	CH 1 INSERT CROSSTALK	112-10B	NC	42	CH 1 INSERT CROSSTALK	112-10B	180
	NC	42	CH 1 INSERT CROSSTALK	112-10B	NC	43	CH 1 INSERT CROSSTALK	112-10B	181
	NC	43	CH 1 INSERT CROSSTALK	112-10B	NC	44	CH 1 INSERT CROSSTALK	112-10B	182
	NC	44	CH 1 INSERT CROSSTALK	112-10B	NC	45	CH 1 INSERT CROSSTALK	112-10B	183
	NC	45	CH 1 INSERT CROSSTALK	112-10B	NC	46	CH 1 INSERT CROSSTALK	112-10B	184
	NC	46	CH 1 INSERT CROSSTALK	112-10B	NC	47	CH 1 INSERT CROSSTALK	112-10B	185
	NC	47	CH 1 INSERT CROSSTALK	112-10B	NC	48	CH 1 INSERT CROSSTALK	112-10B	186
	NC	48	CH 1 INSERT CROSSTALK	112-10B	NC	49	CH 1 INSERT CROSSTALK	112-10B	187
	NC	49	CH 1 INSERT CROSSTALK	112-10B	NC	50	CH 1 INSERT CROSSTALK	112-10B	188

AR-14									
CN12									
A					B				
1	REG GND	1	REG GND	111-1-2-3	1	REG GND	1	REG GND	111-1-2-3
2	REG GND	2	REG GND	111-1-2-3	2	REG GND	2	REG GND	111-1-2-3
3	REG GND	3	REG GND	111-1-2-3	3	REG GND	3	REG GND	111-1-2-3
4	REG +5V	4	REG +5V	111-4	4	REG +5V	4	REG +5V	111-4
5	UNREG +5V	5	UNREG +5V	111-5	5	UNREG +5V	5	UNREG +5V	111-5
6	REG -5V	6	REG -5V	111-6	6	REG -5V	6	REG -5V	111-6
7	UNREG -5V	7	UNREG -5V	111-7	7	UNREG -5V	7	UNREG -5V	111-7
8	REG GND	8	REG GND	NC	8	REG GND	8	REG GND	NC
9	REG GND	9	REG GND	NC	9	REG GND	9	REG GND	NC
10	REG GND	10	CH 1 INSERT CROSSTALK	111-21B	10	CH 1 INSERT CROSSTALK	10	CH 1 INSERT CROSSTALK	111-21B
11	REG GND	11	REG GND	NC	11	REG GND	11	REG GND	NC
12	REG GND	12	AU CH 1 INPUT(Y)	275-2	12	AU CH 1 INPUT(Y)	12	AU CH 1 INPUT(Y)	275-2
13	REG GND	13	REG GND	NC	13	REG GND	13	REG GND	NC
14	AU CH 1 INPUT(G)	14	AU CH 1 INPUT(X)	275-3	14	AU CH 1 INPUT(X)	14	AU CH 1 INPUT(X)	275-3
15	REG GND	15	REG GND	NC	15	REG GND	15	REG GND	NC
16	REG GND	16	CH 1 REC VOL(X)	276-4	16	CH 1 REC VOL(X)	16	CH 1 REC VOL(X)	276-4
17	REG GND	17	REG GND	NC	17	REG GND	17	REG GND	NC
18	CH 1 ENC(G)	18	CH 1 ENC(X)	111-16A	18	CH 1 ENC(X)	18	CH 1 ENC(X)	111-16A
19	REG GND	19	LTC REC I(G)	111-19A	19	LTC REC I(G)	19	LTC REC I(G)	111-19A
20	REG GND	20	LTC REC I(X)	111-19B	20	LTC REC I(X)	20	LTC REC I(X)	111-19B
21	REG GND	21	LTC REC I(G)	111-20B	21	LTC REC I(G)	21	LTC REC I(G)	111-20B
22	REG GND	22	REG GND	NC	22	REG GND	22	REG GND	NC
23	REC LTC	23	LTC ERASE ON	281-34	23	LTC ERASE ON	23	LTC ERASE ON	281-34
24	REG GND	24	L/AU CH 2 ERASE ON	281-32	24	L/AU CH 2 ERASE ON	24	L/AU CH 2 ERASE ON	281-32
25	L/AU CH 2 REC MUTE	25	L/AU CH 1 ERASE ON	281-31	25	L/AU CH 1 ERASE ON	25	L/AU CH 1 ERASE ON	281-31
26	REG GND	26	L/AU CH 1 REC MUTE	281-29	26	L/AU CH 1 REC MUTE	26	L/AU CH 1 REC MUTE	281-29
27	HOSC OFF	27	M/TC PB	111-27A,281-15	27	M/TC PB	27	M/TC PB	111-27A,281-15
28	REG GND	28	L/AU CH 1 BIAS ON	281-27	28	L/AU CH 1 BIAS ON	28	L/AU CH 1 BIAS ON	281-27
29	L/AU CH 2 BIAS ON	29	H-BIAS ON	111-28A	29	H-BIAS ON	29	H-BIAS ON	111-28A
30	REG GND	30	CH 2 INSERT CROSSTALK	111-21A	30	CH 2 INSERT CROSSTALK	30	CH 2 INSERT CROSSTALK	111-21A
31	REG GND	31	REG GND	NC	31	REG GND	31	REG GND	NC
32	REG GND	32	CH 2 ENC(X)	111-36A	32	CH 2 ENC(X)	32	CH 2 ENC(X)	111-36A
33	CH 2 ENC(G)	33	REG GND	NC	33	REG GND	33	REG GND	NC
34	REG GND	34	CH 2 REC VOL(X)	276-1	34	CH 2 REC VOL(X)	34	CH 2 REC VOL(X)	276-1
35	CH 2 REC VOL(G)	35	REG GND	NC	35	REG GND	35	REG GND	NC
36	REG GND	36	AU CH 2 INPUT(X)	276-6	36	AU CH 2 INPUT(X)	36	AU CH 2 INPUT(X)	276-6
37	AU CH 2 INPUT(G)	37	REG GND	NC	37	REG GND	37	REG GND	NC
38	REG GND	38	AU CH 2 INPUT(Y)	275-5	38	AU CH 2 INPUT(Y)	38	AU CH 2 INPUT(Y)	275-5
39	REG GND	39	REG GND	NC	39	REG GND	39	REG GND	NC
40	REG GND	40	REG GND	NC	40	REG GND	40	REG GND	NC
41	111-23A,111-32B	41	CH 1 REC HEAD(X)	111-31B	41	CH 1 REC HEAD(X)	41	CH 1 REC HEAD(X)	111-31B
42	REG GND	42	CH 2 REC HEAD(X)	111-34B	42	CH 2 REC HEAD(X)	42	CH 2 REC HEAD(X)	111-34B
43	CH 2 REC HEAD(X)	43	REG GND	NC	43	REG GND	43	REG GND	NC
44	UNREG -12V	44	UNREG -12V	111-44-45	44	UNREG -12V	44	UNREG -12V	111-44-45
45	UNREG -12V	45	UNREG -12V	111-44-45	45	UNREG -12V	45	UNREG -12V	111-44-45
46	UNREG +12V	46	UNREG +12V	111-46-47	46	UNREG +12V	46	UNREG +12V	111-46-47
47	UNREG +12V	47	UNREG +12V	111-46-47	47	UNREG +12V	47	UNREG +12V	111-46-47
48	UNREG GND	48	UNREG GND	111-48-49-50	48	UNREG GND	48	UNREG GND	111-48-49-50
49	UNREG GND	49	UNREG GND	111-48-49-50	49	UNREG GND	49	UNREG GND	111-48-49-50
50	UNREG GND	50	UNREG GND	111-48-49-50	50	UNREG GND	50	UNREG GND	111-48-49-50

AP-31/A

AP-31/A		CN111	
A		B	
112-1-2-3	REG GND	1	REG GND
112-1-2-3	REG GND	2	REG GND
112-1-2-3	REG GND	3	REG GND
112-4	REG +5V	4	REG +5V
112-5	UNREG +5V	5	UNREG +5V
112-6	REG -5V	6	REG -5V
112-7	UNREG -5V	7	UNREG -5V
NC	(REG GND)	8	CH 1 LINE OUT(G)
274-4	CH 1 LINE OUT(X)	9	CH 1 HP OUT(G)
NC	(REG GND)	10	CH 1 HP OUT(X)
274-5	CH 1 HP RET	11	CH 1 HP VOL(G)
NC	(REG GND)	12	CH 1 HP VOL(X)
112-15A,278-6	CH 1 REC VOL(G)	13	CH 1 METER OUT
NC	(REG GND)	14	CH 1 REC RET
112-18B	CH 1 ENC(X)	15	CH 1 ENC(G)
NC	(REG GND)	16	(REG GND)
281-25	PB LTC	17	LTC EQ(X)
NC	(REG GND)	18	(REG GND)
112-19B	LTC REC I(G)	19	LTC REC I(X)
NC	(REG GND)	20	LTC REC I(G)
112-30B	CH 2 INSERT CROSSTALK	21	CH 2 INSERT CROSSTALK
NC	(REG GND)	22	MCTL CUT
281-21	LIAU CH 1 HEAD REC	23	LIAU CH 1 PB MUTE
NC	(REG GND)	24	LIAU CH 2 PB MUTE
281-18	LIAU CH 2 HEAD REC	25	LIAU CH 1 PB
NC	(REG GND)	26	LIAU CH 2 PB
112-27B,281-15	H/LTC PB	27	LIAUDIO ATT ON
NC	(REG GND)	28	L/SLOW EQ ON
112-29B	H-BIAS ON	29	H/MR ON
NC	(REG GND)	30	L/MAINT MODE
NC	(REG GND)	31	CH 1 REC HEAD(X)
NC	(REG GND)	32	CH 1 REC HEAD(G)
112-41A,111-32B	CH 1 REC HEAD(G)	33	CH 2 REC HEAD(X)
274-2	MONI OUT(X)	34	CH 2 REC HEAD(G)
NC	(REG GND)	35	MONI OUT(G)
112-32B	CH 2 ENC(X)	36	(REG GND)
112-33A	CH 2 ENC(G)	37	CH 2 REC RET
NC	(REG GND)	38	CH 2 REC VOL(G)
277-2	CH 2 METER OUT	39	CH 2 HP VOL(X)
NC	(REG GND)	40	CH 2 HP VOL(G)
278-9	CH 2 HP RET	41	CH 2 HP OUT(X)
NC	(REG GND)	42	CH 2 HP OUT(G)
274-8	CH 2 LINE OUT(X)	43	CH 2 LINE OUT(G)
112-44-45	UNREG -12V	44	UNREG -12V
112-44-45	UNREG -12V	45	UNREG -12V
112-46-47	UNREG +12V	46	UNREG +12V
112-46-47	UNREG +12V	47	UNREG +12V
112-48-49-50,277-3	UNREG GND	48	UNREG GND
112-48-49-50,277-3	UNREG GND	49	UNREG GND
112-48-49-50,277-3	UNREG GND	50	UNREG GND

AR-14

AR-14		CN112	
A		B	
111-1-2-3	REG GND	1	REG GND
111-1-2-3	REG GND	2	REG GND
111-1-2-3	REG GND	3	REG GND
111-4	REG +5V	4	REG +5V
111-5	UNREG +5V	5	UNREG +5V
111-6	REG -5V	6	REG -5V
111-7	UNREG -5V	7	UNREG -5V
NC	(REG GND)	8	(REG GND)
NC	(REG GND)	9	(REG GND)
NC	(REG GND)	10	CH 1 INSERT CROSSTALK
NC	(REG GND)	11	(REG GND)
NC	(REG GND)	12	CH 1 INPUT(Y)
275-1	AU CH 1 INPUT(G)	13	(REG GND)
NC	(REG GND)	14	AU CH 1 INPUT(X)
111-13A,276-6	CH 1 REC VOL(G)	15	(REG GND)
NC	(REG GND)	16	CH 1 REC VOL(X)
111-15B	CH 1 ENC(G)	17	(REG GND)
NC	(REG GND)	18	CH 1 ENC(X)
NC	(REG GND)	19	LTC REC I(G)
NC	(REG GND)	20	LTC REC I(X)
NC	(REG GND)	21	LTC REC I(G)
NC	(REG GND)	22	(REG GND)
281-23	REC LTC	23	L/LTC ERASE ON
NC	(REG GND)	24	LIAU CH 2 ERASE ON
281-30	LIAU CH 2 REC MUTE	25	LIAU CH 1 ERASE ON
NC	(REG GND)	26	LIAU CH 1 REC MUTE
281-28	H/OSC OFF	27	H/LTC PB
NC	(REG GND)	28	LIAU CH 1 BIAS ON
281-28	LIAU CH 2 BIAS ON	29	H-BIAS ON
NC	(REG GND)	30	CH 2 INSERT CROSSTALK
NC	(REG GND)	31	(REG GND)
NC	(REG GND)	32	CH 2 ENC(X)
111-27A	CH 2 ENC(G)	33	(REG GND)
NC	(REG GND)	34	CH 2 REC VOL(X)
111-30B,276-3	CH 2 REC VOL(G)	35	(REG GND)
NC	(REG GND)	36	AU CH 2 INPUT(X)
275-4	AU CH 2 INPUT(G)	37	(REG GND)
NC	(REG GND)	38	AU CH 2 INPUT(Y)
NC	(REG GND)	39	(REG GND)
NC	(REG GND)	40	(REG GND)
111-33A,111-32B	CH 1 REC HEAD(G)	41	CH 1 REC HEAD(X)
NC	(REG GND)	42	CH 2 REC HEAD(X)
111-33B	CH 2 REC HEAD(X)	43	(REG GND)
112-44-45	UNREG -12V	44	UNREG -12V
112-44-45	UNREG -12V	45	UNREG -12V
112-46-47	UNREG +12V	46	UNREG +12V
112-46-47	UNREG +12V	47	UNREG +12V
112-48-49-50	UNREG GND	48	UNREG GND
112-48-49-50	UNREG GND	49	UNREG GND
112-48-49-50	UNREG GND	50	UNREG GND

CN112,CN264,CN265,CN275,CN276...UVW-1800 ONLY

CN264	1	NC	110-30B
DRUM 801-1	2	CH-A RE(X)	110-30B
DRUM 801-2	3	CH-A RE(Y)	110-30B
DRUM 801-3	4	CH-A RE(G)	110-30B
DRUM 801-4	5	CH-B RE(X)	110-30B
DRUM 801-5	6	CH-B RE(Y)	110-30B
DRUM 801-6	7	CH-B RE(G)	110-30B

CN265	1	FULL ERASE(Y)	110-30B
DRUM -1	2	FULL ERASE(G)	110-30B
DRUM -2	3	FULL ERASE(X)	110-30B

CN274	1	MONI OUT(G)	111-32B
CP-281A,274-1	2	MONI OUT(X)	111-32B
CP-281A,274-2	3	CH 1 LINE OUT(G)	111-32B
CP-281A,274-3	4	CH 1 LINE OUT(X)	111-32B
CP-281A,274-4	5	CH 2 LINE OUT(G)	111-32B
CP-281A,274-5	6	CH 2 LINE OUT(X)	111-32B
CP-281A,274-6	7	NC	111-32B

CN275	1	AU CH 1 INPUT(G)	112-12A
CP-282,275-1	2	AU CH 1 INPUT(Y)	112-12A
CP-282,275-2	3	AU CH 1 INPUT(X)	112-12A
CP-282,275-3	4	AU CH 2 INPUT(G)	112-12A
CP-282,275-4	5	AU CH 2 INPUT(Y)	112-12A
CP-282,275-5	6	AU CH 2 INPUT(X)	112-12A

CN276	1	CH 2 REC VOL(X)	112-34B
VR-155,402-1	2	CH 2 REC RET	112-34B
VR-155,402-2	3	CH 2 REC VOL(G)	112-34B
VR-155,402-3	4	CH 1 REC RET	112-34B
VR-155,402-4	5	CH 1 REC VOL(G)	112-34B
VR-155,402-5	6	CH 1 REC VOL(X)	112-34B

CN277	1	CH 1 METER OUT	111-10B
RY-247A,592-1	2	CH 2 METER OUT	111-10B
RY-247A,592-2	3	UNREG GND	111-30A
RY-247A,592-3	4	NC	111-30A


CN278	1	CH 1 HP OUT(X)	111-10B
RP-817A,401-1	2	CH 1 HP OUT(G)	111-10B
RP-817A,401-2	3	CH 2 HP OUT(X)	111-10B
RP-817A,401-3	4	CH 2 HP OUT(G)	111-10B
RP-817A,401-4	5	CH 1 HP RET	111-10B
RP-817A,401-5	6	CH 1 HP VOL(X)	111-10B
RP-817A,401-6	7	CH 1 HP VOL(G)	111-10B
RP-817A,401-7	8	CH 2 HP VOL(X)	111-10B
RP-817A,401-8	9	CH 2 HP VOL(G)	111-10B
RP-817A,401-9	10	CH 2 HP VOL(X)	111-10B


CN281	1	L/V A REC EN A/V	110-30
MB-470A,231-1	2	L/V B REC EN A/V	110-30
MB-470A,231-3	3	L/REC CONT	110-30
MB-470A,231-4	4	L/C A REC EN A/V	110-30
MB-470A,231-5	5	L/C B REC EN A/V	110-30
MB-470A,231-6	6	L/RE A CONT	110-30
MB-470A,231-7	7	L/RE B CONT	110-30
MB-470A,231-8	8	H/FULL ERASE ON	110-30
MB-470A,231-9	9	DEW DET(X)	283-2
MB-470A,231-10	10	DEW DET(X)	283-2
MB-470A,231-11	11	L/MAINT MODE	111-30B
MB-470A,231-12	12	H/MR ON	111-30B
MB-470A,231-13	13	L/SLOW EQ ON	111-30B
MB-470A,231-14	14	L/AUDIO ATT ON	111-30B
MB-470A,231-15	15	M/LTC PB	111-30B
MB-470A,231-16	16	L/AU CH 2 PB	111-30B
MB-470A,231-17	17	L/AU CH 1 PB	111-30B
MB-470A,231-18	18	L/AU CH 2 HEAD REC	111-30A
MB-470A,231-19	19	L/AU CH 2 PB MUTE	111-30A
MB-470A,231-20	20	L/AU CH 2 PB MUTE	111-30A
MB-470A,231-21	21	L/AU CH 1 HEAD REC	111-30A
MB-470A,231-22	22	MCTL CUT	111-30A
MB-470A,231-23	23	LTC EQ(G)	(QUARD)
MB-470A,231-24	24	LTC EQ(X)	(QUARD)
MB-470A,231-25	25	PB LTC	111-17B
MB-470A,231-26	26	L/AU CH 2 BIAS ON	111-17A
MB-470A,231-27	27	L/AU CH 1 BIAS ON	112-29A
MB-470A,231-28	28	H/OSC OFF	112-27A
MB-470A,231-29	29	L/AU CH 1 REC MUTE	112-26B
MB-470A,231-30	30	L/AU CH 2 REC MUTE	112-26B
MB-470A,231-31	31	L/AU CH 1 ERASE ON	112-26B
MB-470A,231-32	32	L/AU CH 2 ERASE ON	112-26B
MB-470A,231-33	33	REC LTC	112-22A
MB-470A,231-34	34	L/LTC ERASE ON	112-22B

MB-471/471A BOARD (1/2)

BOARD NO.1-648-919-11.21
UVW-1800/1600(J) :#10001-
UVW-1800/1600(UC):#10001-

MB-471/471A(2/2);MOTHER BOARD

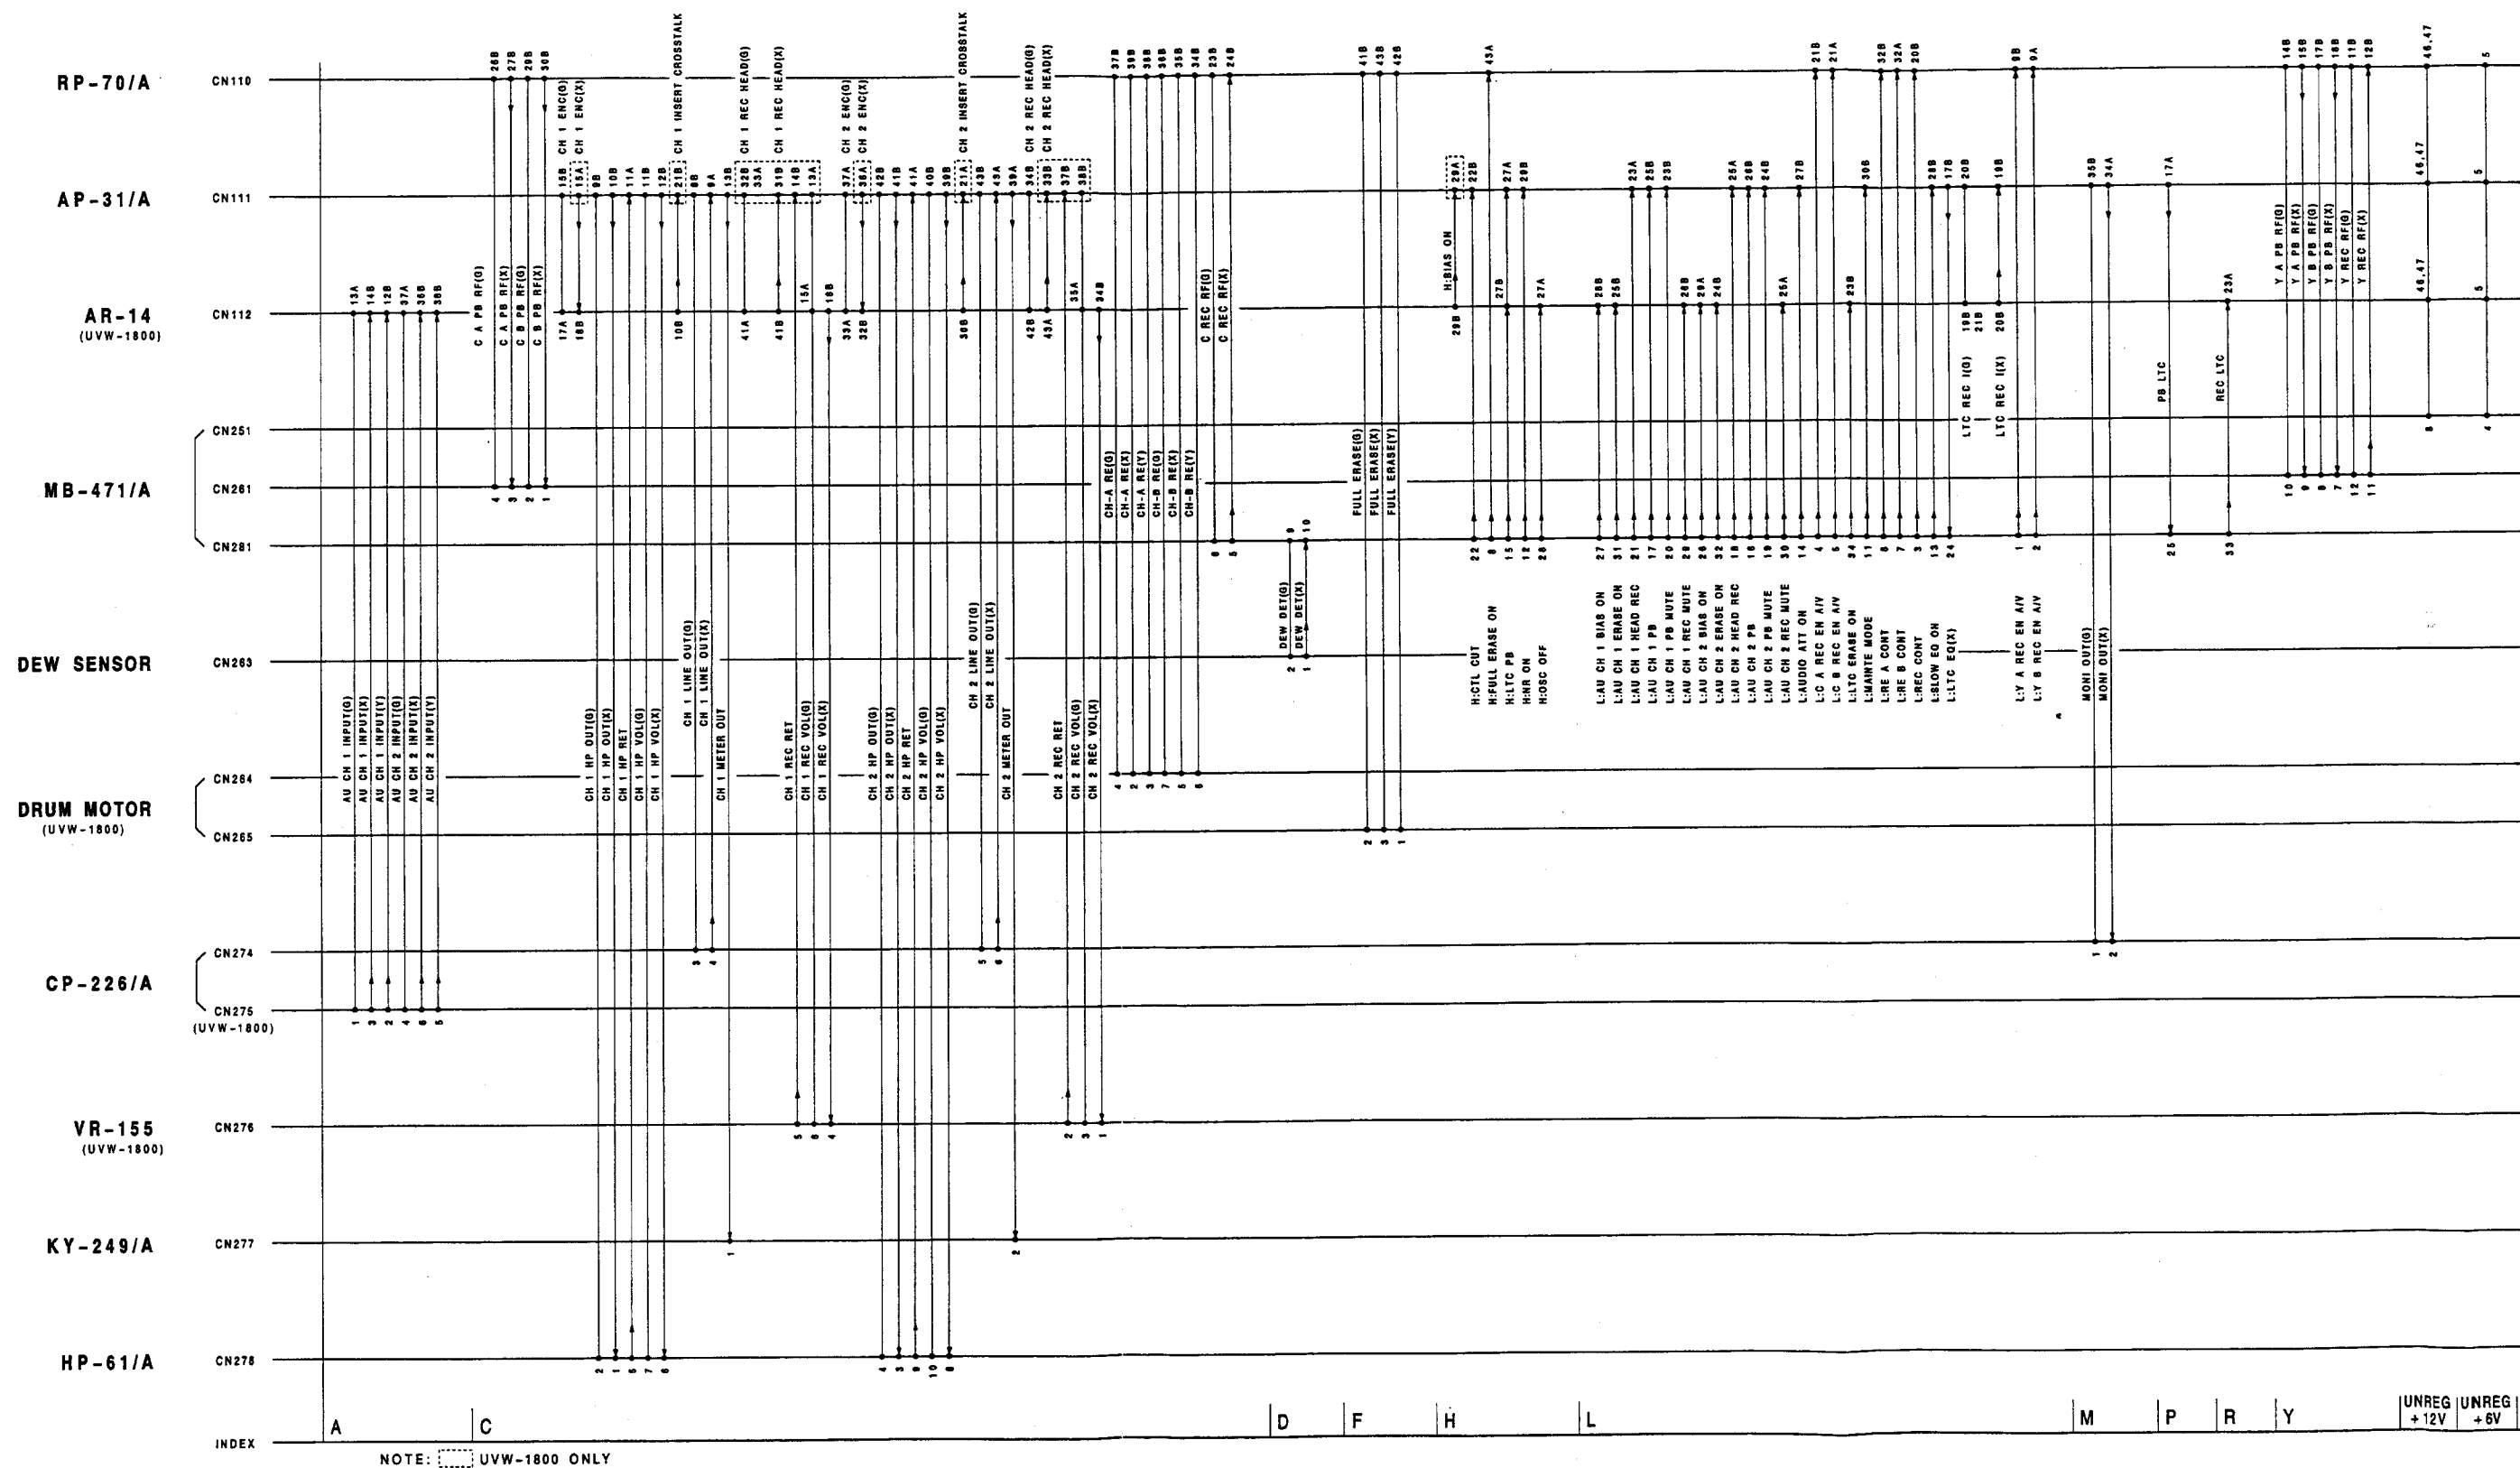

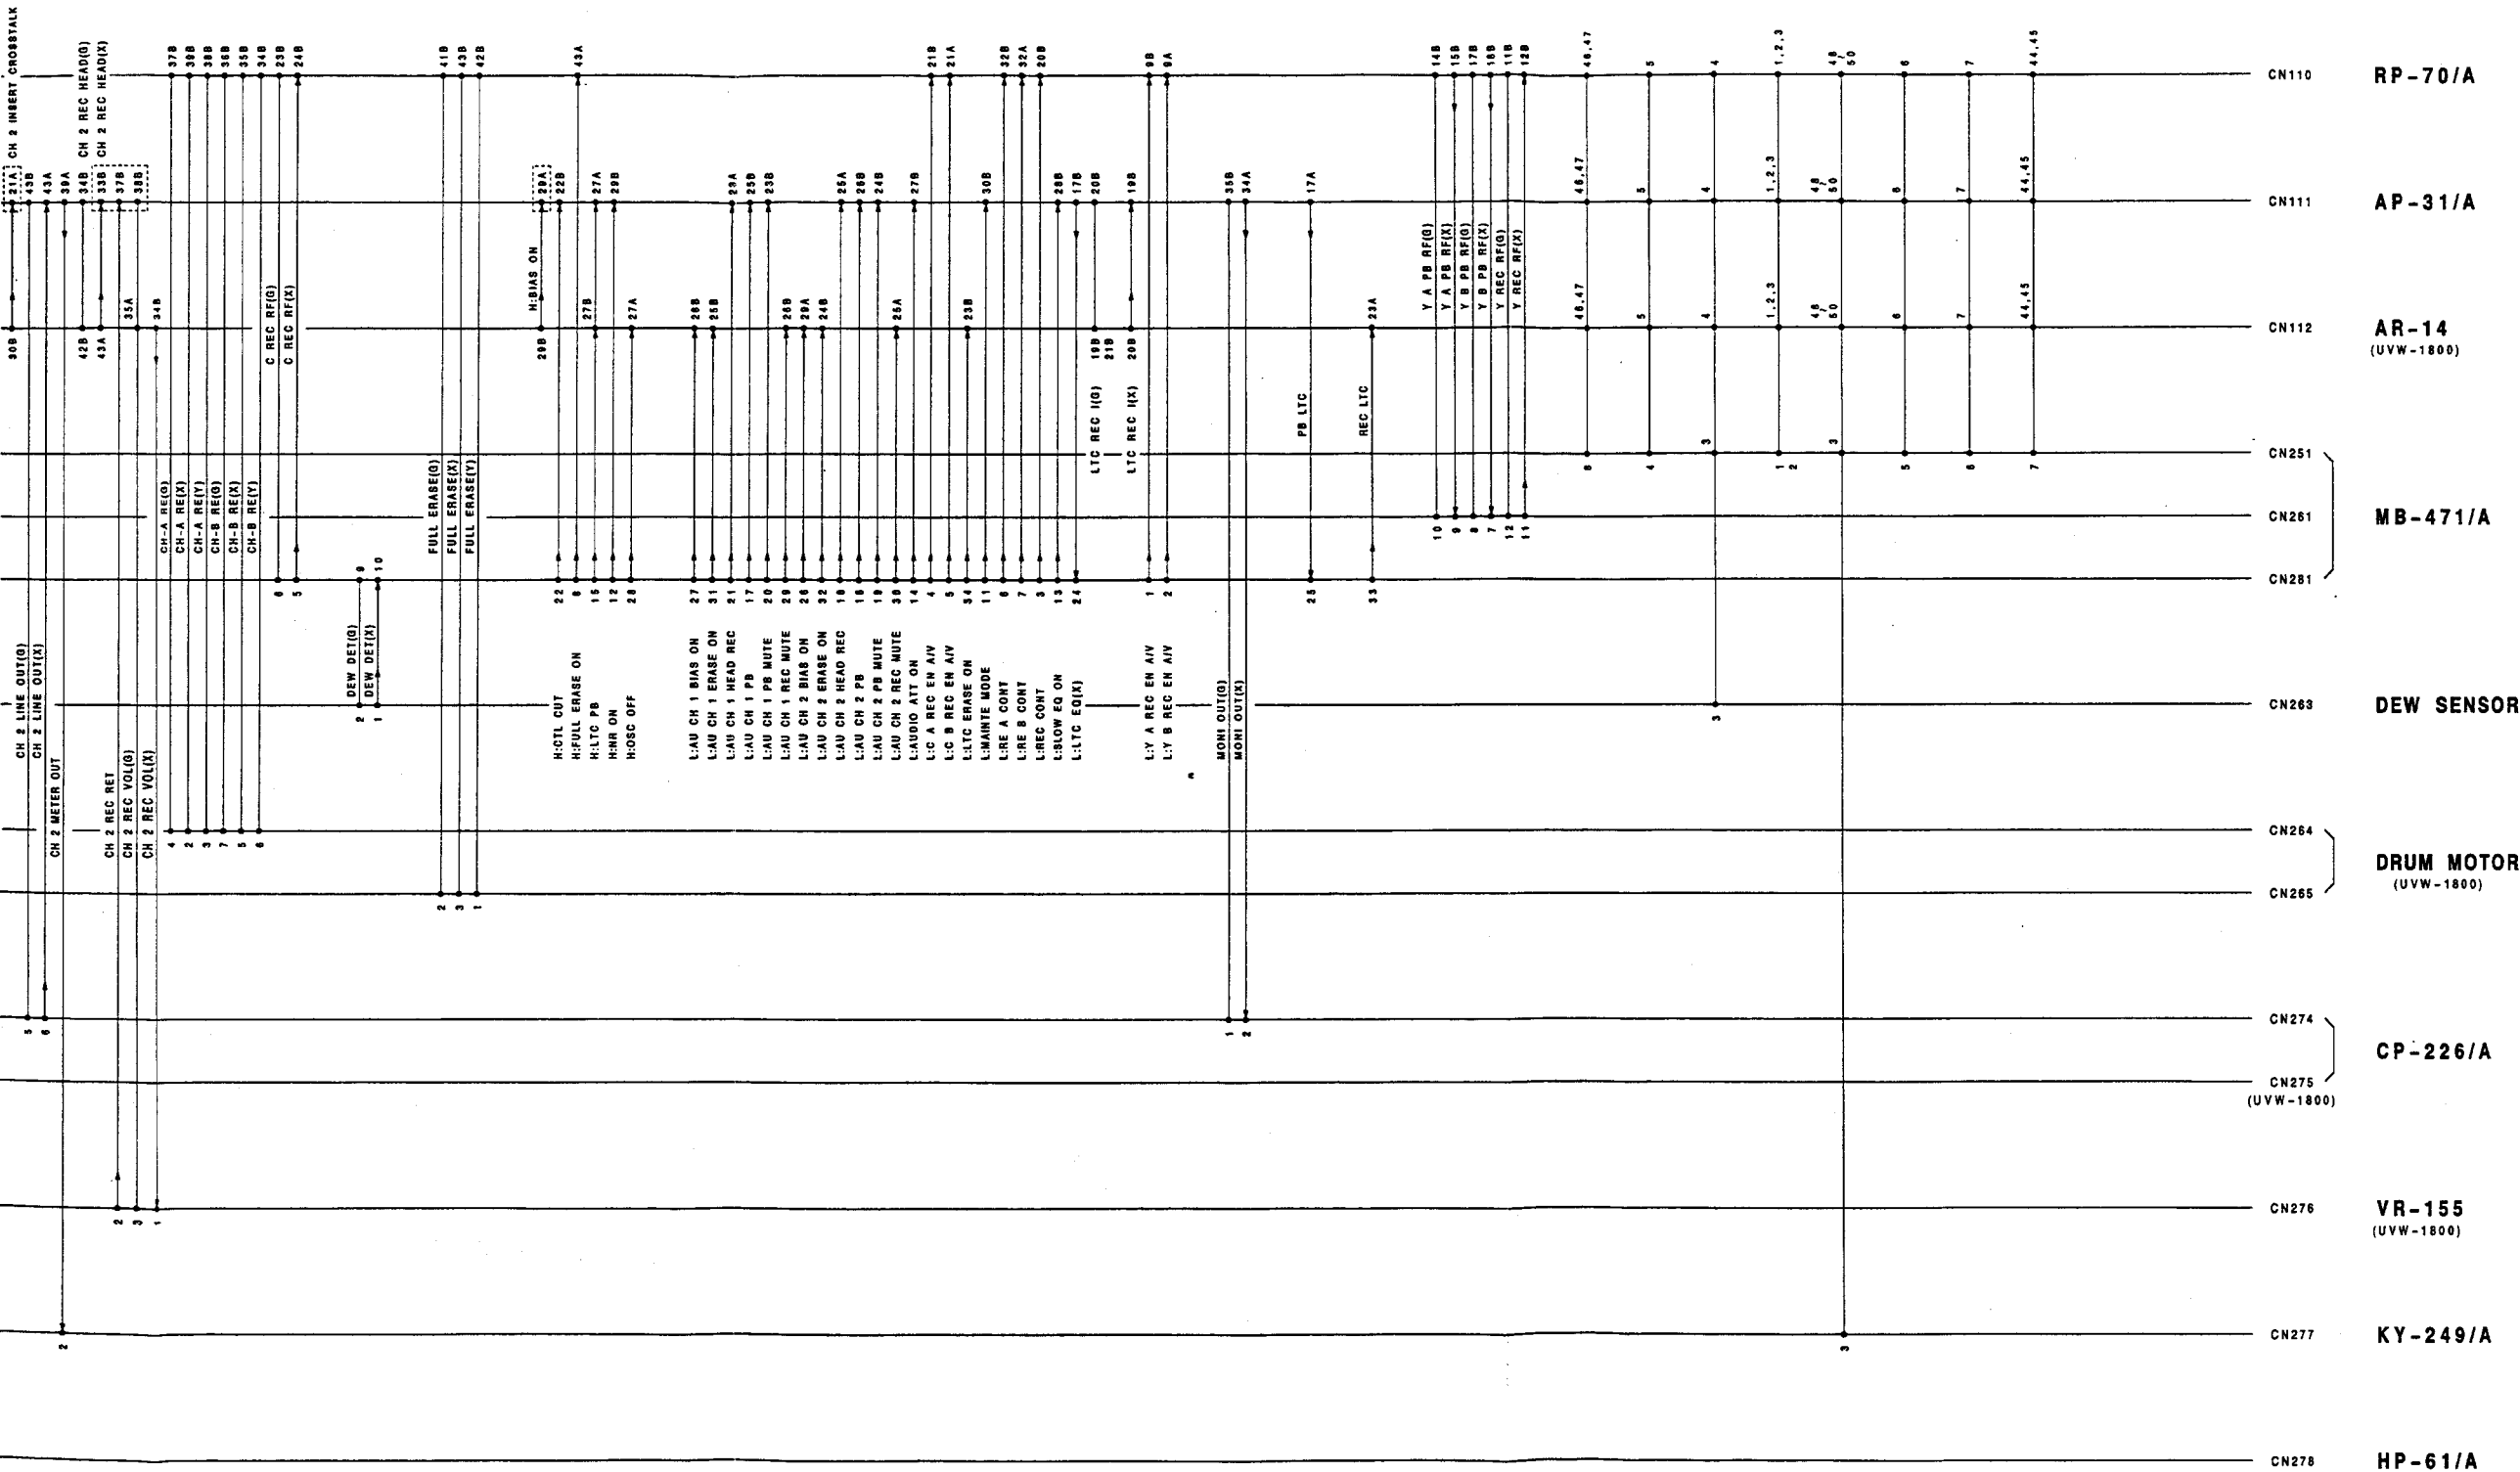




D	F	H	L	M	P	R	Y	UNREG +12V	UNREG +6V	REG +5V	REG GND	UNREG GND	REG -5V	UNREG -8V	UNREG -12V
INDEX															

MB-471/471A BOARD (2/2)

BOARD NO.1-648-919-11,21
UVW-1800/1600(J);#10001-
UVW-1800/1600(UC);#10001-


FRAME(1/2)


FRAME(1/2) FRAME(1/2)

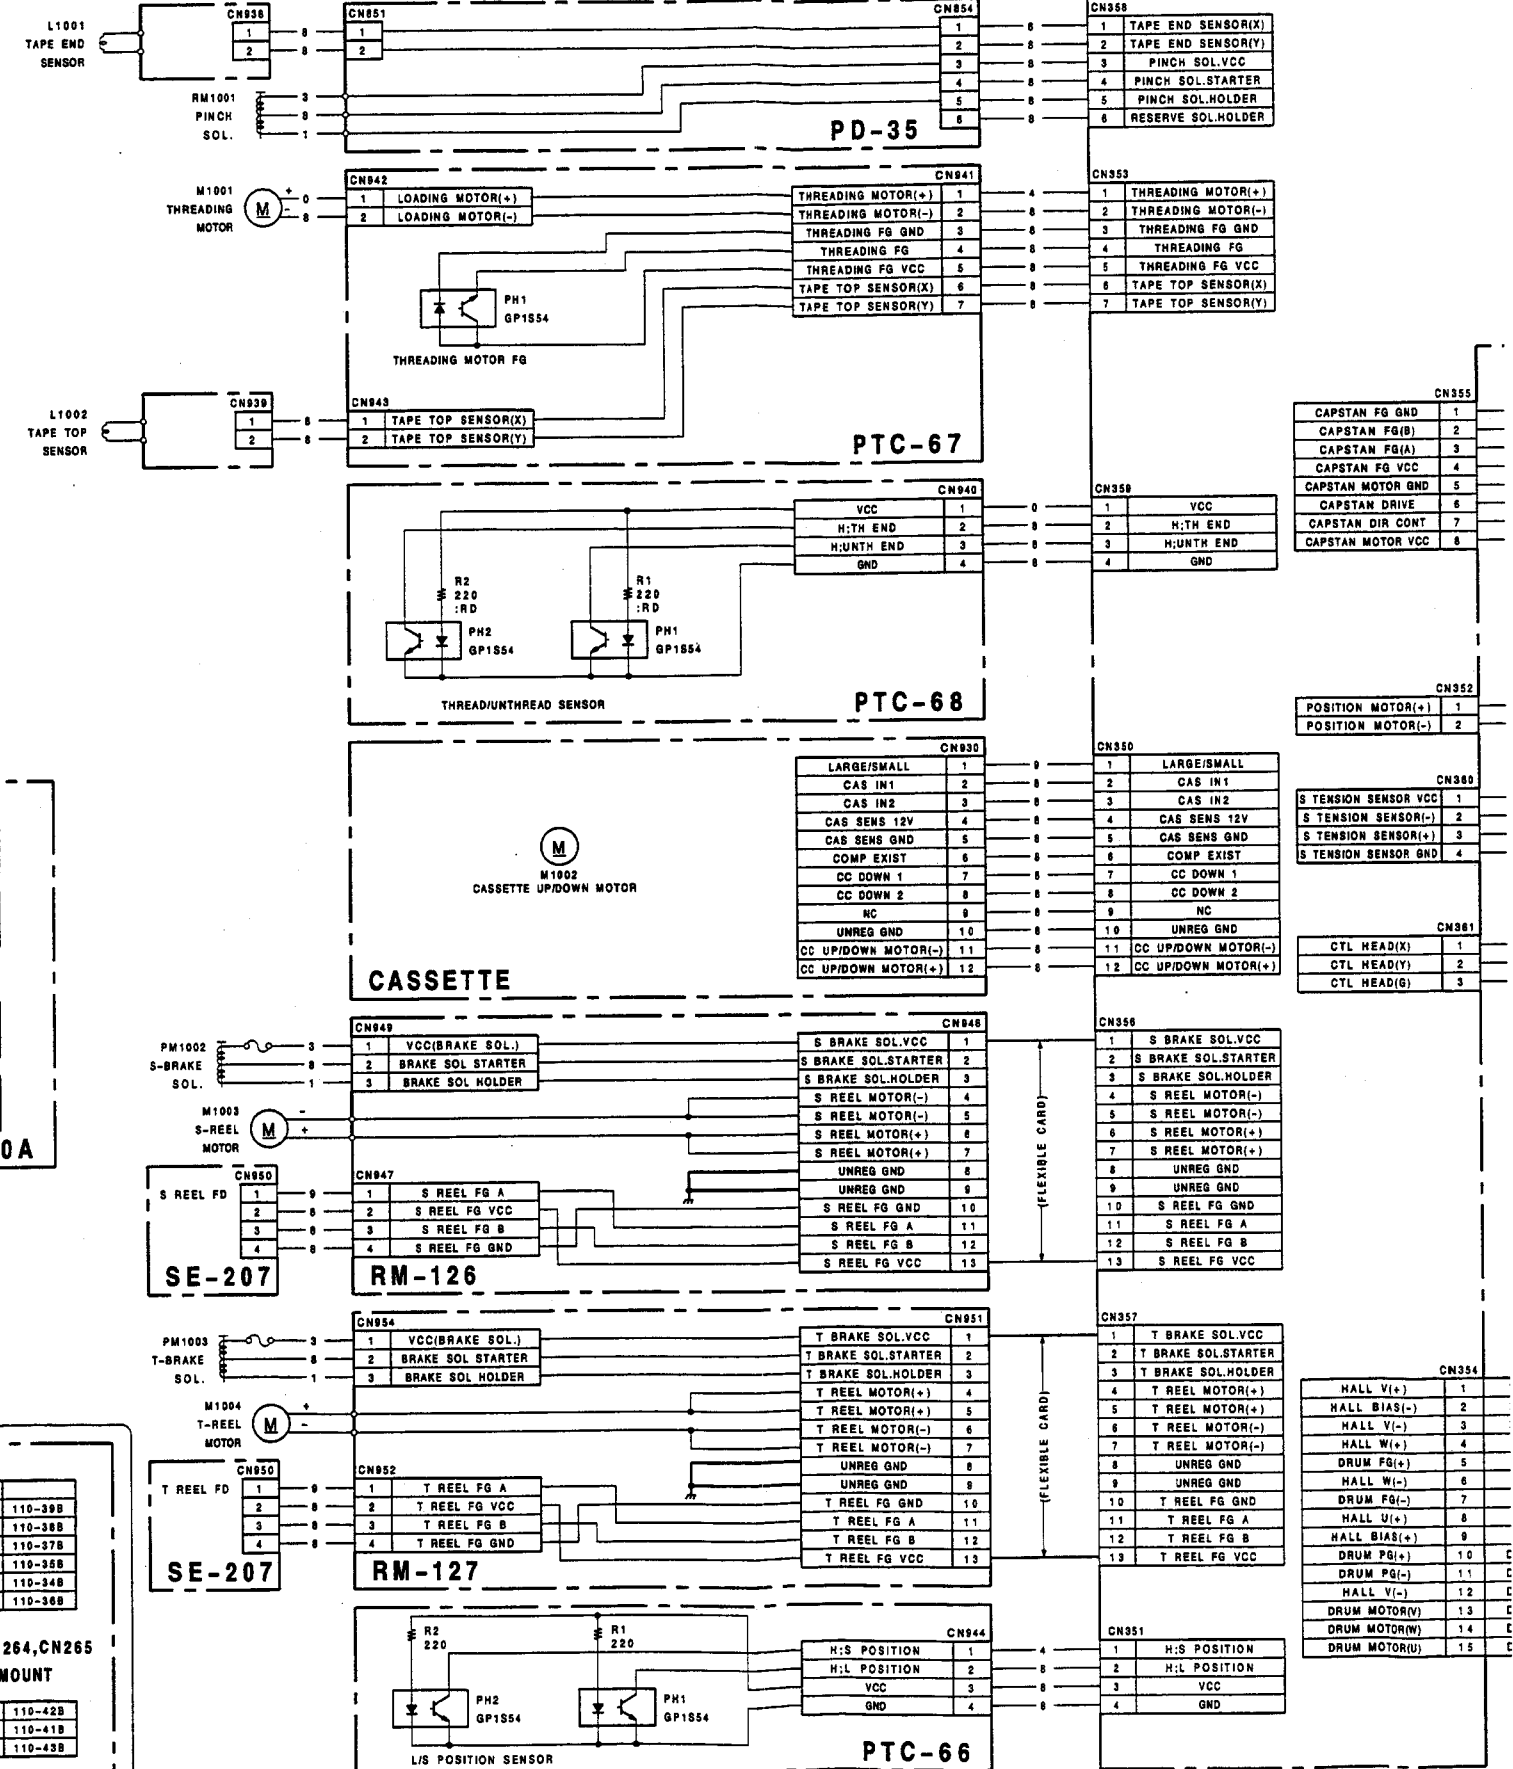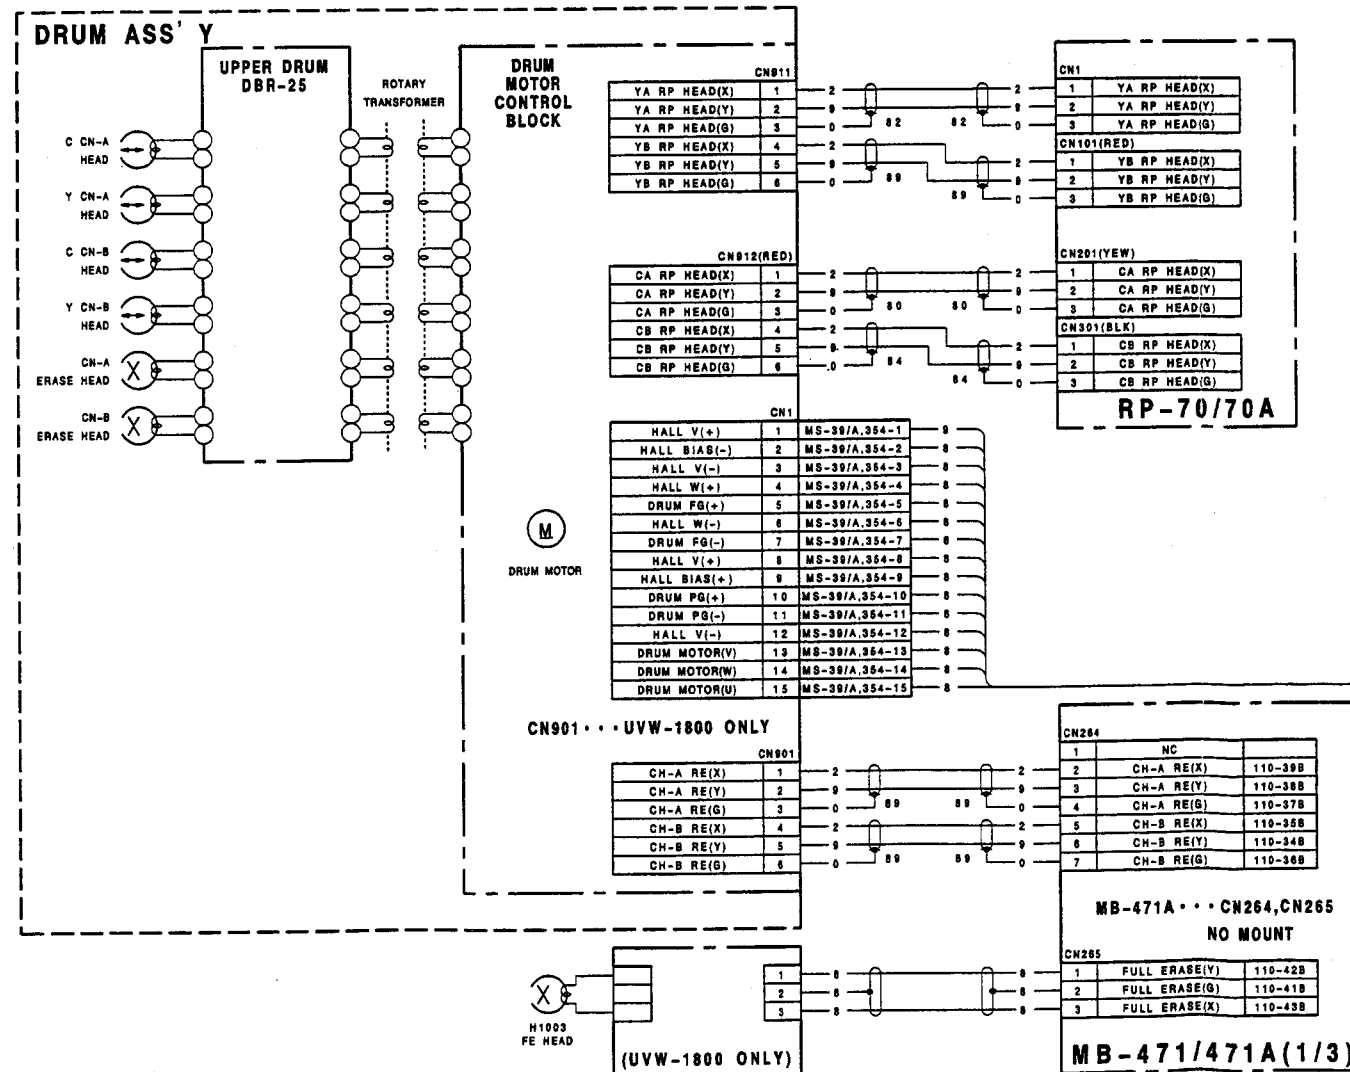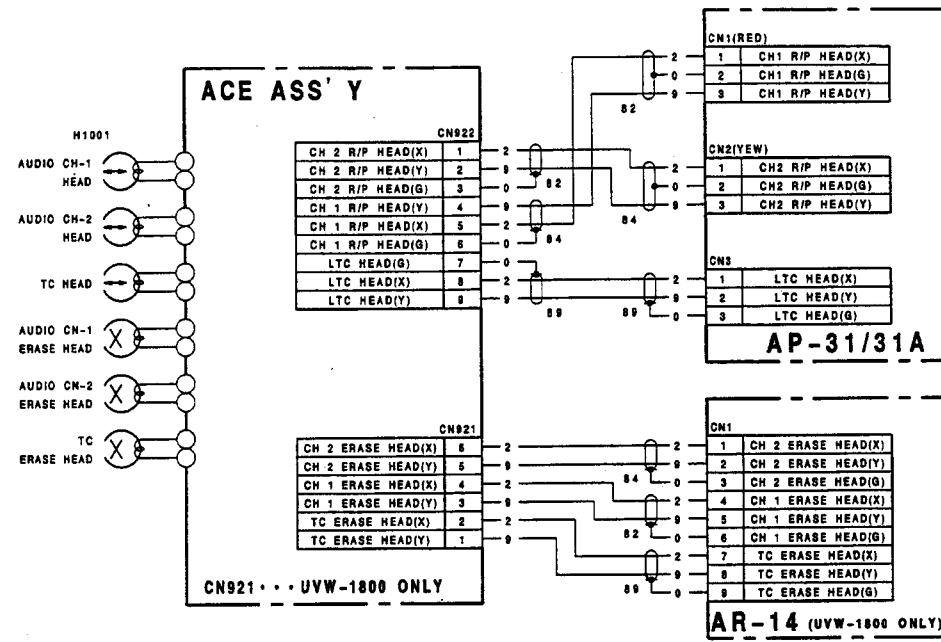



FRAME(2/2)

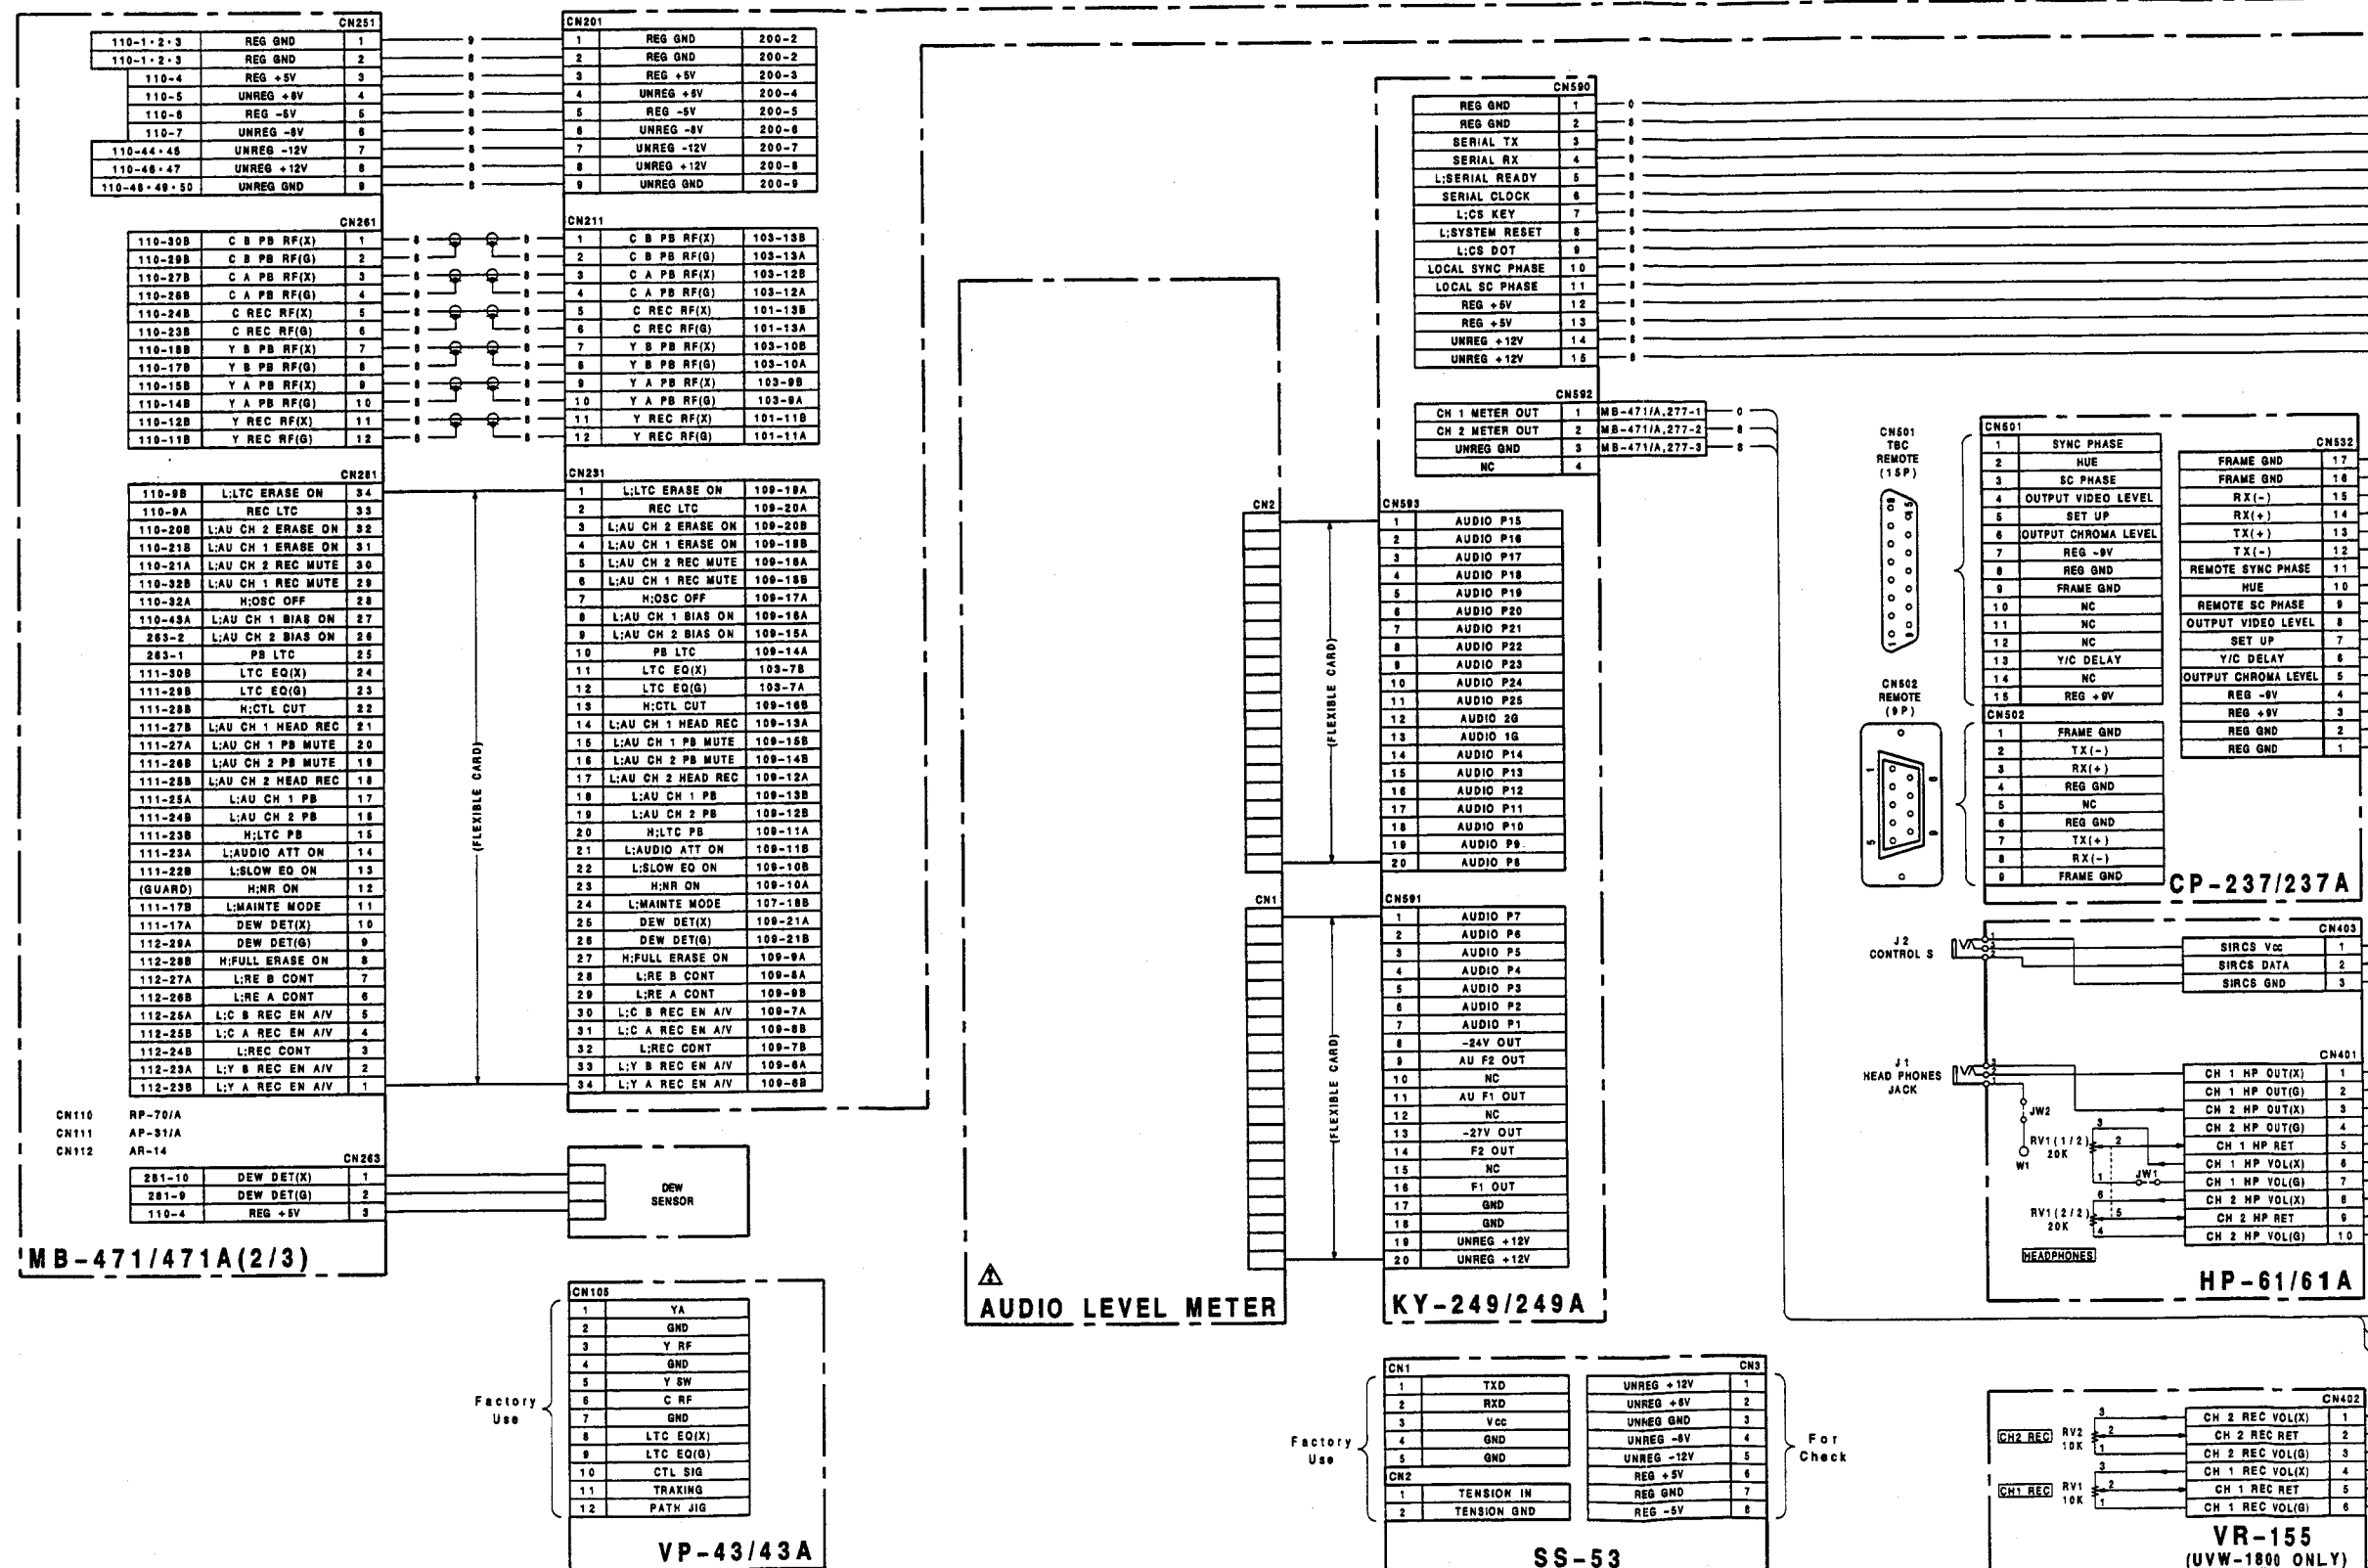

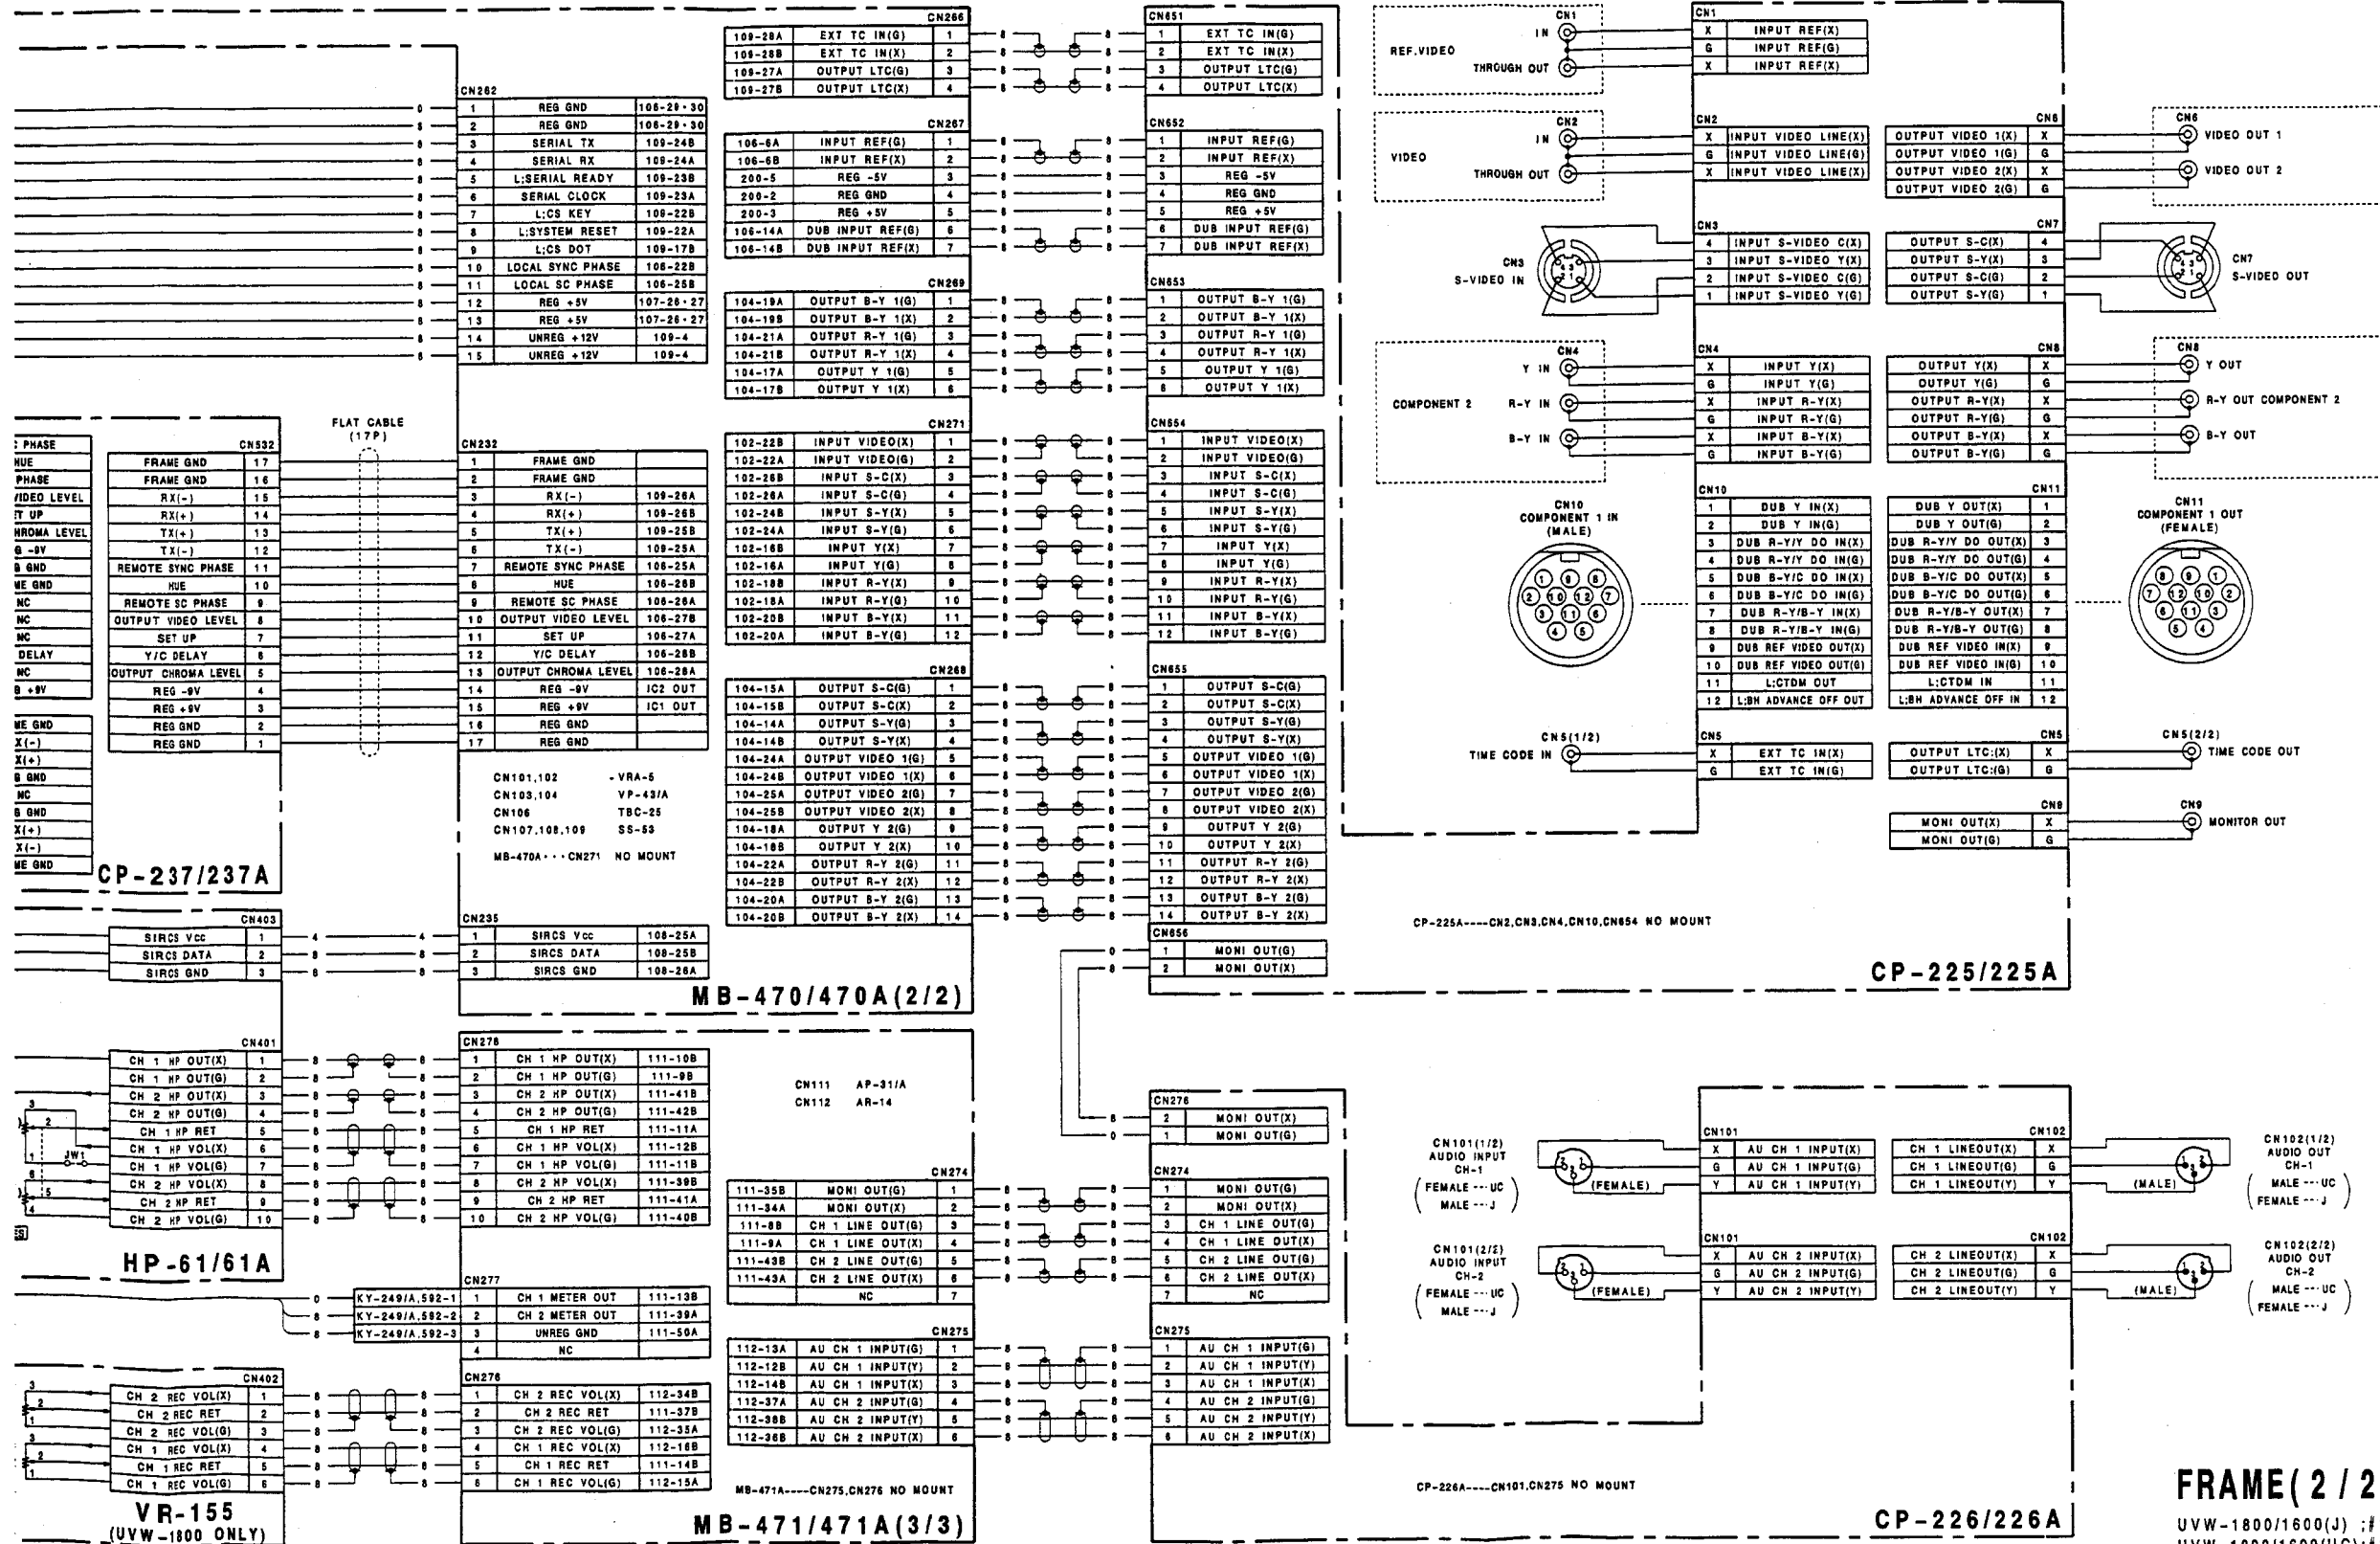

FRAME(2/2)

UVW-1800/1600(J);#10001-
UVW-1800/1600(UC);#10001-

SECTION 17

SEMICONDUCTOR PIN ASSIGNMENTS

この章の図の中には互換性のないダイオード、トランジスタ、ICが併記されていることがあります。部品を交換するときには必ず部品表を参照してください。

等価回路はICメーカーのData Bookに従いました。












The chart in this section may sometimes show diodes, transistors, and ICs that are not interchangeable. When replacing a component, be sure to refer to the parts list. The circuit diagram of each IC is obtained from the IC data book published by the manufacturer.

DIODE	PAGE	TRANSISTOR	PAGE	IC	PAGE	IC	PAGE
10E-2	17-3	2SC2458	17-4	74F00SJ	17-6	M51958A	17-22
11E2	17-3	2SC2655	17-4			M54523P	17-22
		2SC2715	17-4	AM27C020-150DC	17-6	M54532P	17-22
1SS119	17-3	2SC2715Y	17-4	AN77L05	17-6		
1SS119TD	17-3	2SC2785	17-4			MB4002PF	17-22
1SS303	17-3	2SC3012	17-4	BX3914	17-6	MB40568	17-23
1SS304	17-3	2SC3332	17-4			MB88201	17-22
1SV160	17-3	2SC3399	17-4	CX20188	17-7	MB88342PF	17-23
1T33C	17-3	2SC3735	17-4	CX22017	17-6		
		2SC4176-B35	17-4			MC14051BF	17-23
DA204U	17-3	2SC4177-L6	17-4	CXA1370Q	17-8	MC14052BF	17-23
DA210S	17-3	2SC4178-F13	17-4	CXA1450M	17-7	MC14053BCP	17-23
		2SC4213A	17-4	CXA1451M	17-7	MC14053BF	17-23
KV1470	17-3			CXA1479Q	17-8	MC14066BF	17-24
		2SD1020	17-4	CXA1521M	17-7	MC14069UBF	17-24
RB441Q	17-3	2SD1021	17-4			MC14576BF	17-24
RD??M	17-3	2SD2136	17-4	CXD1095Q	17-9	MC34051M	17-24
RD??M-B?	17-3	2SD596-DV5	17-4	CXD1151Q	17-10	MC68HC05C8	17-24
		2SD773	17-4	CXD1171M	17-9	MC74HC173F	17-25
SB007-03CP	17-3	2SD788	17-4	CXD1175AM	17-11	MC74HC4002F	17-25
SB01-05CP	17-3			CXD1216M	17-11	MC74HC4024N	17-25
		2SJ106	17-4	CXD2202Q	17-12	MC74HC4538AN	17-26
UZM??B	17-3	2SJ226	17-5	CXD2207Q	17-13		
				CXD8161AQ	17-16	MS6264CLL-10FC ...	17-25
LED		2SK209	17-5	CXD8165Q	17-15		
		2SK852-X2	17-5	CXD8176AQ	17-14	NJM2068DD	17-26
GL480	17-3	2SK94-X4	17-5	CXD8243AM	17-14	NJM2903D	17-19
				CXD8310M	17-10	NJM360M	17-26
MISCELLANEOUS		DTA123JU	17-5	CXD8313Q	17-18	NJM4556M-A	17-26
		DTA144EU	17-5			NJM4558D-D	17-26
DM-230	17-3			CXK48324Q	17-16	NJM4558D-FA	17-26
GP1A30R	17-3	DTC144ES	17-4	HD6435348RA00F	17-20	NJM4558M	17-26
		DTC144EU	17-5			NJM78L09A	17-26
TRANSISTOR				L78M09T-FA	17-19	NJM78M09FA	17-26
		FMS2	17-5			NJM79L05A	17-26
2SA1020	17-3	FMW2	17-5	L79M05T-FA	17-19	NJM79L09A	17-26
2SA1115	17-3	FMW7	17-5	L79M09T-FA	17-19	NJM79M09FA	17-27
2SA1141	17-3	FMW8	17-5				
2SA1150	17-3	FMY3	17-5	LA7205	17-19	PQ05SZ51	17-19
2SA1175	17-3					PQ30RV1	17-27
2SA1232	17-3	IMX1	17-5	LB1620	17-20		
2SA1319	17-3					SC14S66FEL	17-27
2SA1610	17-3	PT480	17-5	LM1881M	17-19	SC7S04F	17-27
2SA1611	17-3			LM2903P	17-19	SC7S32F	17-27
				LM2903PS	17-19		
2SB1094	17-4			LM311PS	17-19	SN74HC00AN	17-27
2SB1416	17-4			LM358P	17-19	SN74HC00ANS	17-27
2SB733	17-4					SN74HC04ANS	17-27
2SB733-34	17-4					SN74HC08AN	17-27
2SB810	17-4			M51957BFP	17-22	SN74HC08ANS	17-27
2SB941	17-4			M51957BL	17-22	SN74HC10ANS	17-28


SEMICONDUCTOR INDEX

IC	PAGE
SN74HC11ANS	17-28
SN74HC138ANS	17-28
SN74HC157ANS	17-28
SN74HC161AN	17-28
SN74HC164ANS	17-28
SN74HC192NS	17-29
SN74HC266ANS	17-29
SN74HC27ANS	17-29
SN74HC32ANS	17-29
SN74HC541ANS	17-29
SN74HC7266NS	17-29
SN74HC74AN	17-29
SN74HC74ANS	17-29
SN74HC86ANS	17-30
SN74HCU04AN	17-27
SN74HCU04ANS	17-27
SN74LS221NS	17-30
 SRM2016M10	 17-30
 TA7267P	 17-30
TA78L09S	17-26
 TC5081AP	 17-31
TC74HC123AF	17-31
TC74HC191AF	17-31
TC74HC221AF	17-30
TC7S04F	17-27
TC7S08F	17-31
TC7S32F	17-27
 TL062CPS	 17-31
TL082CPS	17-31
TL084CNS	17-31
TL431CLP	17-32
 UPC324G2	 17-32
UPC358C	17-19
UPC358G2	17-19
UPC4557C	17-32
UPC4570C	17-32
UPC4570G2	17-32
UPC4574G2	17-32
UPC78L05T	17-32
 UPD4053BC	 17-23
UPD42101C-3	17-32
UPD42101G-3	17-32
UPD6453GT	17-33
UPD70320GJ-8	
-5BG	17-36
UPD75028GC	17-34
UPD75048CW	17-35



DIODE



LED




MISCELLANEOUS



TRANSISTOR

TRANSISTOR




2SA1020



2SA1115
2SA1150




2SA1141




TYPE NO.
PRINTED


2SA1175
2SB810



2SA1232




2SA1319




TOP VIEW


2SA1610
2SA1611



2SB1094




2SB1416



2SB733
2SB733-34



2SB941




2SC2458




2SC2655
2SD788



TOP VIEW



2SC2715
2SC2715Y
2SC3735
2SC4176-B35
2SC4177-L6
2SC4178-F13
2SC4213A
2SD596-DV5




2SC2785
2SD1020
2SD1021



2SC3012



2SC3332




2SC3399 (R1 = 47K, R2 = 47K)
DTC144ES (R1 = 47K, R2 = 47K)



2SD2136




2SD773




TOP VIEW

2SJ106




2SJ226

TOP VIEW




FMW7

TOP VIEW




2SK209
2SK852-X2
2SK94-X4

TOP VIEW




FMW8

TOP VIEW




DTA123JU (R1 = 2.2K, R2 = 47K)
DTA144EU (R1 = 47K, R2 = 47K)

TOP VIEW




FMY3

TOP VIEW




DTC144EU (R1 = 47K, R2 = 47K)

- TOP VIEW -




IMX1

TOP VIEW



FMS2

TOP VIEW




FMW2





PT480





74F00SJ (NS) FLAT PACKAGE
TTL 2-INPUT POSITIVE-NAND GATE
- TOP VIEW -

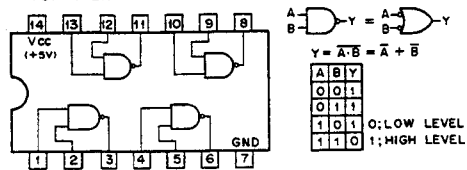


AM27C020-150DC (AMD)
C-MOS 2M (262,144x8)-BIT UV ERASABLE PROM
- TOP VIEW -

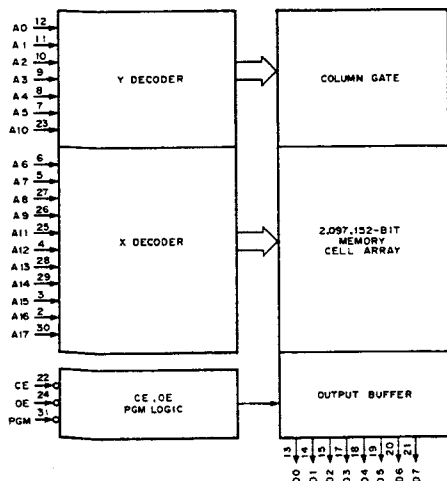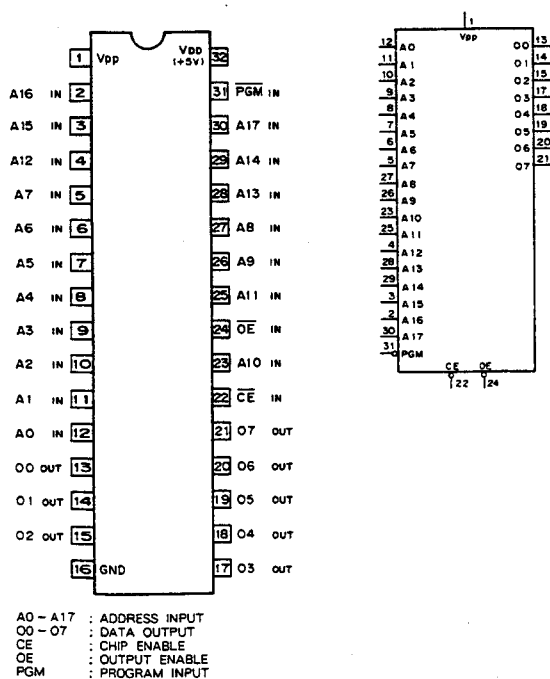


AN77L05 (PANASONIC) +5V
POSITIVE VOLTAGE REGULATOR
- FRONT VIEW -




BX3914 (SONY)
CTL REC/PB AMPLIFIER
- PRINTED SIDE -

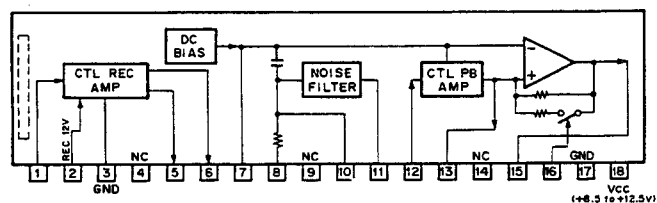

CX22017 (SONY)
VIDEO SIGNAL PROCESSOR
- TOP VIEW -

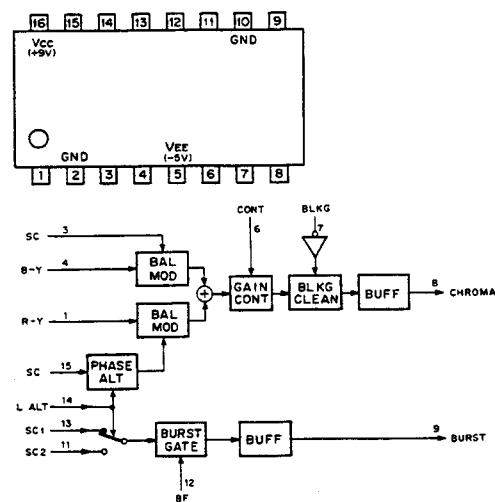


CXA1451M (SONY)
WIDEBAND VIDEO SWITCH
- TOP VIEW -

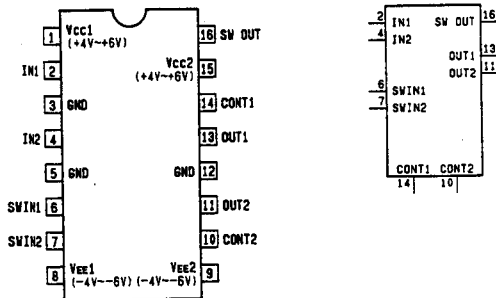


INPUT
CONT1, 2 : POWER SAVE CONTROL PIN OF DRV.1 AND DRV.2
INT1, 2 : 1/2-CHANNEL INPUT PIN
SWIN1, 2 : IN1/IN2 PINS SWITCH CONTROL PIN


OUTPUT
OUT1, 2 : OUTPUT PIN OF DRV.1/2
SWOUT : OUTPUTS IN1 PIN OR IN2 PIN WHICH HAS BEEN SELECTED BY SWITCH.

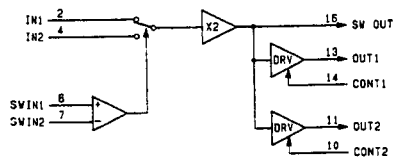


CXA1450M (SONY) FLAT PACKAGE
VIDEO SIGNAL SWITCH
- TOP VIEW -



CXA1521M (SONY)
GAIN CONTROL AMP
- TOP VIEW -




CX20188 (SONY)
DOLBY B TYPE AND C TYPE, NOISE REDUCTION SYSTEM
- TOP VIEW -

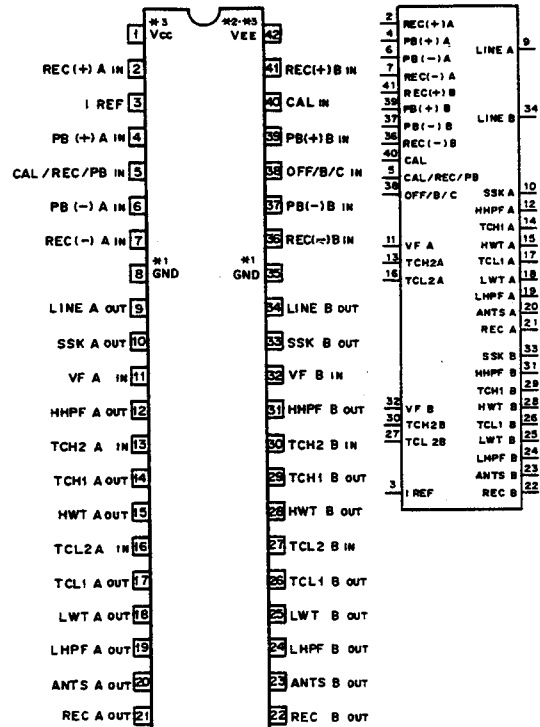


*1 : ONE POWER → Vcc/2. TWO POWER → GND
*2 : ONE POWER → GND. TWO POWER → Vcc
*3 : Vcc - Vee : +8 to +21V

ANTS : ANTI SATURATION
CAL : CALIBRATION
CAL/REC/PB : CALIBRATION/REC/ PB SELECT
HMPF : HLS HIGH PASS FILTER
HWT : HLS WAITING
I REF : REFERENCE SOURCE CURRENT
LHPF : LLS HIGH PASS FILTER
LWT : LLS WAITING
OFF/B/C : DOLBY NR OFF/B-TYPE/C-TYPE SELECT
SSK : SPECTRAL SKEWING SWITCH
TCH : HLS DETECTOR TIME CONSTANT
TCL : LLS DETECTOR TIME CONSTANT
VF : ENCODE INPUT
*HLS : HIGH LEVEL STAGE
*LLS : LOW LEVEL STAGE

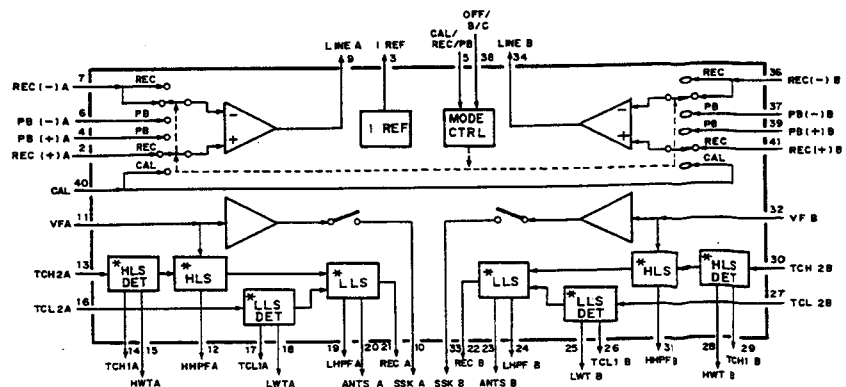

CX1370Q (SONY)

DEMODULATOR/OVER MODULATION COMPENSATOR
- TOP VIEW -

(Vcc = +5V)											
PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL
1	O	OMC	13	I	DRPV	25	-	Vcc4	37	I	SHREF
2	-	Vcc1	14	-	GND3	26	O	DEMCV	38	I	SHAPL
3	O	MYDC	15	O	BBO	27	I	VDGAIN	39	I	SHCLP
4	I	LMT2	16	O	BAO	28	-	Vcc5	40	-	GND6
5	I	LMT1	17	-	Vcc3	29	I	IEXT2	41	I	LM2IN1
6	-	GND2	18	O	SWO	30	I	VIIN	42	I	LM2IN2
7	I	HFX	19	-	GND4	31	I	IEXT1	43	I	LM1IN1
8	I	LDO	20	I	SW3	32	-	GND5	44	I	LM1IN2
9	-	Vcc2	21	I	SWC1	33	-	Vcc6	45	-	Vcc7
10	O	DMRC	22	I	SW2	34	O	SHO	46	-	GND7
11	O	FDEDC	23	I	SWC2	35	O	SHC	47	-	GND1
12	I	DMGAIN	24	I	SW1	36	I	SHVIN	48	I	REFV

Vcc1, GND1: FOR OVER MODULATION COMPENSATOR

Vcc2, GND2: FOR DEMODULATOR

Vcc3, GND3: FOR BUFFER

Vcc4, GND4: FOR 3 INPUT SWITCH

Vcc5, GND5: FOR DEMODULATOR


Vcc6, GND6: FOR SAMPLE HOLD

Vcc7, GND7: FOR LIMITER


5	LMT1	16	BAO
4	LMT2	15	BBO
31	IEXT1		
29	IEXT2		
30	VIIN		
27	VDGAIN	26	DEMCV
12	DMGAIN	10	DMRC
13	DRPV	11	FDEDC
7	HFX	3	MYDC
8	LDO		
43	LM1IN1	1	OMC
44	LM1IN2		
41	LM2IN1		
42	LM2IN2		
48	REFV		
36	SHVIN	34	SHO
37	SHREF	35	SHC
38	SHAPL		
39	SHCLP		
24	SW1	18	SWO
22	SW2		
20	SW3		
21	SWC1		
23	SWC2		

INPUT
DMGAIN : FOR RESISTOR
DRPV : VIDEO SIGNAL
HFX : SWITCH CONTROL
IEXT1, 2 : FOR RESISTOR
LM1, 2 : OVER MODULATION COMPENSATE LIMITER
LMT1, 2 : DEMODULATE LIMITER
LDO : SWITCH CONTROL
REFV : REFERENCE VOLTAGE
SHAPL : FOR RESISTOR
SHCLP : SAMPLE HOLD PULSE
SHREF : SAMPLE HOLD REFERENCE VOLTAGE
SHVIN : SAMPLE HOLD DEMODULATE VIDEO
SW1 - 3 : 3 INPUT SWITCH
SWC1, 2 : 3 INPUT SWITCH CONTROL
VDGAIN : GAIN CONTROL VOLTAGE
VIIN : V-1 CONTROL VOLTAGE

OUTPUT
BAO, BBO : DEMODULATOR
DEMCV : VARIABLE DEEMPHASIS CONSTANT
DMRC : FIXED DEEMPHASIS CONSTANT
FDEDC : FIXED DEEMPHASIS DECOUPLING
MYDC : MONOMULTI DECOUPLING
OMC : OVER MODULATION COMPENSATOR
SHC : SAMPLE HOLD CAPACITY
SHO : SAMPLE HOLD
SWO : 3 INPUT SWITCH

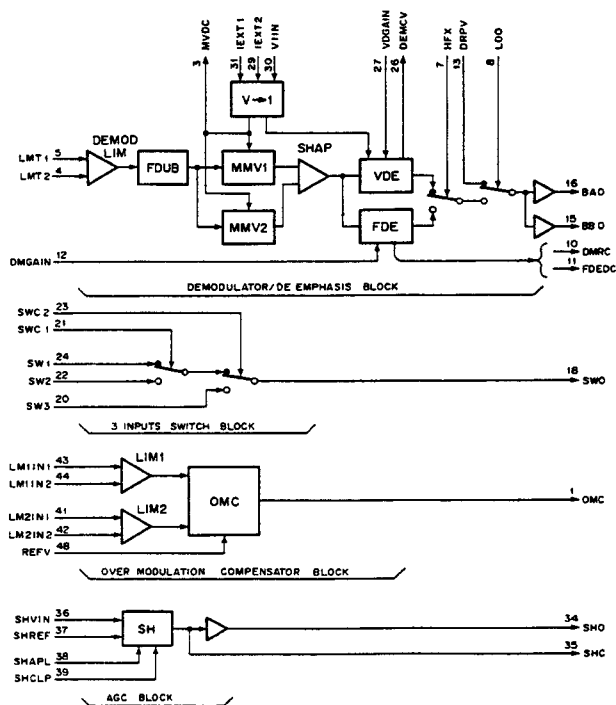


CX1479Q (SONY)



PB RF SIGNAL PROCESSOR FOR VTR
- TOP VIEW -

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	I	CHSW CONT	13	I	OFF SET1	25	I	EQ2(A)IN	37	O	AB RF OUT
2	I	OFF SET2	14	I	IN A	26	I	EQ2(MAIN)CNT	38	-	AMP Vcc
3	O	AOR OUT	15	I	EQSEL	27	I	EQ2(B)IN	39	I	RF(A)IN
4	I	ENV(B)	16	I	IN B	28	-	EQ2 Vcc	40	-	GND
5	I	ENV(A)	17	-	DCPL1	29	O	EQ1 OUT	41	I	RF(B)IN
6	O	TH OUT	18	O	DO EQ	30	I	EQ1 CONT	42	-	RF Vcc
7	I	TH CONT	19	-	DO Vcc	31	I	EQ1(B)IN	43	I	RF(C)IN
8	O	DO OUT	20	-	EQ GND	32	-	EQ1 Vcc	44	-	GND
9	O	REF	21	O	EQ2(MAIN)OUT	33	I	EQ1(A)IN	45	I	RF(D)IN
10	I	ENV IN	22	-	GND	34	I	GAIN CNT	46	-	AMP Vcc
11	O	DET OUT2	23	O	EQ2(SUB)OUT	35	O	SWD RF	47	O	CD RF OUT
12	O	DET OUT1	24	I	EQ2(SUB)CNT	36	I	RF LEVEL	48	I	MODE CONT


CXD1095Q (SONY) FLAT PACKAGE
C-MOS I/O PORT EXPANDER
- TOP VIEW -

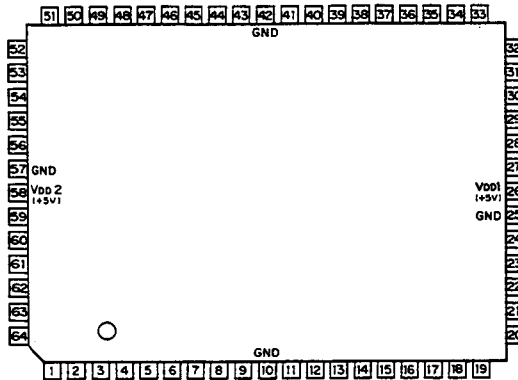


PIN NO.	IN	OUT	SYMBOL	PIN NO.	IN	OUT	SYMBOL	PIN NO.	IN	OUT	SYMBOL	PIN NO.	IN	OUT	SYMBOL
1			NC	17	O	O	PC6	33			NC	49	O	O	PX0
2			NC	18	O	O	PC7	34			NC	50	O	O	PX1
3	O	O	PB1	19			NC	35	O	O	D3	51			NC
4	O	O	PB2	20	O	O	P00	36	O	O	D4	52	O	O	PX2
5	O	O	PB3	21	O	O	P01	37	O	O	D5	53	O	O	PX3
6	O	O	PB4	22	O	O	P02	38	O	O	D6	54	O	O	PA0
7	O	O	PB5	23	O	O	P03	39	O	O	D7	55	O	O	PA1
8	O	O	PB6	24	O	O	P04	40	O	O	CLR	56	O	O	PA2
9	O	O	PB7	25			GND	41	O		RST	57			GND
10			GND	26	O		VDD1(+5V)	42			GND	58	O		VDD1(+5V)
11	O	O	PC0	27	O	O	P05	43	O		WR	59	O	O	PA3
12	O	O	PC1	28	O	O	P06	44	O		RD	60	O	O	PA4
13	O	O	PC2	29	O	O	P07	45	O		CS	61	O	O	PA5
14	O	O	PC3	30	O	O	D0	46	O		A0	62	O	O	PA6
15	O	O	PC4	31	O	O	D1	47	O		A1	63	O	O	PA7
16	O	O	PC5	32	O	O	D2	48	O		A2	64	O	O	PB0

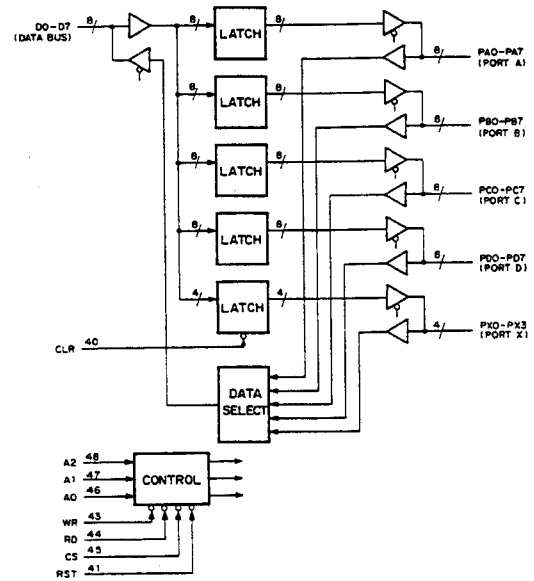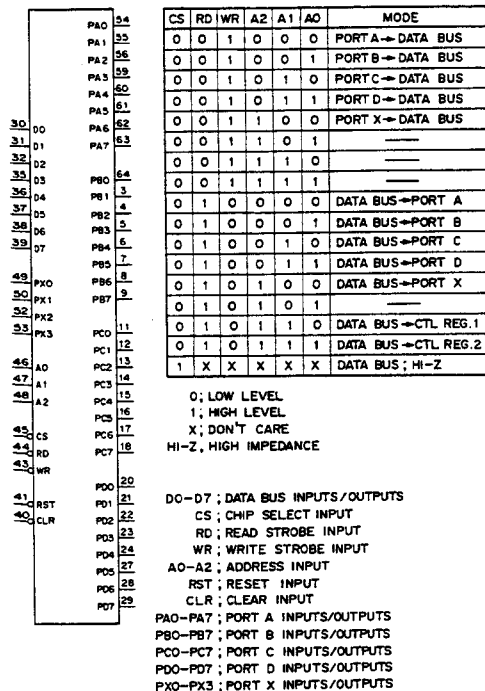

CXD1171M (SONY) FLAT PACKAGE
C-MOS 8-BIT D/A CONVERTER
- TOP VIEW -

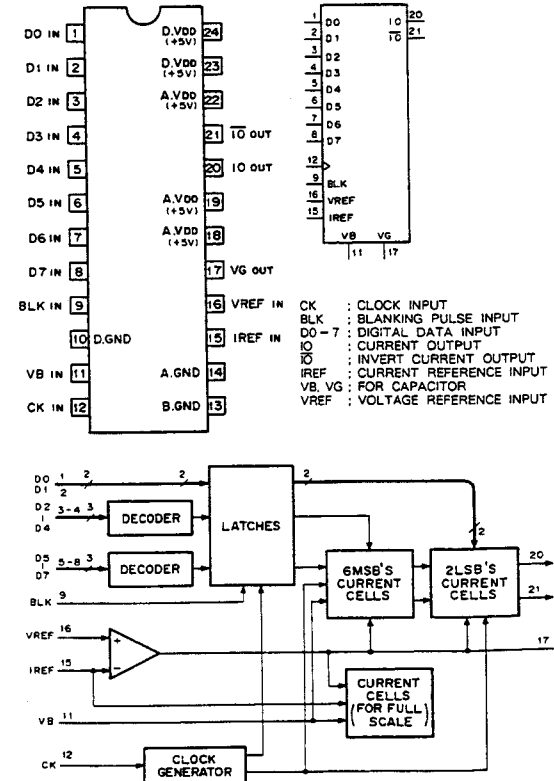


CXD1175AM (SONY) FLAT PACKAGE
C-MOS 8-BIT 20MSPS VIDEO A/D CONVERTER
- TOP VIEW -

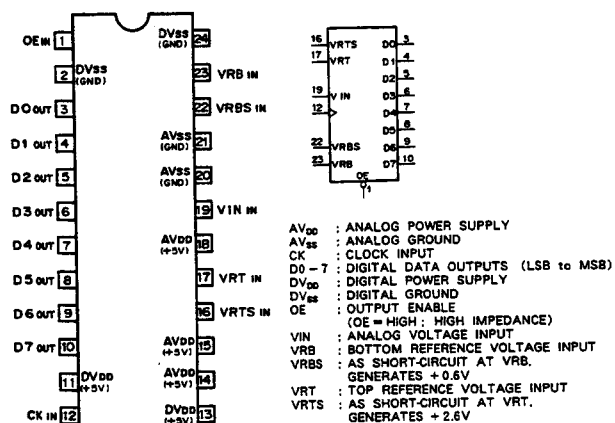


STEP	INPUT SIGNAL VOLTAGE	DATA OUTPUTS							
		D7	D6	D5	D4	D3	D2	D1	D0
0	0V (VRT)	1	1	1	1	1	1	1	1
1	0.01V	1	1	1	1	1	1	1	0
...
127	1.34V	1	0	0	0	0	0	0	0
128	1.35V	0	1	1	1	1	1	1	1
...
255	2.7V (VRB)	0	0	0	0	0	0	0	0

0 : LOW LEVEL
1 : HIGH LEVEL

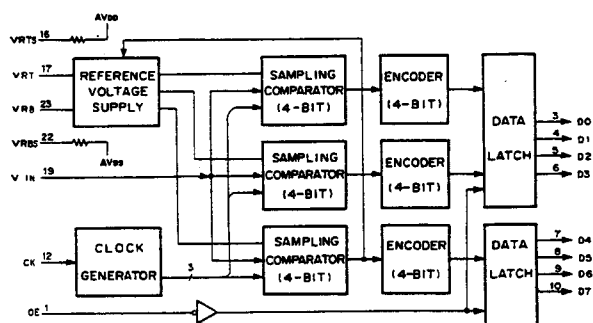


CXD1216M (SONY) FLAT PACKAGE
C-MOS GENLOCK DRIVER
- TOP VIEW -

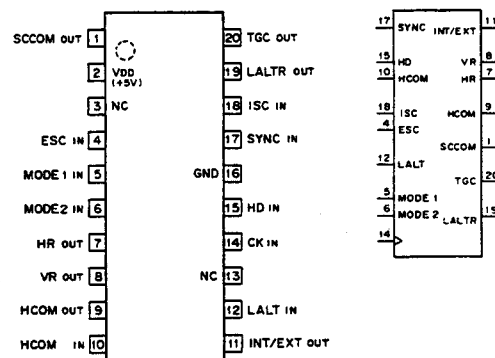

INPUT		MODE	SYSTEM
MODE1	MODE2		
0	0	M1	PAL-VBS
1	0	M2	PALM-VBS
0	1	M3	PALSECAM-VS/SC/LALT
1	1	M4	NTSC-VBS/NTSC-VS/SC/LALT


0 : LOW LEVEL
1 : HIGH LEVEL

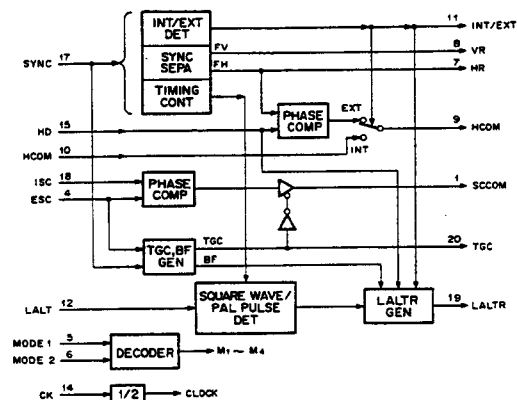


INPUT
 CK : 4fsc CLOCK INPUT
 ESC : SC/COLOR BURST
 HCOM : PHASE COMPARE FROM CXD1217
 HD : H DRIVE FROM CXD1217
 ISC : SUBCARRIER FROM CXD1217
 LALT : LALT FROM REFERENCE SIGNAL GENERATOR
 MODE1,2 : SYSTEM SELECT
 SYNC : SYNC FROM REFERENCE SIGNAL GENERATOR

OUTPUT
 HCOM : PHASE COMPARE HR WITH HD
 HR : fH OF SYNC SEPARATE
 INT/EXT : INTERNAL/EXTERNAL SPECIFIED
 LALTR : LINE CHANGE RESET
 SCCOM : PHASE COMPARE ESC WITH ISC
 TGC : TRISTATE CONTROL
 VR : fV OF SYNC SEPARATE

CXD2202Q (SONY)

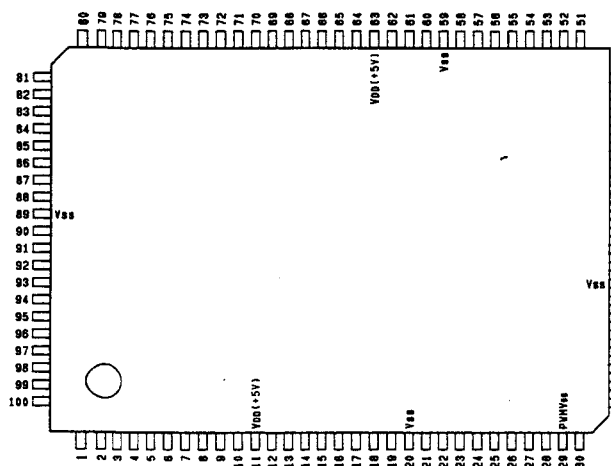SERVO IC
- TOP VIEW -

(VDD = +5V)															
PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL	PIN No.
1	I	FG1/IP24	26	I/O	IOP2	51	I/O	D7	76	O	PPG11/OP21				
2	I	FG0/IP23	27	I/O	IOP1	52	I/O	D6	77	O	PPG10/OP20				
3	I	PBH/IP22	28	I/O	IOP0	53	I/O	D5	78	O	PPG0F/OP17				
4	I	SYNCT/IP21	29	-	PWM VDD	54	I/O	D4	79	O	PPG0E/OP16				
5	I	SYNCO/IP20	30	O	PWM7/OP37	55	I/O	D3	80	O	PPG0D/OP15				
6	I	FG02/IP14	31	O	PWM6/OP36	56	I/O	D2	81	O	PPG0C/OP14				
7	I	FG01/IP13	32	O	PWM5/OP35	57	I/O	D1	82	O	PPG0B/OP13				
8	I	FG00/IP12	33	O	PWM4/OP34	58	I/O	D0	83	O	PPG0A/OP12				
9	I	CTL/IP11	34	O	PWM3/OP33	59	-	VSS	84	O	PPG09/OP11				
10	I	LAT/IP10	35	O	PWM2/OP32	60	I	RES	85	O	PPG08/OP10				
11	-	VDD	36	O	PWM1/OP31	61	I	MD1	86	O	CLKO				
12	I	UD/IP07	37	O	PWM0/OP30	62	I	MD0	87	I	EXTAL				
13	I	CCLK/IP06	38	-	VSS	63	-	VDD	88	O	XTAL				
14	I	FGC1/IP05	39	I	AS14	64	I	WR	89	-	VSS				
15	I	FGC0/IP04	40	I	AS13	65	I	RD	90	O	PPG07/OP07				
16	I	FGB1/IP03	41	I	A15	66	I	CE	91	O	PPG06/OP06				
17	I	FGB0/IP02	42	I	A14	67	O	IREQ2	92	O	PPG05/OP05				
18	I	FGA1/IP01	43	I	A13	68	O	IREQ1	93	O	PPG04/OP04				
19	I	FGA0/IP00	44	I	A6	69	O	IREQ0	94	O	PPG03/OP03				
20	-	VSS	45	I	A5	70	I	FXSEL	95	O	PPG02/OP02				
21	I/O	IOP7	46	I	A4	71	O	OP26	96	O	PPG01/OP01				
22	I/O	IOP6	47	I	A3	72	O	EXCST/OP25	97	O	PPG00/OP00				
23	I/O	IOP5	48	I	A2	73	O	EXCS0/OP24	98	I	FG12/IP27				
24	I/O	IOP4	49	I	A1	74	O	PPG13/OP23	99	I	FG11/IP26				
25	I/O	IOP3	50	I	A0	75	O	PPG12/OP22	100	I	FG10/IP25				

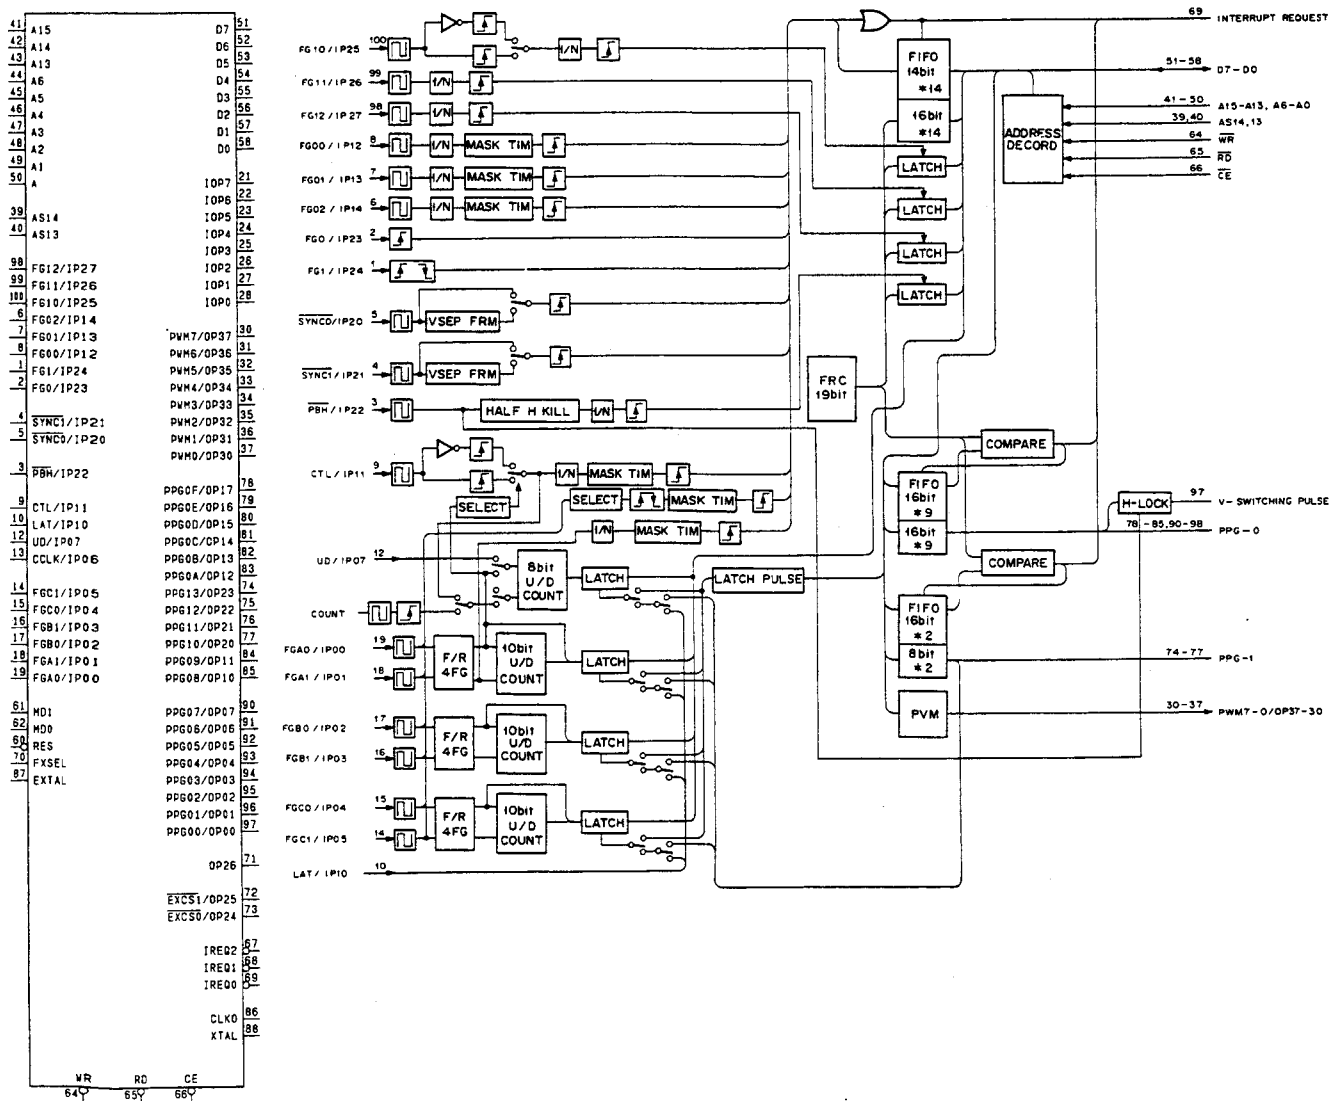

CXD2207Q (SONY)


C-MOS TBC WRITE CLOCK GENERATOR FOR BETACAM

- TOP VIEW -

INPUT
 AO - A15 : ADDRESS BUS
 AS13, AS14 : SELECTING CONDITION OF ADDRESS DECODER
 AS13 AND AS14 BITS
 CCLK : 8-BIT COUNTER CLOCK INPUT
 CE : CHIP ENABLE
 CTL : RESOLUTION 2.5MHz WITH EDGE SELECT FUNCTION.
 WITH FREQUENCY DIVISION MASK TIMER
 EXTAL : CRYSTAL OSCILLATION OR EXTERNAL CLOCK INPUT
 FG0 : RESOLUTION 2.5MHz
 FG00 - FG02 : FREQUENCY DIVISION ENABLE RESOLUTION 2.5MHz
 WITH FREQUENCY DIVISION MASK TIMER
 FG1 : RESOLUTION 2.5MHz BOTH EDGES
 FG10 : EDGE SELECTION ENABLE RESOLUTION 10MHz
 FG11, 12 : FREQUENCY DIVISION ENABLE RESOLUTION 10MHz
 FGA0 : PERFORMS FORWARD/REVERSE ROTATION
 DETECTION AND 4FG COUNT (UP/DOWN) BY FGA0
 AND FGA1. 10 BITS. UP/DOWN IS MADE BY
 CONTROLLING THE UP/DOWN OF 8-BIT COUNTER.
 FGA1 : 4FG PERFORMS FREQUENCY DIVISION AND FRC
 CAPTURE THROUGH MASK TIMER.
 *1: SELECTS ONE OF FGA0 TO FGC1 INPUT AND
 DETECTS BOTH EDGES AND PERFORM THE FRC
 CAPTURE THROUGH THE MASK TIMER.
 FGB0 : PERFORMS FORWARD/REVERSE ROTATION
 DETECTION AND 4FG COUNT BY FGB0 AND FGB1.
 FGB1 : *1: SELECTS ONE OF FGA0 TO FGC1 INPUT AND
 DETECTS BOTH EDGES AND PERFORM THE FRC
 CAPTURE THROUGH THE MASK TIMER.
 FGC0 : PERFORMS FORWARD/REVERSE ROTATION
 DETECTION AND 4FG COUNT BY FGC0 AND FGC1.
 FGC1 : *1: SELECTS ONE OF FGA0 TO FGC1 INPUT AND
 DETECTS BOTH EDGES AND PERFORM THE FRC
 CAPTURE THROUGH THE MASK TIMER.
 FXSEL : FREQUENCY DIVISION SELECTION OF CLOCK INPUT
 LAT : EXTERNAL LATCH TIMING OF UP/DOWN COUNTER
 MD0, 1 : TEST MODE DESIGNATION
 PBH : INPUT OF COMPOSITE SYNC OR H SYNC.
 RESOLUTION 10MHz WITH HALF H KILLER.
 RD : REDE
 RES : RESET
 SYNC0, 1 : INPUT OF COMPOSITE SYNC OR V SYNC.
 RESOLUTION 2.5MHz
 UD : 8-BIT COUNTER UP/DOWN INPUT
 WR : WRITE

XOUTPUT
 CLK0 : CLOCK OUTPUT
 EXCS0, 1 : DECODE AT ADDRESS A3 LEVEL
 IREQ0 : INTERRUPTION SIGNAL OF FRC CAPTURE UNIT
 IREQ1 : COINCIDENCE INTERRUPTION OF PPG0
 IREQ2 : COINCIDENCE INTERRUPTION OF PPG1
 OP26 : EXCLUSIVELY OUTPUT PORT
 PPG00 - PPG0F : PROGRAMMABLE PULSE GENERATOR
 PPG10 - PPG13 : PROGRAMMABLE PULSE GENERATOR
 RESOLUTION 1.25MHz PPG00: WITH HLOCK
 PWM0 - PWM5 : PWM OUTPUT NORMALLY PWM, OR PWM0 AND
 PWM1, PWM2 AND PWM3, OR PWM4 AND PWM5
 OUTPUT SIGNAL CORRESPONDED TO PUSH-PULL.
 PWM6, 7 : PWM OUTPUT
 XTAL : CRYSTAL OSCILLATION

INPUT/OUTPUT
 DO - D7 : DATA BUS
 IOP0 - IOP7 : SELECTS AND USES INPUT AND OUTPUT BY
 EVERY 1 BIT.

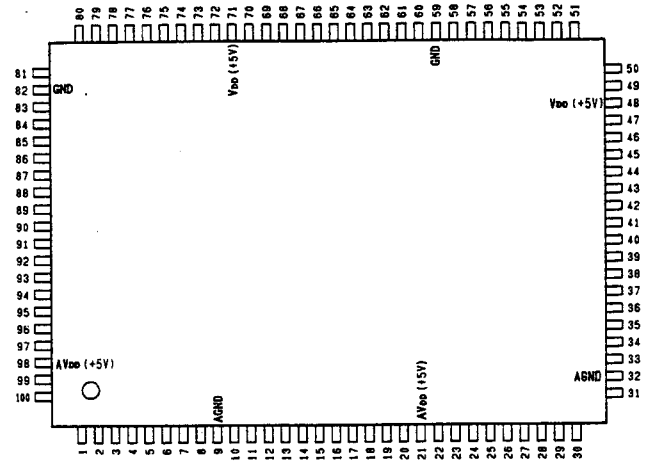


(VDD = AVDD = +5V)

PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL
1	O	SYNC	26	I	FOPO	51	I	PBE	76	I	SVLK
2	I	BLK	27	I	SHOT	52	I	NCS	77	I	SVD
3	I	VIN4	28	I	BCPI	53	I	SPD	78	I	OFF
4	I	REF3	29	O	BCPO	54	I	R20	79	O	LOCK
5	I	VIN3	30	I	EOPX	55	I	FBID	80	O	CS
6	O	VOT3	31	O	EOP0	56	I	DO	81	I/O	MO0
7	I	A13	32	-	AGND	57	I	GBD	82	-	GND
8	I	ACPI	33	I	A12	58	I	GAT	83	I/O	MO1
9	-	AGND	34	I	DOP1	59	-	GND	84	I/O	MO2
10	I	ACPX	35	I	DOPX	60	I	GH	85	I/O	MO3
11	O	ACPO	36	O	DOP0	61	O	WCP	86	I/O	MO4
12	I	SMPL	37	I	VCCI	62	O	ACP	87	I/O	MO5
13	I	CHIN	38	I	VCEN	63	O	TOUT	88	I/O	MO6
14	I	BOPX	39	I	MD1	64	O	AZ2	89	I/O	MO7
15	I	BOPO	40	I	MD2	65	O	AZ1	90	I	AMD
16	I	SHC1	41	I	INT	66	O	WZ	91	I	VIN2
17	I	SHC2	42	I	YC	67	I	CKN	92	I	REF1
18	I	SH2I	43	I	TMOD	68	O	GCK	93	I	REF2
19	O	ER1	44	I	TCK	69	O	ACK	94	I	VIN1
20	O	ER2	45	I	TDAT	70	O	XCK	95	I	AOP1
21	-	AVDD	46	I	BTS	71	-	VDD	96	I	AOPX
22	I	COP1	47	I	REST	72	O	CH	97	O	AOP0
23	I	COPX	48	-	VDD	73	O	SSH	98	-	AVDD
24	O	COPO	49	I	DDF	74	O	DCP	99	I	A11
25	I	FOPX	50	O	SHO	75	I	ERR	100	I	CCPI

CXD8176A0 (NEC)

CMOS DUAL PORT RAM CONTROLLER

- TOP VIEW -

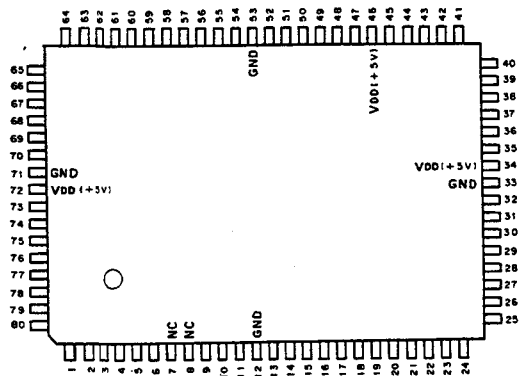


(V_{DD} = +5 V)

PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL
1	I/O	DOL	21	I/O	D7R	41	I/O	D6M	61	I	A10L
2	I	WRL	22	I/O	D6R	42	I/O	D5M	62	I	A9L
3	I	RDL	23	I/O	D5R	43	I/O	D4M	63	I	A8L
4	O	WAITL	24	I/O	D4R	44	I/O	D3M	64	I	A7L
5	I	CSL	25	I/O	D3R	45	I/O	D2M	65	I	A6L
6	I	CKL	26	I/O	D2R	46	-	V _{DD}	66	I	A5L
7	-	NC	27	I/O	D1R	47	I/O	D1M	67	I	A4L
8	-	NC	28	I/O	D0R	48	I/O	D0M	68	I	A3L
9	I	A10R	29	I	WRR	49	O	A0M	69	I	A2L
10	I	A9R	30	I	RDR	50	O	A1M	70	I	A1L
11	I	A8R	31	O	WAITR	51	O	A2M	71	-	GND
12	-	GND	32	I	CSR	52	O	A3M	72	-	V _{DD}
13	I	A7R	33	-	GND	53	-	GND	73	I	A0L
14	I	A6R	34	-	V _{DD}	54	O	A4M	74	I/O	D7L
15	I	A5R	35	I	CKR	55	O	A5M	75	I/O	D6L
16	I	A4R	36	I	CKT	56	O	A6M	76	I/O	D5L
17	I	A3R	37	O	WEM	57	O	A7M	77	I/O	D4L
18	I	A2R	38	O	OEM	58	O	A8M	78	I/O	D3L
19	I	A1R	39	O	CEM	59	O	A9M	79	I/O	D2L
20	I	A0R	40	I/O	D7M	60	O	A10M	80	I/O	D1L

CXD8243AM (SONY) FLAT PACKAGE

CMOS DIGITAL YC SEPARATOR/DECODER/CTDM CLOCK GENERATOR

- TOP VIEW -

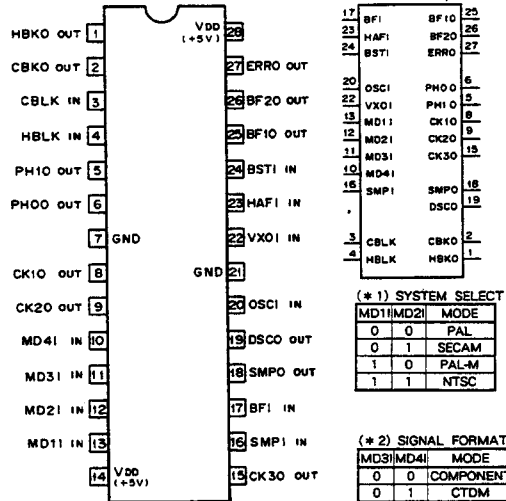

(*) SYSTEM SELECT

MD11	MD21	MODE
0	0	PAL
0	1	SECAM
1	0	PAL-M
1	1	NTSC

(*) SIGNAL FORMAT SELECT

MD31	MD41	MODE
0	0	COMPONENT
0	1	CTDM
1	0	COMPOSITE
1	1	SVIDEO



0: LOW LEVEL
1: HIGH LEVEL

INPUT


BF1 : BURST FLAG
BST1 : BURST FOR PHASE COMPARISON
CBLK : CHROMA BLANKING PULSE
HAF1 : TRIGGER PULSE FOR BURST SAMPLING
HBLK : H BLANKING PULSE
MD1, 21 : SYSTEM SELECT (*)
MD3, 41 : SIGNAL FORMAT SELECT (*)
OSCI : H LOCK LOOP VCO
SMP1 : TRAPEZOID SAMPLING PULSE OF THE H LOCK LOOP
VXOI : BURST LOCK LOOP VCXO

OUTPUT


BF1, 20 : BURST FLAG
CBKO : CHROMA BLANKING PULSE
CK1 - 30 : CLOCK SELECTED BY MODE
DSCO : TRAPEZOID GENERATOR DISCHARGE PULSE
ERRR : BURST PHASE COMPARISON ERROR
HBKO : H BLANKING PULSE
PHOO : 2FSC
PH10 : FSC
SMPO : TRAPEZOID SAMPLING PULSE OF THE H LOCK LOOP

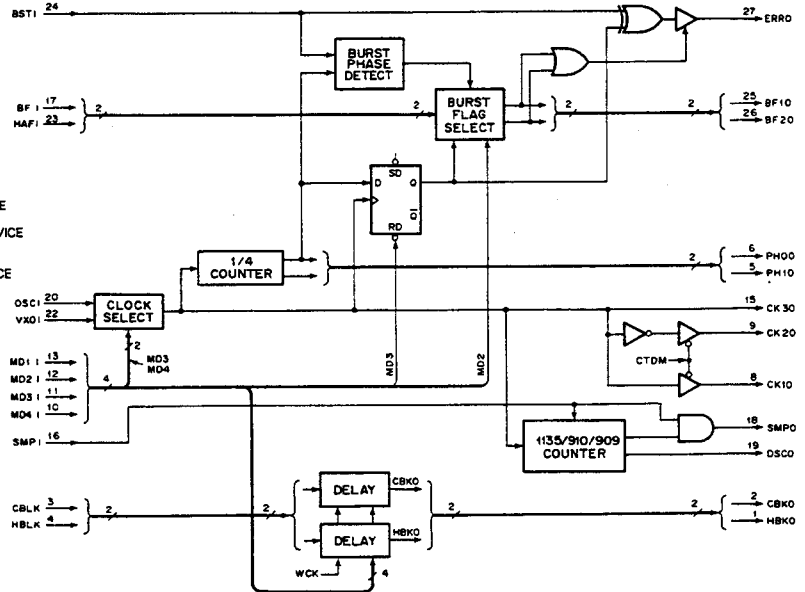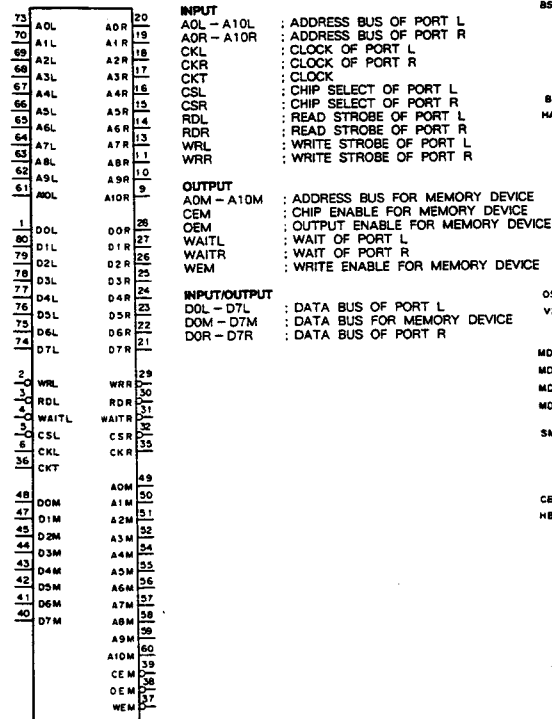


CXD8165Q (SONY) FLAT PACKAGE
C-MOS REFERENCE SYNC GENERATOR
- TOP VIEW -

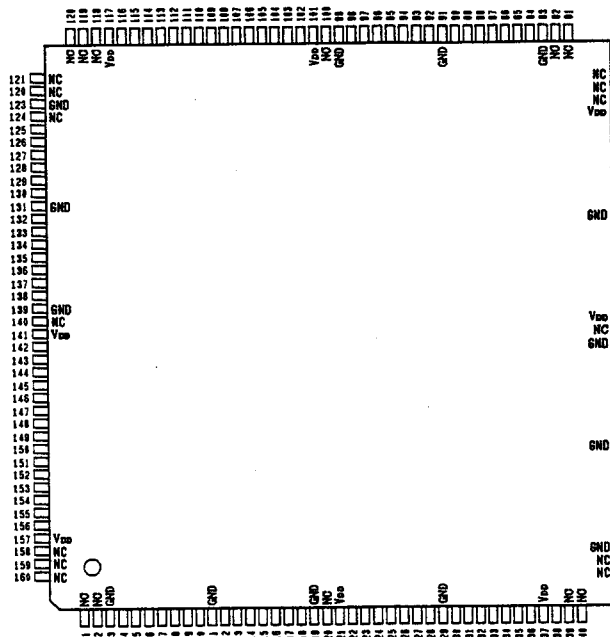

PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL
1	-	NC	41	-	NC	81	-	NC	121	-	NC
2	-	NC	42	-	NC	82	-	NC	122	-	NC
3	-	GND	43	-	GND	83	-	GND	123	-	GND
4	I/O	VBL	44	I	HR	84	I	TM2	124	-	NC
5	I/O	OBL	45	I/O	LALT	85	O	OSC	125	O	VD0
6	I/O	OVD	46	I	ALTR	86	I	SD1	126	O	VD1
7	I/O	OFOE	47	I	CLR	87	I	SCK	127	O	VD2
8	O	CFDET	48	I	CK27	88	I	STRB	128	O	VD3
9	O	OSYNC	49	O	CK13	89	I/O	PD0	129	O	VD4
10	I	VOVR	50	I	HCK	90	I/O	PD1	130	O	VD5
11	-	GND	51	-	GND	91	-	GND	131	-	GND
12	O	OVR	52	I	SM1	92	I/O	PD2	132	O	VD6
13	O	READV	53	I	SM2	93	I/O	PD3	133	O	VD7
14	I	VP0	54	I	SM3	94	I/O	PD4	134	I	VISP
15	I	VP1	55	O	PHO	95	I/O	PD5	135	I/O	BST
16	I	VP2	56	I	PHI	96	I/O	PD6	136	I/O	O2BH
17	I	VP3	57	O	PH	97	I/O	PD7	137	I/O	HS
18	I	ADV	58	O	CLP	98	I	PCK	138	O	RZ
19	-	GND	59	-	GND	99	-	GND	139	-	GND
20	-	NC	60	-	NC	100	-	NC	140	-	NC
21	-	VDD	61	-	NC	101	-	VDD	141	-	VDD
22	I	CONF	62	I/O	EQ	102	I	SYCK	142	I/O	F2H
23	I	SDL	63	I/O	VS	103	I	ADOE	143	I/O	FH
24	I	CSDL	64	O	PALT	104	I	CNT	144	I	FLK2
25	O	RSID	65	I/O	R2BH	105	O	SWR	145	I	VIEK
26	O	RBG	66	I/O	RHBL	106	O	SWS	146	I	VIEK
27	O	SCBL	67	I/O	OHBL	107	I	SCLD	147	O	YBL
28	O	RBLK	68	I/O	OHFB	108	I	VISC	148	O	CBL
29	-	GND	69	-	GND	109	O	UD0	149	I	BCAM
30	O	RSYNC	70	O	IBF	110	O	UD1	150	O	ENBL
31	O	RVD	71	I	P8F	111	O	UD2	151	O	CID8
32	O	RECE	72	I/O	I2H	112	O	UD3	152	O	CIDR
33	O	RBF	73	O	INTH	113	O	UD4	153	O	VISB
34	I	EXVR	74	I	TM1	114	O	UD5	154	O	VISR
35	I	SEXT	75	I	TCI	115	O	UD6	155	O	OSID
36	O	BEXT	76	I	FSC4	116	O	UD7	156	O	JUC
37	-	VDD	77	-	VDD	117	-	VDD	157	-	VDD
38	I	TGC	78	-	NC	118	-	NC	158	-	NC
39	-	NC	79	-	NC	119	-	NC	159	-	NC
40	-	NC	80	-	NC	120	-	NC	160	-	NC

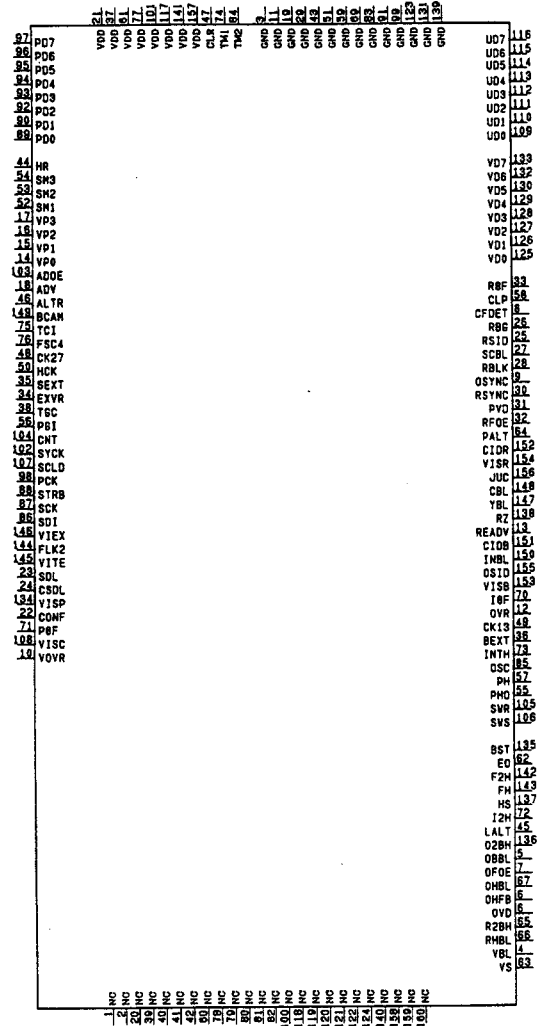

CXK48324Q (SONY)

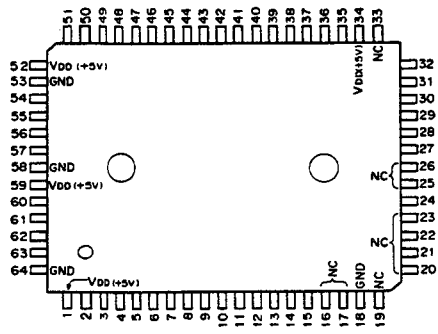
C-MOS 2.4M (960x306x8) BITS 3 PORTS VIDEO FIELD MEMORY
- TOP VIEW -

(V_{DD} = +5 V)


PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL
1	-	V _{DD}	23	-	NC	45	I	VCLR2
2	O	DO13	24	I	TE	46	I	OE2
3	O	DO12	25	-	NC	47	I	CKR2
4	O	DO11	26	-	NC	48	O	DO27
5	O	DO10	27	I	RM	49	O	DO26
6	I	CKR1	28	I	HCLR0	50	O	DO25
7	I	OE1	29	I	INCO	51	O	DO24
8	I	VCLR1	30	I	VCLR0	52	-	V _{DD}
9	I	INCL1	31	I	WE	53	-	GND
10	I	HCLR1	32	I	CKW	54	O	DO23
11	I	ADD3	33	-	NC	55	O	DO22
12	I	ADD2	34	-	V _{DD}	56	O	DO21
13	I	ADD1	35	I	DIN7	57	O	DO20
14	I	ADD0	36	I	DIN6	58	-	GND
15	I	APM	37	I	DIN5	59	-	V _{DD}
16	-	NC	38	I	DIN4	60	O	DO17
17	-	NC	39	I	DIN3	61	O	DO16
18	-	GND	40	I	DIN2	62	O	DO15
19	-	NC	41	I	DIN1	63	O	DO14
20	-	NC	42	I	DINO	64	-	GND
21	-	NC	43	I	HCLR2			
22	-	NC	44	I	INCL2			

INPUT
 ADD0 - ADD3 : ADDRESS INPUT
 APM : ADDRESS PRESET MODE ENABLE
 CKR1, CKR2 : PORT 1 OR 2 SHIFT SIGNAL INPUT
 CKW : PORT 0 SHIFT SIGNAL INPUT
 DINO - DIN7 : PORT 0 DATA INPUT
 HCLR0 - HCLR2 : PORT 0 - 2 HORIZONTAL CLEAR
 INCO - INC2 : PORT 0 - 2 LINE INCREMENT
 RM : RECURSIVE MODE ENABLE
 TE : TEST MODE ENABLE
 VCLR0 - VCLR2 : PORT 0 - 2 VERTICAL CLEAR
 OE1, OE2 : PORT 1 OR 2 OUTPUT ENABLE
 WE : PORT 0 WRITE ENABLE

OUTPUT
 DO10 - DO17 : PORT 1 DATA OUTPUT
 DO20 - DO27 : PORT 2 DATA OUTPUT

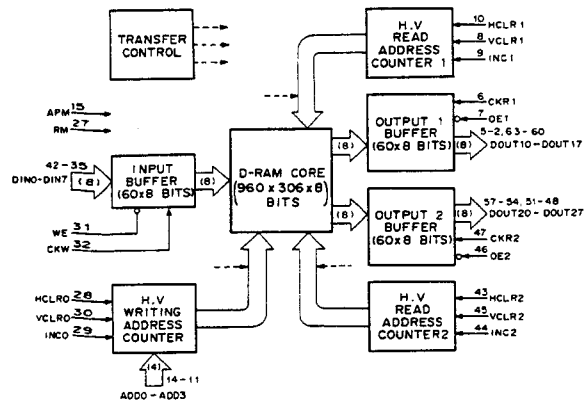

CXD8161AQ (SONY) FLAT PACKAGE

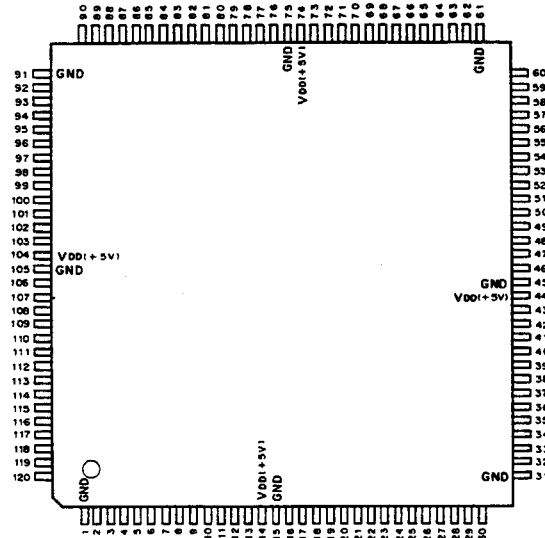C-MOS DIGITAL Y/C SEPARATOR & CHROMA DECODER
- TOP VIEW -

(V_{DD} = +5 V)

PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL
1	-	GND	31	-	GND	61	-	GND	91	-	GND
2	O	PEW	32	I	DO9	62	O	Y02	92	O	BO1
3	O	PES	33	I	DO8	63	O	Y03	93	O	BO0
4	I	BI9	34	I	DO7	64	O	Y04	94	O	RO9
5	I	BI8	35	I	DO6	65	O	Y05	95	O	RO8
6	I	BI7	36	I	DO5	66	I	OE	96	I	HOD1
7	I	BI6	37	I	DO4	67	I	RND	97	I	HOD2
8	I	BI5	38	I	DO3	68	I	B67	98	I	HOD3
9	I	BI4	39	I	DO2	69	I	CO	99	I	HOD4
10	I	BI3	40	I	DO1	70	O	Y06	100	O	RO7
11	I	BI2	41	I	DO0	71	O	Y07	101	O	RO6
12	I	BI1	42	I	MRST	72	O	Y08	102	O	RO5
13	I	BI0	43	O	DRST	73	O	Y09	103	O	RO4
14	-	V _{DD}	44	-	V _{DD}	74	-	V _{DD}	104	-	V _{DD}
15	-	GND	45	-	GND	75	-	GND	105	-	GND
16	O	BCEW	46	I	D19	76	O	BO9	106	O	RO3
17	O	BCE5	47	I	D18	77	O	BO8	107	O	RO2
18	O	RCEW	48	I	D17	78	O	BO7	108	O	RO1
19	O	RCE5	49	I	D16	79	O	BO6	109	O	RO0
20	I	RI9	50	I	D15	80	I	TMOD0	110	I	CLP
21	I	RI8	51	I	D14	81	I	TMOD1	111	I	CLBK
22	I	RI7	52	I	D13	82	I	TMOD2	112	I	YISC
23	I	RI6	53	I	D12	83	I	TMOD3	113	I	HBLK
24	I	RI5	54	I	D11	84	I	TMOD4	114	I	BPF
25	I	RI4	55	I	D10	85	I	PM0	115	I	BW
26	I	RI3	56	I	CMOD2	86	I	PM1	116	I	LALT1
27	I	RI2	57	I	CMOD1	87	O	BO5	117	O	LALT0
28	I	RI1	58	I	CMOD0	88	O	BO4	118	I	PH1
29	I	RI0	59	O	Y00	89	O	BO3	119	I	PH0
30	I	HIZ	60	O	Y01	90	O	BO2	120	I	CLK

```

OUTPUT
SCES      : B-Y CLAMP ERROR SENSE
SC5W      : B-Y CLAMP ERROR WIDTH
SC5W - B09 : B-Y DATA (B 09 : MSB)
DRST      : EXTERNAL DELAY LINE RESET
LALTO     : LINE ALTERNATE
PES        : PHASE ERROR SENSE
PEW        : PHASE ERROR WIDTH
RCES      : R-Y CLAMP ERROR SENSE
RC5W      : R-Y CLAMP ERROR WIDTH
R00 - R09 : R-Y DATA (R00 : MSB)
Y00 - Y09 : Y DATA (Y09 : MSB)

```

MODE2	MODE1	MODE
0	0	PAL
0	1	PAL-M
1	0	SECAM
1	1	NTSC

MODE4	MODE3	MODE
0	0	COMPONENT
0	1	COMPOSITE
1	0	CTDM
1	1	CHROMA


C : LOW LEVEL 0-1 : UPPER 2 LINE COMB FILTER
1 : HIGH LEVEL 1-2 : LOWER 2 LINE COMB FILTER
 0-1-2 : UPPER/LOWER 3 LINE COMB FILTER




CXD8313Q (SONY)

CMOS TBC


- TOP VIEW -

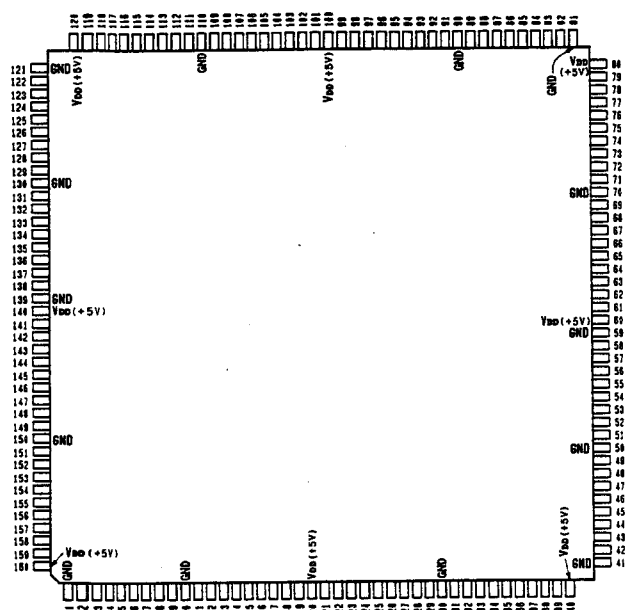


PIN No.	I/O	PIN NAME	PIN No.	I/O	PIN NAME	PIN No.	I/O	PIN NAME	PIN No.	I/O	PIN NAME
1	-	GND	41	-	GND	81	-	GND	121	-	GND
2	I	FWDXREV	42	I/O	RMAB	82	O	RBWLN	122	I	DIN9
3	I	X13	43	I/O	RVCLR	83	O	COMPBLK	123	I	DIN8
4	I	NOIPB	44	I/O	WMAB	84	O	VBLK2	124	I	DIN7
5	I	HEE	45	I/O	WVCLR	85	O	VBLK1	125	I	DIN6
6	I	HINPHASE	46	I/O	TDTO	86	O	ADVVBK	126	I	DIN5
7	I	SHIFTH	47	I	TST5	87	O	ADDTHRU	127	I	DIN4
8	O	VSCXFP1	48	I	TST4	88	O	RDIZ	128	I	DIN3
9	O	VSCDTP2	49	I	TST3	89	O	RCK	129	I	DIN2
10	-	GND	50	-	GND	90	-	GND	130	-	GND
11	I	OSCON	51	I	TST2	91	O	VCLR2	131	I	DIN1
12	I	MOD6	52	I	TST1	92	O	INC2	132	I	DIN0
13	I	DT	53	I	TST0	93	O	HCLR2	133	I	WCK
14	I	DTX3	54	I	RLMOFF	94	O	MRCK2	134	I	WZ
15	I	PBOE	55	I	FLMOFF	95	O	VCLR1	135	I	ADVWZ
16	I	DTV	56	I	MOD11	96	O	INC1	136	I	WCLP
17	I	SVV	57	I	MOD10	97	O	HCLR1	137	I	VISCCMUT
18	I	SWP	58	I	MOD7	98	O	MRCK1	138	I	PRCK
19	I	FRX3020	59	-	GND	99	O	VCLR0	139	-	GND
20	-	VDD	60	-	VDD	100	-	VDD	140	-	VDD
21	O	BINS	61	I/O	BID	101	O	INCO	141	I	PRZ
22	O	WINS	62	I/O	BIDIR	102	O	HCLR0	142	I	PBSYNC
23	O	SWBLK	63	I	MOD4	103	O	DOCLR	143	O	WBLK
24	O	WHITECNT	64	I	MOD3	104	O	MRCK	144	I/O	GH
25	I	DO	65	I	MOD2	105	O	WE	145	O	SHW
26	I/O	PB16H	66	I	MOD1	106	O	DOUT0	146	I/O	SDO1
27	I/O	PB2H	67	I	JUC	107	O	DOUT1	147	I/O	GB
28	O	COUNTERV	68	I	SGBLK	108	O	DOUT2	148	O	WDIZ
29	I/O	PBV	69	I	REFOE	109	O	DOUT3	149	I/O	FBID
30	-	GND	70	-	GND	110	-	GND	150	-	GND
31	O	WRITEV	71	I	READV	111	O	DOUT4	151	I/O	FFB
32	O	WOE	72	I	RZ	112	O	DOUT5	152	I/O	FRB
33	I/O	WVISCID	73	I	R456FH	113	O	DOUT6	153	O	FF30COFF
34	O	RVISCID	74	I	R2BH	114	O	DOUT7	154	O	FR30HDL
35	I/O	RVSET	75	I	R2FH	115	-	-	155	I	THRU2
36	I/O	WENP	76	I	HCK	116	O	DOUT8	156	I	THRU1
37	I/O	REN	77	I	SDATA	117	O	DOUT9	157	I/O	NOSIG
38	I	LEVST	78	I	SLD	118	O	SDO2WDO	158	O	PDSCONT
39	I	CLR	79	I	SCK	119	I	HCE	159	O	SPDPWM
40	-	VDD	80	-	VDD	120	-	VDD	160	-	VDD

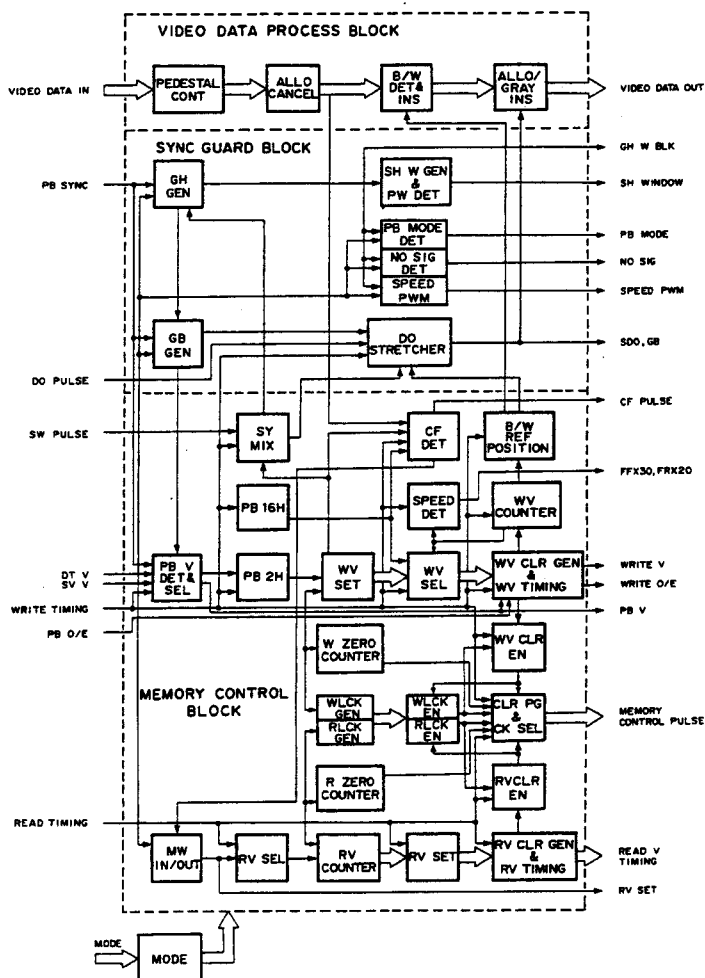


L78M09T-FA (SANYO) +9V 0.5A
PQ05SZ51 (SHARP) +5V 1A
POSITIVE VOLTAGE REGULATOR




L79M05T-FA (SANYO) -5V
L79M09T-FA (SANYO) -9V
NEGATIVE VOLTAGE REGULATOR (500 mA)




LA7205 (SANYO)
AGC AMP, INPUT SELECT, AGC DET, COMPARATOR
- SIDE VIEW -




LM1881M (NS) FLAT PACKAGE
VIDEO SYNC SEPARATOR
- TOP VIEW -

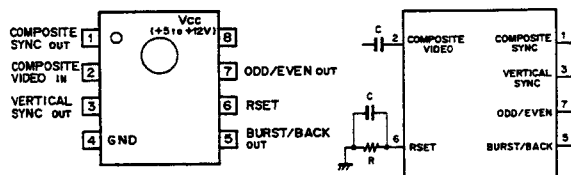


TIMING CHART

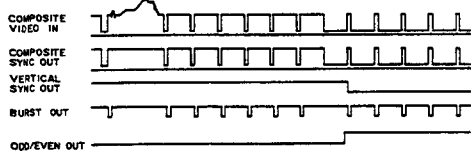


LM358P (TI)
UPC358C (NEC)
UPC358G2 (NEC) FLAT PACKAGE
DUAL OPERATIONAL AMPLIFIERS
- TOP VIEW -




LM2903P (TI)
LM2903PS (TI) FLAT PACKAGE
NJM2903D (JRC)
DUAL VOLTAGE COMPARATORS
- TOP VIEW -



LM311PS (TI) FLAT PACKAGE
VOLTAGE COMPARATOR WITH STROBE
- TOP VIEW -



LB1620 (SANYO)

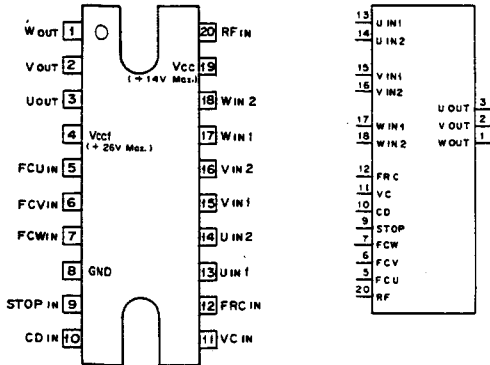
3-PHASE MOTOR DRIVER
- TOP VIEW -

SOURCE / SINK	INPUT	FRC
1 W PHASE→V PHASE	U	0
2 V PHASE→W PHASE	V	1
3 W PHASE→U PHASE	U	0
4 U PHASE→W PHASE	V	1
5 V PHASE→U PHASE	U	0
6 U PHASE→W PHASE	V	1
7 W PHASE→U PHASE	U	0
8 U PHASE→W PHASE	V	1
9 V PHASE→U PHASE	U	0
10 U PHASE→W PHASE	V	1
11 W PHASE→U PHASE	U	0
12 U PHASE→W PHASE	V	1


0: LOW LEVEL
1: HIGH LEVEL

INPUT
CD : CURRENT DETECTION
FCU : PHASE COMPENSATION
FCV : PHASE COMPENSATION
FCW : PHASE COMPENSATION
FRC : DIRECTION CONTROL
RF : CURRENT DETECTION
STOP : OVERCURRENT PROTECTION
UIN1, UIN2 : U PHASE HALL ELEMENT
VIN1, VIN2 : V PHASE HALL ELEMENT
WIN1, WIN2 : W PHASE HALL ELEMENT


OUTPUT
U OUT : U PHASE OUTPUT
V OUT : V PHASE OUTPUT
W OUT : W PHASE OUTPUT

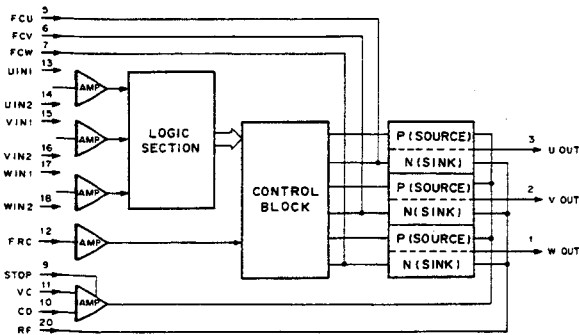

HD6435348RA00F (HITACHI)

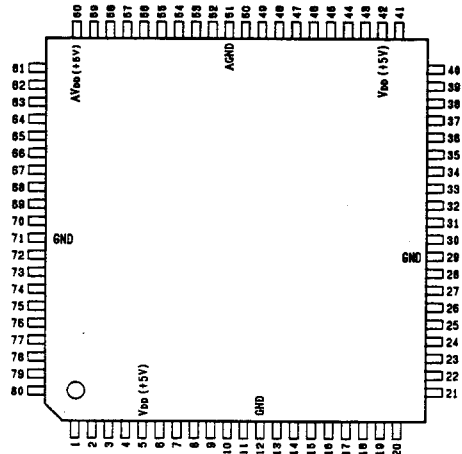C-MOS 8-BIT 1-CHIP MICROCOMPUTER
- TOP VIEW -

PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL
1	I/O	P21/R/W	41	I/O	P63/PM3/IRQ ₅ /A19
2	I/O	P22/D ₅	42	-	V _{cc}
3	I/O	P23/RD	43	I/O	P70/TMC1
4	I/O	P24/WR	44	I/O	P71/ET11
5	-	V _{cc}	45	I/O	P72/ET12
6	I	MD0	46	I/O	P73/FT03/TMRI
7	I	MD1	47	I/O	P74/FT081/FTC11
8	I	MD2	48	I/O	P75/FT082/FTC12
9	I	STBY	49	I/O	P76/FT083/FTC13
10	I	RES	50	I/O	P77/FT0A1
11	I	NMI	51	-	AGND
12	-	GND	52	I	P80/AN0
13	I/O	P30/D0	53	I	P81/AN1
14	I/O	P31/D1	54	I	P82/AN2
15	I/O	P32/D2	55	I	P83/AN3
16	I/O	P33/D3	56	I	P84/AN4
17	I/O	P34/D4	57	I	P85/AN5
18	I/O	P35/D5	58	I	P86/AN6
19	I/O	P36/D6	59	I	P87/AN7
20	I/O	P37/D7	60	-	AV _{cc}
21	I/O	P40/A0	61	I/O	P90/FT0A2
22	I/O	P41/A1	62	I/O	P91/FT0A3
23	I/O	P42/A2	63	I/O	P92/TXD2/PW1
24	I/O	P43/A3	64	I/O	P93/RXD2/PW2
25	I/O	P44/A4	65	I/O	P94/SCK2/PW3
26	I/O	P45/A5	66	I/O	P95/TXD1
27	I/O	P46/A6	67	I/O	P96/RXD1
28	I/O	P47/A7	68	I/O	P97/SCK1
29	-	GND	69	I	EXTAL
30	I/O	P50/A1	70	I	XTAL
31	I/O	P51/A2	71	-	GND
32	I/O	P52/A10	72	I/O	P10/φ
33	I/O	P53/A11	73	I/O	P11/E
34	I/O	P54/A12	74	I/O	P12/BACK
35	I/O	P55/A13	75	I/O	P13/BREQ
36	I/O	P56/A14	76	I/O	P14/WAIT
37	I/O	P57/A15	77	I/O	P15/IRQ0
38	I/O	P60/IRQ ₂ /A16	78	I/O	P16/IRQ1/ADTRG
39	I/O	P61/PM1/IRQ ₂ /A17	79	I/O	P17/TMO
40	I/O	P62/PM2/IRQ ₄ /A18	80	I/O	P20/AS

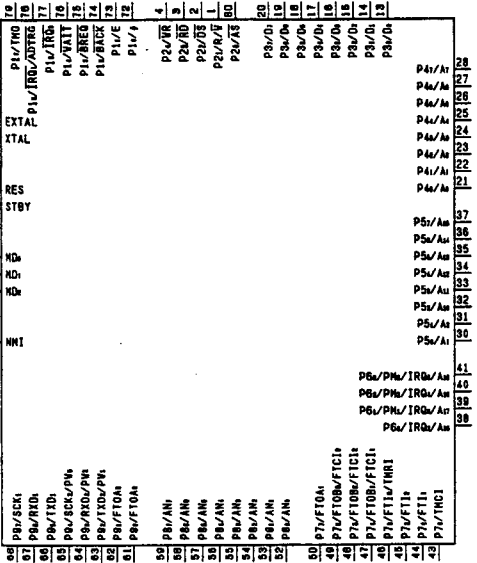


```

INPUT
ADTRG      : ANALOG TRIGGER
AN0 - AN7  : ANALOG DATA
BREQ       : BUS REQUEST
EXTAL       : CONNECTED TO CRYSTAL OSCILLATOR
FTC11 - FTC13 : FRT COUNTER CLOCK (CHANNEL 1 TO 3)
FT11 - FT13 : FRT COUNTER CAPTURE (CHANNEL 1 TO 3)
IRC0 - IRC5 : INTERRUPT REQUEST 0 AND 1
MD0 - MD2   : MODE SETTING
NMI         : NON MASKABLE INTERRUPT
P80 - P87   : PORT 8
RES         : RESET
RXD1, 2     : RECEIVE DATA
STBY        : STANDBY
TMR1        : 8-BIT TIMER CLOCK
TMR2        : 8-BIT TIMER COUNTER RESET
WAIT        : WAIT
XTAL        : CONNECTED TO CRYSTAL OSCILLATOR



OUTPUT
A0 - A19    : ADDRESS BUS
AS          : ADDRESS STROBE
BACK        : BUS REQUEST ACKNOWLEDGE
DS          : DATA STROBE
DS          : ENABLE CLOCK
FT0A1 - FT0A3 : FRT OUTPUT COMPARE A (CHANNEL 1 TO 3)
FT0B1 - FT0B3 : FRT OUTPUT COMPARE B (CHANNEL 1 TO 3)
PW1 - PW3    : PWM TIMER (CHANNEL 1 TO 3)
R/W         : READ/WRITE
RD          : READ
TMO         : 8-BIT TIMER
TXD1, 2     : SEND DATA
WR          : WRITE
 $\phi$          : SYSTEM CLOCK

INPUT/OUTPUT
D0 - D7     : DATA BUS
P10 - P17   : PORT 1
P20 - P24   : PORT 2
P30 - P37   : PORT 3
P40 - P47   : PORT 4
P50 - P57   : PORT 5
P60 - P63   : PORT 6
P70 - P77   : PORT 7
P80 - P97   : PORT 9
SCK1, 2     : SERIAL CLOCK


```

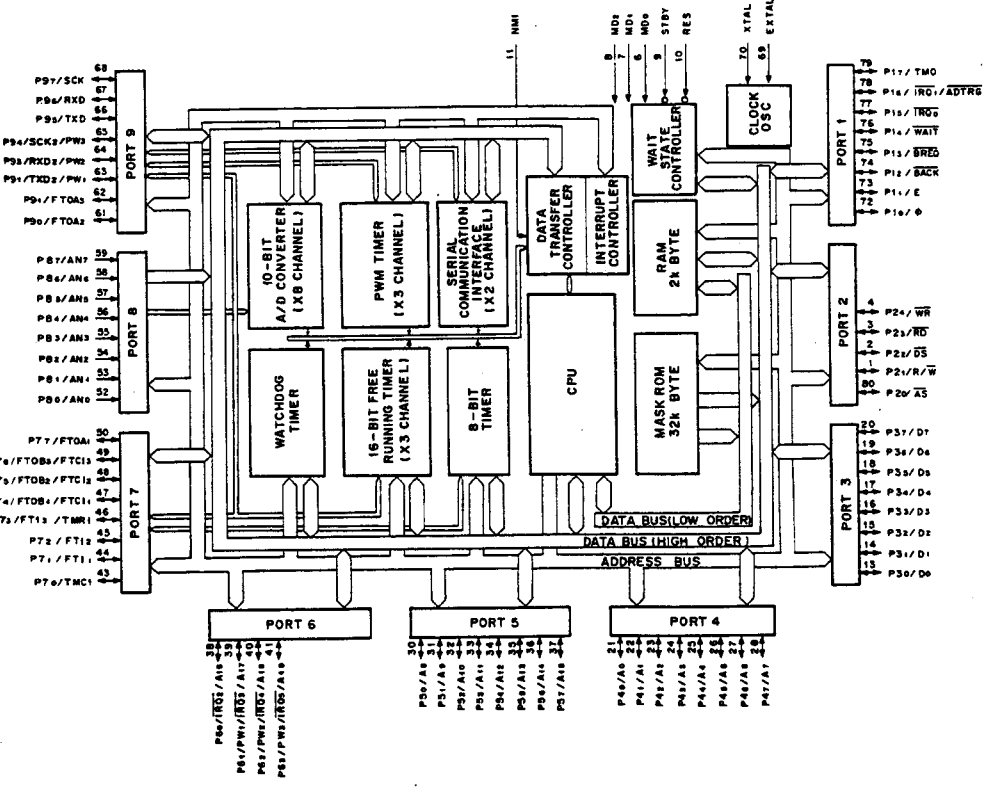


M51957BFP (MITSUBISHI) FLAT PACKAGE
VOLTAGE DETECTOR
 - TOP VIEW -

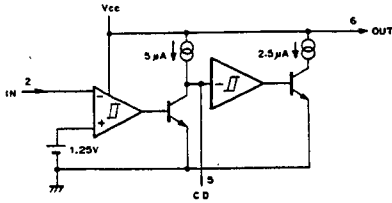



M51957BL (MITSUBISHI)
VOLTAGE DETECT DELAY
 - PRINTED SIDE VIEW -




TIMING CHART





M51958A (MITSUBISHI) FLAT PACKAGE
VOLTAGE DETECT DELAY
 - TOP VIEW -

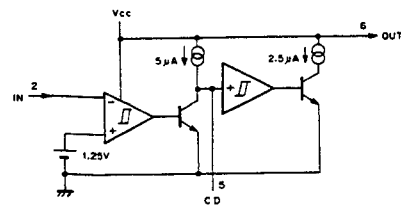


M54523P (MITSUBISHI)
BIPOLAR TRANSISTOR ARRAY WITH OPEN COLLECTOR
 - TOP VIEW -





M54532P (MITSUBISHI)
DARLINGTON TRANSISTOR ARRAY WITH CLAMP DIODE
 - TOP VIEW -




MB4002PF (FUJITSU) FLAT PACKAGE
HIGH SPEED VOLTAGE COMPARATOR
 - TOP VIEW -





MB88201 (FUJITSU)
C-MOS 4-BIT MICROCOMPUTER
 - TOP VIEW -

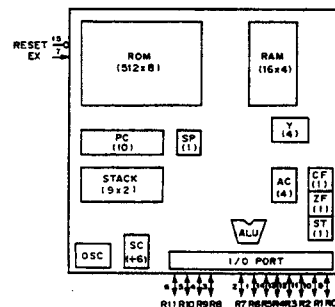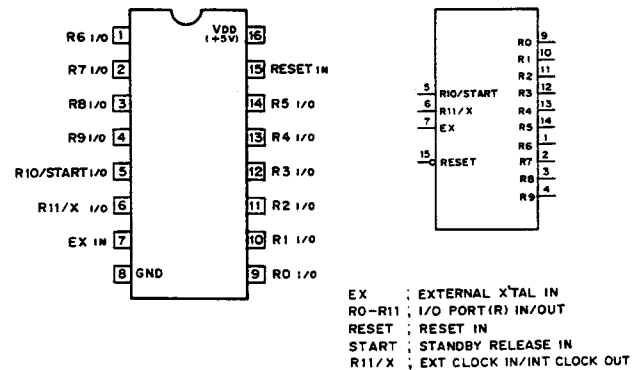


MB40568 (FUJITSU) FLAT PACKAGE
8BIT VIDEO A/D CONVERTER
- TOP VIEW -

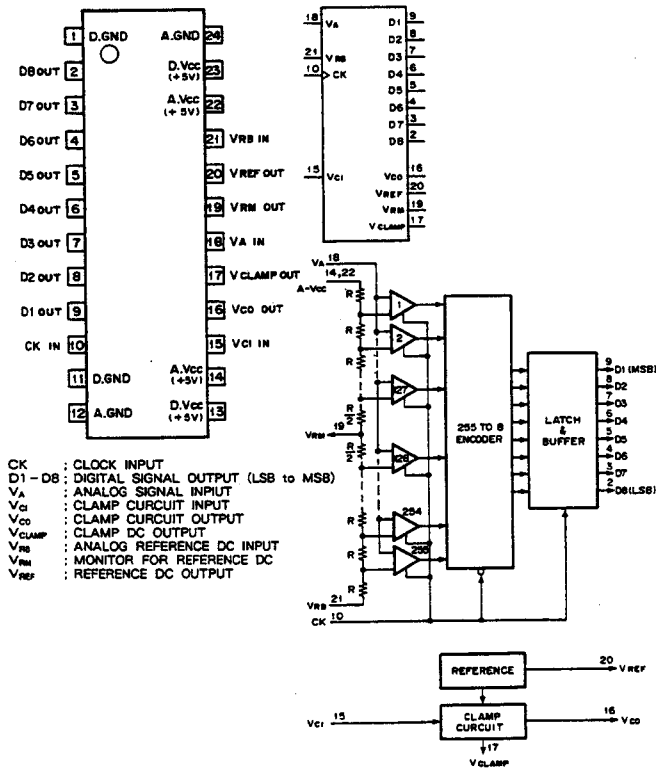


MB88342PF (FUJITSU) FLAT PACKAGE
C-MOS 8-BIT D/A CONVERTER
- TOP VIEW -

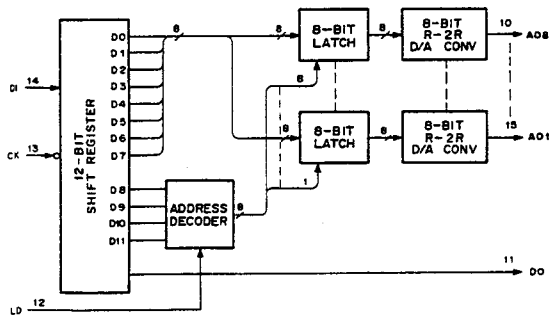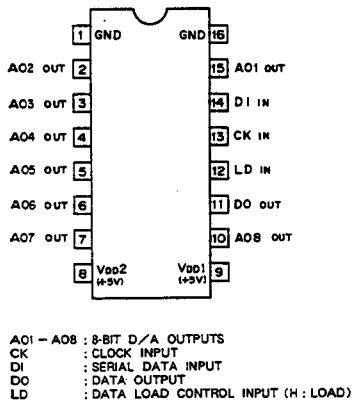


MC14051BF (MOTOROLA) FLAT PACKAGE
C-MOS 8-CHANNEL ANALOG MULTIPLEXER/DEMUTIPLEXER
- TOP VIEW -

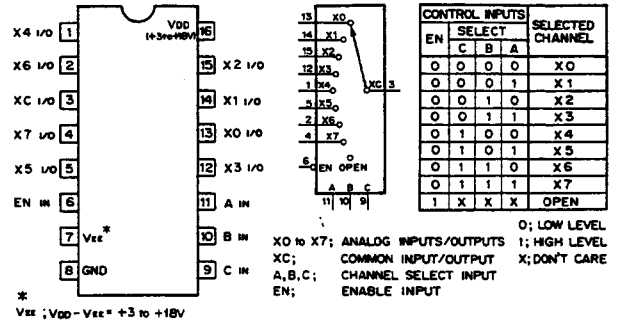


MC14052BF (MOTOROLA) FLAT PACKAGE
C-MOS DUAL 4-CHANNEL ANALOG MULTIPLEXERS/DEMUTIPLEXERS
- TOP VIEW -

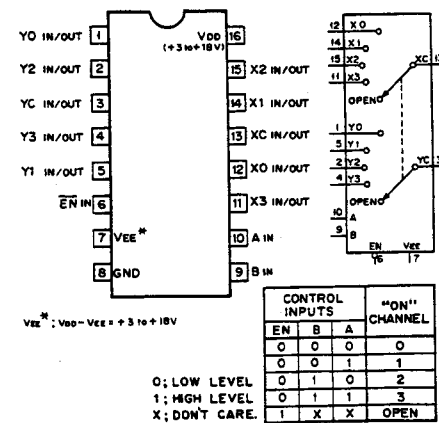


MC14053BCF (MOTOROLA)
MC14053BF (MOTOROLA) FLAT PACKAGE
UPD4053BC (NEC)
C-MOS TRIPLE 2-CHANNEL ANALOG MULTIPLEXERS/DEMUTIPLEXERS
- TOP VIEW -

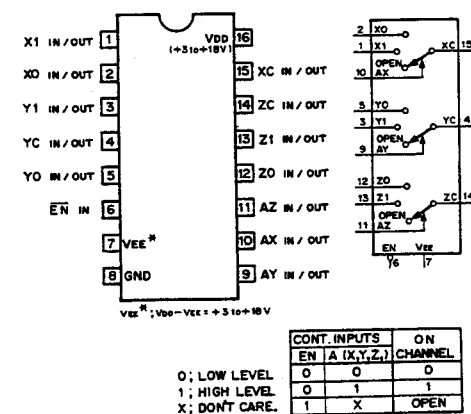


MC14066BF (MOTOROLA) FLAT PACKAGE
CMOS QUAD BILATERAL ANALOG SWITCH
- TOP VIEW -

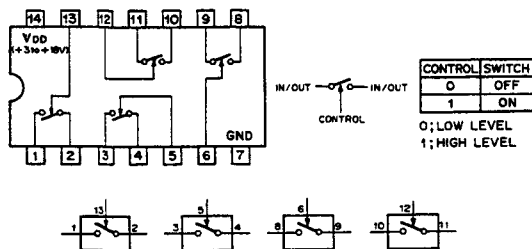


MC14069UBF (MOTOROLA)
CMOS INVERTER
- TOP VIEW -

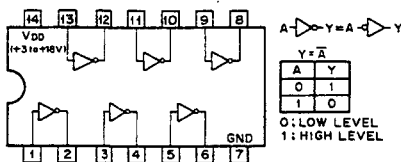


MC14576BF (MOTOROLA) FLAT PACKAGE
CMOS DUAL VIDEO AMPLIFIERS
- TOP VIEW -



MC34051M (MOTOROLA) FLAT PACKAGE
RS-422 DRIVER/RECEIVER
- TOP VIEW -

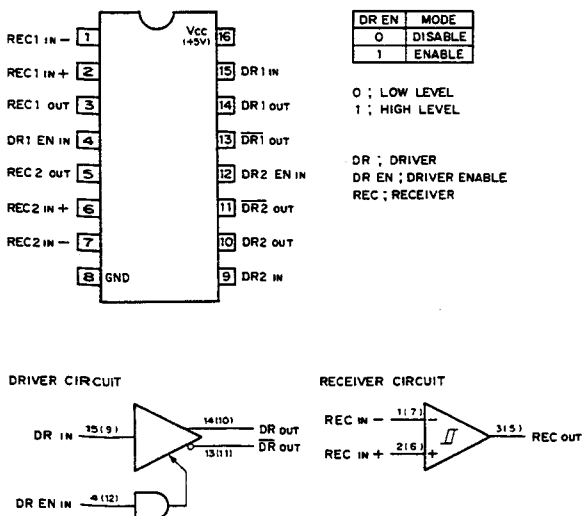


MC68HC05C8 (MOTOROLA)
CMOS 8-BIT MICROCONTROLLER UNIT
- TOP VIEW -

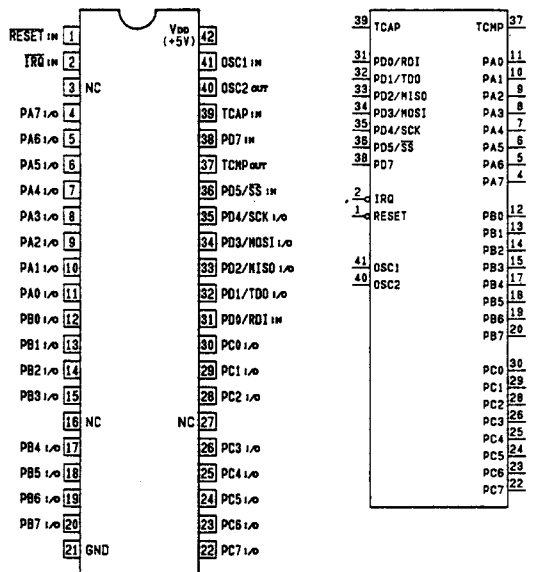

INPUT
IRQ : INTERRUPT REQUEST
OSC1 : OSCILLATOR FREQUENCY
PD0 - PD7 : PROGRAMMABLE D PORT
RDI : RECEIVING DATA
RESET : RESET
SS : SUB SELECT
TCAP : CAPTURE FEATURE FOR THE ON-CHIP PROGRAMMABLE TIMER


OUTPUT
OSC2 : OSCILLATOR FREQUENCY
SCK : SERIAL CLOCK
TCMP : COMPARE FEATURE OF THE ON-CHIP TIMER
TDO : TRANSMISSION DATA

INPUT/OUTPUT
MISO : MASTER INPUT, SUB OUTPUT
MOSI : MASTER OUTPUT, SUB INPUT
PA0 - PA7 : PROGRAMMABLE A PORT
PB0 - PB7 : PROGRAMMABLE B PORT
PC0 - PC7 : PROGRAMMABLE C PORT

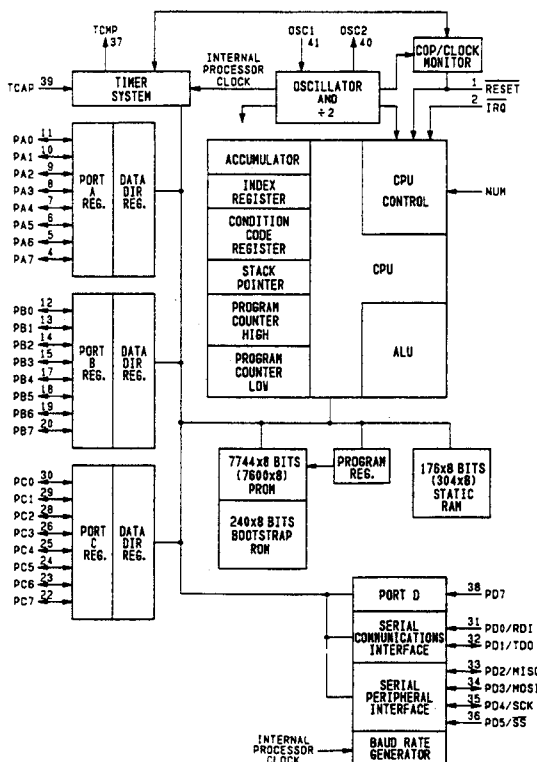


MC74HC4002F (MOTOROLA) FLAT PACKAGE

C-MOS 4-INPUT NOR GATE
- TOP VIEW -

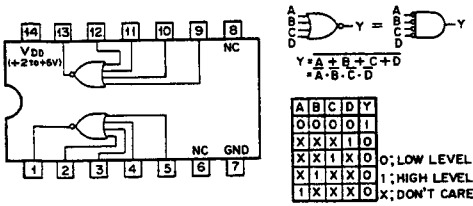


MC74HC173F (MOTOROLA) FLAT PACKAGE

C-MOS 4-BIT D-TYPE REGISTERS WITH 3-STATE OUTPUT
- TOP VIEW -

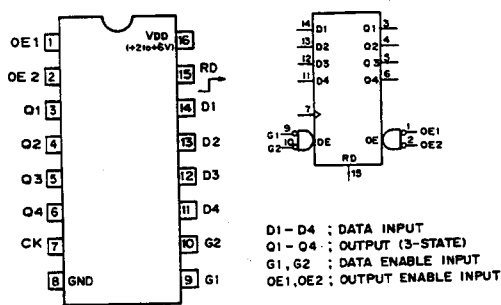



MC74HC4024N (MOTOROLA)

C-MOS 7-BIT BINARY COUNTERS
- TOP VIEW -

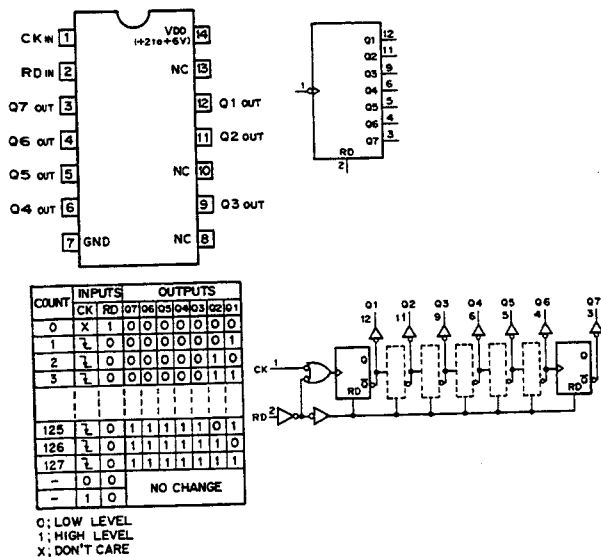




MS6264CLL-10FC (MOSEL) FLAT PACKAGE

C-MOS 64K (8Kx8)-BIT STATIC RAM
- TOP VIEW -

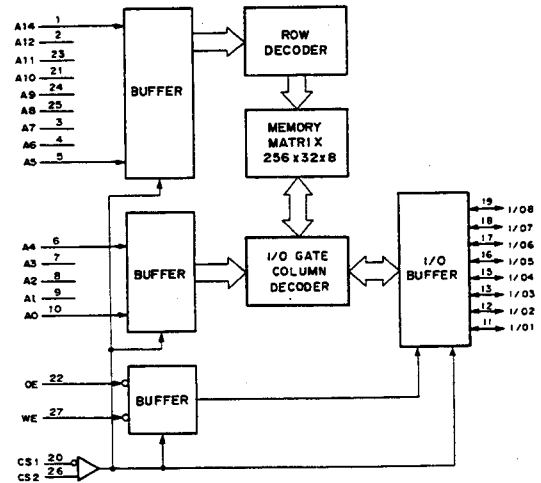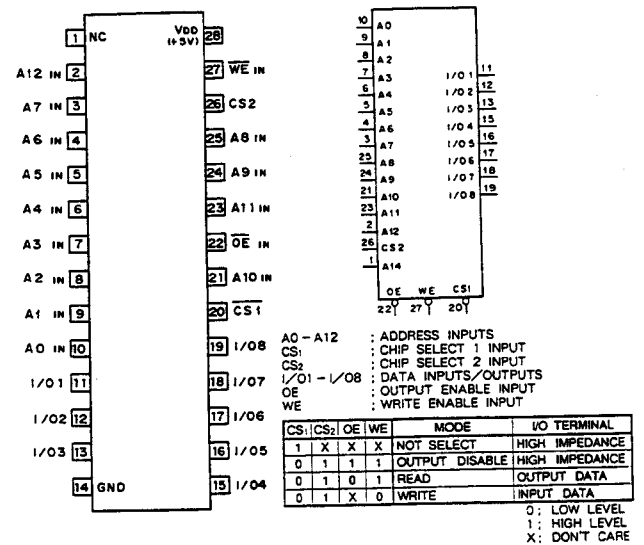


MC74HC4538AN (MOTOROLA)


C-MOS DUAL RETRIGGERABLE / NON-RETRIGGERABLE MONOSTABLE MULTIVIBRATOR
- TOP VIEW -




$$\text{OUTPUT PULSE WIDTH} = k \cdot C \cdot R$$



RETRIGGERABLE M.M.V.




NON-RETRIGGERABLE M.M.V.




NJM2068DD (JRC)


LOW NOISE OPERATIONAL AMPLIFIER
- TOP VIEW -




NJM360M (JRC) FLAT PACKAGE
HIGH SPEED VOLTAGE COMPARATOR
(TTL OUTPUT)
- TOP VIEW -





NJM4556M-A (JRC) FLAT PACKAGE
OPERATIONAL AMPLIFIER
(WIDE BAND, DECOMPENSATED)
- TOP VIEW -





NJM4558D-D (JRC)
NJM4558D-FA (JRC)
NJM4558M (JRC) FLAT PACKAGE
DUAL OPERATIONAL AMPLIFIER
- TOP VIEW -





NJM78L09A (JRC) + 9V (100mA)
TA78L09S (TOSHIBA) + 9V (100mA)
POSITIVE VOLTAGE REGULATOR




NJM78M09FA (JRC) + 9V
POSITIVE VOLTAGE REGULATOR (500mA)
- FRONT VIEW -




NJM79L05A (JRC) - 5V
NJM79L09A (JRC) - 9V
NEGATIVE VOLTAGE REGULATOR (100mA)




NJM79M09FA (JRC) -9V
NEGATIVE VOLTAGE REGULATOR (500mA)
- FRONT VIEW -




PQ30RV1 (SHARP) VARIABLE 1A
POSITIVE VOLTAGE REGULATOR



SC14S66FEL (MOTOROLA) CHIP PACKAGE
C-MOS BILATERAL ANALOG SWITCH




SC7S04F (MOTOROLA) CHIP PACKAGE
TC7S04F (TOSHIBA) CHIP PACKAGE
C-MOS INVERTER




TYPE	V _{DD}
7S04F	+2 to +6V
7SU04F	+2 to +6V
4S69F	+3 to +18V
4SU69F	+3 to +18V

SC7S32F (MOTOROLA) CHIP PACKAGE
TC7S32F (TOSHIBA) CHIP PACKAGE
C-MOS 2-INPUT OR GATE

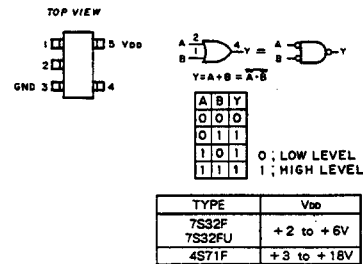


SN74HC00AN (TI)
SN74HC00ANS (TI) FLAT PACKAGE
C-MOS QUAD 2-INPUT NAND GATES
- TOP VIEW -

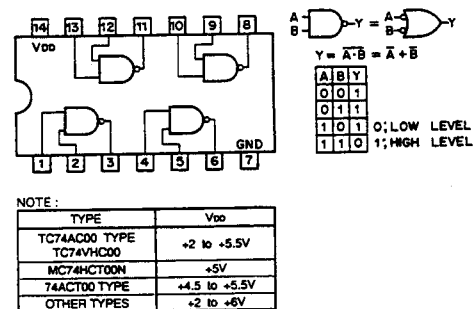


TYPE	V _{DD}
TC74AC00 TYPE	+2 to +5.5V
TC74VHC00	+2 to +5.5V
MC74HCT00N	+5V
74ACT00 TYPE	+4.5 to +5.5V
OTHER TYPES	+2 to +6V

SN74HC04ANS (TI) FLAT PACKAGE
SN74HC04AN (TI)
SN74HC04ANS (TI) FLAT PACKAGE
C-MOS HEX INVERTERS
- TOP VIEW -

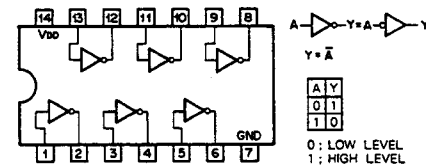

TYPE	V _{DD}
74HCT04 TYPE	+5V
TC74AC04 TYPE	+2 to +5.5V
TC74VHC04 TYPE	+2 to +5.5V
74ACT04 TYPE	+4.5 to +5.5V
OTHER TYPES	+2 to +6V


SN74HC08AN (TI)
SN74HC08ANS (TI) FLAT PACKAGE
C-MOS QUAD 2-INPUT AND GATES
- TOP VIEW -

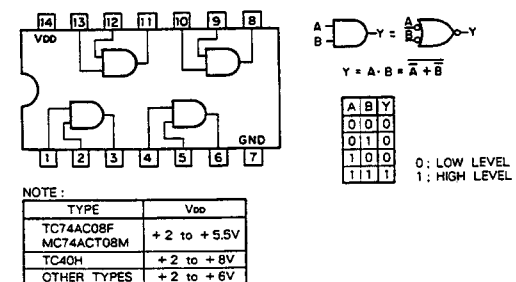

TYPE	V _{DD}
TC74AC08F	+2 to +5.5V
MC74ACT08M	+2 to +5.5V
TC40H	+2 to +8V
OTHER TYPES	+2 to +6V

SN74HC10ANS (TI) FLAT PACKAGE

C-MOS 3-INPUT NAND GATE
- TOP VIEW -

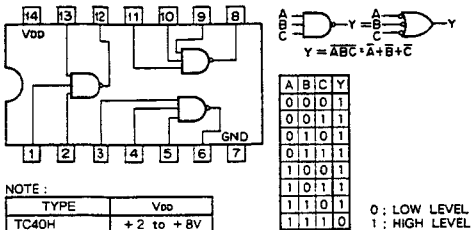


NOTE :

TYPE	V _{DD}
TC40H	+ 2 to + 8V
OTHERS	+ 2 to + 6V

0 : LOW LEVEL
1 : HIGH LEVEL

SN74HC11ANS (TI) FLAT PACKAGE


C-MOS 3-INPUT POSITIVE-AND GATE

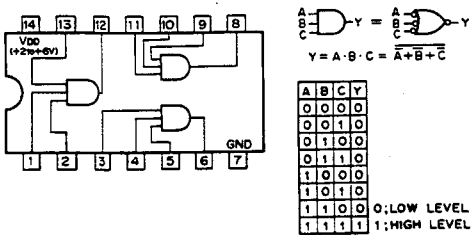

1; HIGH LEVEL

SN74HC138ANS (TI) FLAT PACKAGE

C-MOS 3-T08 LINE DECODER/DEMULTIPLEXER
- TOP VIEW -

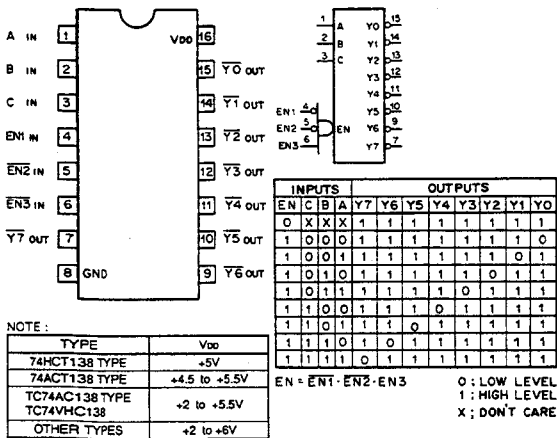

NOTE :


TYPE	V _{DD}
74HCT138 TYPE	+5V
74ACT138 TYPE	+4.5 to +5.5V
TC74AC138 TYPE TC74VHC138	+2 to +5.5V
OTHER TYPES	+2 to +6V

EN = $\overline{EN1} \cdot \overline{EN2} \cdot EN3$

0	: LOW LEVEL
1	: HIGH LEVEL
X	: DON'T CARE

SN74HC157ANS (TI) FLAT PACKAGE

C-MOS QUAD 2-LINE-TO-1-LINE DATA SELECTOR/MULTIPLEXER
- TOP VIEW -

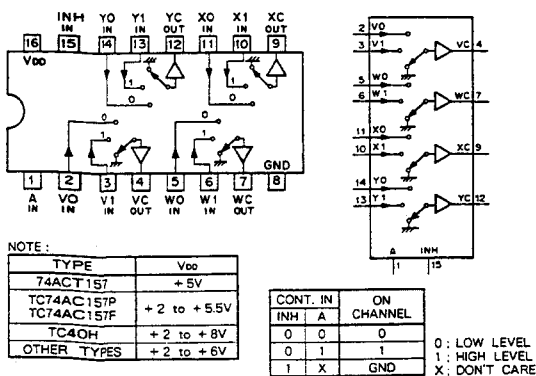

NOTE :


TYPE	V _{DD}
74ACT157	+5V
TC74AC157P TC74AC157F	+2 to +5.5V
TC40H	+2 to +8V
OTHER TYPES	+2 to +6V

CONT. IN		ON CHANNEL
INH	A	
0	0	0
0	1	1
1	X	GND

0 : LOW LEVEL
1 : HIGH LEVEL
X : DON'T CARE


SN74HC161AN (TI)

C-MOS SYNCHRONOUS PRESETTABLE 4-BIT BINARY COUNTER
- TOP VIEW -

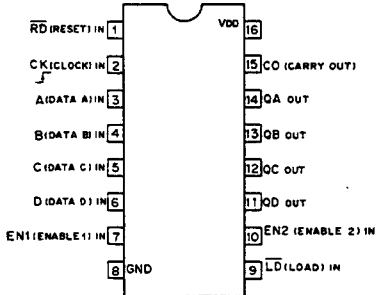

MODE SELECTION				
CONTROL INPUTS				MODE
R ₀	LD	EN1	EN2	
0	X	X	X	RESET (ASYNCHRONOUS)
1	0	X	X	PRESET (SYNCHRONOUS)
1	1	0	X	NO COUNT
1	1	X	0	NO COUNT
1	1	1	1	COUNT

0 : LOW LEVEL
1 : HIGH LEVEL
X : DON'T CARE



CO IS HIGH WHEN EN2 INPUT IS HIGH AND COUNT IS "15".


COUNT SEQUENCE				
COUNT	OUTPUTS			
	QD	QC	QB	QA
0	0	0	0	0
1	0	0	0	1
2	0	0	1	0
3	0	0	1	1
4	0	1	0	0
5	0	1	0	1
6	0	1	1	0
7	0	1	1	1
8	1	0	0	0
9	1	0	0	1
10	1	0	1	0
11	1	0	1	1
12	1	1	0	0
13	1	1	0	1
14	1	1	1	0
15	1	1	1	1

NOTE :

TYPE	V _{DD}
74ACT	+5V
TC40H	+2 to +8V
OTHERS	+2 to +6V


SN74HC164ANS (TI) FLAT PACKAGE

C-MOS 8-BIT SERIAL-IN/PARALLEL-OUT SHIFT REGISTER
- TOP VIEW -

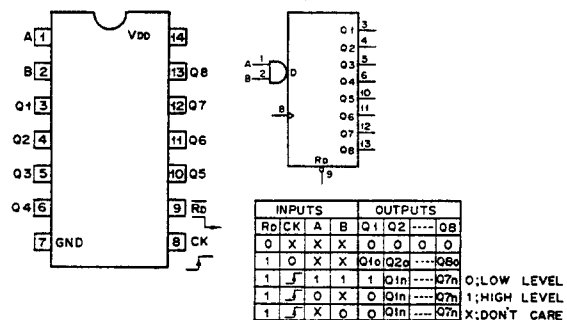


NOTE



TYPE	V _{DD}
TC74AC164 TYPE	+2 to +5.5V
OTHER TYPES	+2 to +6V

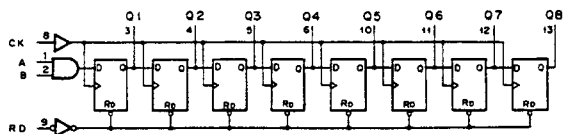

SN74HC192NS (TI) FLAT PACKAGE
C-MOS SYNCHRONOUS UP/DOWN DECADE COUNTER
- TOP VIEW -

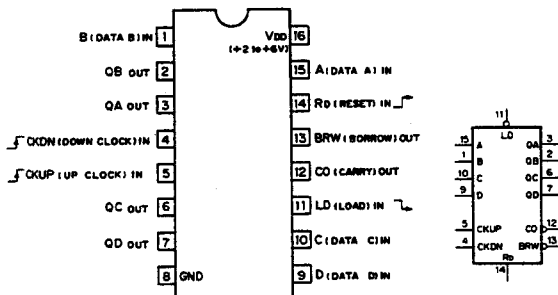

CONTROL INPUTS					MODE
Rd	LD	CKUP	CKDN		
1	X	X	X		RESET TO ZERO
0	0	X	X		PRESET
0	1	1	1		UP COUNT
0	1	1	0		DOWN COUNT
0	1	1	1		NO COUNT




COUNT	OUTPUTS			
	QD	QC	QB	QA
0	0	0	0	0
1	0	0	0	1
2	0	0	1	0
3	0	0	1	1
4	0	1	0	0
5	0	1	0	1
6	0	1	1	0
7	0	1	1	1
8	1	0	0	0
9	1	0	0	1

0: LOW LEVEL
1: HIGH LEVEL
X: DON'T CARE

UP COUNT
DOWN COUNT


SN74HC266ANS (TI) FLAT PACKAGE
C-MOS 2-INPUT EXCLUSIVE-NOR GATE
- TOP VIEW -

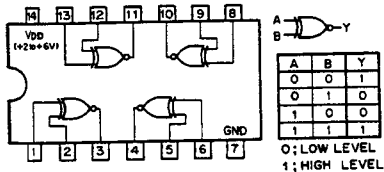

A	B	Y
0	0	1
0	1	0
1	0	0
1	1	1

0: LOW LEVEL
1: HIGH LEVEL

SN74HC27ANS (TI) FLAT PACKAGE
C-MOS 3-LINE POSITIVE-NOR GATE
- TOP VIEW -

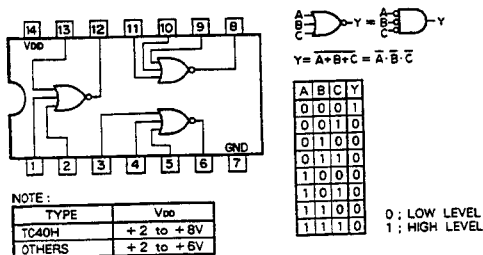


A	B	C	Y
0	0	0	1
0	0	1	0
0	1	0	0
0	1	1	0
1	0	0	0
1	0	1	0
1	1	0	0
1	1	1	0

0: LOW LEVEL
1: HIGH LEVEL

TYPE	VDD
TC40H	+2 to +8V
OTHERS	+2 to +6V

SN74HC32ANS (TI) FLAT PACKAGE
C-MOS QUAD 2-INPUT OR GATES
- TOP VIEW -

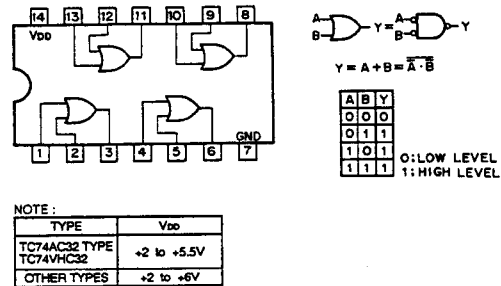


A	B	Y
0	0	0
0	1	1
1	0	1
1	1	1

0: LOW LEVEL
1: HIGH LEVEL

TYPE	VDD
TC74AC32 TYPE TC74VHC32	+2 to +5.5V
OTHER TYPES	+2 to +6V

SN74HC541ANS (TI) FLAT PACKAGE
C-MOS BUFFERS AND LINE DRIVERS WITH 3-STATE OUTPUTS
- TOP VIEW -

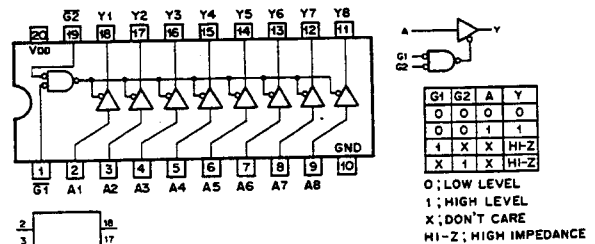


G1	G2	A	Y
0	0	0	0
0	0	1	1
1	X	X	Hi-Z
X	1	X	Hi-Z

0: LOW LEVEL
1: HIGH LEVEL
X: DON'T CARE
Hi-Z: HIGH IMPEDANCE

TYPE	VDD
AC/VHC	+2 to +5.5V
HC	+2 to +6V
ACT/BCT/HCT	+5V


SN74HC7266NS (TI) FLAT PACKAGE
C-MOS 2-INPUT EXCLUSIVE-NOR GATES
- TOP VIEW -

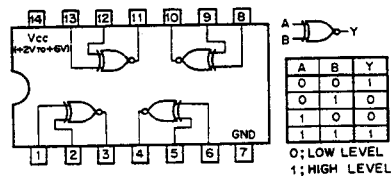

A	B	Y
0	0	1
0	1	0
1	0	0
1	1	1

0: LOW LEVEL
1: HIGH LEVEL

SN74HC74AN (TI)
SN74HC74ANS (TI) FLAT PACKAGE
C-MOS DUAL D-TYPE FLIP-FLOPS WITH DIRECT SET/RESET
- TOP VIEW -

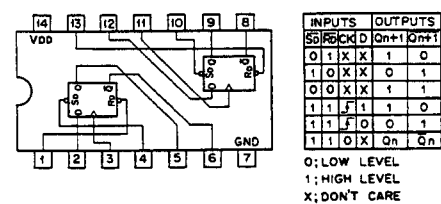


INPUTS				OUTPUTS	
S	R	C	D	Q _{n+1}	Q _{n+1}
0	1	X	X	1	0
1	0	X	X	0	1
0	0	X	X	1	1
1	1	1	1	0	0
1	1	1	0	0	1
1	1	0	X	Q _n	Q _n

0: LOW LEVEL
1: HIGH LEVEL
X: DON'T CARE

TYPE	VDD
TC74HCT74AF	+5V
TC74AC74 TYPE	+2 to +5.5V
74ACT74 TYPE	+4.5 to +5.5V
OTHER TYPES	+2 to +6V


SN74HC86ANS (TI) FLAT PACKAGE
C-MOS QUAD EXCLUSIVE OR GATES
- TOP VIEW -

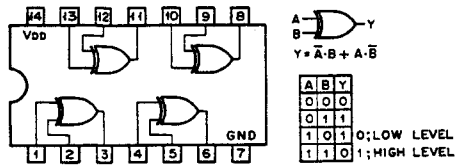


NOTE:

TYPE	VDD
TC74AC86 TYPE	+2 to +5.5V
OTHER TYPES	+2 to +6V



SN74LS221NS (TI) FLAT PACKAGE
TTL MONOSTABLE MULTIVIBRATOR WITH SCHMITT TRIGGER INPUT
- TOP VIEW -

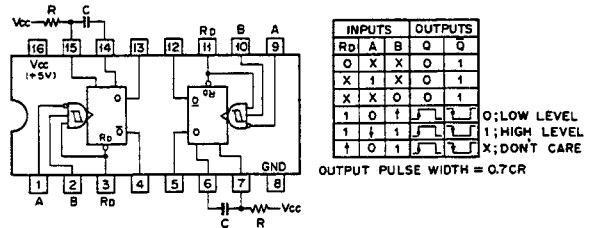



SRM2016M10 (SEIKO EPSON) FLAT PACKAGE
C-MOS 16384-BIT (2048x8) STATIC RAM
- TOP VIEW -

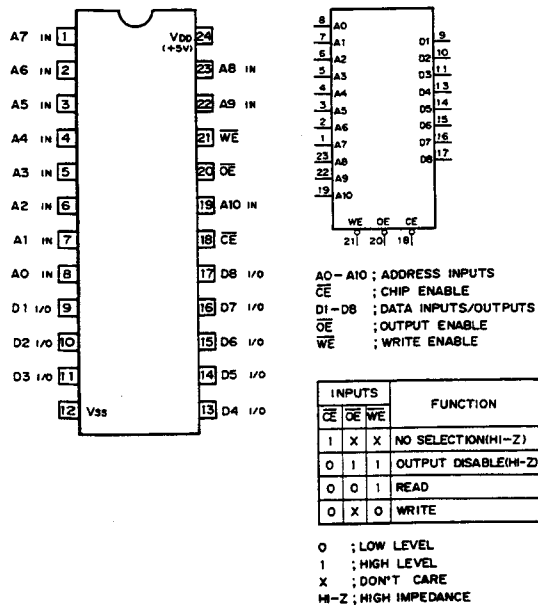


TA7267P (TOSHIBA)
DC MOTOR DRIVER
- PRINTED SIDE VIEW -

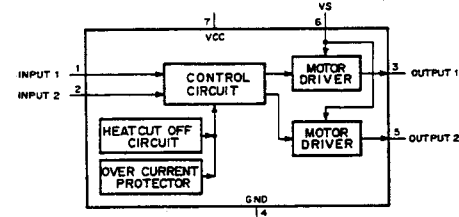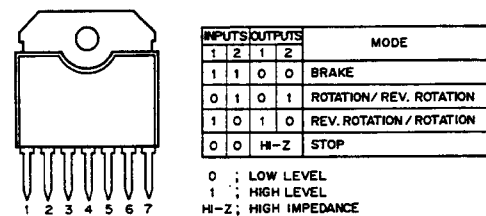


TC74HC221AF (TOSHIBA) FLAT PACKAGE
C-MOS MONOSTABLE MULTIVIBRATOR WITH SCHMITT TRIGGER INPUT
- TOP VIEW -

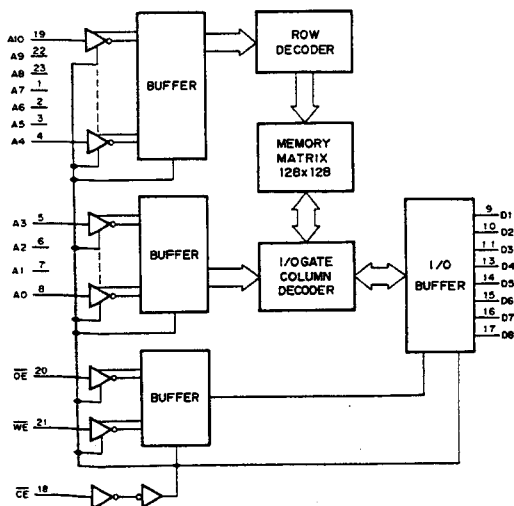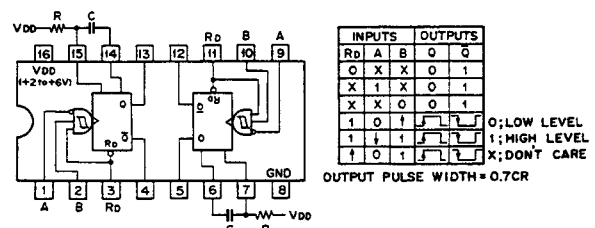


TC5081AP (TOSHIBA)
CMOS PHASE COMPARATOR
- SIDE VIEW -



PHASE COMPARATOR TIMING CHART

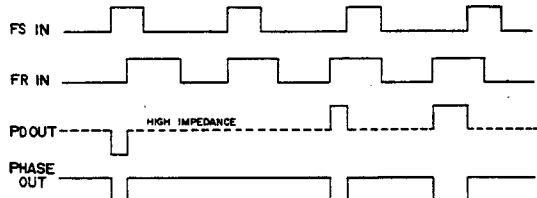


TC74HC123AF (TOSHIBA) FLAT PACKAGE
CMOS DUAL RETRIGGERABLE MONOSTABLE MULTIVIBRATORS
- TOP VIEW -



INPUT		OUTPUT	
RD	A	B	Q
0	X	X	0
1	1	X	0
1	X	0	0
1	0	1	1
1	1	1	1
1	0	1	1

0; LOW LEVEL
1; HIGH LEVEL
X; DON'T CARE

OUTPUT PULSE WIDTH = 0.46CR




NOTE:

TYPE	V _{DD}
TC74HCT123AF	+5V
OTHER TYPES	+2 to +6V

TC7S08F (TOSHIBA) CHIP PACKAGE
CMOS 2-INPUT AND GATE

(SCALE 6/1)
TOP VIEW




A	B	Y
0	0	0
0	1	0
1	0	0
1	1	1

0; LOW LEVEL
1; HIGH LEVEL

TYPE	V _{DD}
7S08F	+2 to +6V
7S08FU	+2 to +6V
4S81F	+3 to +18V
14S81F	+3 to +18V

TC74HC191AF (TOSHIBA) FLAT PACKAGE
CMOS PRESETTABLE SYNCHRONOUS 4-BIT BINARY UP/DOWN COUNTER
- TOP VIEW -

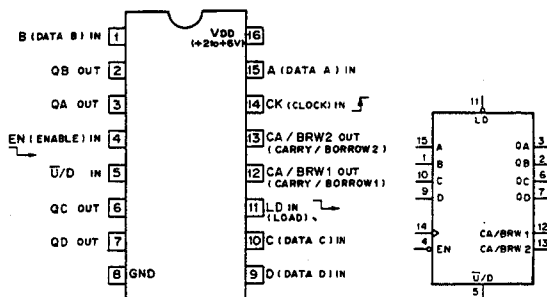

MODE SELECTION

CONTROL INPUTS			MODE
LD	EN	U/D	
0	X	X	PRESET (ASYNCHRONOUS)
1	1	X	NO COUNT
1	0	0	UP COUNT
1	0	1	DOWN COUNT


0; LOW LEVEL
1; HIGH LEVEL
X; DON'T CARE.

COUNT SEQUENCE

COUNT	OUTPUTS			
	QD	QC	QB	QA
0	0	0	0	0
1	0	0	0	1
2	0	0	1	0
3	0	0	1	1
4	0	1	0	0
5	0	1	0	1
6	0	1	1	0
7	0	1	1	1
8	1	0	0	0
9	1	0	0	1
10	1	0	1	0
11	1	0	1	1
12	1	1	0	0
13	1	1	0	1
14	1	1	1	0
15	1	1	1	1

UP COUNT
DOWN COUNT

CA/BRW OUTPUTS




CA/BRW1 OUTPUT IS HIGH WHEN COUNT IS "15" AT UP-COUNT OR WHEN COUNT IS "0" AT DOWN COUNT.

CA/BRW2 OUTPUT IS LOW WHEN BOTH THE CLOCK AND EN INPUTS ARE LOW AND CA/BRW1 OUTPUT IS HIGH.


TL062CPS (TI) FLAT PACKAGE
TL082CPS (TI) FLAT PACKAGE

OPERATIONAL AMPLIFIER
(JFET INPUT)
- TOP VIEW -




TL084CNS (TI) FLAT PACKAGE


OPERATIONAL AMPLIFIER
(J FET-INPUT)
- TOP VIEW -




TL431CLP (TI)
ADJUSTABLE PRECISION SHUNT REGULATOR

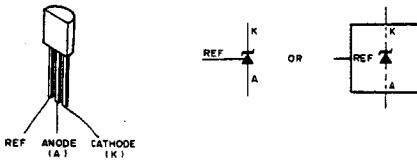


UPC324G2 (NEC) FLAT PACKAGE
QUAD OPERATIONAL AMPLIFIERS
- TOP VIEW -




UPC4557C (NEC)
OPERATIONAL AMPLIFIER (WIDE BAND, LOW NOISE)
- TOP VIEW -




UPC4570C (NEC)
UPC4570G2 (NEC) FLAT PACKAGE
OPERATIONAL AMPLIFIER
- TOP VIEW -





UPC4574G2 (NEC)
QUAD OPERATIONAL AMPLIFIER
- TOP VIEW -




UPC78L05T (NEC) +5V
POSITIVE VOLTAGE REGULATOR (100mA)



UPD42101C-3 (NEC)
UPD42101G-3 (NEC) FLAT PACKAGE
C-MOS 7K (910x8)-BIT FIFO MEMORY
- TOP VIEW -

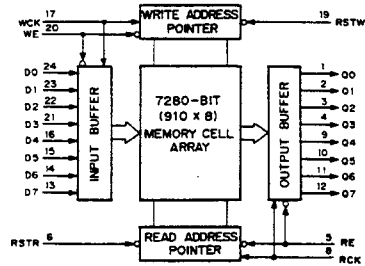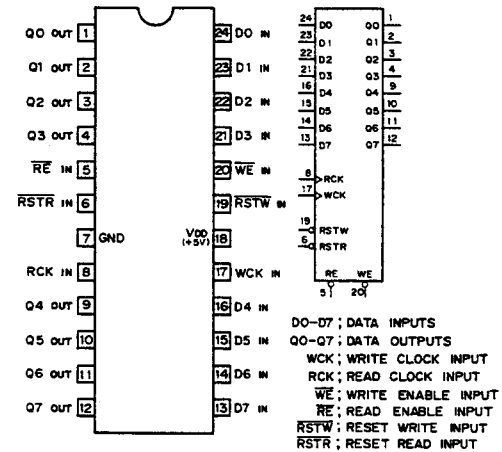


UPD6453GT (NEC) FLAT PACKAGE
C-MOS ON-SCREEN CHARACTER DISPLAY
- TOP VIEW -

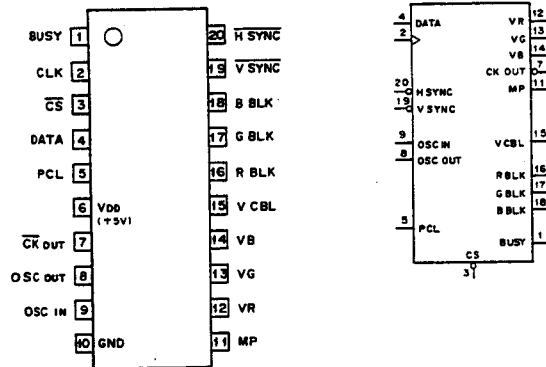

INPUT
CLK : CLOCK
CS : CHIP SELECT
DATA : SERIAL DATA
H SYNC : HORIZONTAL SYNC
OSC IN : OSCILLATOR IN
PCL : POWER ON CLEAR
V SYNC : VERTICAL SYNC


OUTPUT
RBLK, GBLK, VBLK : B, R, G, BLANKING
BUSY : BUSY OUT
CK OUT : CLOCK
MP : MASK PULSE
OSC OUT : OSCILLATOR OUT
VR, VG, VB : R, G, B, CHARACTER DATA
VCBL : VIDEO CUT BLANKING

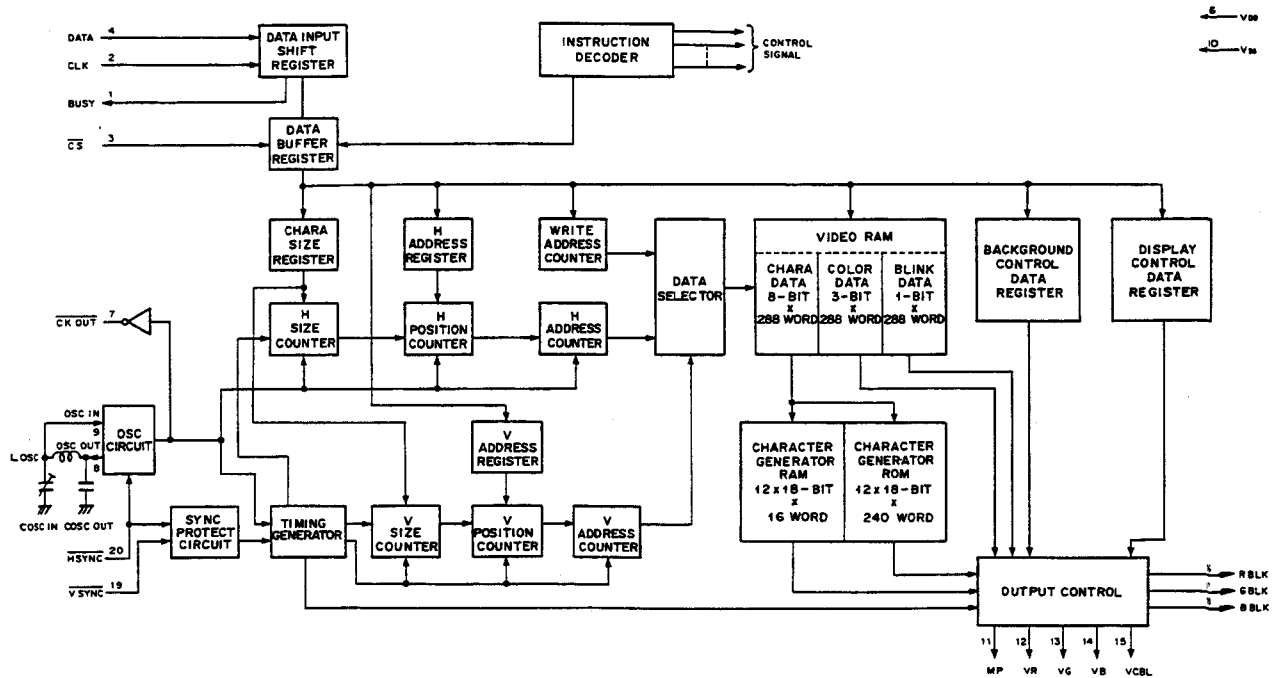

UPD75028GC (NEC)

C-MOS 4-BIT 1-CHIP MICROCOMPUTER

- TOP VIEW -

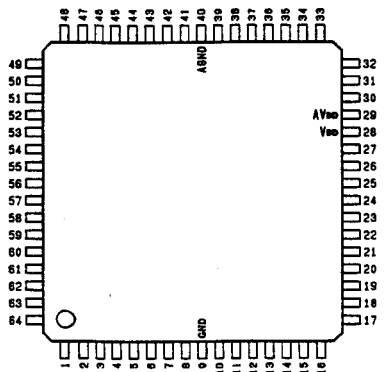


PIN NO.	I/O	SYMBOL	PIN NO.	I/O	SYMBOL	PIN NO.	I/O	SYMBOL	PIN NO.	I/O	SYMBOL
1	I/O	P43	17	I/O	PT00/P20	33	I	AN6	49	I/O	P83
2	I/O	P42	18	I/O	MAT/P103	34	I	AN5	50	I/O	P82
3	I/O	P41	19	I/O	MAZ/P102	35	I	AN4	51	I/O	P81
4	I/O	P40	20	I/O	MAI/P101	36	I	AN3/P113	52	I/O	P80
5	I/O	P39	21	I/O	MAR/P100	37	I	AN2/P112	53	I/O	P79/KR7
6	I/O	P38	22	I	RESET	38	I	AN1/P111	54	I/O	P78/KR6
7	I/O	P37	23	I	X1	39	I	AN0/P110	55	I/O	P77/KR5
8	I/O	P36	24	-	X2	40	I	A GND	56	I/O	P76/KR4
9	-	GND	25	-	IC	41	I	TIO/P13	57	I/O	P63/KR3
10	I/O	SB1/SI/P03	26	I	XT1	42	I	P12/INT2	58	I/O	P62/KR2
11	I/O	SB0/SO	27	I/O	XT2	43	I	P11/INT1	59	I/O	P61/KR1
12	I/O	SCK/P01	28	-	VDD	44	I	P10/INT0	60	I/O	P60/KR0
13	I	INT4/P00	29	-	AVDD	45	I/O	P93	61	I/O	P53
14	I/O	BUZ/P23	30	-	AVREF -	46	I/O	P92	62	I/O	P52
15	I/O	PCL/P22	31	-	AVREF -	47	I/O	P91	63	I/O	P51
16	I/O	PP0/P21	32	I	AN7	48	I/O	P90	64	I/O	P50

PIN NO.	I/O	SYMBOL	PIN NO.	I/O	SYMBOL	PIN NO.	I/O	SYMBOL	PIN NO.	I/O	SYMBOL
13	I/O	P00/INT4	50	I/O	P50	33	I	AN6	49	I/O	P83
12	I/O	P01/SCK	51	I/O	P51	34	I	AN5	50	I/O	P82
11	I/O	P02/S0/SB0	52	I/O	P52	35	I	AN4	51	I/O	P81
10	I/O	P03/S1/SB1	53	I/O	P53	36	I	AN3/P113	52	I/O	P80
44	I/O	P10/INT0	54	I/O	P54	37	I	AN2/P112	53	I/O	P79/KR7
43	I/O	P11/INT1	55	I/O	P55	38	I	AN1/P111	54	I/O	P78/KR6
42	I/O	P12/INT2	56	I/O	P56	39	I	AN0/P110	55	I/O	P77/KR5
41	I/O	P13/TIO	57	I/O	P57	40	I	A GND	56	I/O	P76/KR4
17	I/O	P20/PT00	58	I/O	P58	41	I	TIO/P13	57	I/O	P63/KR3
16	I/O	P21/PT01	59	I/O	P59	42	I	P12/INT2	58	I/O	P62/KR2
15	I/O	P22/PCL	60	I/O	P60	43	I	P11/INT1	59	I/O	P61/KR1
14	I/O	P23/BUZ	61	I/O	P61	44	I	P10/INT0	60	I/O	P60/KR0
8	I/O	P30	62	I/O	P62	45	I/O	P93	61	I/O	P53
7	I/O	P31	63	I/O	P63	46	I/O	P92	62	I/O	P52
6	I/O	P32	64	I/O	P64	47	I/O	P91	63	I/O	P51
5	I/O	P33	65	I/O	P65	48	I/O	P90	64	I/O	P50
4	I/O	P40	66	I/O	P66	49	I/O	P89	65	I/O	P59
3	I/O	P41	67	I/O	P67	50	I/O	P88	66	I/O	P58
2	I/O	P42	68	I/O	P68	51	I/O	P87	67	I/O	P57
1	I/O	P43	69	I/O	P69	52	I/O	P86	68	I/O	P56
25	I/O	RESET	70	I/O	P70	53	I/O	P85	69	I/O	P55
23	I/O	X1	71	I/O	P71	54	I/O	P84	70	I/O	P54
24	I/O	X2	72	I/O	P72	55	I/O	P83	71	I/O	P53
25	I/O	XT1	73	I/O	P73	56	I/O	P82	72	I/O	P52
26	I/O	XT2	74	I/O	P74	57	I/O	P81	73	I/O	P51
39	I/O	AN0/P110	75	I/O	P75	58	I/O	P80	74	I/O	P50
40	I/O	AN1/P111	76	I/O	P76	59	I/O	P79	75	I/O	P49
41	I/O	AN2/P112	77	I/O	P77	60	I/O	P78	76	I/O	P48
42	I/O	AN3/P113	78	I/O	P78	61	I/O	P77	77	I/O	P47
43	I/O	AN4	79	I/O	P79	62	I/O	P76	78	I/O	P46
44	I/O	AN5	80	I/O	P80	63	I/O	P75	79	I/O	P45
45	I/O	AN6	81	I/O	P81	64	I/O	P74	80	I/O	P44
46	I/O	AN7	82	I/O	P82	65	I/O	P73	81	I/O	P43
47	I/O	AN8	83	I/O	P83	66	I/O	P72	82	I/O	P42
48	I/O	AN9	84	I/O	P84	67	I/O	P71	83	I/O	P41
49	I/O	AN10	85	I/O	P85	68	I/O	P70	84	I/O	P40
50	I/O	AN11	86	I/O	P86	69	I/O	P69	85	I/O	P39
51	I/O	AN12	87	I/O	P87	70	I/O	P68	86	I/O	P38
52	I/O	AN13	88	I/O	P88	71	I/O	P67	87	I/O	P37
53	I/O	AN14	89	I/O	P89	72	I/O	P66	88	I/O	P36
54	I/O	AN15	90	I/O	P90	73	I/O	P65	89	I/O	P35
55	I/O	AN16	91	I/O	P91	74	I/O	P64	90	I/O	P34
56	I/O	AN17	92	I/O	P92	75	I/O	P63	91	I/O	P33
57	I/O	AN18	93	I/O	P93	76	I/O	P62	92	I/O	P32
58	I/O	AN19	94	I/O	P94	77	I/O	P61	93	I/O	P31
59	I/O	AN20	95	I/O	P95	78	I/O	P60	94	I/O	P30
60	I/O	AN21	96	I/O	P96	79	I/O	P59	95	I/O	P29
61	I/O	AN22	97	I/O	P97	80	I/O	P58	96	I/O	P28
62	I/O	AN23	98	I/O	P98	81	I/O	P57	97	I/O	P27
63	I/O	AN24	99	I/O	P99	82	I/O	P56	98	I/O	P26
64	I/O	AN25	100	I/O	P100	83	I/O	P55	99	I/O	P25


INPUT
 AN0 - AN7 : ANALOG 0 - 7
 AVREF (+) : ANALOG REFERENCE (+)
 AVREF (-) : ANALOG REFERENCE (-)
 INT 0, 1, 4 : EXTERNAL VECTORED INTERRUPT 0, 1, 4
 INT2 : EXTERNAL TEST 2
 KR0 - KR7 : KEY RETURN 0 - 7
 MAT : EXTERNAL COMPARE TIMING (MFT A/D MODE)
 P00 - P03 : PORT 0
 P10 - P13 : PORT 1
 P20 - P23 : PORT 2
 P30 - P33 : PORT 3
 P40 - P43 : PORT 4
 P50 - P53 : PORT 5
 P60 - P63 : PORT 6
 P70 - P73 : PORT 7
 P80 - P83 : PORT 8
 P90 - P93 : PORT 9
 P100 - P103 : PORT 10
 P110 - P113 : PORT 11
 RESET : RESET
 SI : SIREAL
 TI 0 : TIMER 0
 X1, 2 : MAIN SYSTEM CLOCK OSCILLATION 1, 2
 XT1, XT2 : SUB SYSTEM CLOCK OSCILLATION 1, 2

OUTPUT
 BUZ : BUZZER CLOCK
 MAI : INTEGRATION CONTROL (MFT A/D MODE)
 MAR : REFERENCE INTEGRATION CONTROL (MFT A/D MODE)
 MAZ : AUTOZERO CONTROL (MFT A/D MODE)
 PCL : PROGRAMMABLE CLOCK
 PPO : PROGRAMMABLE PULSE (MFT TIMER MODE)
 PT00 : PROGRAMMABLE TIMER 0
 SB 0, 1 : SERIAL BUS 0, 1
 SO : SERIAL

INPUT/OUTPUT
 SCK : SERIAL CLOCK

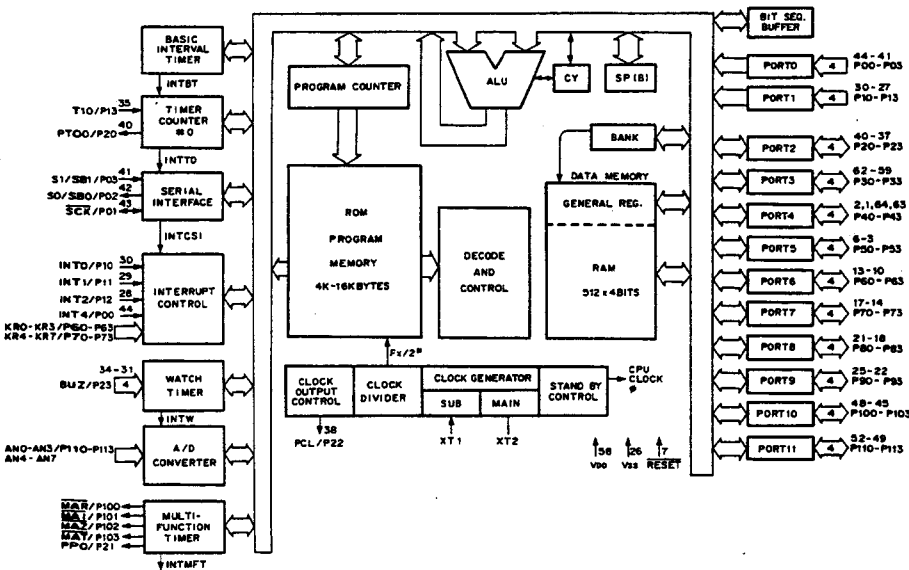


UPD75048CW (NEC)

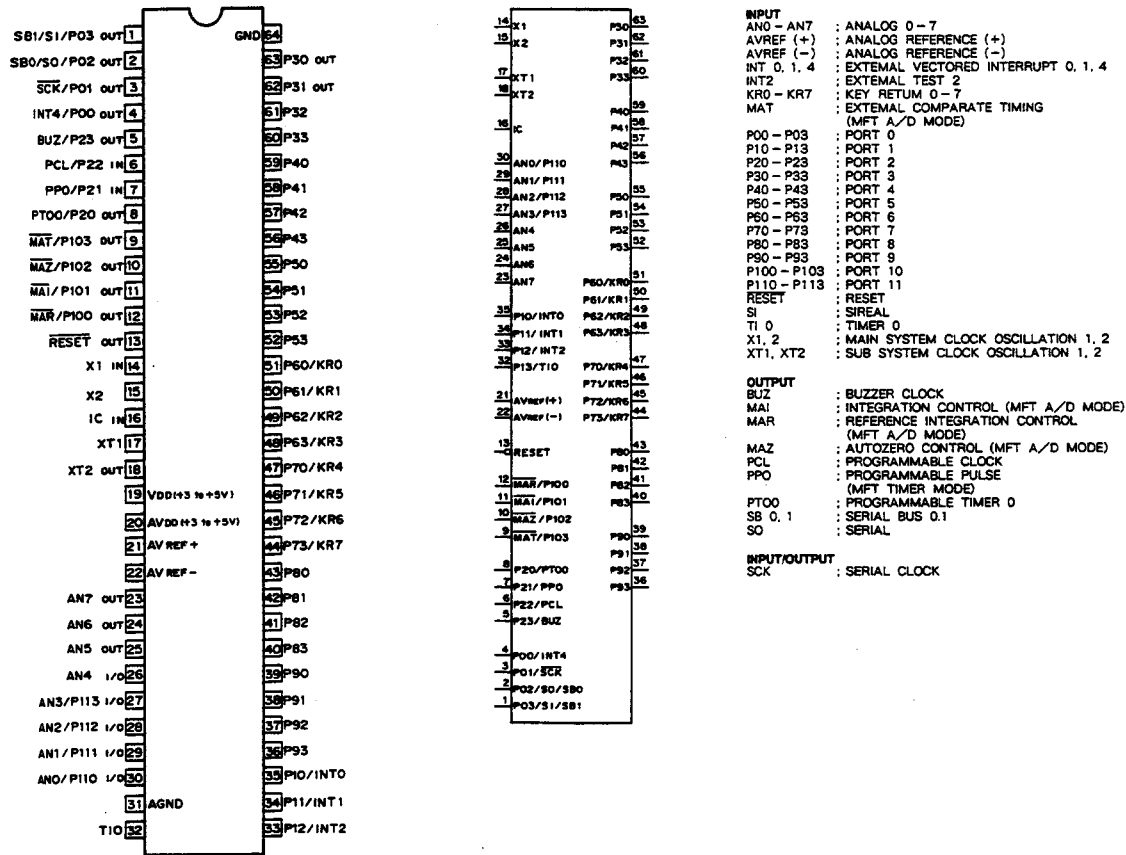C-MOS 4-BIT 1-CHIP MICROCOMPUTER
- TOP VIEW -

UPD70320GJ-8-5BG (NEC)


CMOS SINGLE CHIP 16/8-BIT MICROCOMPUTER


- TOP VIEW -

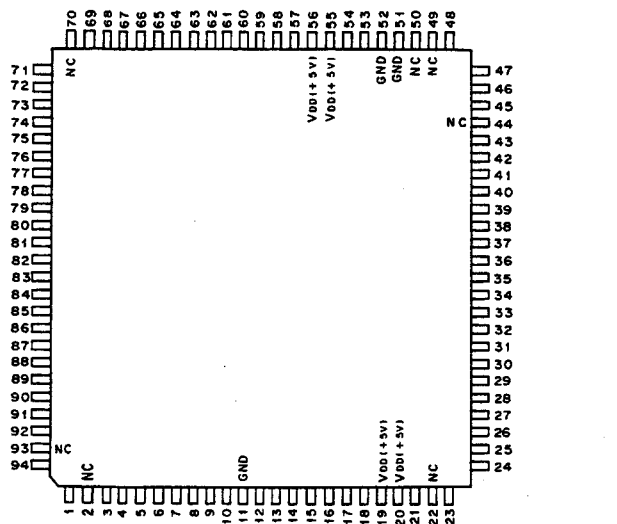

(VDD = +5V)

PIN No.	I/O	SYMBOL	PIN No.	I/O	SYMBOL	PIN No.	I/O	SYMBOL
1	O	A12	33	I/O	P13/INTP2/INTAK	65	I/O	P01
2	-	NC	34	I/O	P14/INT/POLL	66	I/O	P02
3	O	A13	35	I/O	P15/TOUT	67	I/O	P03
4	O	A14	36	I/O	P16/SCK0	68	I/O	P04
5	O	A15	37	I/O	P17/READY	69	-	INT.CONNECT
6	O	A16	38	I	PT0	70	-	NC
7	O	A17	39	I	PT1	71	I/O	P05
8	O	A18	40	I	PT2	72	I/O	P06
9	O	A19	41	I	PT3	73	I/O	P07/CLKOUT
10	I	RxD0	42	I	PT4	74	I/O	D0
11	-	GND	43	I	PT5	75	I/O	D1
12	I/O	CTS0	44	-	NC	76	I/O	D2
13	O	TxD0	45	I	PT6	77	I/O	D3
14	I	RxD1	46	I	PT7	78	I/O	D4
15	I	CTS1	47	-	INT.CONNECT	79	I/O	D5
16	O	TxD1	48	-	VTH	80	I/O	D6
17	I/O	P20/DMAK0	49	-	NC	81	I/O	D7
18	-	INT.CONNECT	50	-	NC	82	O	A0
19	-	VDD	51	-	GND	83	O	A1
20	-	VDD	52	-	GND	84	O	A2
21	I/O	P21/DMAK0	53	-	X1	85	O	A3
22	-	NC	54	-	X2	86	O	A4
23	I/O	P22/TC0	55	-	VDD	87	O	A5
24	-	INT.CONNECT	56	-	VDD	88	O	A6
25	I/O	P23/DMAK1	57	I	RESET	89	O	A7
26	I/O	P24/DMAK1	58	O	REFRQ	90	O	A8
27	I/O	P25/TC1	59	O	R/W	91	O	A9
28	I/O	P26/HLDK	60	O	MSTB	92	O	A10
29	I/O	P27/HLDK	61	O	IOSTB	93	-	NC
30	I	P10/NMI	62	O	MREQ	94	O	A11
31	I	P11/INTP0	63	I	EA			
32	I	P12/INTP1	64	I/O	P00			

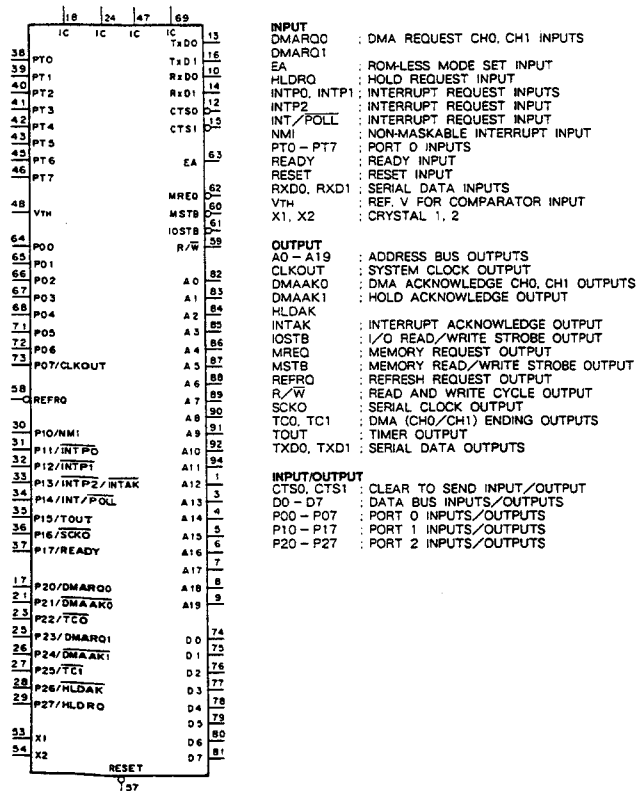

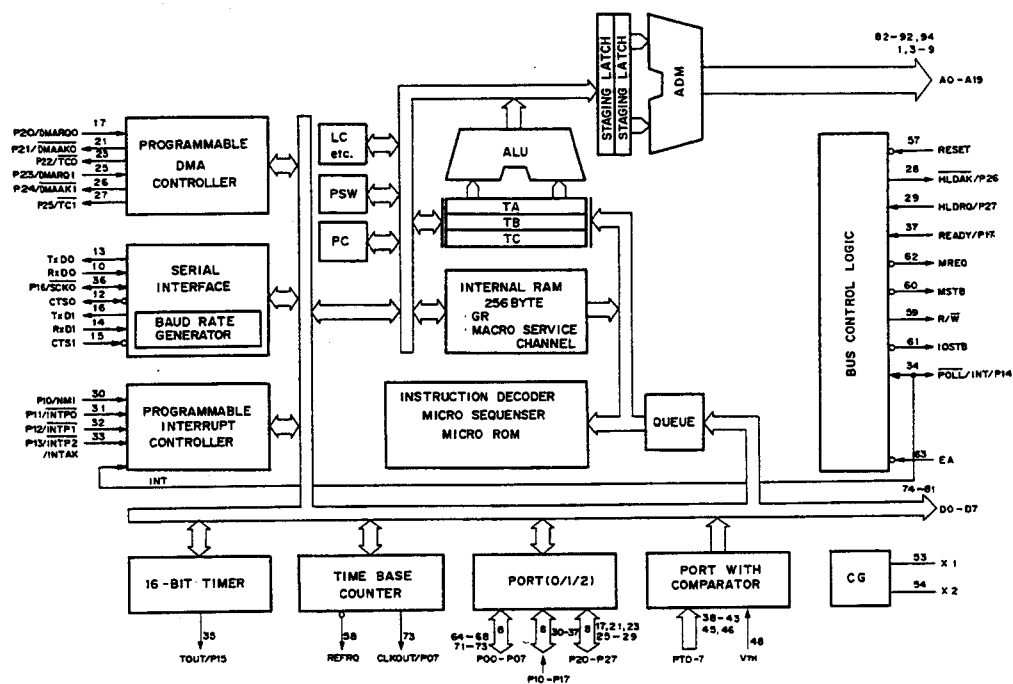





SECTION 18

SPARE PARTS AND OPTIONAL FIXTURES

18-1. NOTES ON SPARE PARTS

(1) Safety Related Components Warning

Components marked with \triangle on the schematic diagrams, exploded views and electrical spare parts list are critical to safe operation. Replace these components with Sony parts whose part numbers appear in this manual or in service bulletin and service manual supplements published by Sony.

(2) Standardization of Parts

Repair parts supplied from Sony Parts Center may not be always identical with the parts which actually in use due to "accommodating the improved parts and/or engineering changes" or "standardization of genuine parts".

This manual's exploded views and electrical spare parts list are indicating the part numbers of "the standardized genuine parts at present".

(3) Stock of Parts

Parts marked with "o" SP (Supply Code) column of the spare parts list are not normally required for routine service work. Orders for parts marked with "o" will be processed, but allow for additional delivery time.

(4) Units for Capacitors, Inductors and Resistors

The following units are assumed in schematic diagrams, electrical parts list and exploded views unless otherwise specified.

Capacitors : μF

Inductors : μH

Resistors : Ω

(5) Tension Spring

($\times \times T$) after a tension spring is shown on the parts list in order to indicate the number of spring turns required for the use.

(Example) TENSION, SPRING (20 T) :

This spring must be cut at its 20th turn for actual use.

18-1. 補修用部品注意事項

(1) 安全重要部品

回路図、分解図、電気部品表中、 \triangle 印の部品は安全性を維持するために重要な部品です。従ってこれらの部品を交換するときには必ず指定の部品と交換して下さい。

(2) 部品の共通化

ソニーから供給される部品は、セットに実装されているものと異なることがあります。これは部品の共通化、改良等によるものです。

分解図や電気部品表には現時点での共通化された部品が記載されています。

(3) 部品の在庫

部品表のSP (Supply code) 欄に"o"で示される部品は交換頻度が低い部品です。在庫していないことがあり、納期が長くなることがあります。

(4) コンデンサー、インダクター、抵抗の単位

回路図、分解図、電気部品表中、特に明記したものを除き、下記の単位は省略されています。

コンデンサー : μF

インダクター : μH

抵抗 : Ω

(5) 引張コイルバネ

部品表中の引張コイルバネの名称のあとの($\times \times T$)は、使用時の巻数を示しています。

(例) TENSION, SPRING (20 T)


巻数が20になるように切断し、使用する。

18-2. EXPLODED VIEWS


Index of Main Mechanical Parts/Components

Mark	Item	Title	Page
① ②	Reel Table Block (T) RS Table (T) Block	REEL CHASSIS (1)	18-4
③ ④ ⑤	Loading Ring Block Gear Box Block Cleaning Roller Block	LOADING RING	18-6
⑥ ⑦ ⑧ ⑨	MC Block Reel Table Block (S) RS Table (S) Block LS Motor Block	REEL CHASSIS (2)	18-8
⑩ ⑪ ⑫	Head Drum Tension Regulator Block Capstan Motor	DRUM & TENSION REGULATOR ASSEMBLY	18-10
⑬	DR-214 Board	DR-214 BOARD ASSEMBLY	18-12
⑭ ⑮ ⑯ ⑰ ⑱	AT Head (R) Block Pinch Press Block FE Head Block CTL Head Block T Sensor Block	PRESS ASSY, PINCH	18-14
⑲	Cassette Compartment	CASSETTE COMPARTMENT ASSEMBLY	18-16
⑳	Upper Lid Bottom Plate Cabinet (right) Cabinet (left)	CHASSIS & ORNAMENTAL PANEL BLOCK	18-18
㉑	Printed Circuit Boards	CARD RACK BLOCK (1)	18-20
㉒	Printed Circuit Boards	CARD RACK BLOCK (2)	18-22
㉓	SC Guide Block Indicator Tube Module, Fluoresce	CHASSIS BLOCK	18-24
㉔	Connector Panel	CONNECTOR PANEL BLOCK	18-26



MECHANICAL DECK

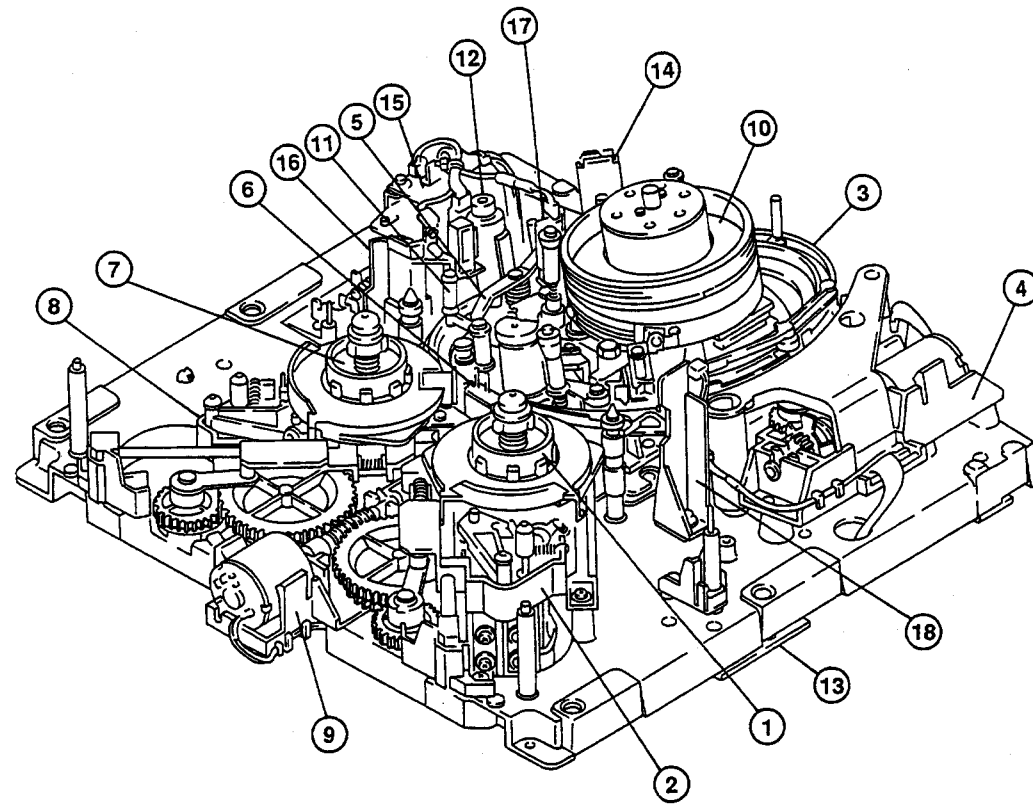

OVERALL BLOCK

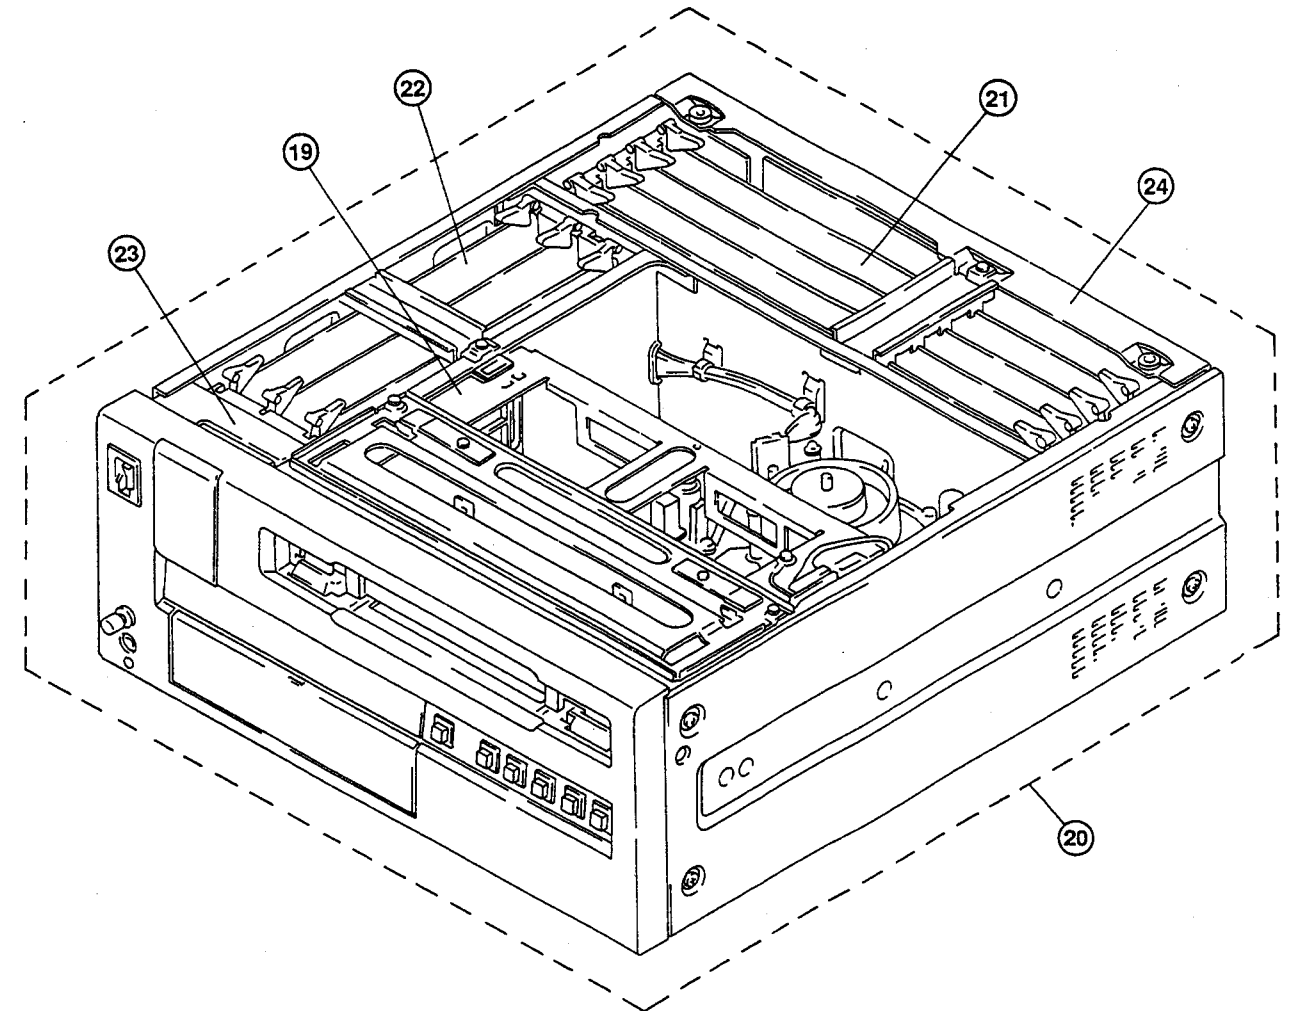

REEL CHASSIS (1)

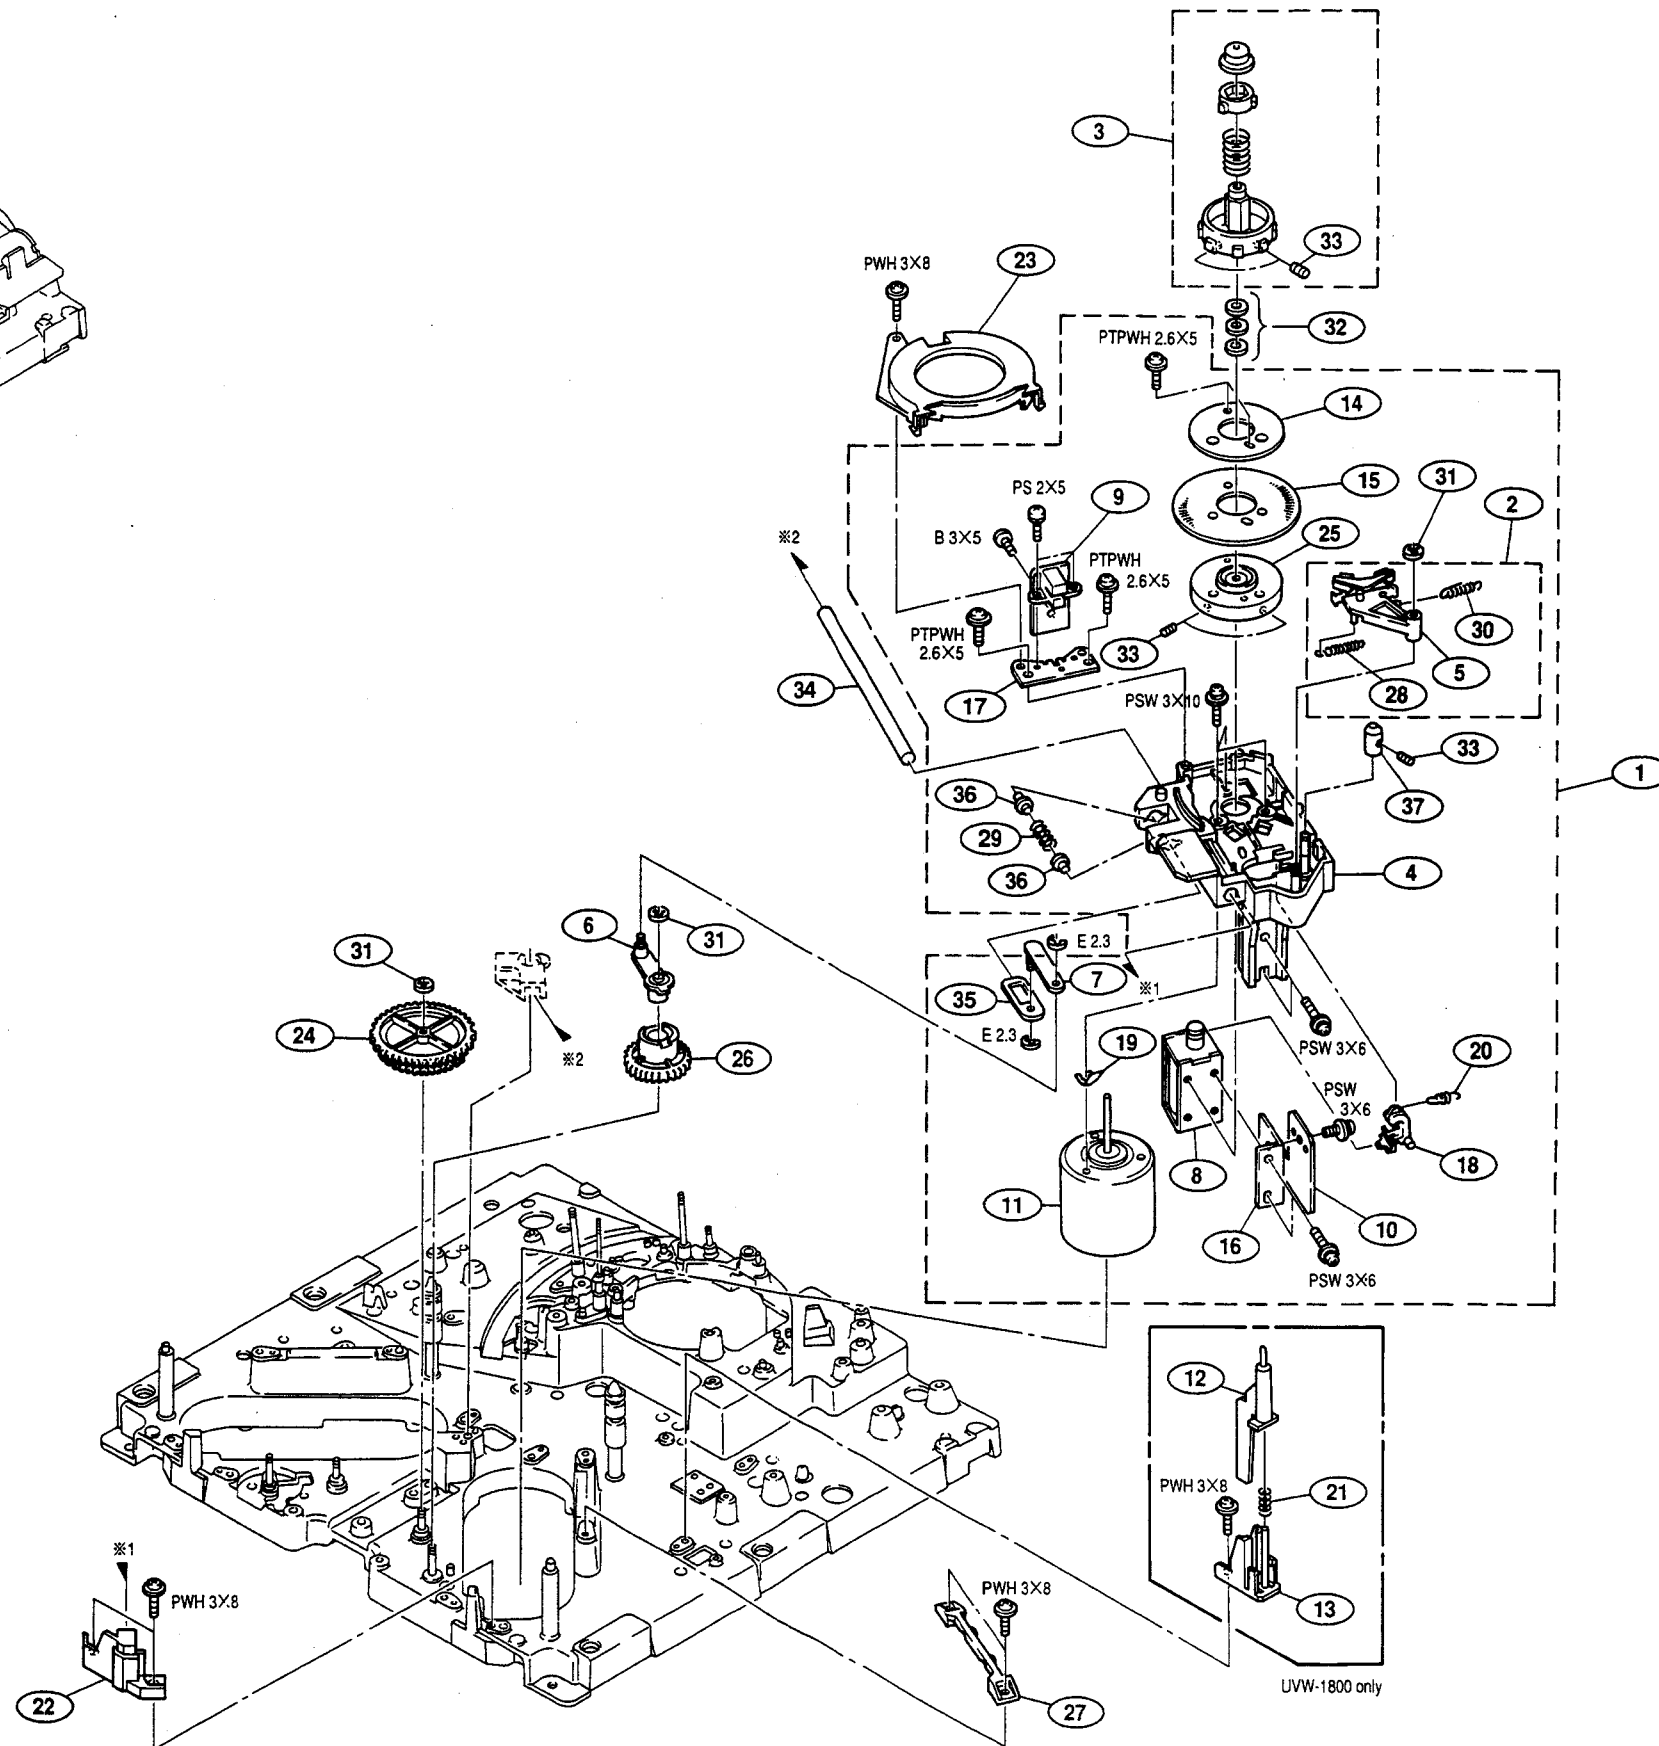
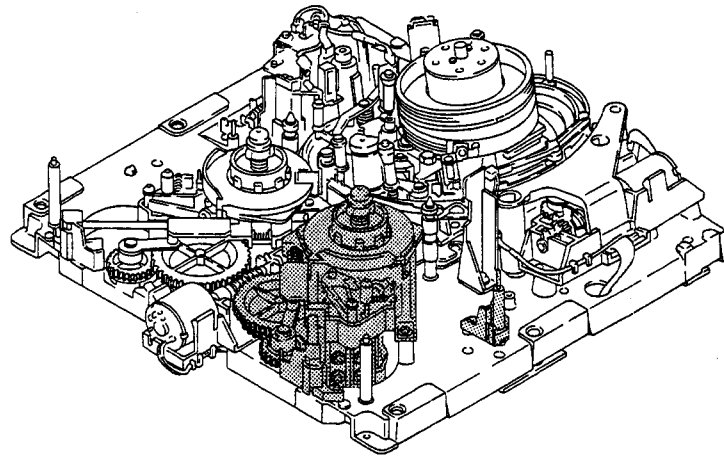


No.	Part No.	SP Description
1	A-8267-684-A	s TABLE (T) ASSY, RS
2	A-8267-685-A	s BRAKE ASSY
3	A-8267-690-B	s TABLE ASSY, REEL
4	X-3167-230-2	o PLATE (T) ASSY, REEL MOTOR
5	X-3167-231-1	s LINING ASSY
6	X-3717-202-3	o ARM ASSY, CRANK
7	X-3717-204-1	o ARM (B) ASSY, CRANK
8	1-454-417-41	s SOLENOID, PLUNGER
9	1-648-923-11	o SE-207 BOARD
10	1-648-925-11	o RM-127 BOARD
11	1-698-231-11	s MOTOR, DC (REEL)
12	3-180-745-01	o LEVER, MR (UVW-1800)
13	3-180-746-01	o HOLDER, MR (UVW-1800)
14	3-182-279-01	o RETAINER, DISK
15	3-182-280-01	o DISK, REEL
16	3-182-281-01	o SHEET METAL (T), RM FITTING
17	3-182-282-01	o SHEET METAL, SENSOR FITTING
18	3-182-284-01	o ARM, BRAKE RELEASE
19	3-182-285-01	s SPACER
19	3-182-285-11	s SPACER
20	3-182-286-01	s SPRING, TENSION
21	3-182-295-01	o SPRING, COMPRESSION (UVW-1800)
22	3-182-367-01	o RETAINER (T), SHAFT
23	3-182-368-01	o COVER, REEL
24	3-182-369-01	s WHEEL, WORM
25	3-182-375-01	o DISK HUB, REEL
26	3-182-382-01	s GEAR (T), CRANK
27	3-182-402-01	o GUIDE, PLATE
28	3-307-381-00	s SPRING, TENSION
29	3-491-247-00	s SPRING, COMPRESSION
30	3-648-217-00	o SPRING, TENSION
31	3-669-596-01	s WASHER (2.3), STOPPER
32	3-701-439-01	s WASHER, POLY 3MM DIA 0.13T
32	3-701-439-11	s WASHER, POLY 3MM DIA 0.25T
32	3-701-439-21	s WASHER, POLY 3MM DIA 0.5T
33	3-701-506-01	s SET SCREW, DOUBLE POINT 3X4
34	3-717-223-01	s SHAFT, SLIDE
35	3-717-230-01	o BRACKET, LIMITER
36	3-717-231-01	o HOLDER, LIMITER
37	3-717-266-01	o CAP (S), CG SHAFT


LOADING RING

No.	Part No.	SP Description
101	A-8267-680-A	s BOX ASSY, GEAR
102	A-8267-681-A	o RING ASSY, LOADING
103	A-8267-683-A	o ROLLER ASSY, ADJUSTMENT RING
104	A-8267-699-A	o ROLLER ASSY, CLEANING
105	X-3167-224-1	s ROLLER ASSY, PRECEDING
106	X-3167-225-1	s ROLLER ASSY, GUIDE
107	X-3167-226-1	s ARM ASSY, AT CLEANER
108	X-3167-232-1	s ROLLER ASSY, C
109	X-3167-233-2	o ARM ASSY, C MAIN
110	X-3167-234-1	o DECK ASSY, C
111	X-3167-235-2	o ARM ASSY, DRIVING
112	X-3167-236-1	o ROLLER (B) ASSY, RING
113	X-3717-215-3	s ARM ASSY, PINCH ROLLER
114	1-648-922-11	o PTC-67 BOARD
115	1-698-152-11	s MOTOR, DC (SVD-1449)
116	3-171-423-02	o JOINT, MOTOR
117	3-180-036-01	s GEAR, LIMITER
118	3-183-653-01	s RUBBER, LIMITER
119	3-182-242-01	o WHEEL, WORM
120	3-182-276-01	o SPRING, DRIVING
121	3-182-293-01	s FLANGE, GUIDE
122	3-182-294-01	s GUIDE, TAPE
123	3-182-346-01	s SPRING, PINCH ARM
124	3-182-347-01	s FLANGE, PRECEDING UPPER
125	3-182-349-01	o RETAINER, SHAFT
126	3-182-350-02	s SPRING, CLEANER ARM
127	3-182-389-02	s CLEANER, AT
128	3-182-390-01	o GEAR, WORM
129	3-182-453-01	o GUIDE, P
130	3-533-373-00	s SPRING, TENSION
131	3-549-887-00	s SPRING, COIL, COMPRISON
132	3-657-841-71	s SPACER (2X6.5)
133	3-669-465-00	s WASHER (1.5), STOPPER
134	3-669-596-01	s WASHER (2.3), STOPPER
135	3-675-866-00	s ROLLER, RING
136	3-680-812-00	s FLANGE, LOWER
137	3-682-166-21	s SPACER DIA 2
138	3-698-829-01	s NUT (M2)
139	3-701-439-21	s WASHER POLY, 3MM DIA 0.5T
140	3-721-333-01	s SPRING, COMPRESSION
141	4-602-490-00	o SPRING, TENSION
142	8-719-939-05	s PHOTO INTERRUPTER GP1S54

LOADING RING

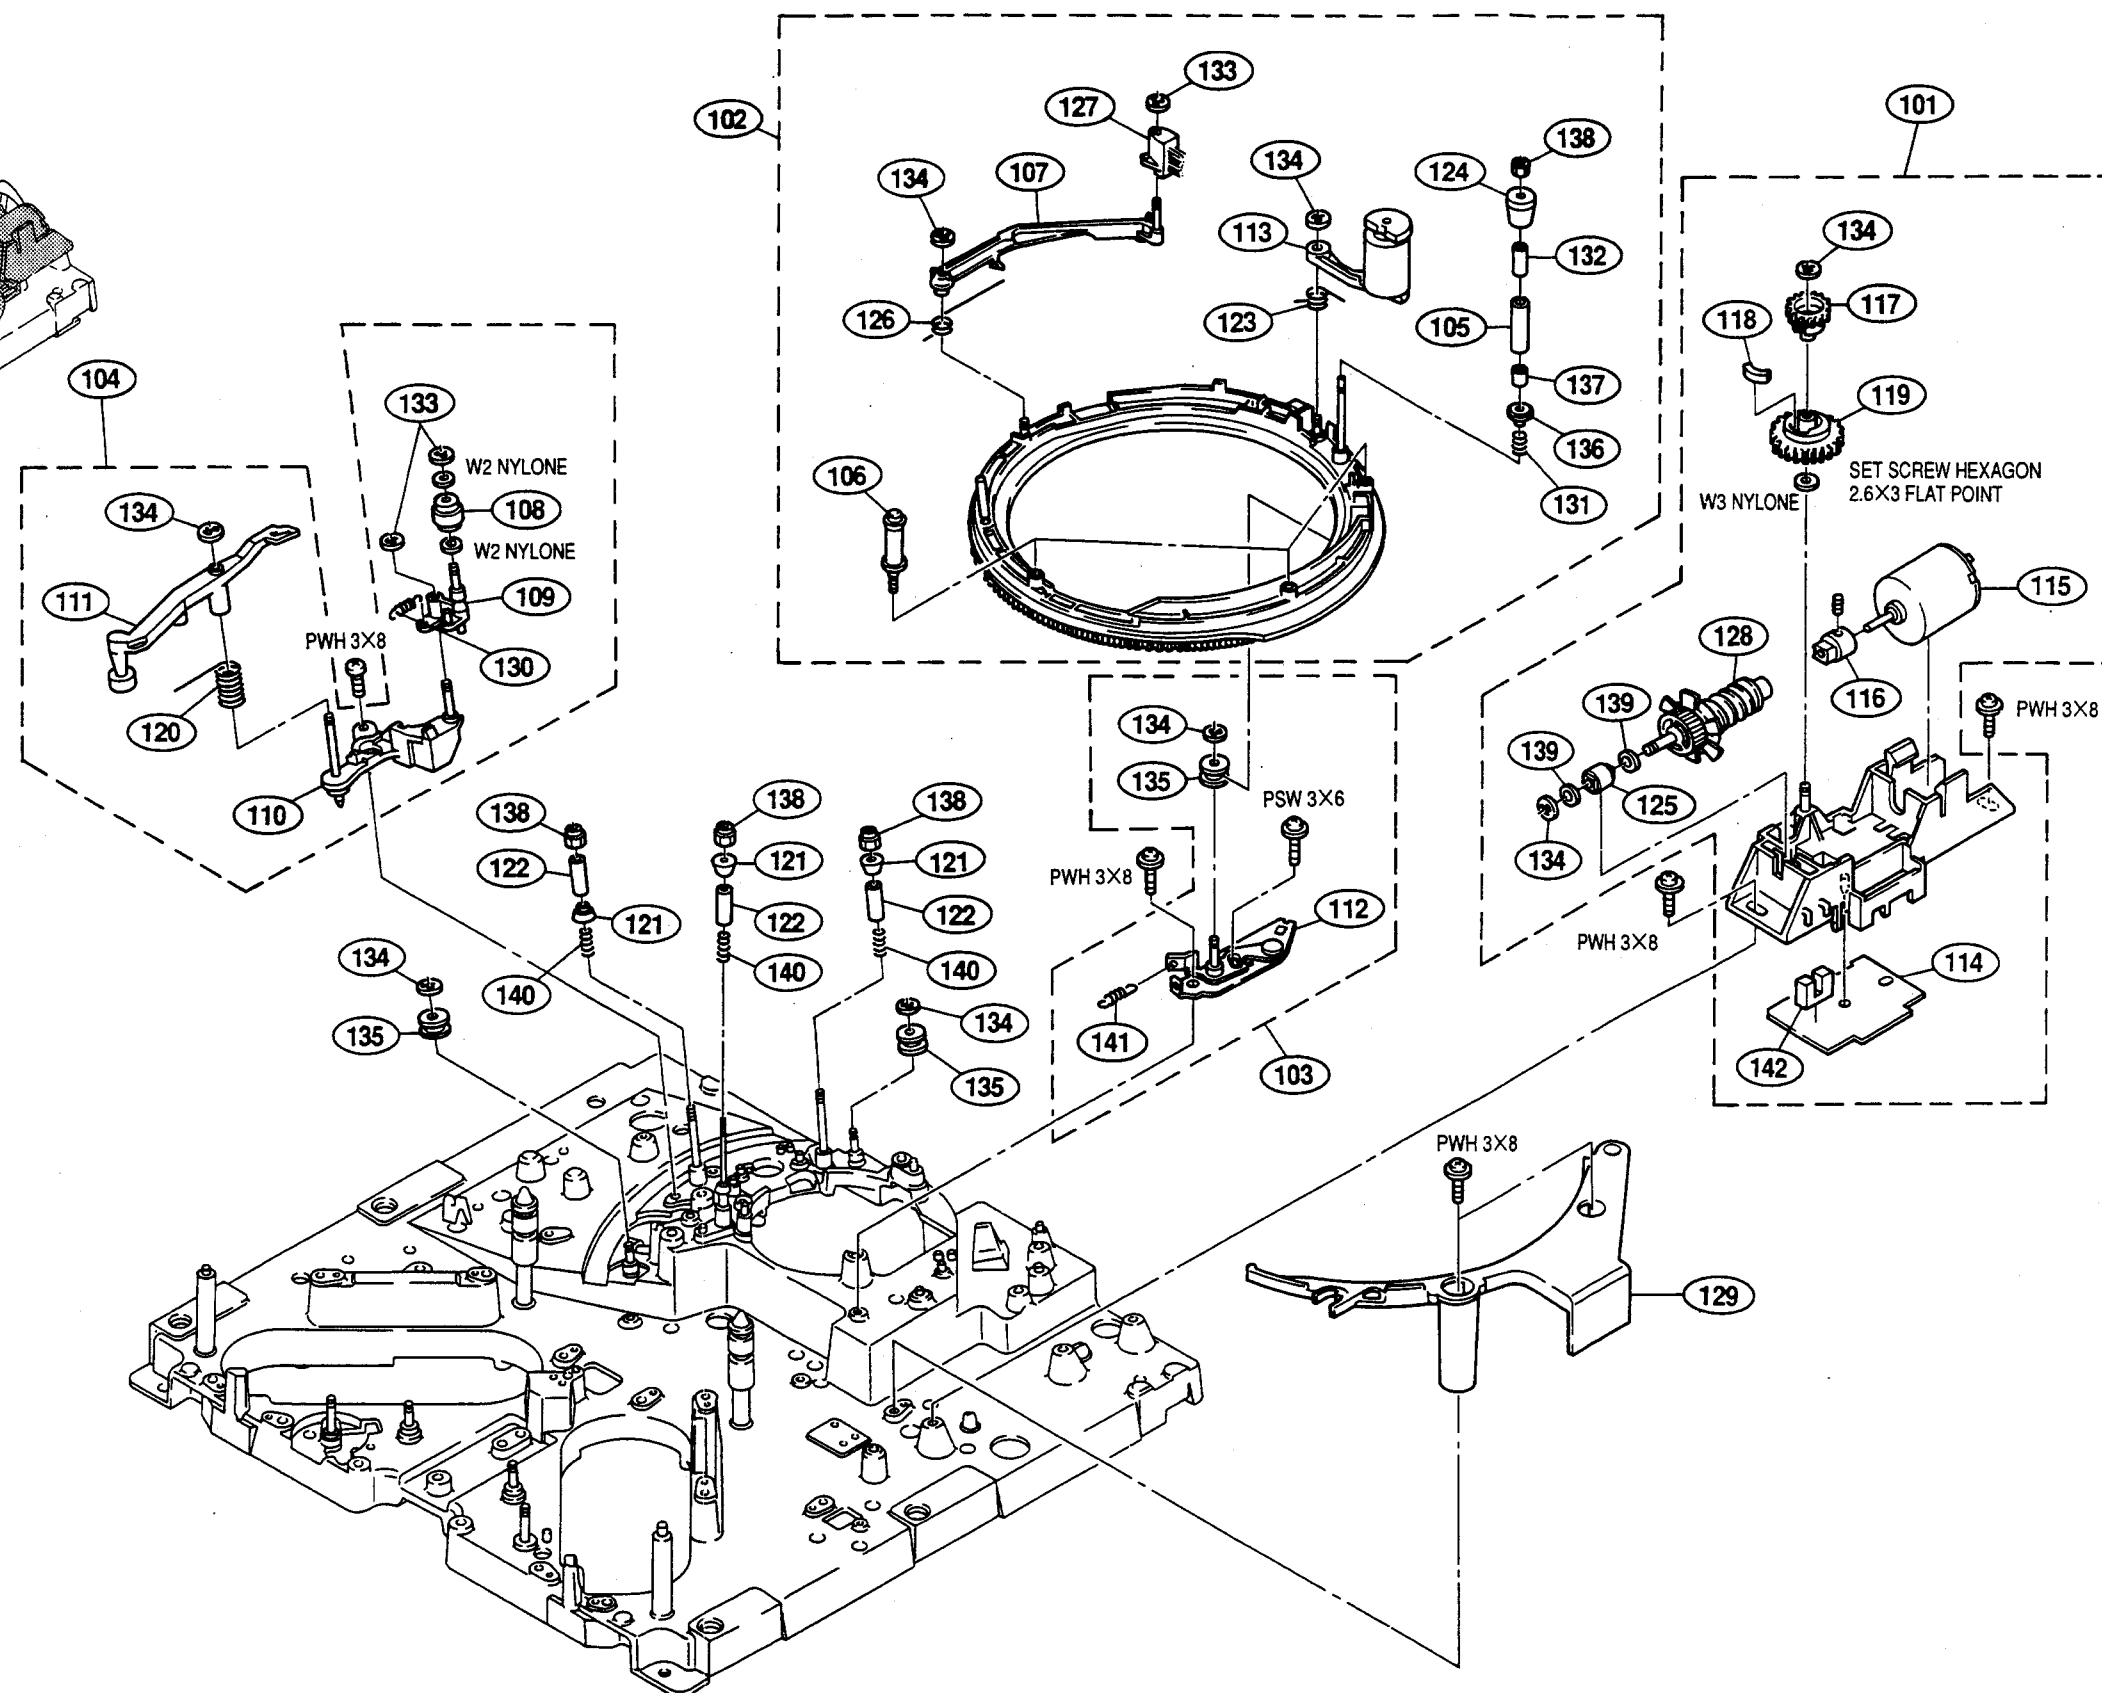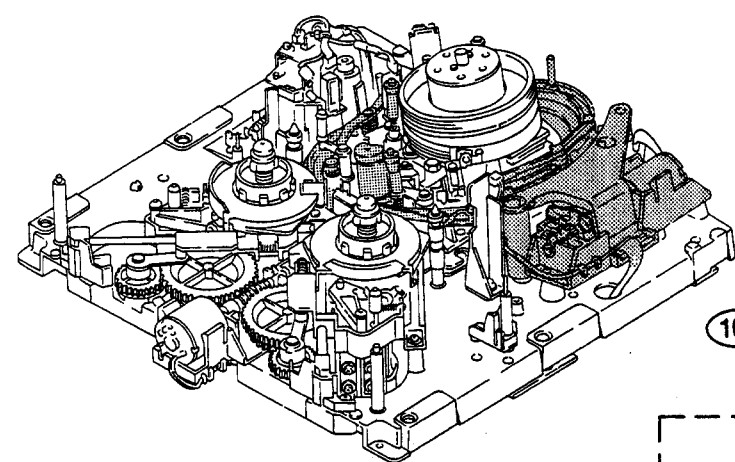

REEL CHASSIS (2)


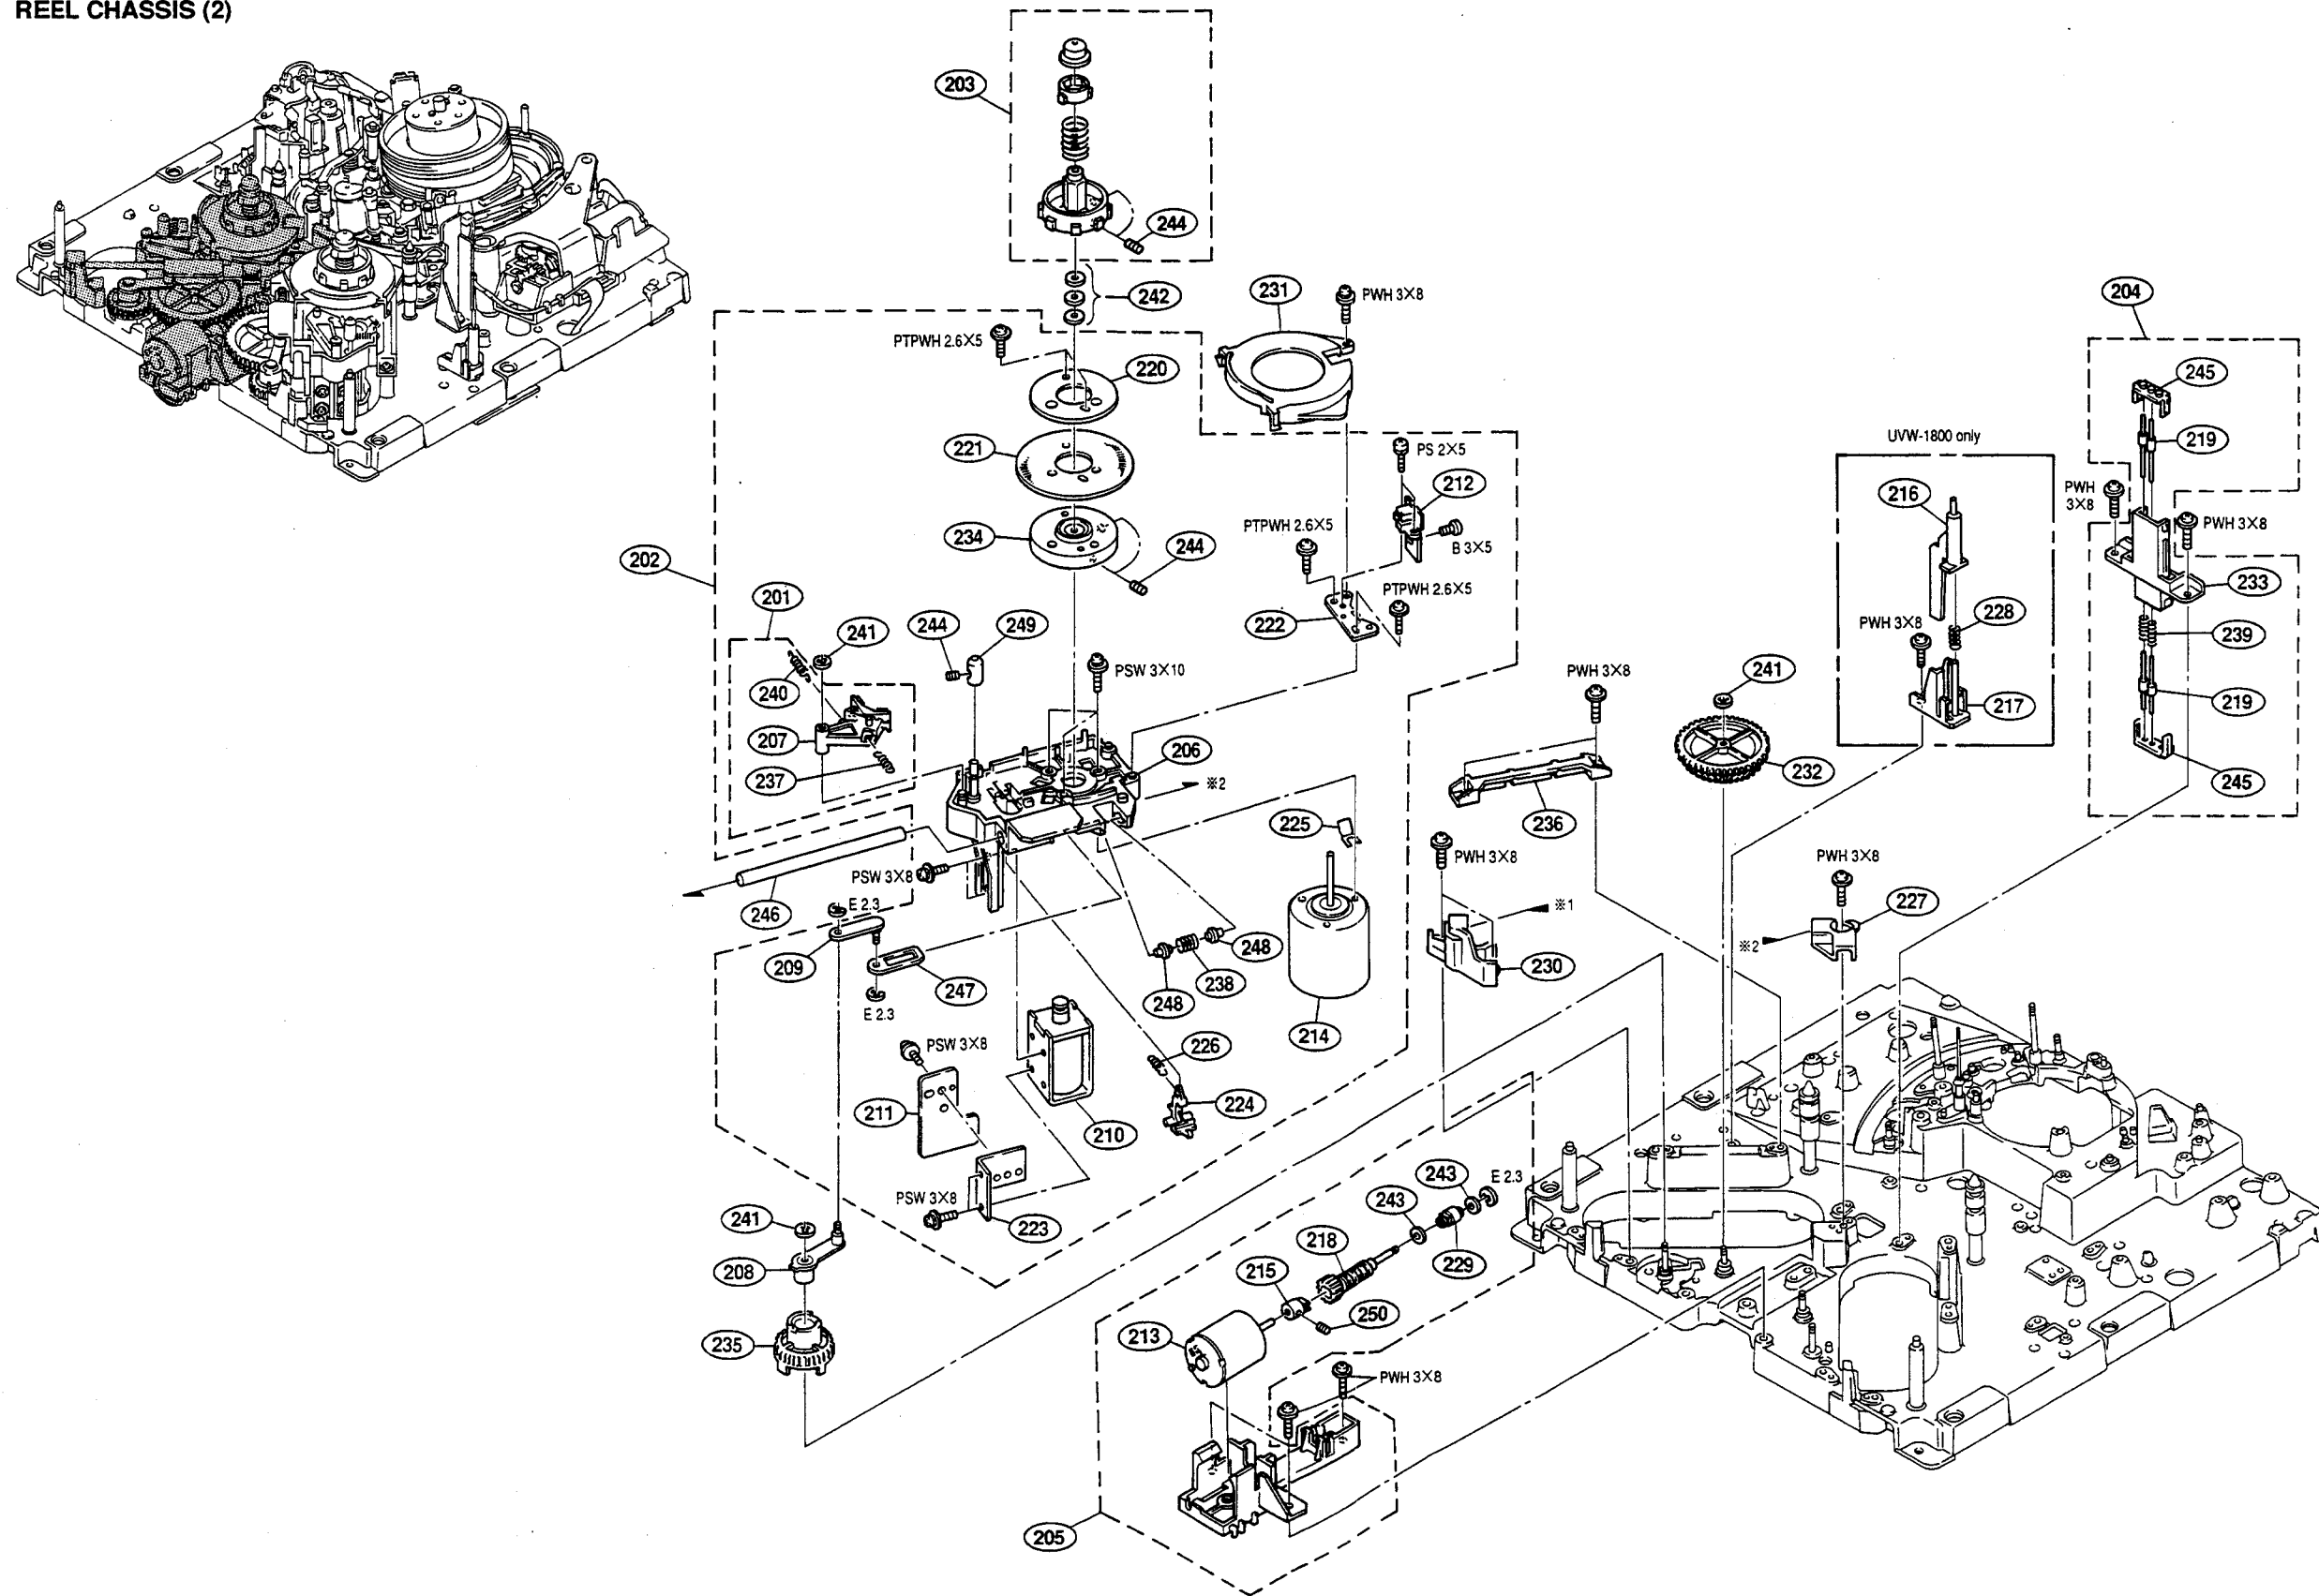


No.	Part No.	SP	Description
201	A-8267-685-A	s	BRAKE ASSY
202	A-8267-688-A	s	TABLE (S) ASSY, RS
203	A-8267-690-B	s	TABLE ASSY, REEL
204	A-8267-691-A	s	MC ASSY
205	A-8267-698-A	o	MOTOR ASSY, LS
206	X-3167-229-2	o	PLATE (S) ASSY, REEL MOTOR
207	X-3167-231-1	s	LINING ASSY
208	X-3717-202-3	o	ARM ASSY, CRANK
209	X-3717-204-1	o	ARM (B) ASSY, CRANK
210	1-454-417-41	s	SOLENOID, PLUNGER
211	1-648-924-11	o	RM-126 BOARD
212	1-648-923-11	o	SE-207 BOARD
213	1-698-152-11	s	MOTOR, DC (SVD-1449)
214	1-698-231-11	s	MOTOR, DC (REEL)
215	3-171-423-02	o	JOINT, MOTOR
216	3-180-745-01	o	LEVER, MR (UVW-1800)
217	3-180-746-01	o	HOLDER, MR (UVW-1800)
218	3-182-266-01	o	WORM
219	3-182-277-01	o	PIN, MC
220	3-182-279-01	o	RETAINER, DISK
221	3-182-280-01	o	DISK, REEL
222	3-182-282-01	o	SHEET METAL, SENSOR FITTING
223	3-182-283-01	o	SHEET METAL, (S) RM FITTING
224	3-182-284-01	o	ARM, BRAKE RELEASE
225	3-182-285-01	s	SPACER
225	3-182-285-11	s	SPACER
226	3-182-286-01	s	SPRING, TENSION
227	3-182-292-01	o	RETAINER (ST), SHAFT
228	3-182-295-01	o	SPRING, COMPRESSION (UVW-1800)
229	3-182-349-01	o	RETAINER, SHAFT
230	3-182-366-01	o	RETAINER (S), SHAFT
231	3-182-368-01	o	COVER, REEL
232	3-182-369-01	s	WHEEL, WORM
233	3-182-372-01	o	HOLDER, MC
234	3-182-375-01	o	DISK HUB, REEL
235	3-182-383-01	s	GEAR (S), CRANK
236	3-182-402-01	o	GUIDE, PLATE
237	3-307-381-00	s	SPRING, TENSION
238	3-491-247-00	s	SPRING, COMPRESSION
239	3-554-202-00	o	SPRING, COMPRESSION
240	3-648-217-00	o	SPRING, TENSION
241	3-669-596-01	s	WASHER (2.3), STOPPER
242	3-701-439-01	s	WASHER POLY 3MM DIA, 0.13T
242	3-701-439-11	s	WASHER POLY 3MM DIA, 0.25T
242	3-701-439-21	s	WASHER POLY 3MM DIA, 0.5T
243	3-701-439-21	s	WASHER POLY 3MM DIA, 0.5T
244	3-701-506-01	s	SET SCREW, DOUBLE POINT 3X4
245	3-717-207-01	s	COVER, M/C DETECTION HOLDER
246	3-717-223-01	s	SHAFT, SLIDE
247	3-717-230-01	o	BRACKET, LIMITER
248	3-717-231-01	o	HOLDER, LIMITER
249	3-717-266-01	o	CAP (S), CG SHAFT
250	7-621-734-09	s	SET SCREW, DOUBLE POINT 2.6X3


DRUM & TENSION REGULATOR ASSEMBLY

No.	Part No.	SP	Description
301	A-8260-972-A	s	HEAD DRUM ASSY, DBH-39A-R (UVW-1800)
301	A-8260-976-A	s	HEAD DRUM ASSY, DBH-41A-R (UVW-1600)
302	A-8267-973-A	s	UPPER DRUM ASSY, DBR-39-R (UVW-1800)
302	A-8267-977-A	s	UPPER DRUM ASSY, DBR-41-R (UVW-1600)
303	A-8267-693-A	s	TENSION REGULATOR ASSY
304	X-3166-376-1	s	GROUND ASSY, SHAFT
305	X-3167-218-1	o	HOOK ASSY, TR
306	X-3167-219-1	o	BASE ASSY, TR HOOK
307	X-3167-220-1	o	PLATE, ADJUSTMENT ASSY, TR
308	X-3167-241-1	s	ARM ASSY, RETURN
309	X-3675-851-0	s	ROLLER ASSY, TR
310	1-648-921-11	o	TR-84 BOARD
311	1-648-927-11	o	PTC-68 BOARD
312	1-698-179-11	s	MOTOR, DC (CAPSTAN)
313	1-810-381-11	s	SENSOR, DEW CONDENSATION
314	2-618-901-00	s	SPRING
315	3-171-234-01	s	SPACER, FLANGE 0.01T
316	3-171-234-11	s	SPACER, FLANGE 0.03T
317	3-171-234-21	s	SPACER, FLANGE 0.05T
318	3-171-579-02	o	SPRING, LEAF, TENSION REGULATOR
319	3-182-216-01	o	BRACKET, GROUND
320	3-182-217-01	o	BRACKET, TAPE
321	3-182-257-01	s	HOLDER, DME
322	3-182-274-01	o	PLATE, ADJUSTMENT, RETURN
323	3-182-275-01	o	COVER, MAGNET
324	3-182-288-01	o	PROTECTOR
325	3-182-289-01	o	BASE, TR
326	3-437-173-02	o	SCREW, HEAD ADJUSTING
327	3-653-350-00	s	SPRING, COMPRESSION
328	3-669-465-00	s	WASHER (1.5), STOPPER
329	3-669-596-01	s	WASHER (2.3), STOPPER
330	3-677-749-03	s	RETAINER, B
331	3-677-752-00	s	NUT, ADJUSTMENT, T
332	3-680-828-00	o	MAGNET
333	3-680-860-01	s	SPRING, TENSION(POWER TENSION)
334	3-717-253-01	s	ROLLER
335	3-729-125-01	o	SCREW (M2.6X8)
336	7-621-731-08	s	SET SCREW, FLAT POINT 2X2.5
337	7-682-176-21	s	SET SCREW, SLOT CONE POINT 3X6
338	8-759-057-48	s	PHOTO REFLECTOR NJL5803K-F10
339	8-745-001-07	s	DM-230-1

DRUM & TENSION REGULATOR ASSEMBLY

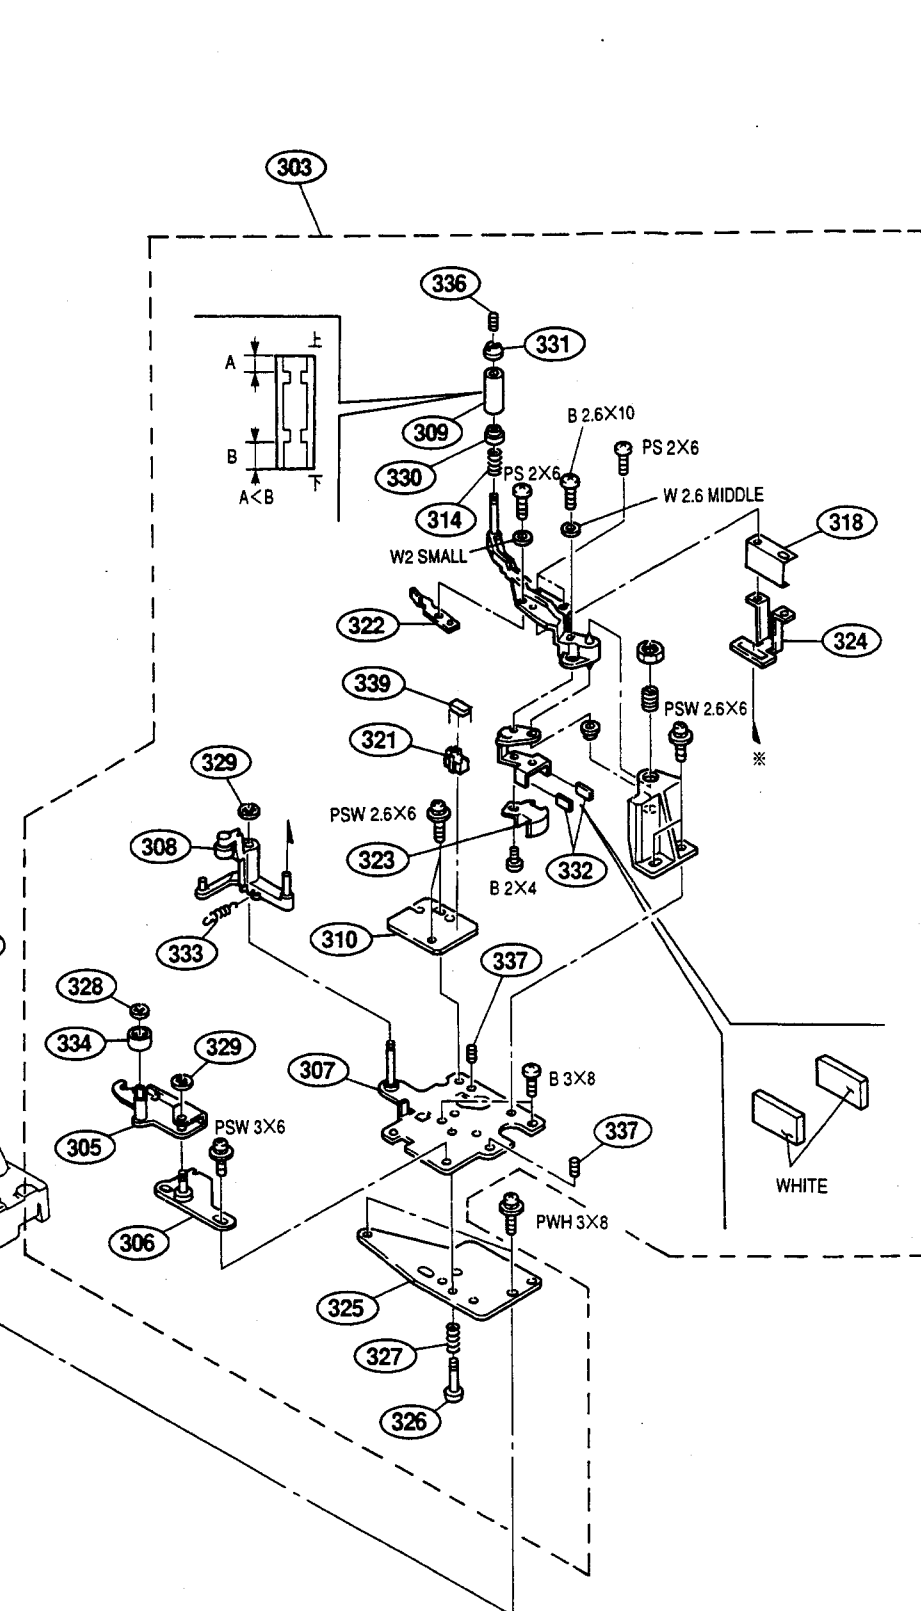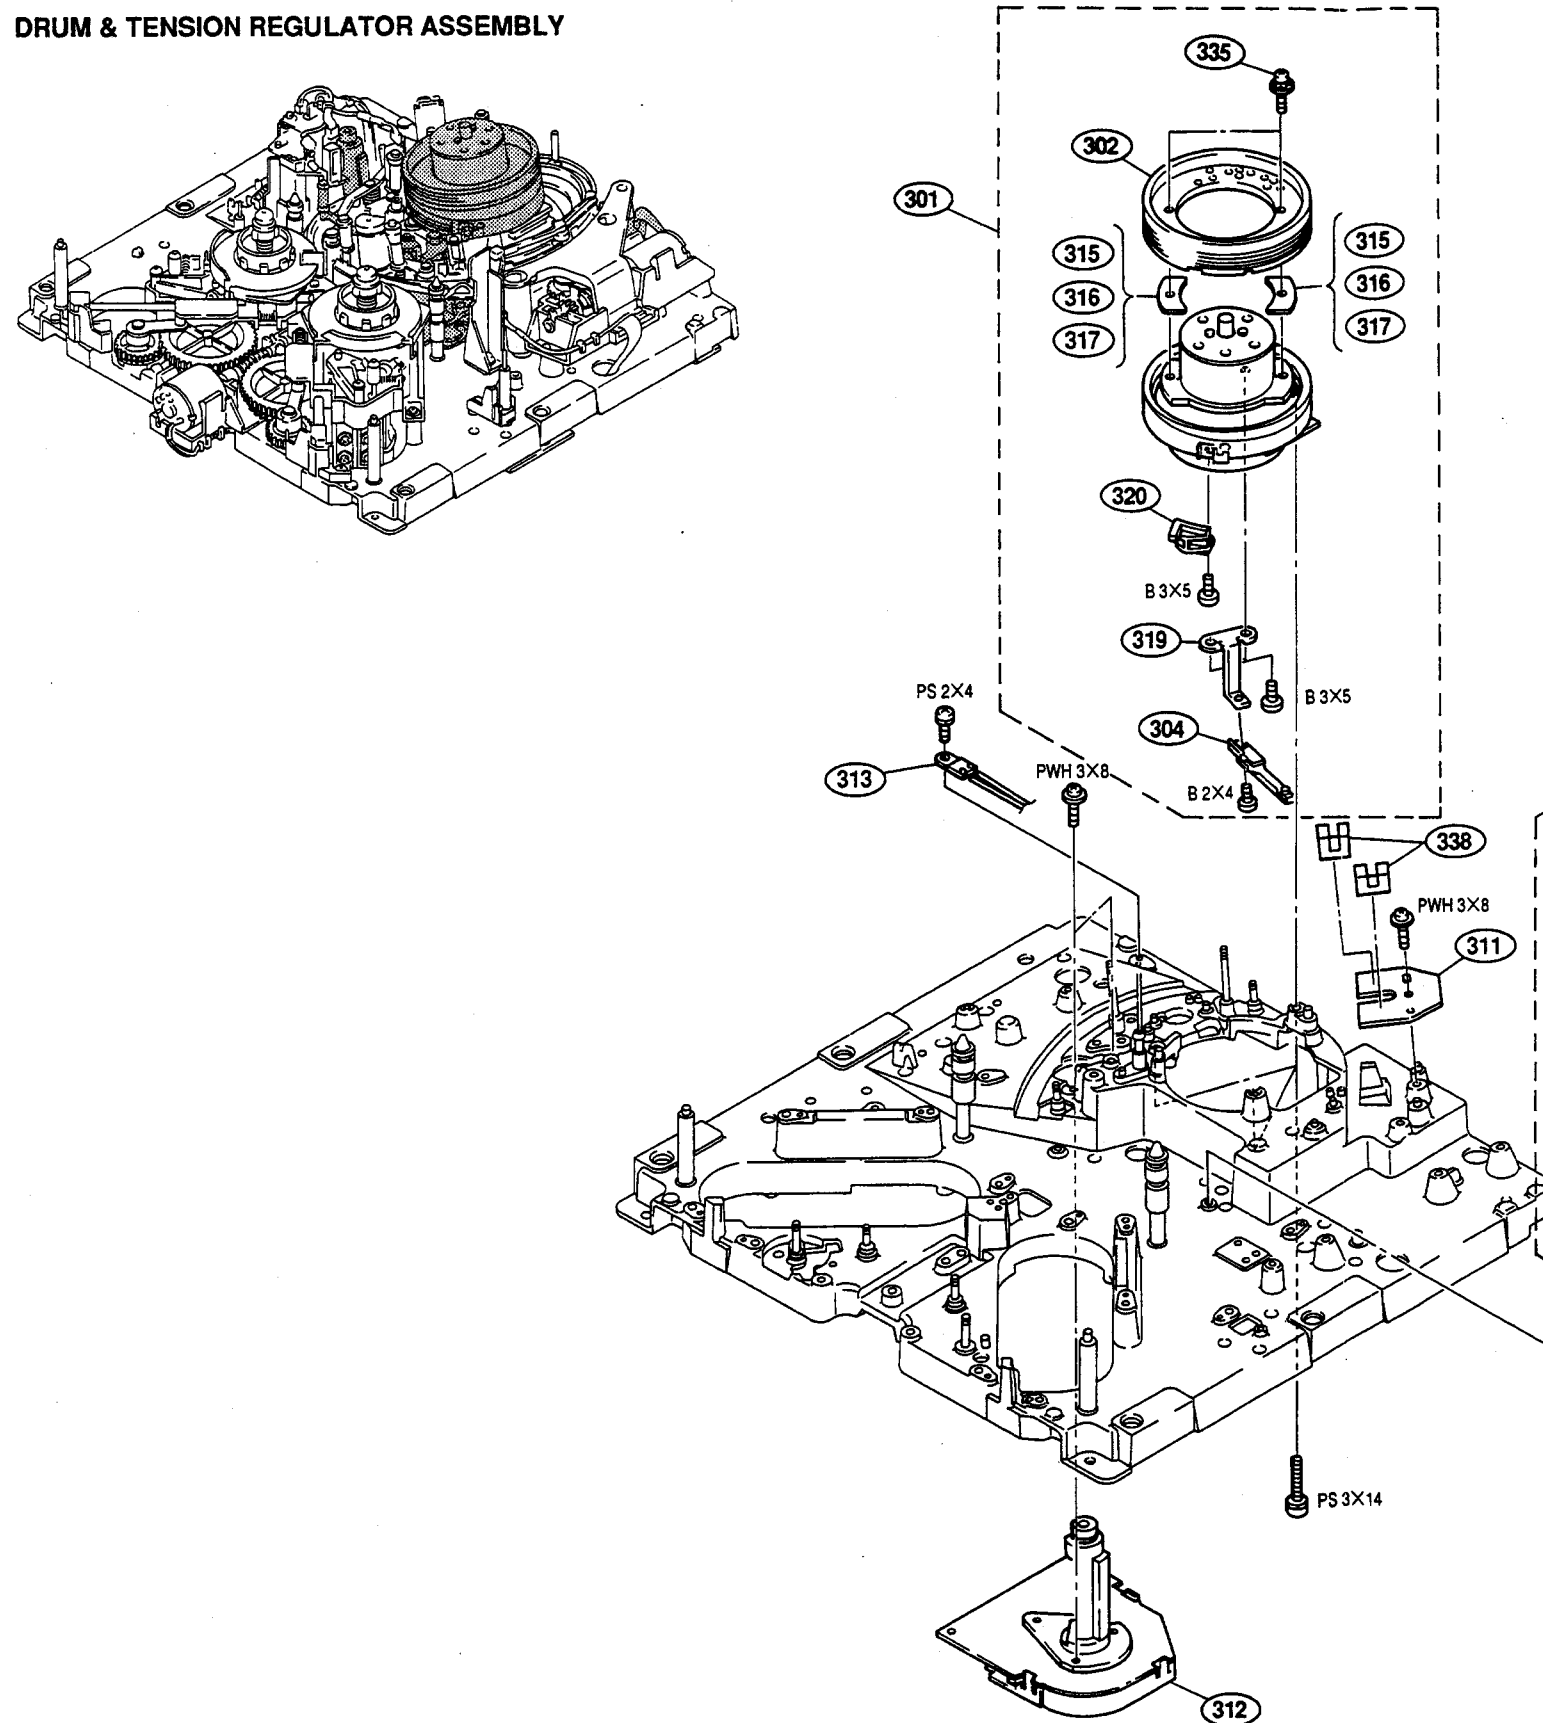

DR-214 BOARD ASSEMBLY


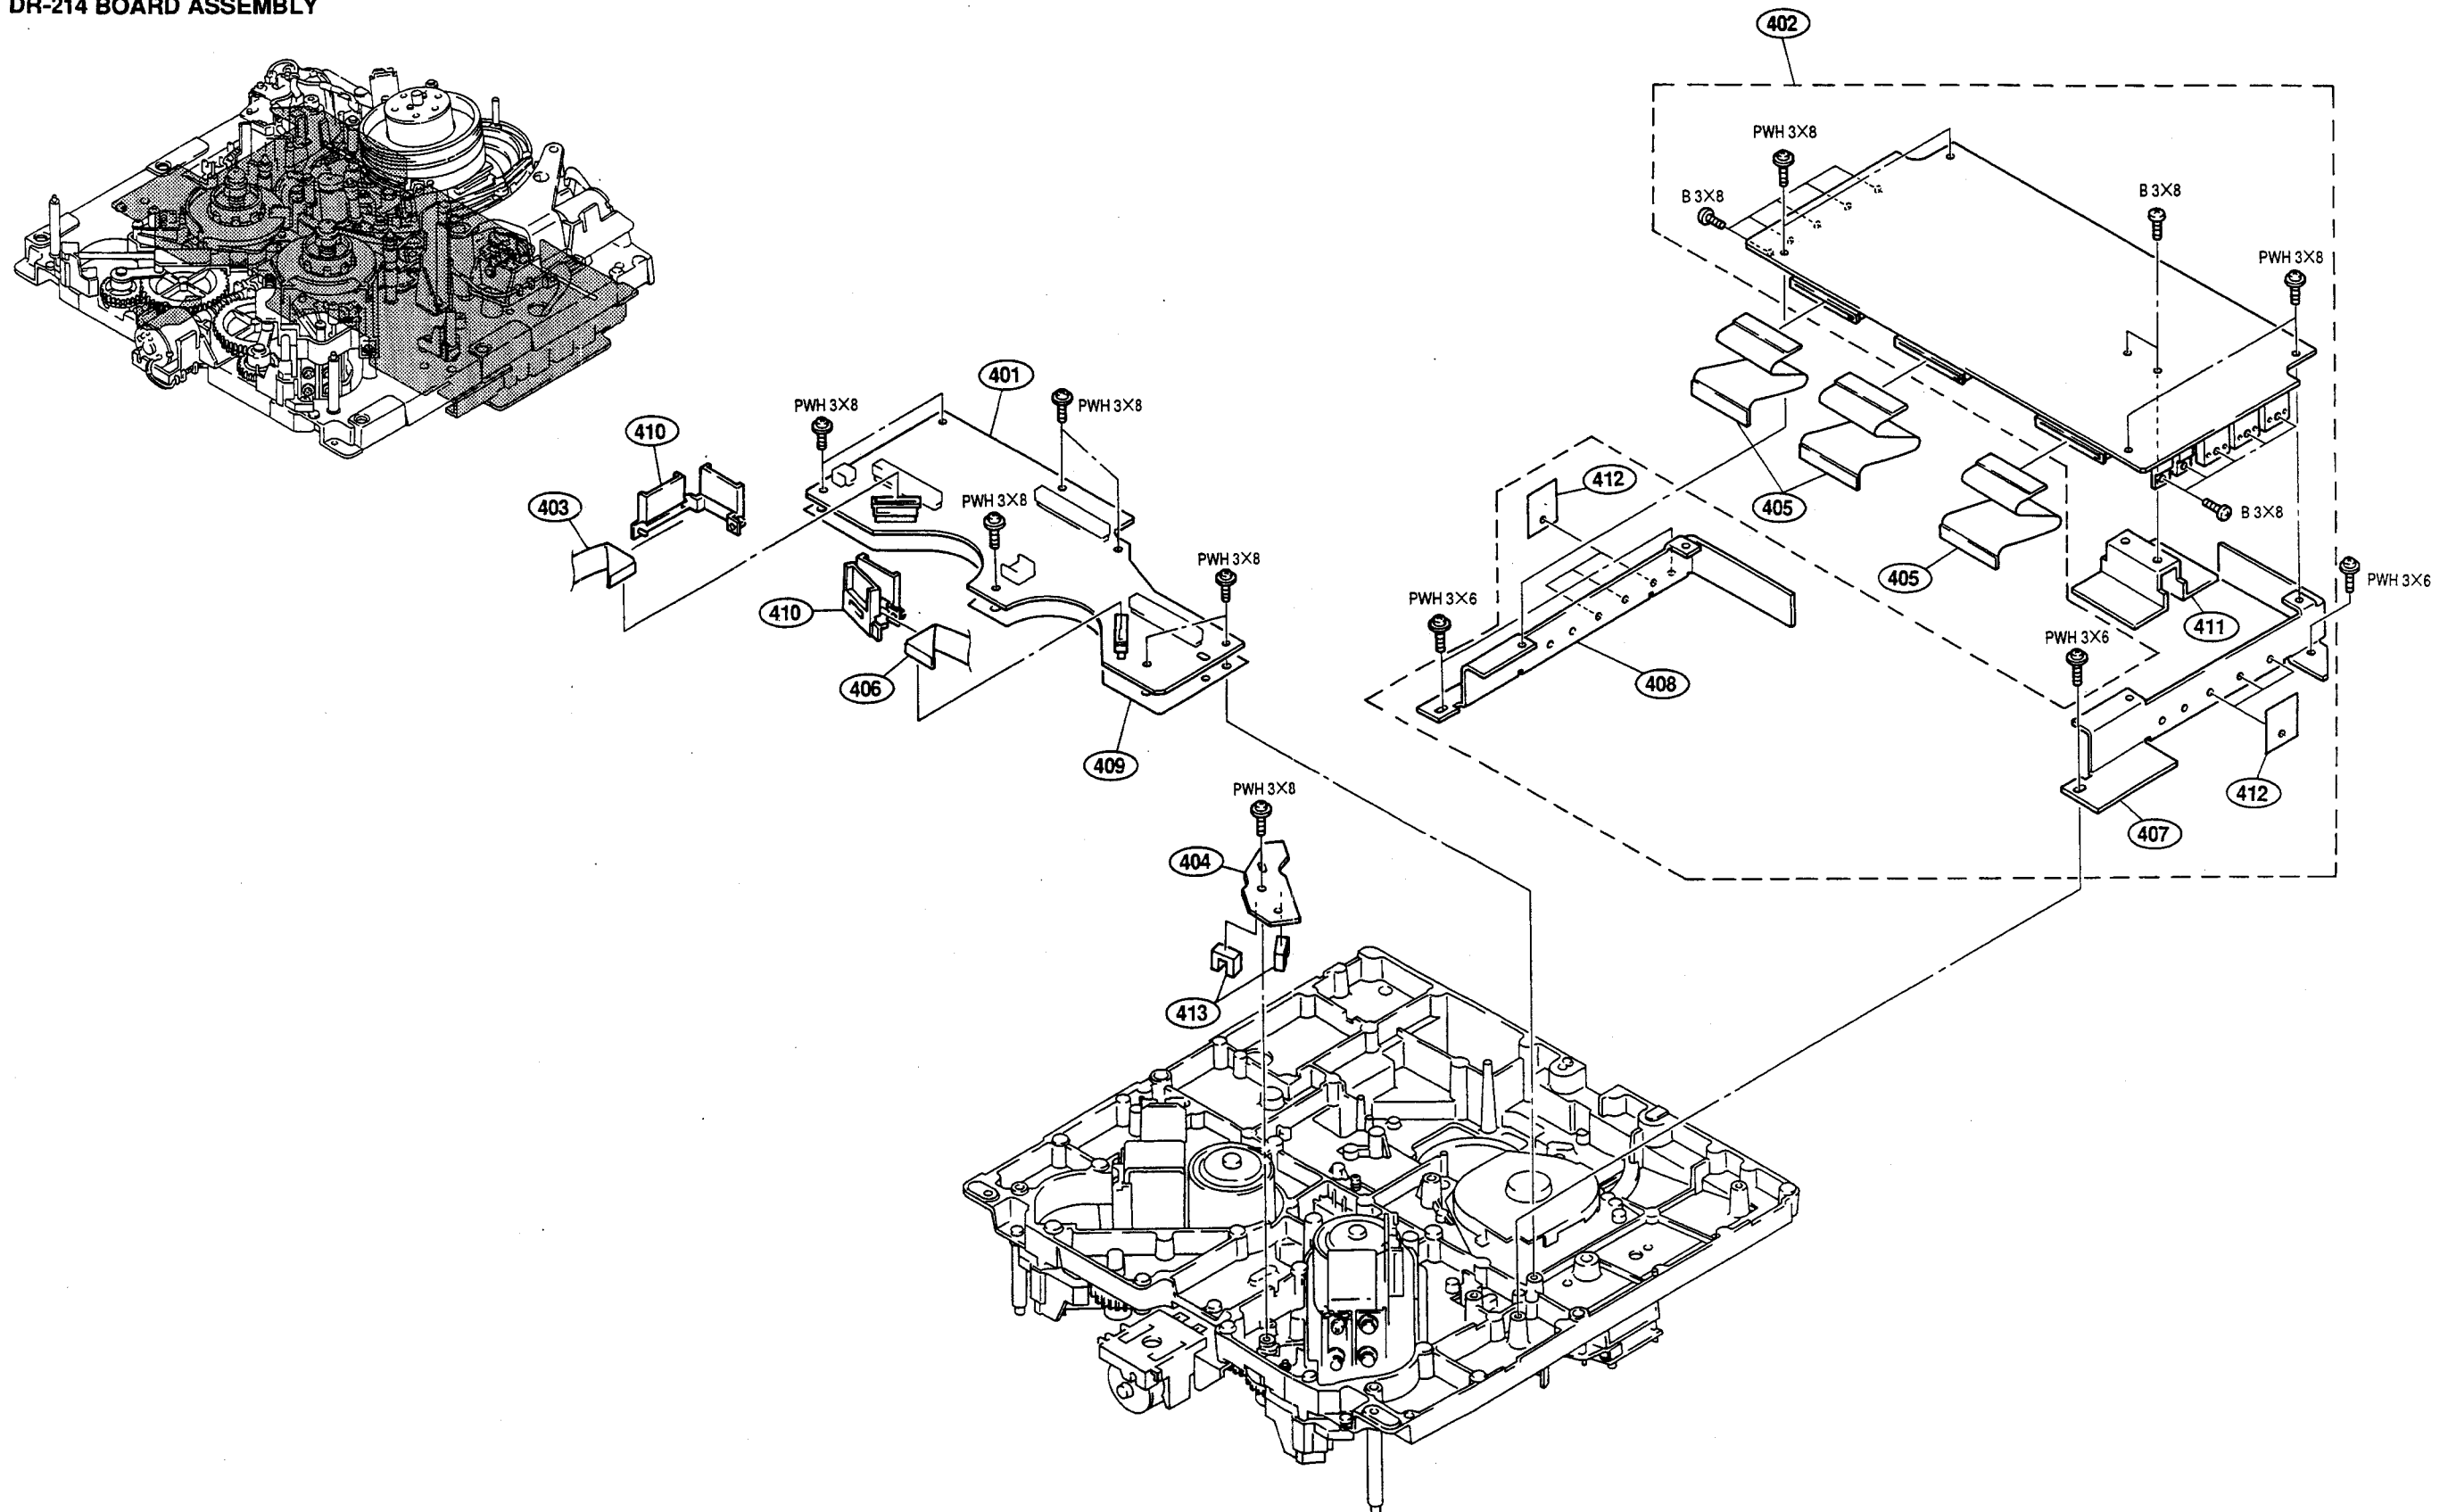


No.	Part No.	SP	Description
401	A-8275-288-A	o	COMPLETE PCB, MS-39A (UVW-1600)
401	A-8275-291-A	o	COMPLETE PCB, MS-39 (UVW-1800)
402	A-8275-290-A	o	COMPLETE PCB, DR-214
403	1-558-261-31	s	WIRE, FLEXIBLE CARD
404	1-648-926-11	o	PTC-66 BOARD
405	1-751-633-11	s	WIRE, FLEXIBLE CARD
406	1-751-634-11	s	WIRE, FLEXIBLE CARD
407	3-182-357-01	o	HEAT SINK (L), DR
408	3-182-358-01	o	HEAT SINK (R), DR
409	3-182-400-01	o	SHEET, MS
410	3-182-401-01	o	HOLDER, FLAT CABLE
411	3-183-144-01	o	HEAT SINK (D), DR
412	4-911-232-01	s	SHEET INSULATING
413	8-719-939-05	s	PHOTO INTERRUPTER GP1S54


PRESS ASSY, PINCH

No.	Part No.	SP	Description
501	A-8267-676-A	o	BLADE ASSY (UVW-1600)
502	A-8267-677-A	s	HEAD (P) ASSY, AT (UVW-1600)
502	A-8267-682-A	s	HEAD (R) ASSY, AT (UVW-1800)
503	A-8267-694-A	s	HEAD ASSY, CTL
504	A-8267-695-A	s	PRESS ASSY, PINCH
505	A-8267-696-A	o	SENSOR ASSY, T
506	A-8267-697-A	o	HEAD ASSY, FE (UVW-1800)
507	X-3167-210-2	o	SUPPORT (P) ASSY, AT (UVW-1600)
507	X-3167-228-2	o	SUPPORT (R) ASSY, AT (UVW-1800)
508	X-3167-211-2	o	PLATE, ADJUSTMENT ASSY, P (UVW-1600)
508	X-3167-227-2	o	PLATE, ADJUSTMENT ASSY, RP (UVW-1800)
509	X-3167-212-1	2	CLEANING BLADE ASSY (UVW-1600)
510	X-3167-221-1	o	BRACKET ASSY, CTL HEAD
511	X-3167-316-1	s	HEAD (EF291-21) ASSY (UVW-1800)
512	1-454-338-00	s	SOLENOID, PLUNGER
513	1-506-481-11	o	PIN, CONNECTOR 2P
514	1-543-316-31	s	HEAD, SENSING (SMALL TYPE)
515	1-564-001-11	o	PIN, CONNECTOR 2P
516	1-564-005-11	o	PIN, CONNECTOR 6P
517	1-564-013-11	o	PIN, CONNECTOR 3P (UVW-1800)
518	1-622-596-11	o	PC BOARD, PD-35
519	2-279-715-01	s	RIVET, NYLON
520	3-182-244-01	o	LEVER, P PRESS
521	3-182-250-01	o	HOLDER, S SENSOR
522	3-182-255-01	s	SPRING, CTL
523	3-182-256-01	o	DECK, CTL HEAD
524	3-182-317-01	o	SHAFT, AT FIXED
525	3-182-376-01	o	CASE (1), AT SHIELD
526	3-182-377-01	o	CASE (2), AT SHIELD
527	3-182-388-02	o	BRACKET, RP
528	3-182-391-01	o	HOLDER, T SENSOR
529	3-537-674-03	s	SPRING, TENSION
530	3-642-719-01	o	SPACER (2.6X11)
531	3-653-382-01	o	SPACER (4X25)
532	3-698-829-01	s	NUT (M2)
533	3-701-441-21	s	WASHER, POLY 4MM DIA 0.5T
534	3-717-247-01	o	LIMITER, P
535	3-717-248-01	o	SPRING
536	3-717-249-01	o	STOPPER, P
537	3-717-250-02	o	SHAFT, JOINT, P
538	3-738-730-01	s	SPRING, COMPRESSION
539	4-812-134-21	s	RIVET NYLON, 3.5
540	7-621-712-46	s	SET SCREW, SLOT FLAT POINT 2.6X5
541	7-621-712-55	s	SET SCREW, SLOT CONE POINT 2.6X6
542	8-825-554-83	s	HEAD, CTL PS244-21B
543	8-825-778-81	s	HEAD EPS244-2103H (UVW-1800)
543	8-825-778-91	s	HEAD PS244-2103G (UVW-1600)

PRESS ASSY, PINCH

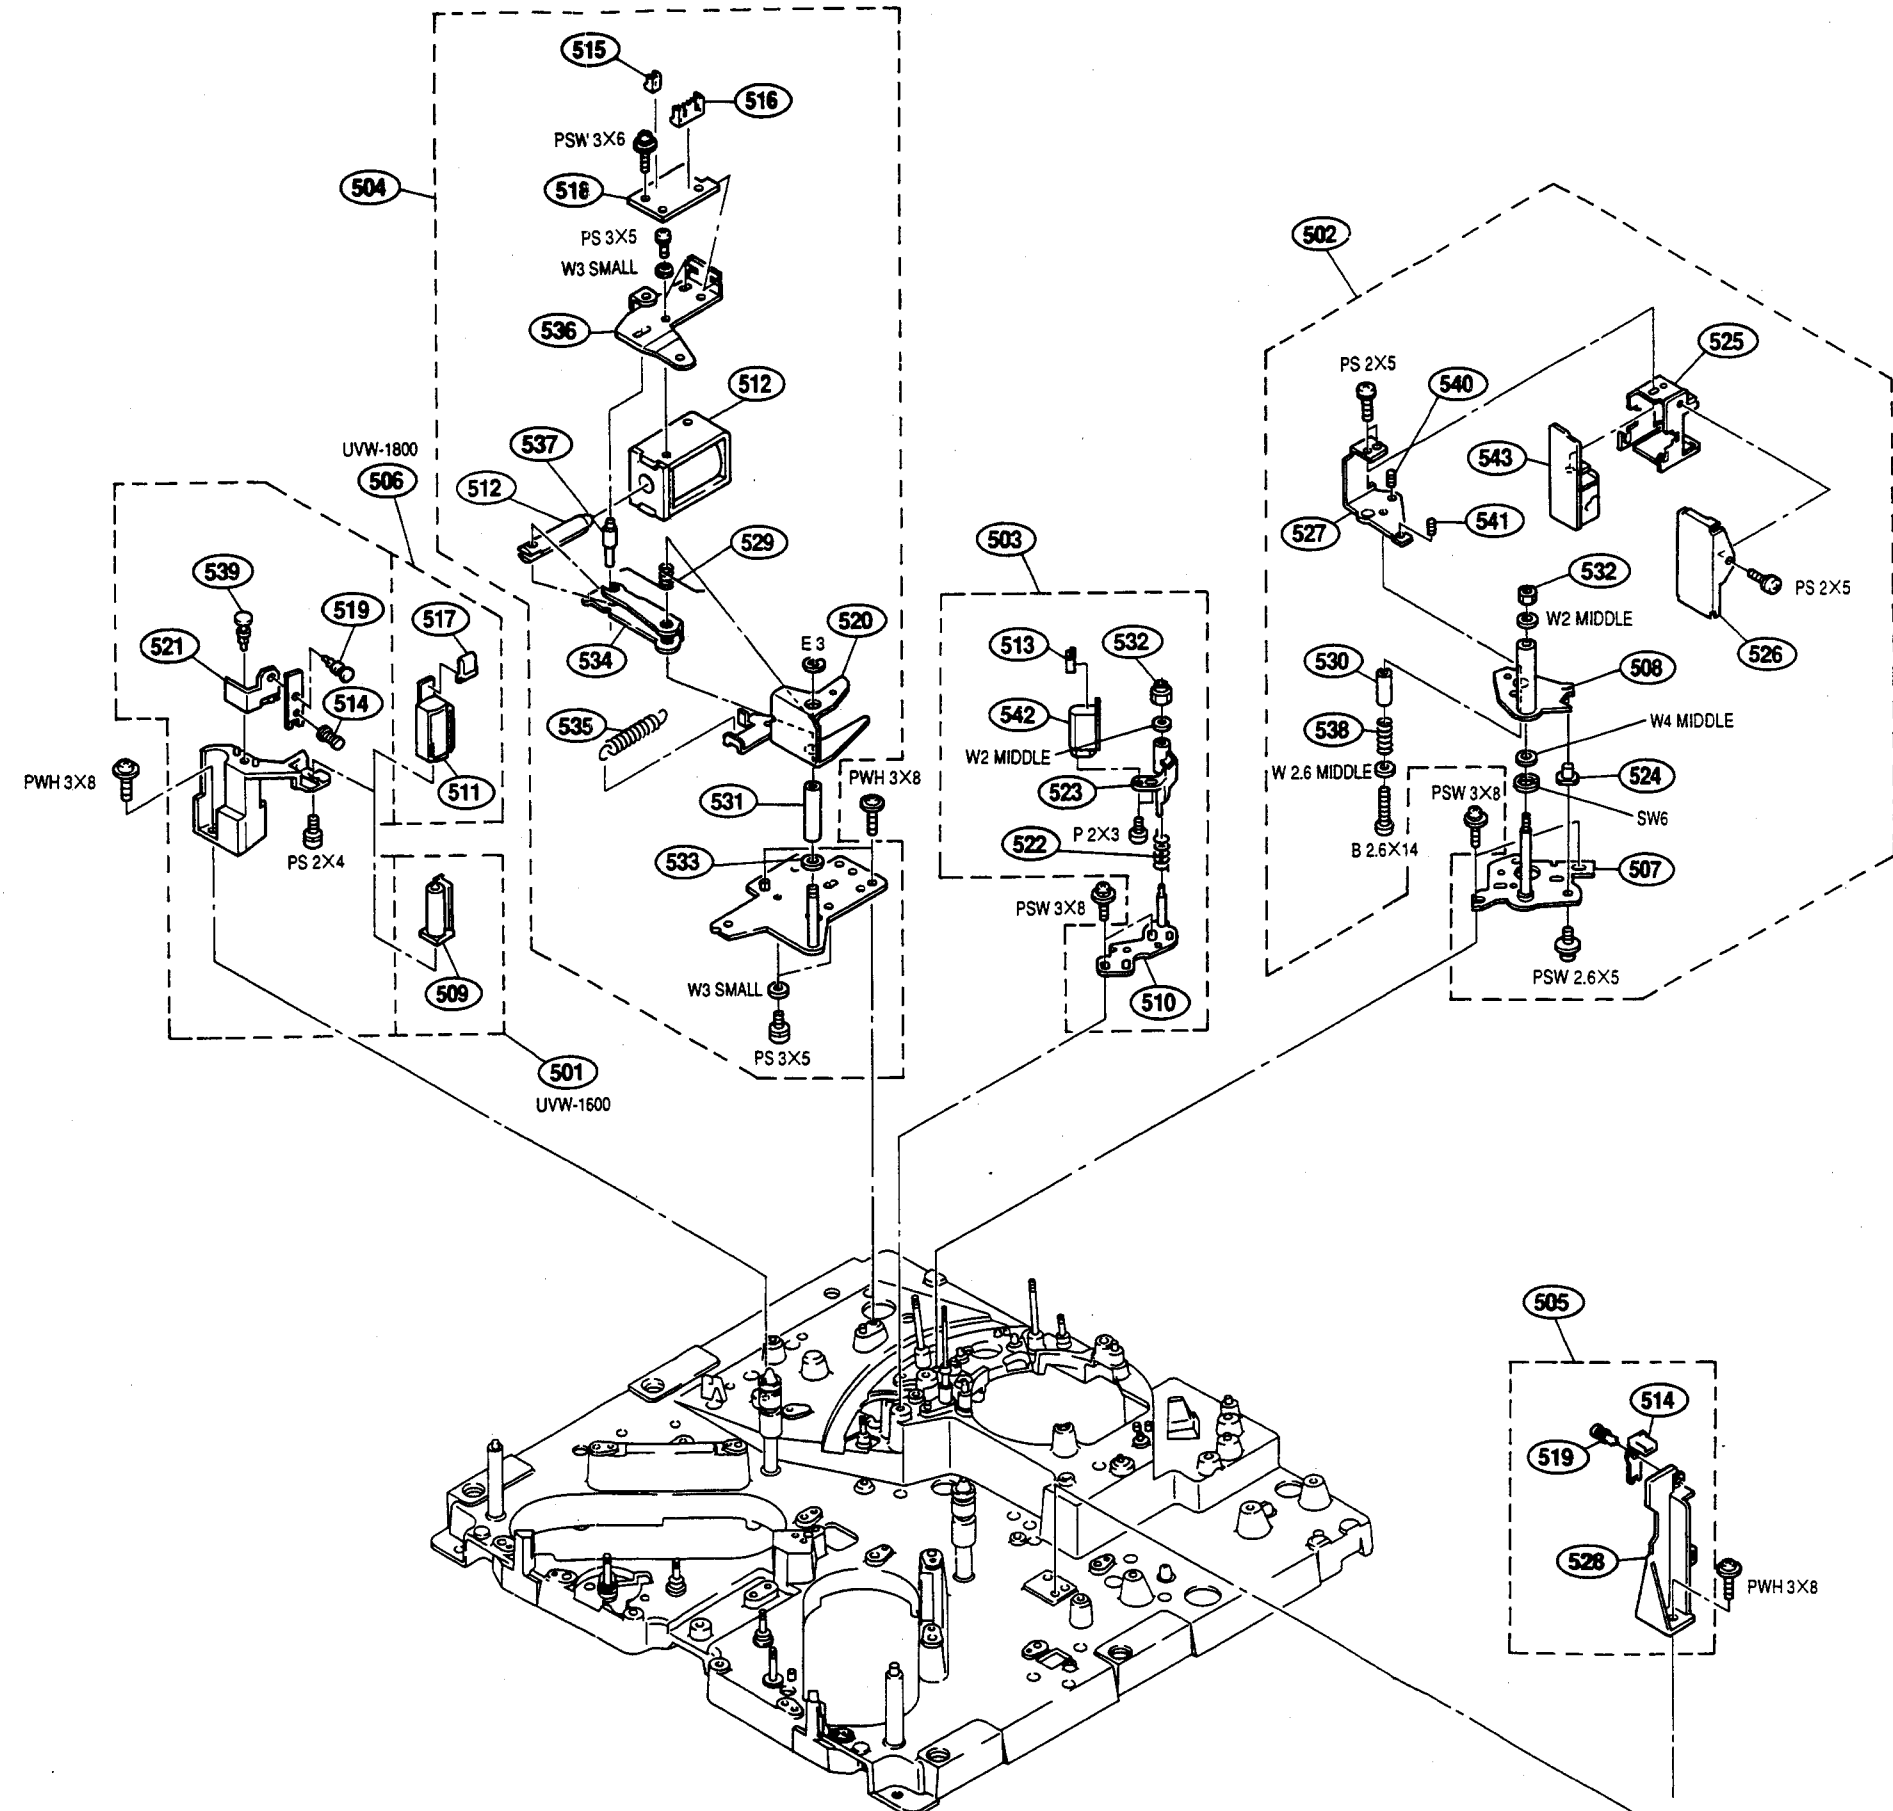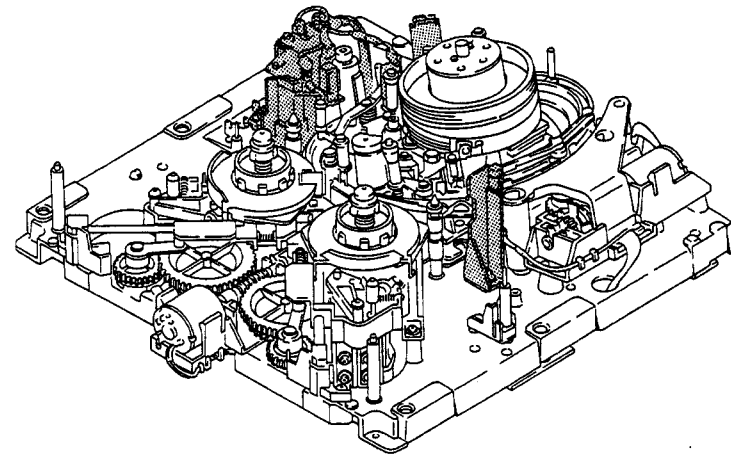

CASSETTE COMPARTMENT ASSEMBLY

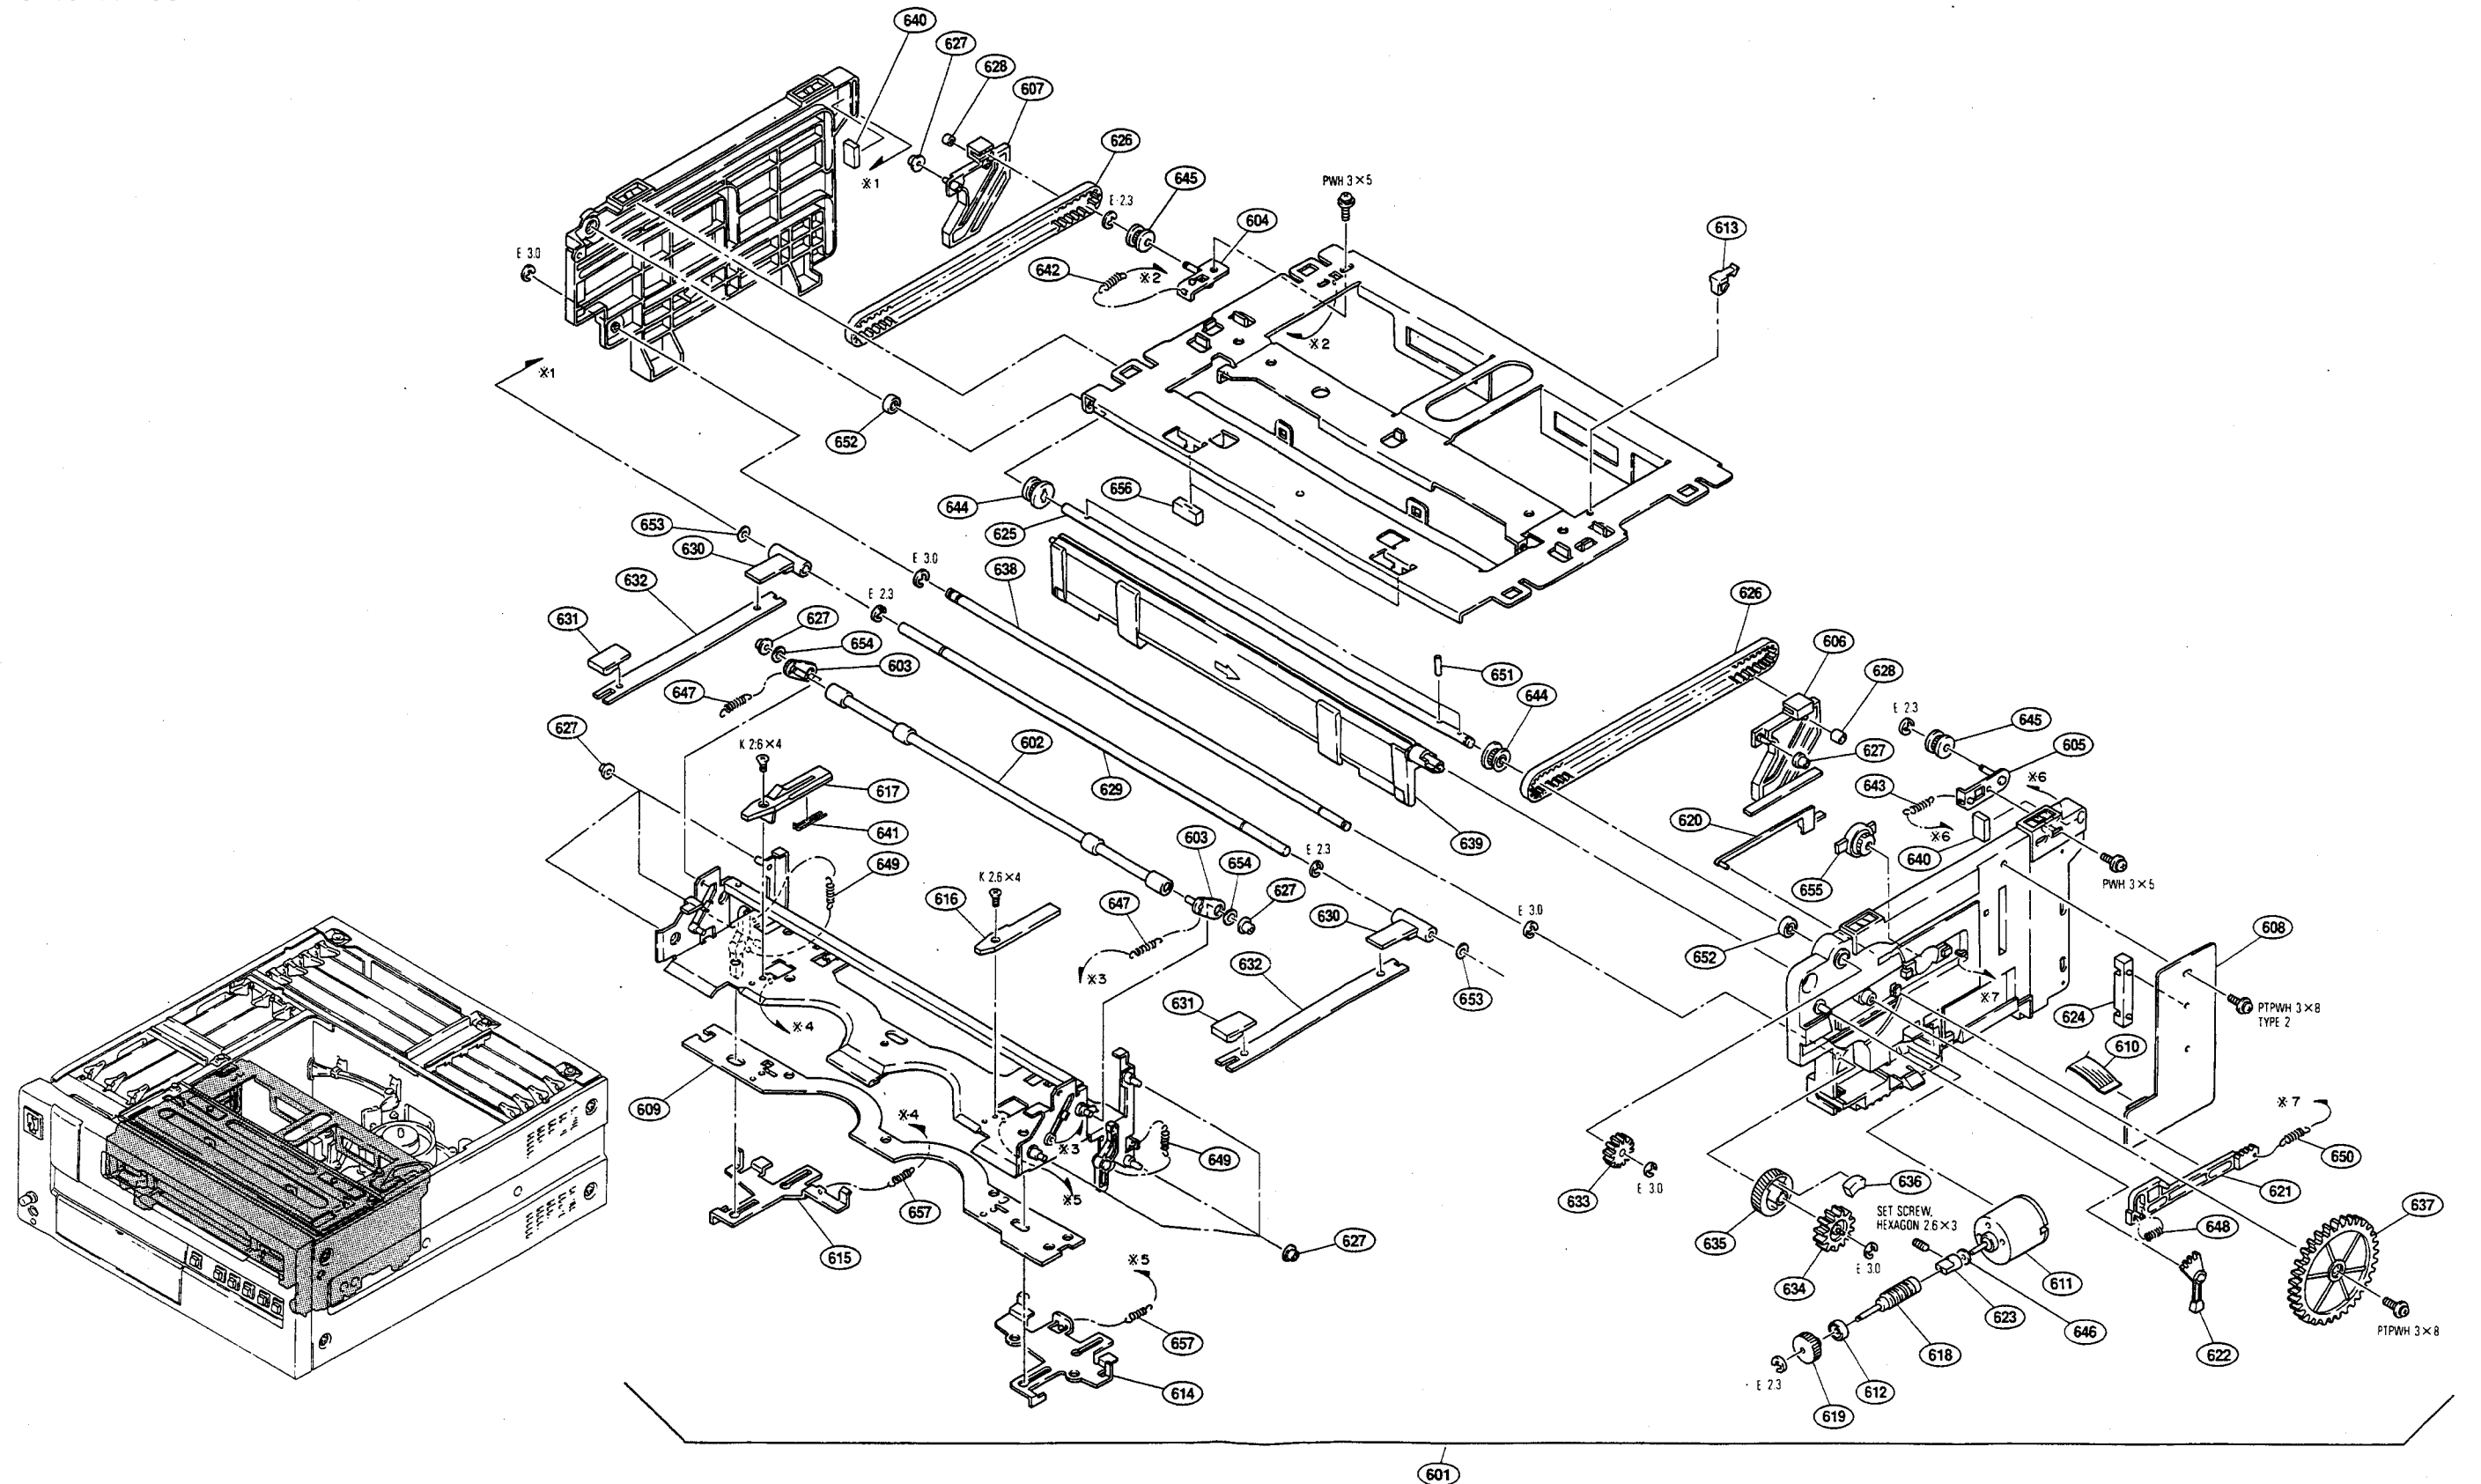


No.	Part No.	SP	Description
601	A-8267-863-A	s	CASSETTE COMPARTMENT ASSY
602	X-3166-062-1	o	SHAFT ASSY, PRESS ROLLER
603	X-3166-063-2	o	ARM ASSY, PRESS
604	X-3166-065-1	o	DECK (L) ASSY, PULLEY
605	X-3166-066-1	o	DECK (R) ASSY, PULLEY
606	X-3166-067-1	o	SLIDER (R) ASSY
607	X-3166-068-1	o	SLIDER (L) ASSY
608	1-640-170-13	o	CL-25 BOARD
609	1-640-171-12	o	PC-62 BOARD
610	1-690-106-12	s	WIRE, FLEXIBLE CARD (5P)
611	1-698-152-11	s	MOTOR, DC SVD-1499
612	2-621-007-01	ls	BEARING, BALL, (B) (NO FRANGE)
613	3-671-150-11	o	CLAMP
614	3-171-367-04	o	SWITCH (R), IN
615	3-171-398-03	o	SWITCH (L), IN
616	3-171-399-02	o	GUIDE (R), CASSETTE
617	3-171-400-03	o	GUIDE (L), CASSETTE
618	3-171-418-02	s	WORM
619	3-171-419-03	s	WHEEL
620	3-171-420-01	o	SHUTTER
621	3-171-421-01	o	SLIDER, DOOR SWITCHING
622	3-171-422-01	o	LEVER, DOOR SWITCHING
623	3-171-423-02	o	JOINT, MOTOR
624	3-171-424-01	o	HOLDER, SENSER
625	3-171-457-01	o	SHAFT, JOINT
626	3-171-458-01	s	BELT, TIMING
627	3-171-459-01	s	ROLLER, GUIDE
628	3-171-460-01	s	ROLLER, SLIDER
629	3-171-461-01	o	SHAFT, RETAINER, L CASSETTE
630	3-171-462-01	o	HOLDER, SHAFT
631	3-171-463-02	o	PLATE
632	3-171-464-01	o	SPRING, LEAF
633	3-171-465-01	o	GEAR, DRIVING
634	3-171-466-02	o	GEAR, LIMITER
635	3-171-477-02	o	WHEEL, WORM
636	3-181-431-01	o	RUBBER, LIMITER
637	3-171-479-01	o	GEAR, MIDWAY
638	3-171-480-01	o	SHAFT, WORM WHEEL
639	3-171-510-02	s	DOOR, CASSETTE
640	3-174-908-01	s	STOPPER
641	3-176-139-01	s	SPRING, C GUIDE
642	3-176-578-01	s	SPRING, TENSION
643	3-176-579-01	s	SPRING, TENSION
644	3-176-583-01	o	PULLEY (A)
645	3-176-584-01	o	PULLEY (B)
646	3-182-706-01	s	SPACER
647	3-548-757-00	s	SPRING, TENSION
648	3-579-759-00	s	SPRING, COMPRESSION
649	3-646-214-00	s	SPRING
650	3-672-461-00	s	SPRING, TENSION
651	3-677-193-00	o	PIN, STOPPER
652	3-698-217-01	s	BEARING (NO FLANGE), BALL
653	3-701-439-21	s	WASHER
654	3-701-443-21	s	WASHER, 5 DIA.
655	3-712-786-01	s	DAMPER, OIL
656	3-717-369-03	o	STOPPER, DOOR
657	4-858-799-00	s	SPRING, TENSION




CHASSIS & ORNAMENTAL PANEL BLOCK

No.	Part No.	SP Description
701	A-6771-428-A	s STAY ASSY, CASSETTE COMPARTMENT
702	A-8267-664-B	o PANEL ASSY, FRONT (UVW-1600)
702	A-8267-666-B	o PANEL ASSY, FRONT (UVW-1800)
703	A-8267-665-A	o LID, UPPER ASSY
704	A-8267-667-A	o DOOR ASSY, FRONT
705	A-8267-670-A	o RETAINER (L) ASSY, PC BOARD
706	A-8267-673-A	o RETAINER (S) ASSY, PC BOARD
707	X-3166-071-1	s KNOB ASSY (B), VOL
708	3-182-395-01	o GEAR, DAMPER
709	3-182-406-01	o GUARD, POWER SW
710	3-182-441-01	o PLATE, BOTTOM
711	3-182-451-01	o CABINET (RIGHT)
712	3-182-452-01	o CABINET (LEFT)
713	3-642-656-01	s FOOT
714	3-669-595-00	s WASHER (2), STOPPER
715	3-688-102-01	o SPACER, M4
716	3-701-438-21	s WASHER
717	3-712-786-01	s DAMPER, OIL
718	3-717-306-01	o SPRING
719	3-717-377-01	o FRAME (SQUARE 17), ORNAMENTAL

CHASSIS & ORNAMENTAL PANEL BLOCK

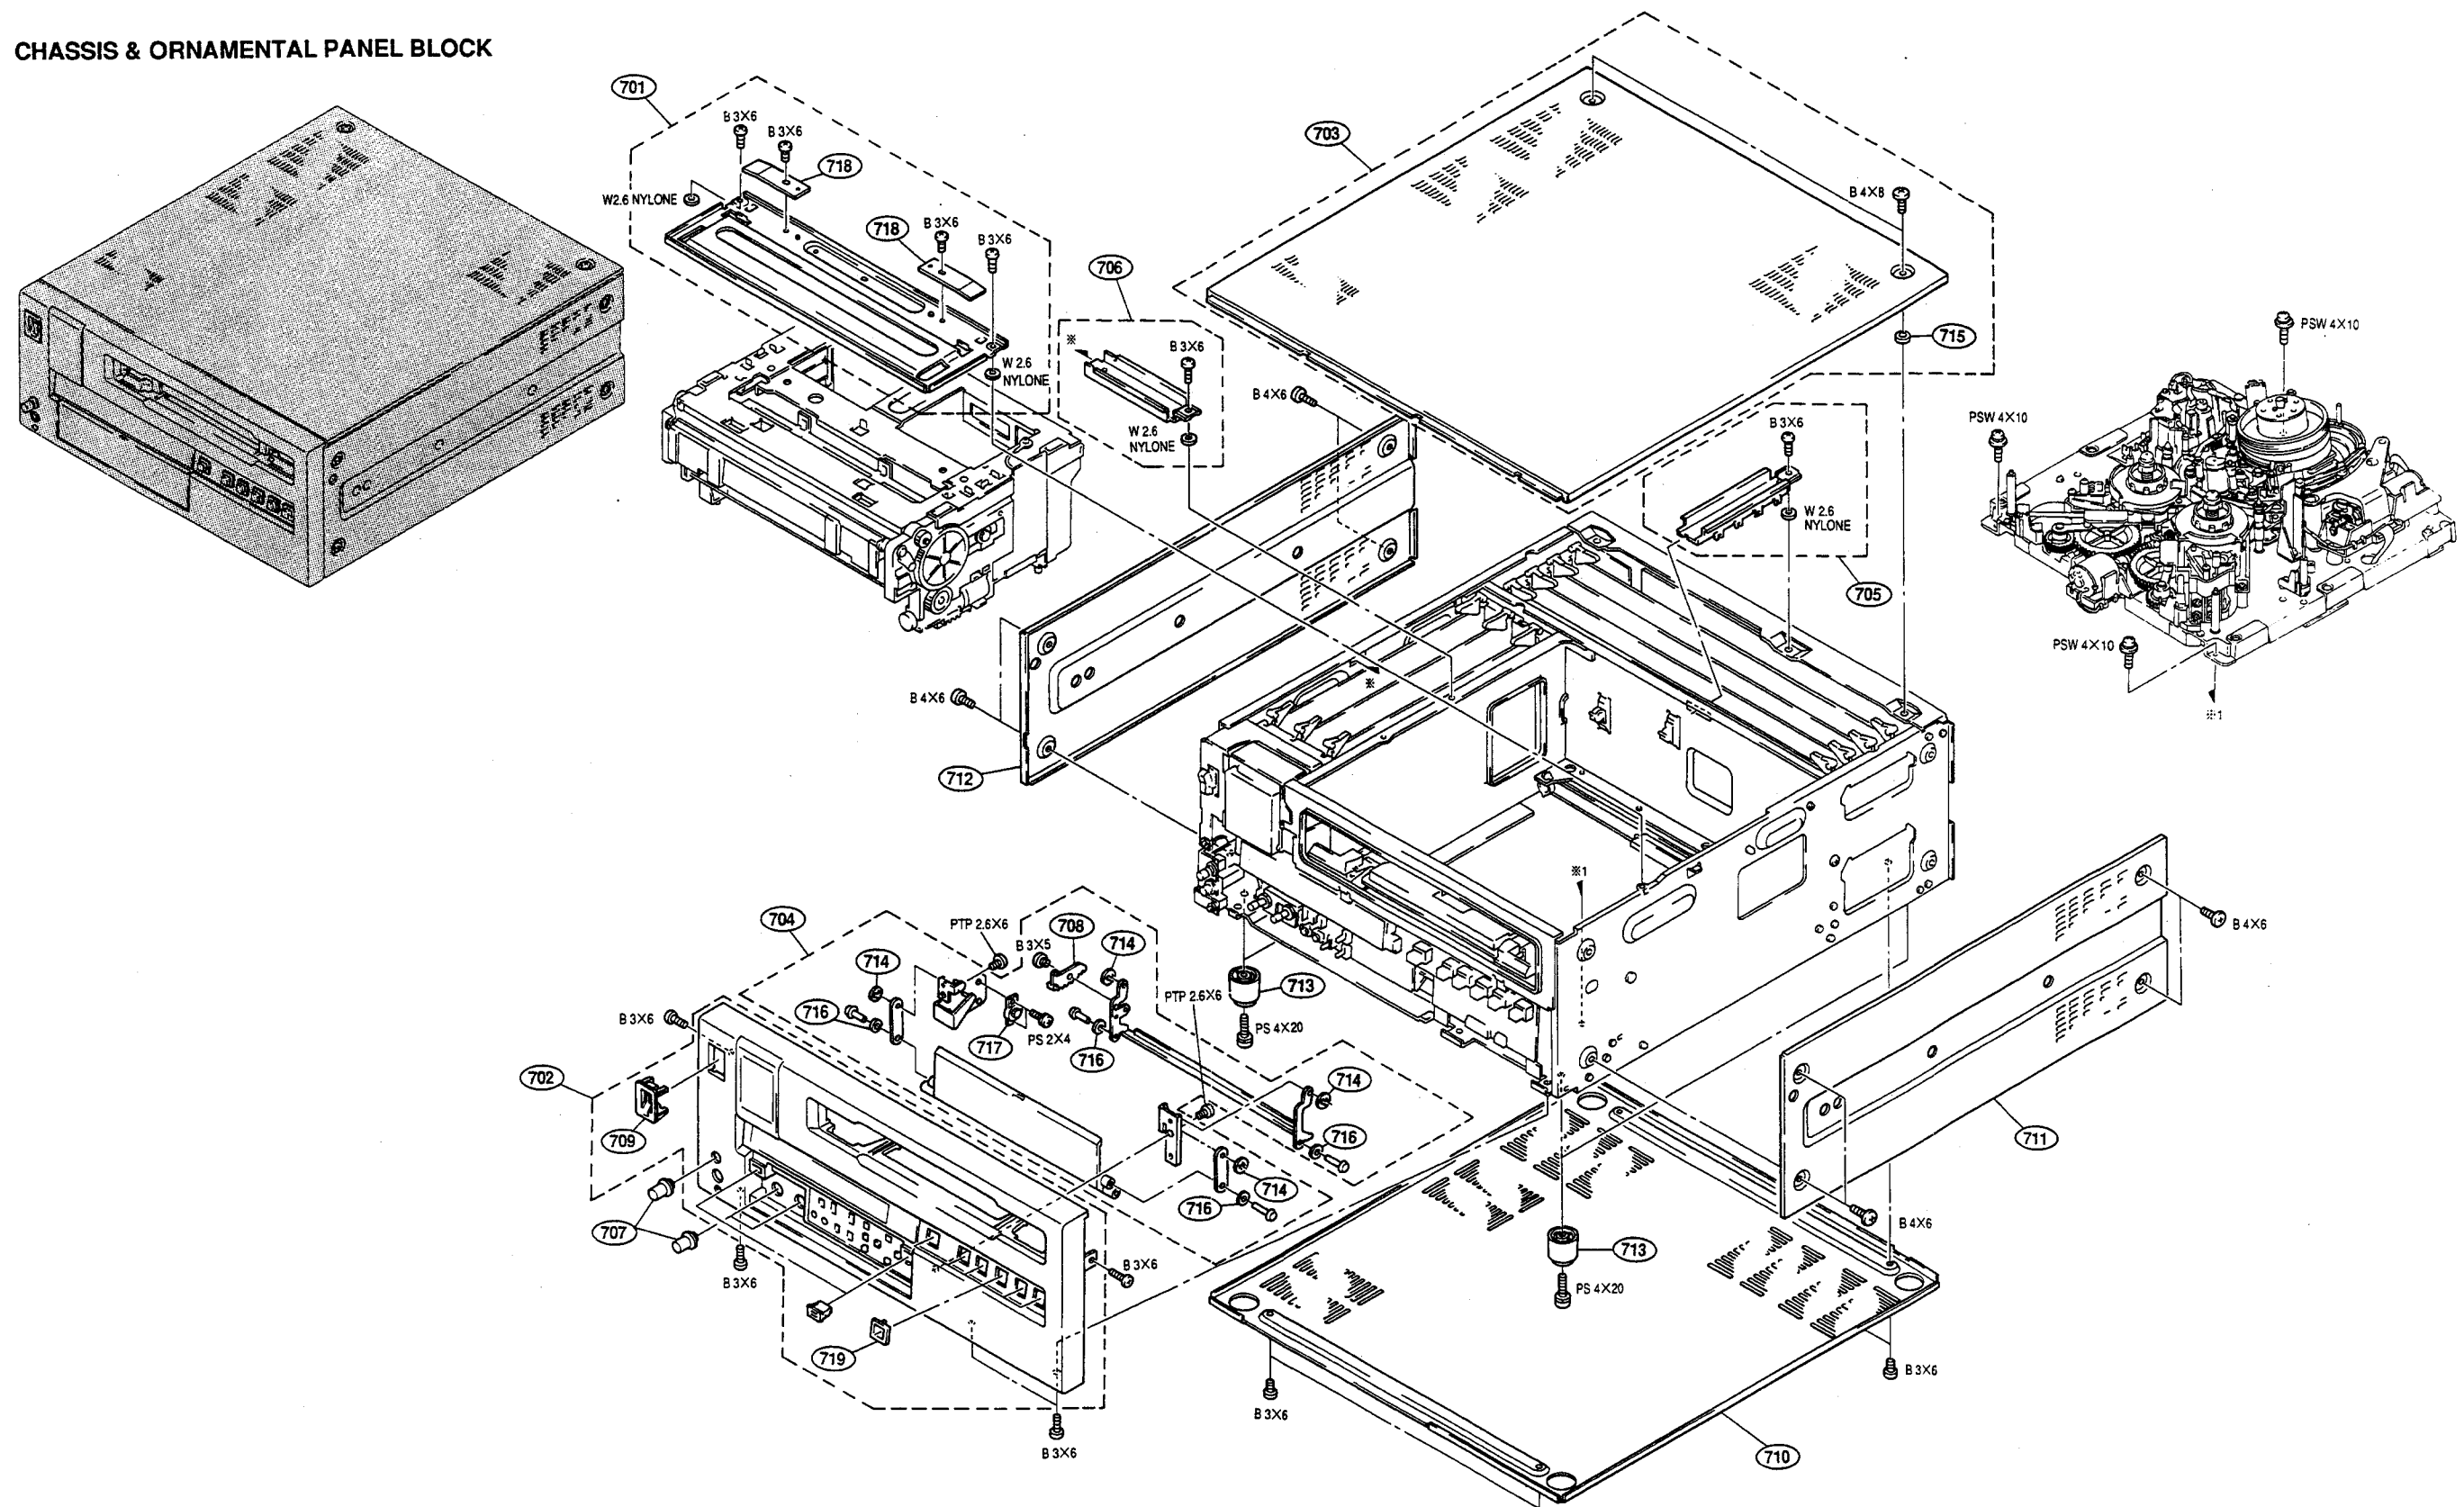

CARD RACK BLOCK (1)

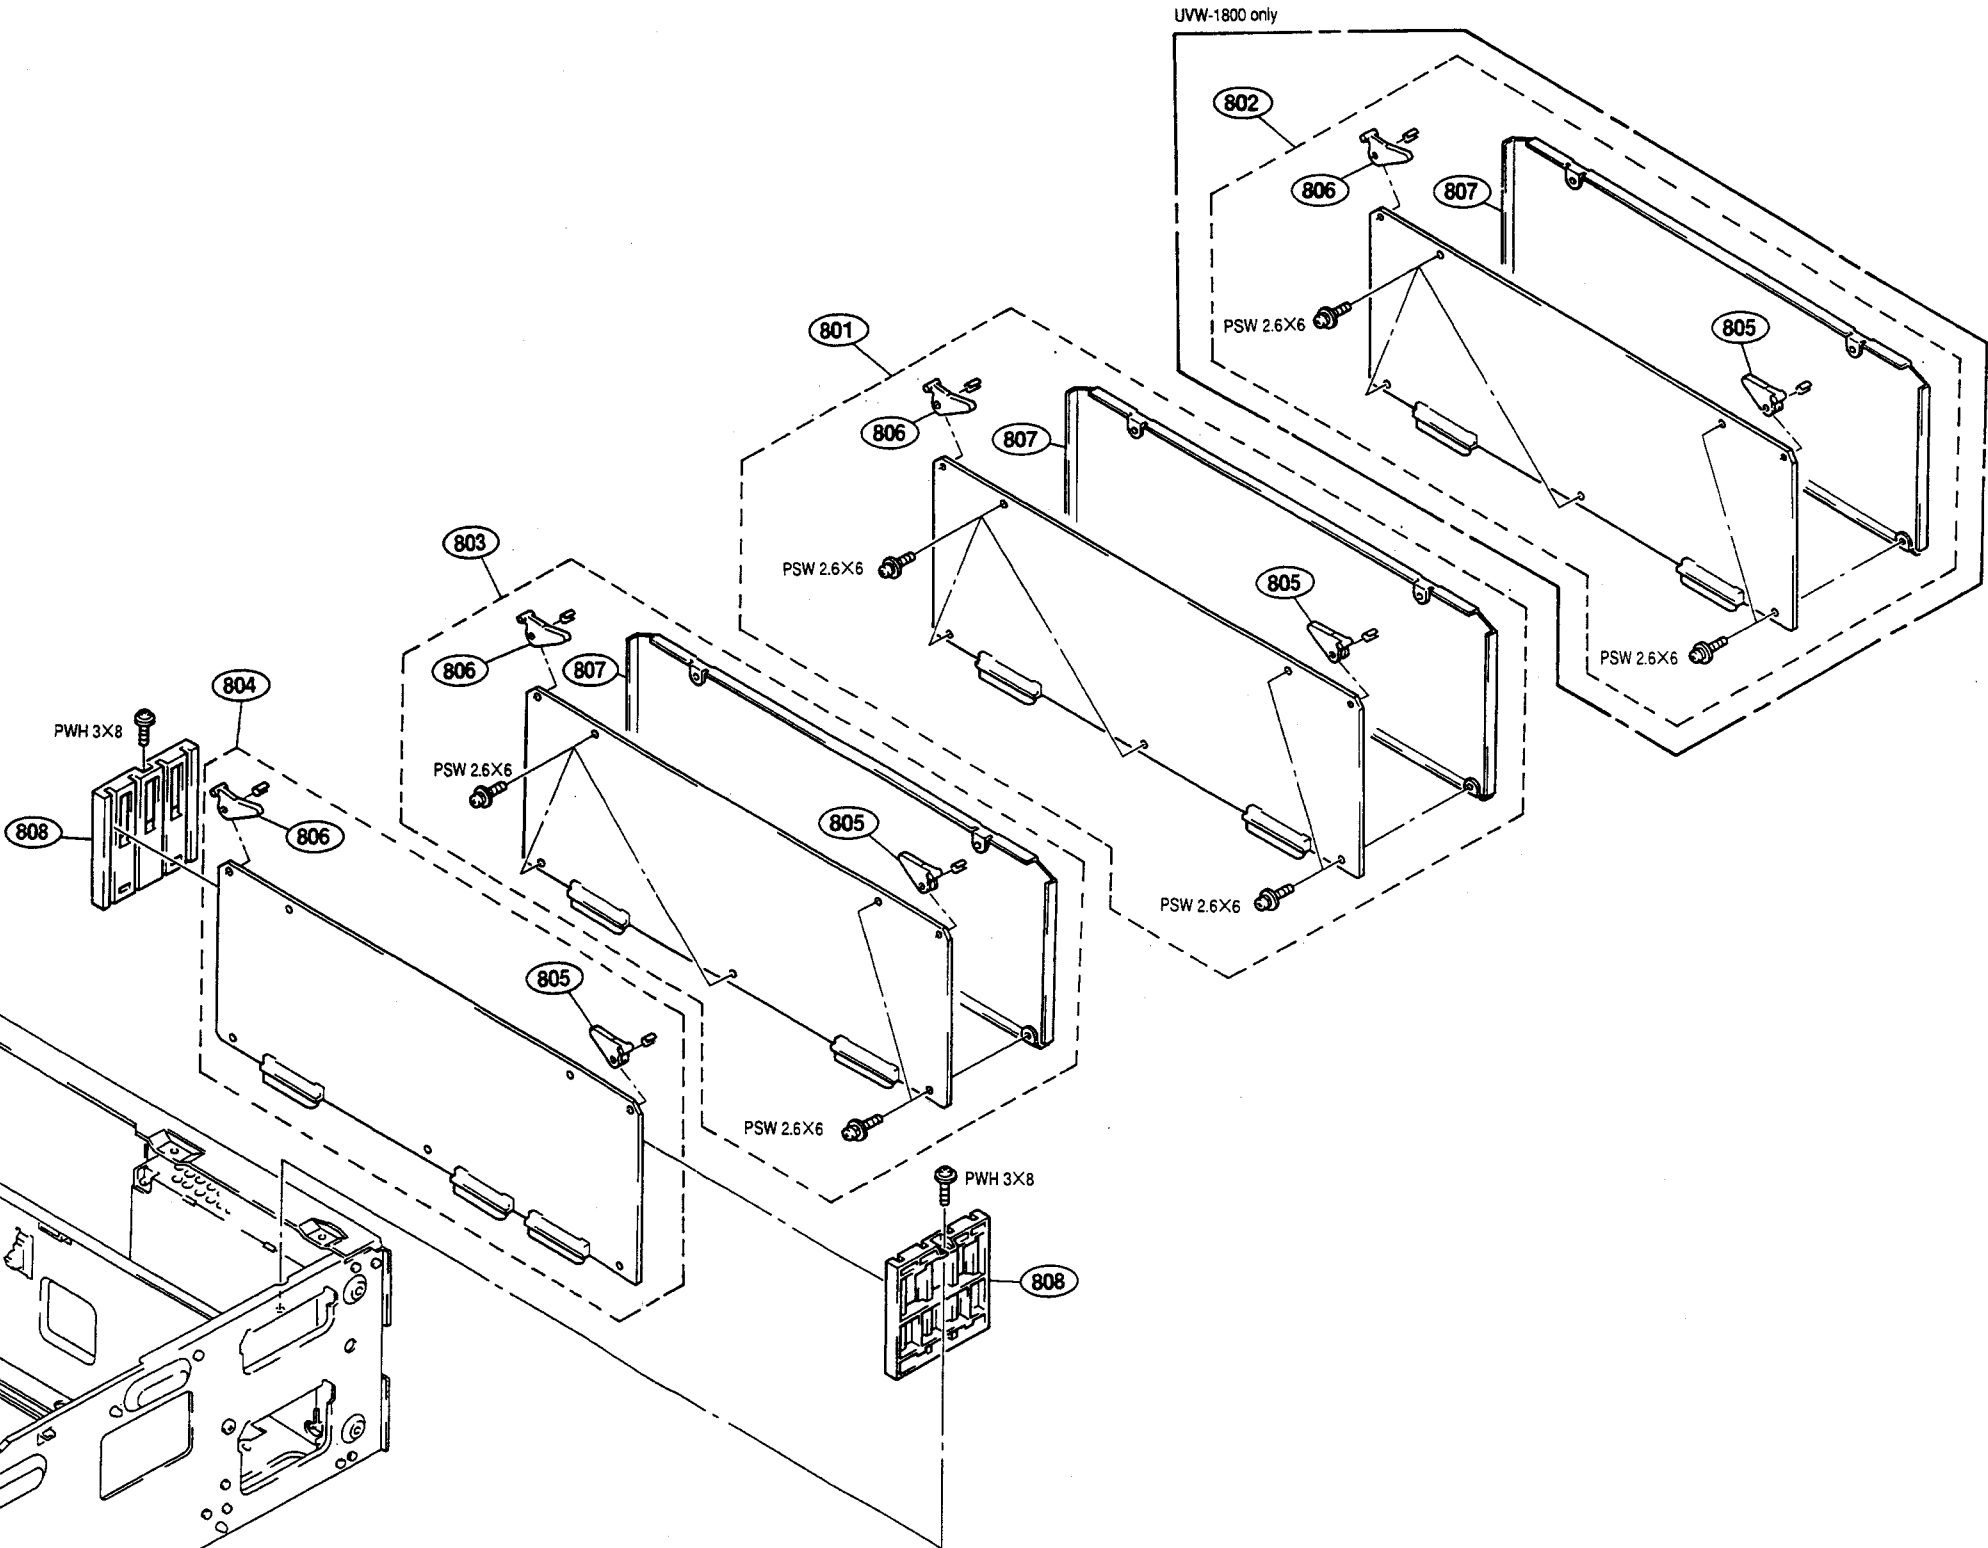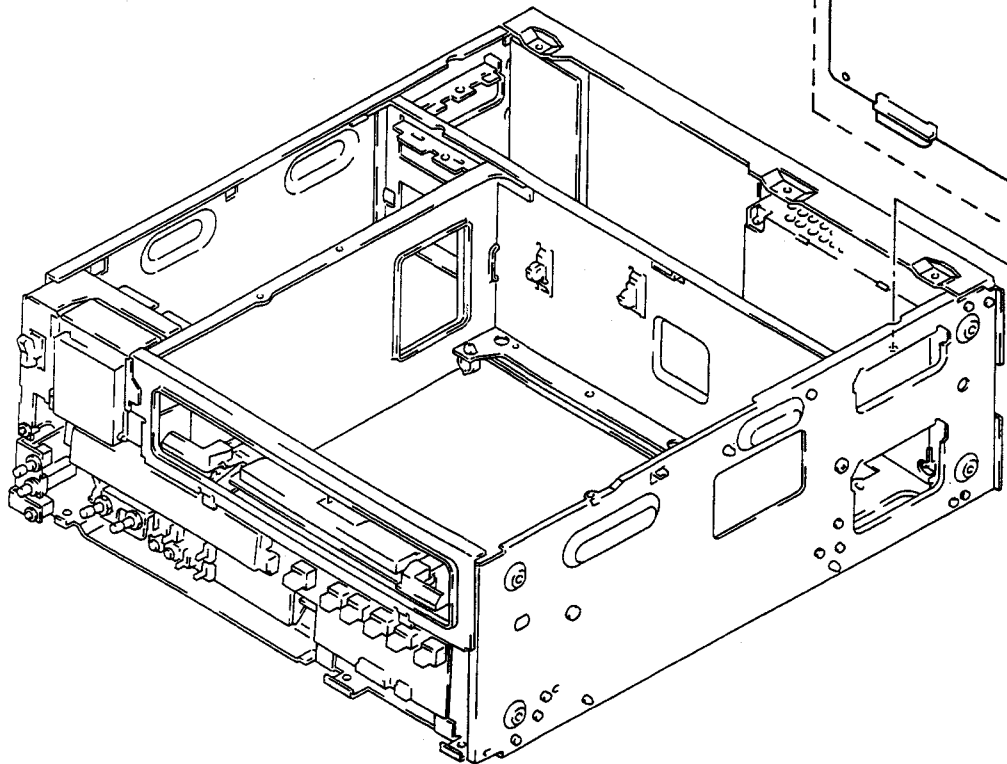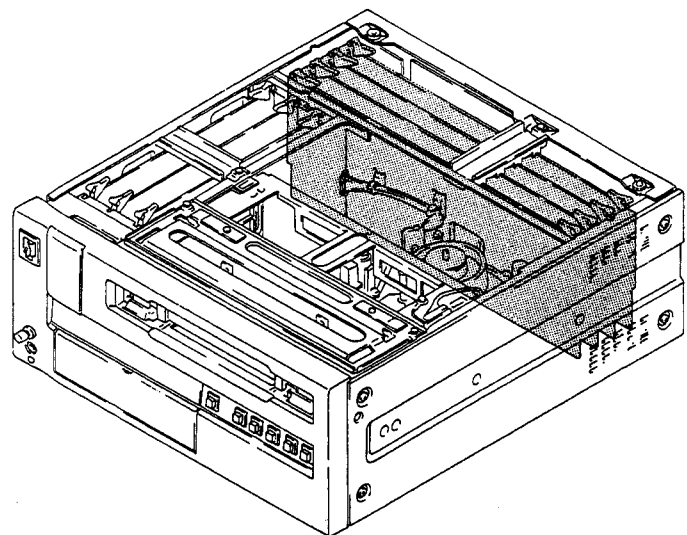


No.	Part No.	SP Description
801	A-8275-277-A	o COMPLETE PCB, VP-43A (UVW-1600)
801	A-8275-281-A	o COMPLETE PCB, VP-43 (UVW-1800)
802	A-8275-280-A	o COMPLETE PCB, VRA-5 (UVW-1800)
803	A-8275-282-A	o COMPLETE PCB, TBC-25
804	A-8275-284-A	o COMPLETE PCB, SS-53
805	3-179-084-01	s LEVER, PC BOARD (R)
806	3-179-085-01	s LEVER, PC BOARD (L)
807	3-182-386-01	o PLATE, SHIELD (L), CARD
808	3-182-438-01	o GUIDE (L), PCB

CARD RACK BLOCK (2)

No.	Part No.	SP	Description
901	A-8275-278-A	o	COMPLETE PCB, RP-70A (UVW-1600)
901	A-8275-285-A	o	COMPLETE PCB, RP-70 (UVW-1800)
902	A-8275-279-A	o	COMPLETE PCB, AP-31A (UVW-1600)
902	A-8275-286-A	o	COMPLETE PCB, AP-31 (UVW-1800)
903	A-8275-287-A	o	COMPLETE PCB, AR-14 (UVW-1800)
904	A-8276-730-A	o	MOUNTED PCB, MB-470A (UVW-1600)
904	A-8276-736-A	o	MOUNTED PCB, MB-470 (UVW-1800)
905	A-8276-731-A	o	MOUNTED PCB, MB-471A (UVW-1600)
905	A-8276-737-A	o	MOUNTED PCB, MB-471 (UVW-1800)
906	1-571-632-11	s	WIRE, FLEXIBLE CARD 34P
907	3-179-084-01	s	LEVER, PC BOARD (R)
908	3-179-085-01	s	LEVER, PC BOARD (L)
909	3-182-298-01	o	CASE, SHIELD (LID), AP2
910	3-182-316-01	o	CASE, SHIELD (LID), PR70V
911	3-182-351-01	o	CASE, SHIELD, AP (2B)
912	3-182-385-01	o	PLATE, SHIELD (S), CARD
913	3-182-407-01	o	LID, AR CASE, SHIELD (UVW-1800)
914	3-182-439-01	o	GUIDE (S), PCB

CARD RACK BLOCK (2)**CARD RACK BLOCK (2)**



CARD RACK BLOCK (2)

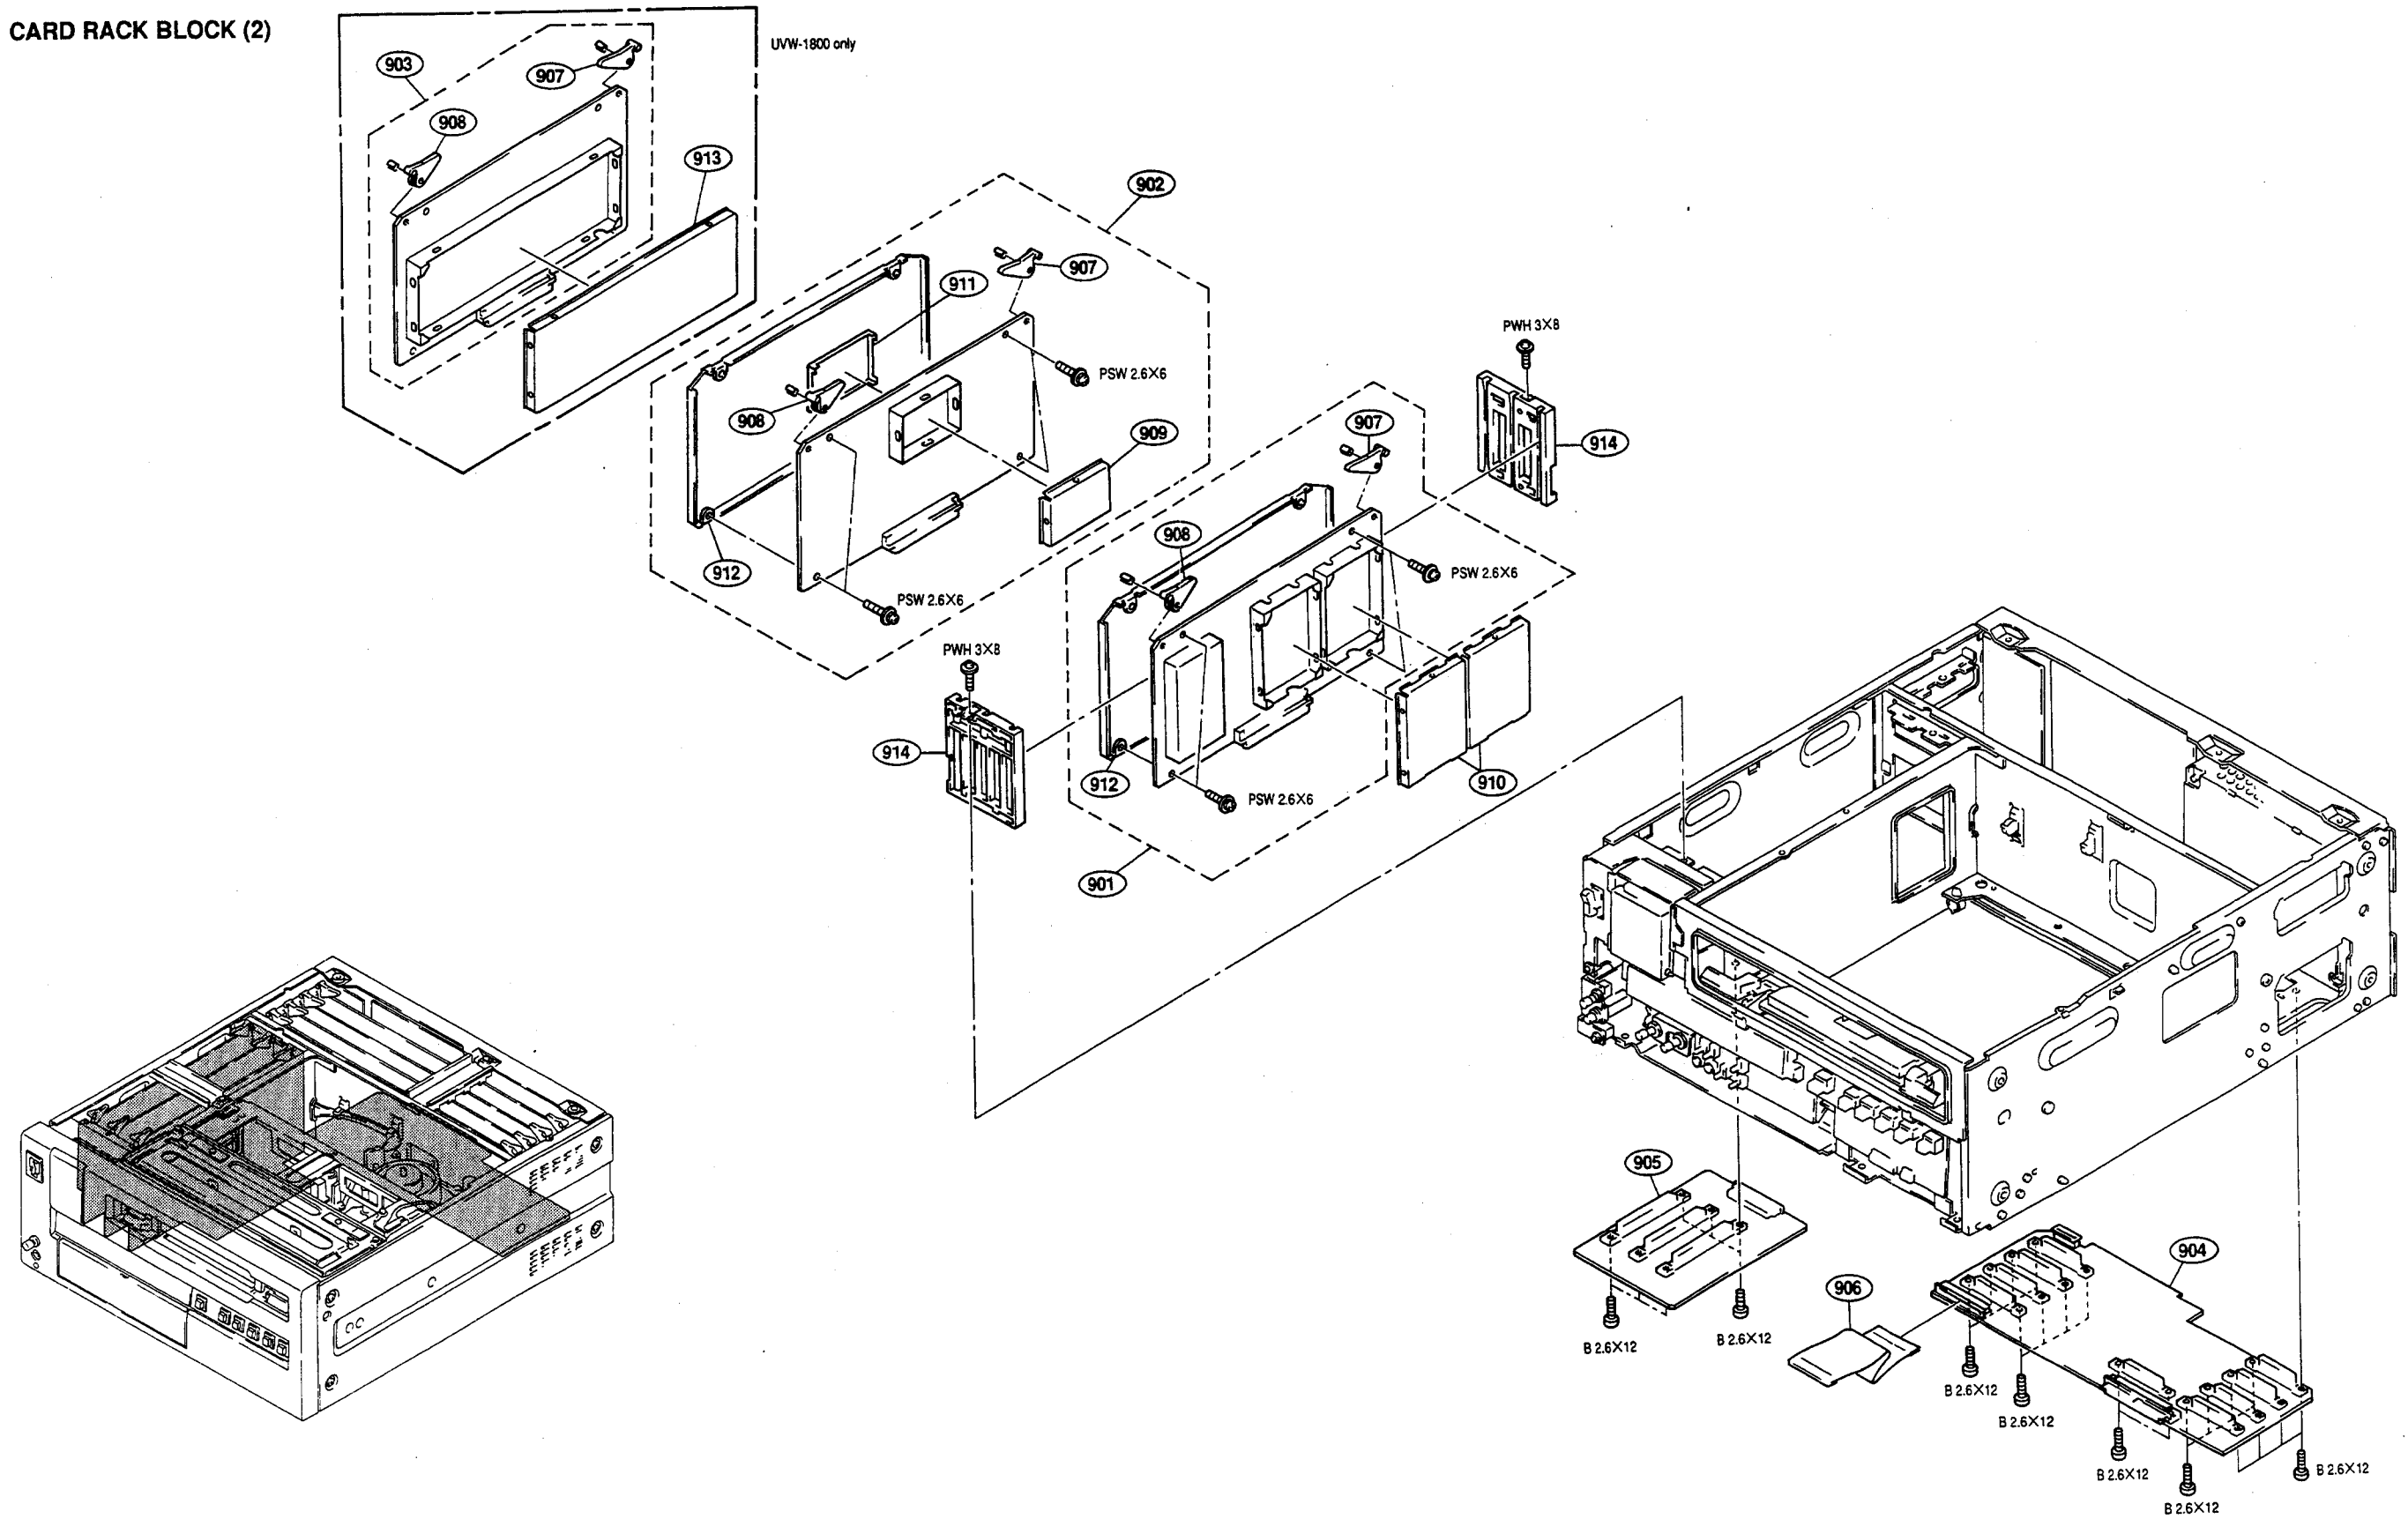

CHASSIS BLOCK

CHASSIS BLOCK

CHASSIS BLOCK


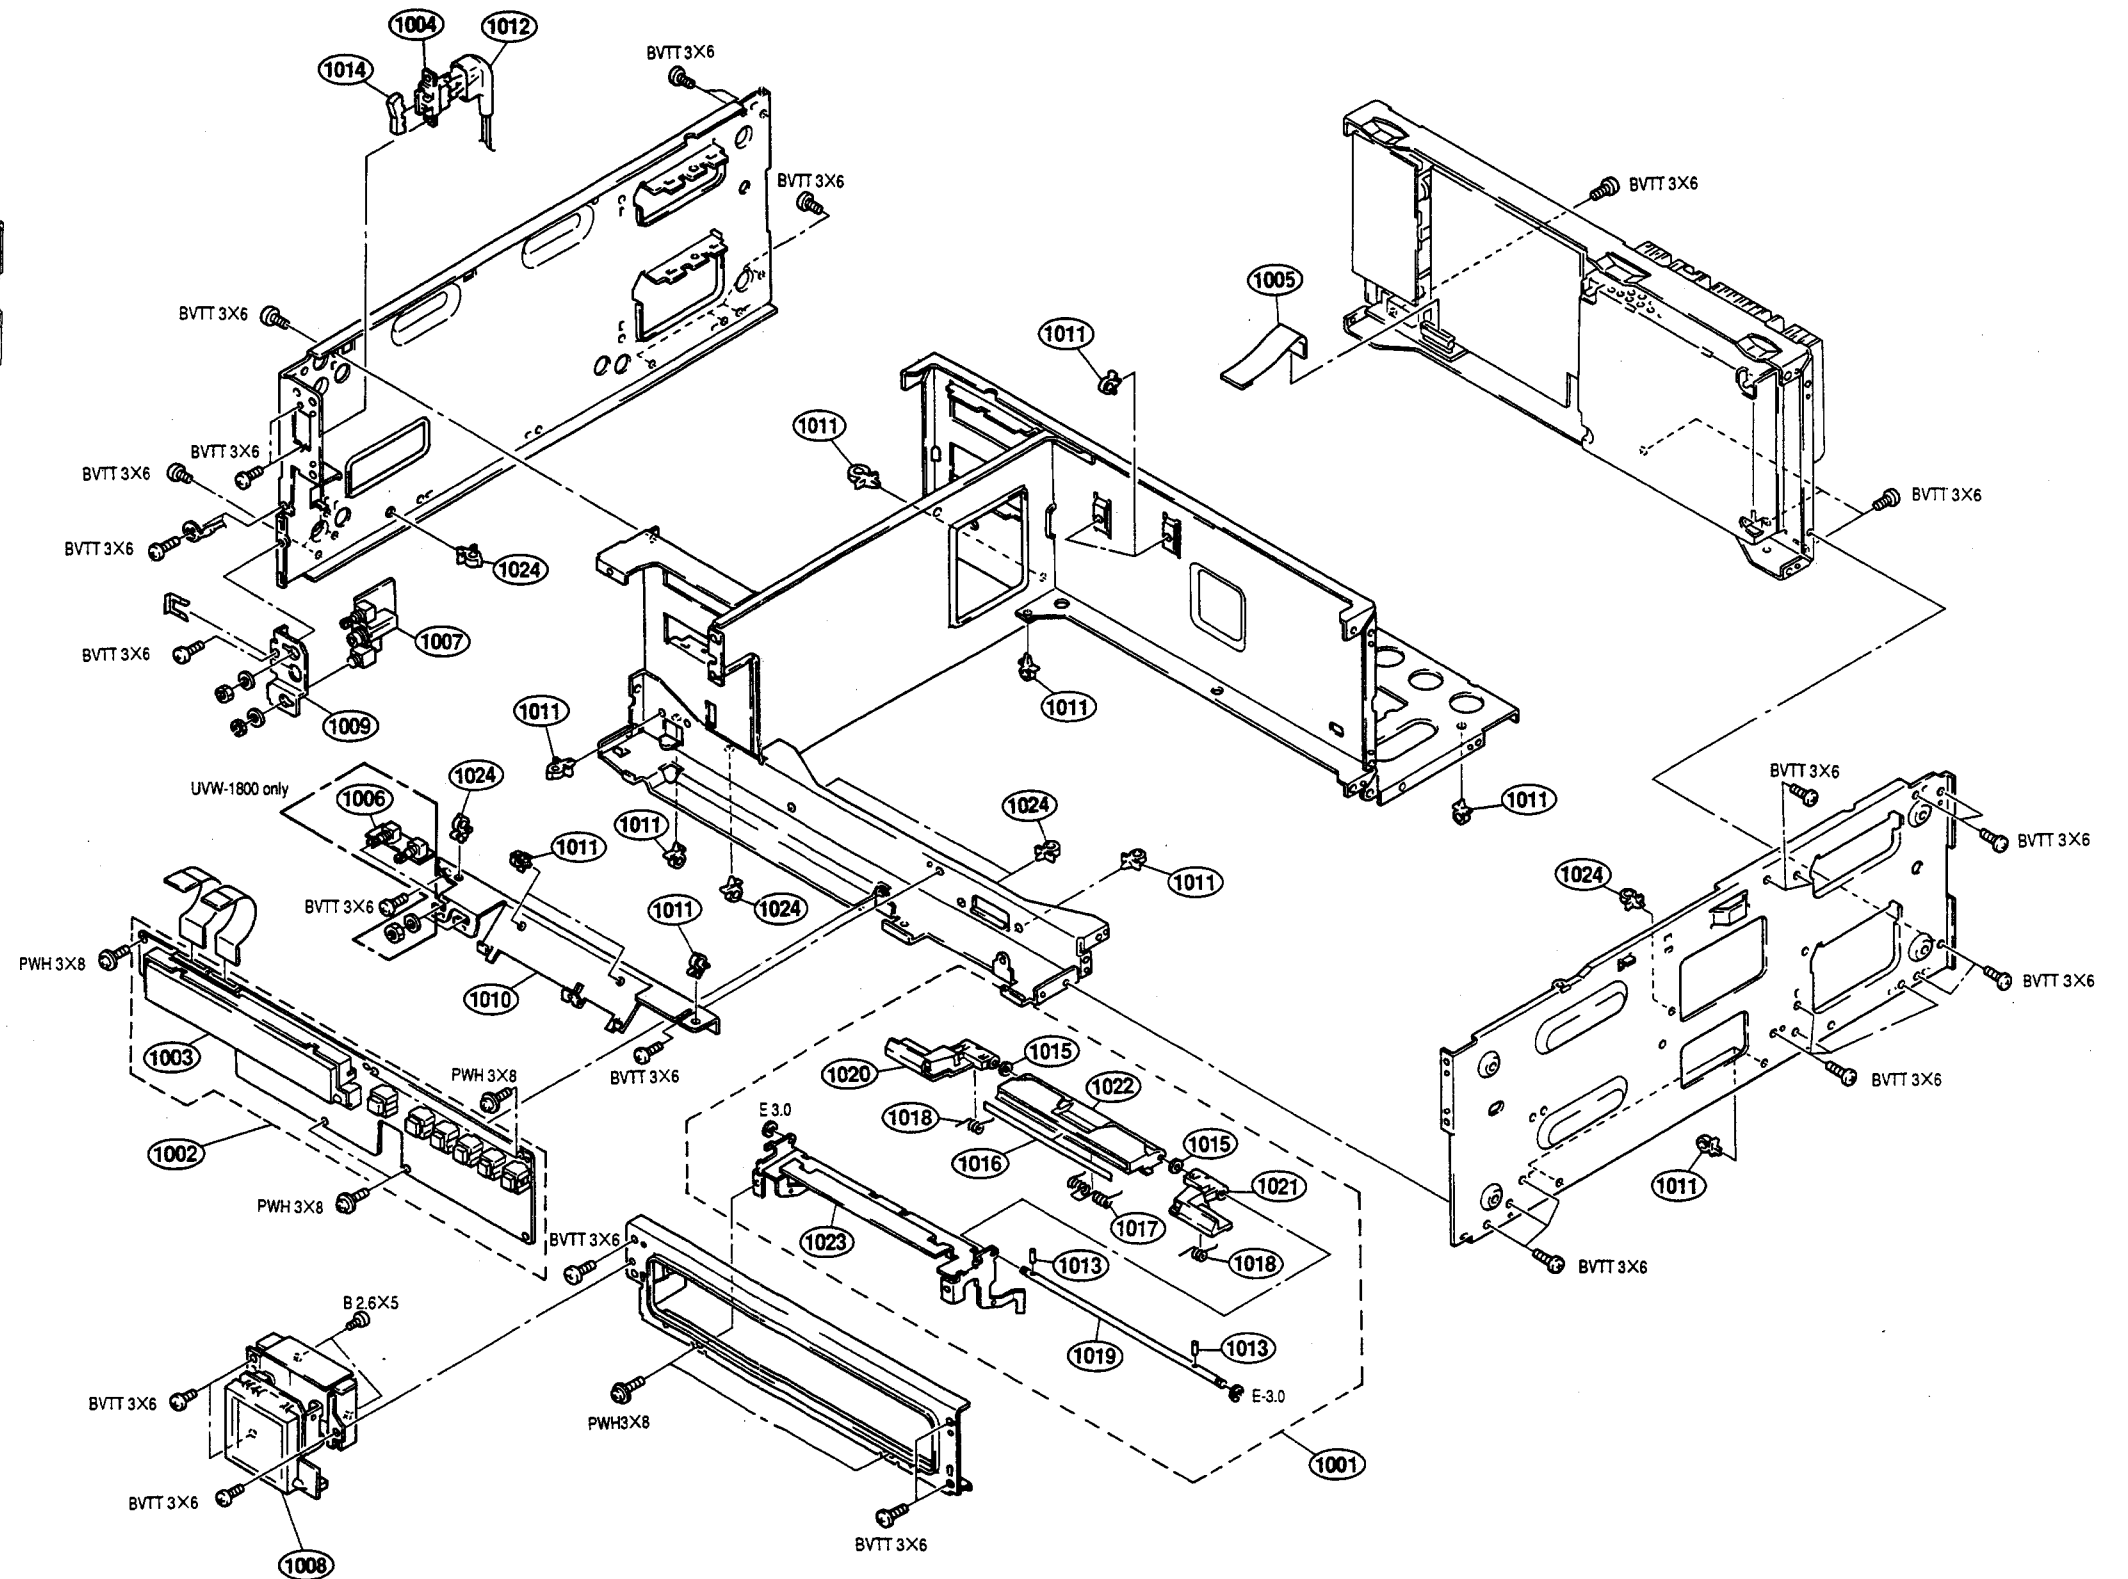
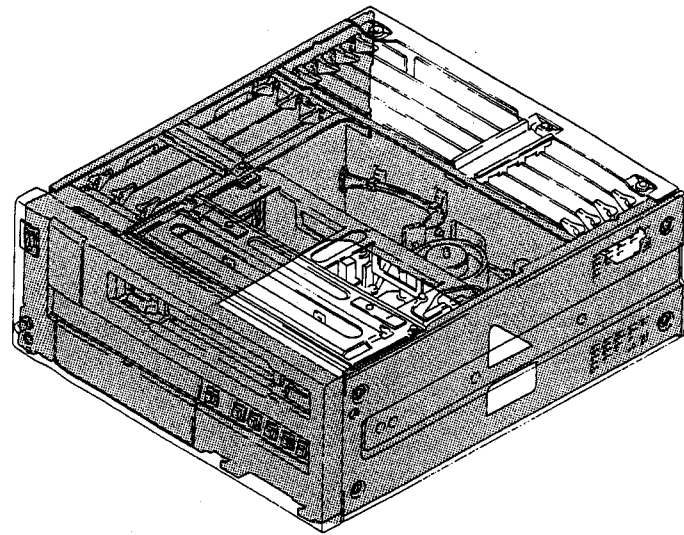


No.	Part No.	SP	Description
1001	A-6751-377-A	o	GUIDE ASSY, SC
1002	A-8275-283-A	o	COMPLETE PCB, KY-249A (UVW-1600)
1002	A-8275-289-A	o	COMPLETE PCB, KY-249 (UVW-1800)
1003	1-517-246-11	s	INDICATION TUBE, FLUORESCENT
1004	△ 1-570-117-31	s	SWITCH, SEESAW (AC POWER)
1005	1-575-733-11	s	WIRE, FLAT TYPE (17 CORE)
1006	1-648-916-11	o	VR-155 BOARD (UVW-1800)
1007	1-648-917-11	o	HP-61 BOARD (UVW-1800)
1007	1-648-917-21	o	HP-61A BOARD (UVW-1600)
1008	△ 1-810-374-11	s	INDICATOR TUBE MODULE, FLUORES
1009	3-182-297-01	o	BRACKET, HP FIXED
1010	3-182-449-01	o	BRACKET, VR
1011	3-312-955-00	o	CLIP, CABLE
1012	3-659-969-11	o	COVER, SWITCH
1013	3-677-193-00	o	PIN, STOPPER
1014	3-688-814-01	s	CAP, SWITCH
1015	3-701-441-21	s	WASHER
1016	3-717-614-01	o	LABEL, C-LOCK OUT
1017	3-717-615-01	o	SPRING
1018	3-717-616-01	o	SPRING
1019	3-717-617-01	o	SHAFT, SC GUIDE
1020	3-717-618-01	o	GUIDE (LEFT), SC
1021	3-717-619-01	o	GUIDE (RIGHT), SC
1022	3-717-620-01	o	PLATE, OUT, C-LOCK
1023	3-717-621-03	o	PLATE, INDICATION, SC GUIDE
1024	4-312-237-00	o	CLIP, CABLE

CONNECTOR PANEL BLOCK

No.	Part No.	SP	Description
1101	A-8276-732-A	o	MOUNTED PCB, CP-225A (UVW-1600)
1101	A-8276-738-A	o	MOUNTED PCB, CP-225 (UVW-1800)
1102	A-8276-733-A	o	MOUNTED PCB, CP-226A (UVW-1600)
1102	A-8276-739-A	o	MOUNTED PCB, CP-226 (UVW-1800)
1102	A-8276-762-A	o	MOUNTED PCB, CP-226J (UVW-1800)
1102	A-8276-763-A	o	MOUNTED PCB, CP-226AJ (UVW-1600)
1103	A-8276-734-A	o	MOUNTED PCB, CP-237A (UVW-1600)
1103	A-8276-741-A	o	MOUNTED PCB, CP-237 (UVW-1800)
1104	△ 1-413-889-11	s	SWITCHING REGULATOR(SOPS-1045)
1105	1-570-157-51	s	SWITCH, SLIDE
1106	1-570-756-11	s	SWITCH, SLIDE (UVW-1800)
1107	1-573-566-11	s	CONNECTOR, D-SUB (ANGLE TYPE) 9P
1108	1-573-582-11	s	CONNECTOR, BNC (RECEPTACLE)
1109	1-573-583-11	s	CONNECTOR, BNC (RECEPTACLE)
1110	1-573-584-11	s	CONNECTOR, BNC (RECEPTACLE)
1111	1-573-585-11	s	CONNECTOR, BNC (RECEPTACLE) (UVW-1800)
1112	1-573-589-11	s	CONNECTOR (R-M) 12P (UVW-1800)
1113	1-573-590-12	s	CONNECTOR, (S) TERMINAL 4P
1114	1-573-592-11	s	CONNECTOR (R-F) 12P
1115	1-691-273-11	s	JACK, PIN 1P
1116	1-750-785-11	s	CONNECTOR (XLR TYPE) 3P
1117	1-750-786-11	s	CONNECTOR (XLR TYPE) 3P
1118	1-764-165-11	s	CONNECTOR, BNC (RECEPTACLE)
1119	1-764-259-11	s	CONNECTOR, D-SUB (ANGLE TYPE) 15P
1120	3-171-450-01	o	ADAPTOR, SW
1121	3-182-459-02	o	CONNECTOR, PANEL (UVW-1800)
1121	3-182-459-12	o	CONNECTOR, PANEL (UVW-1600)

CONNECTOR PANEL BLOCK

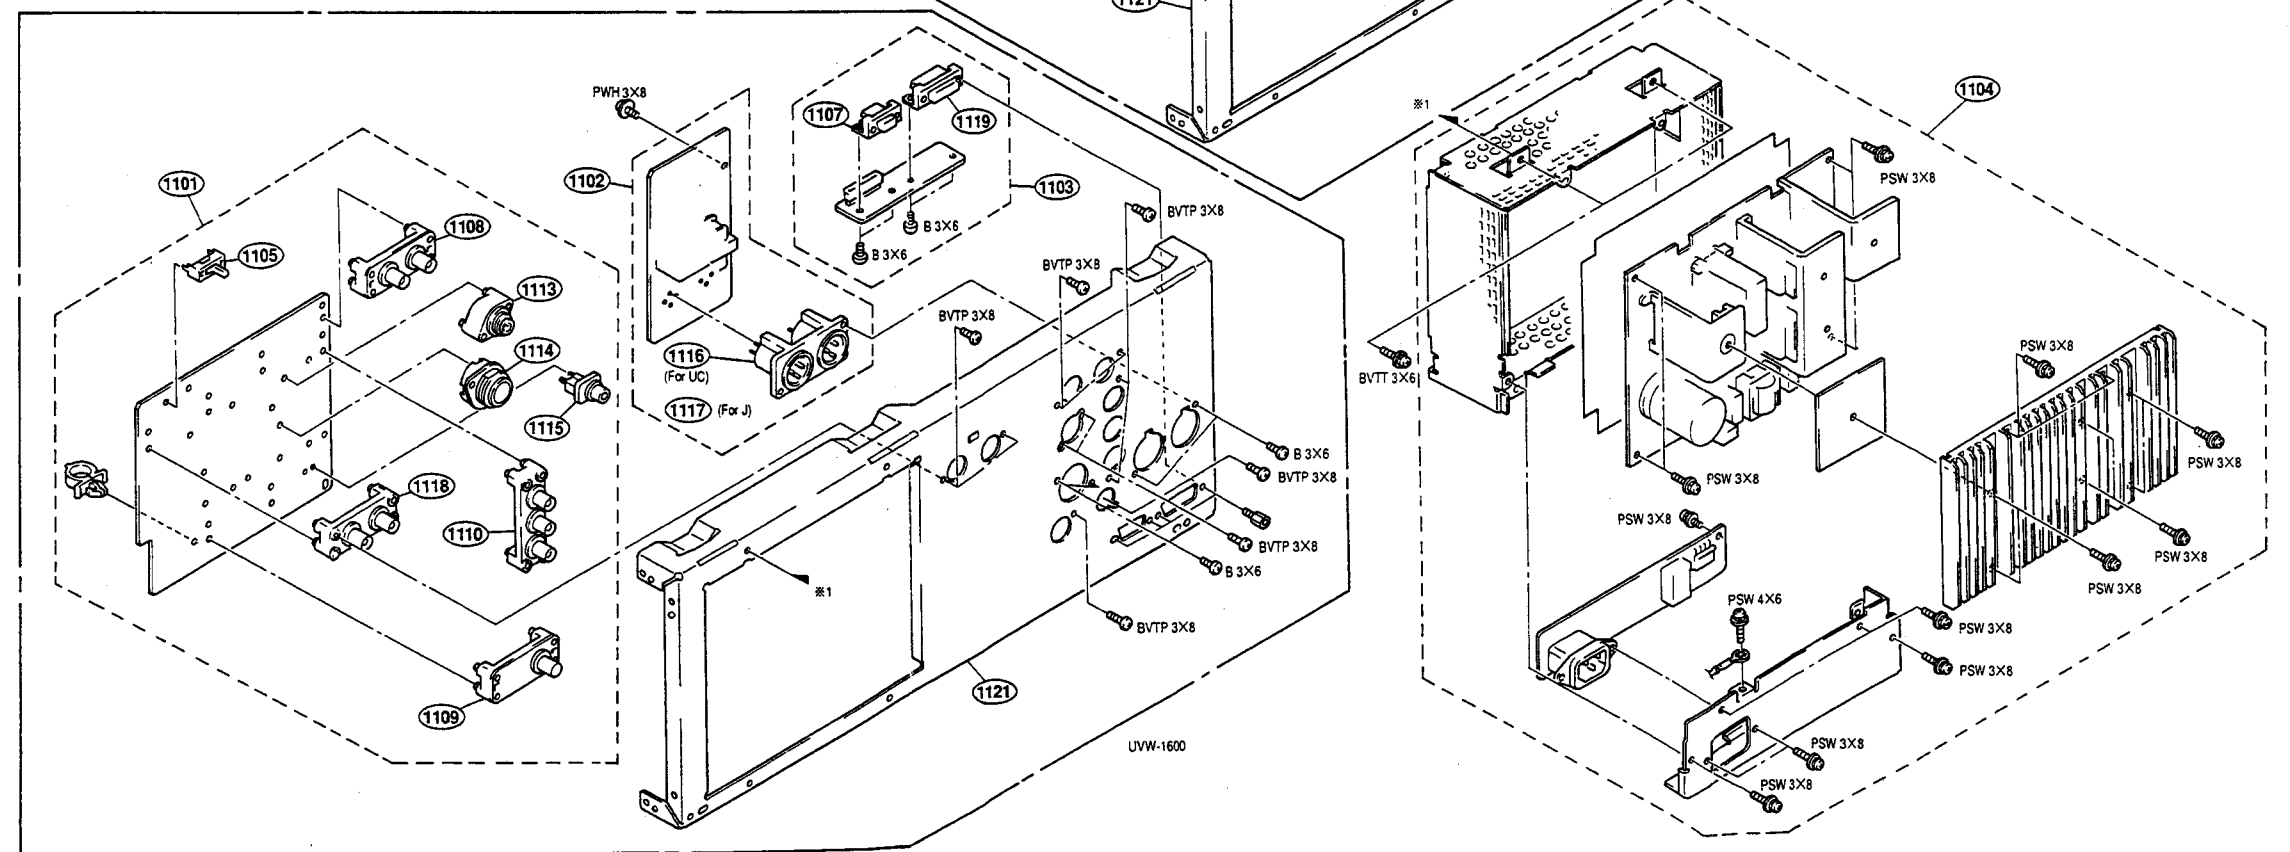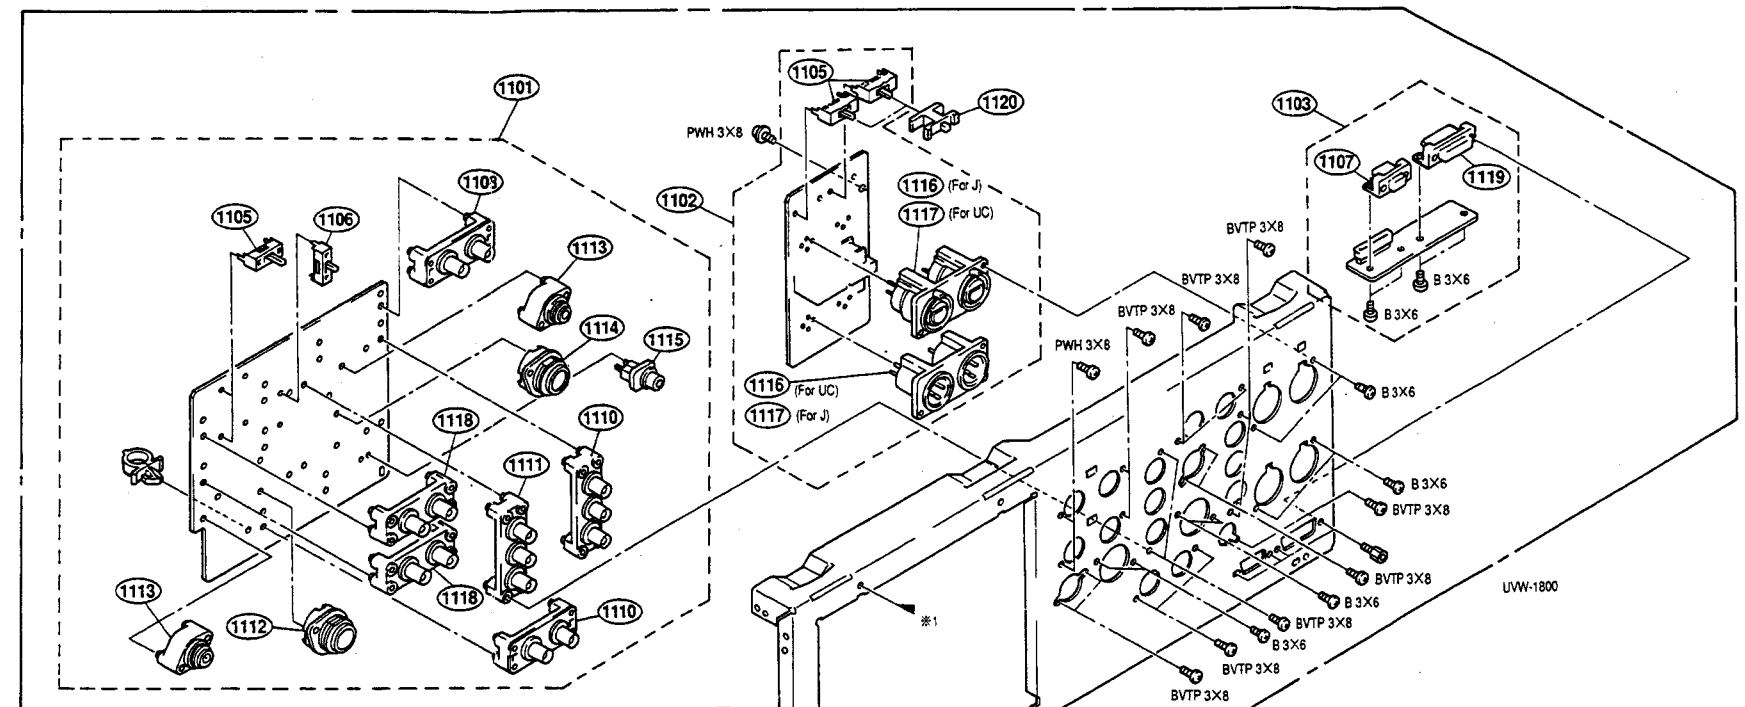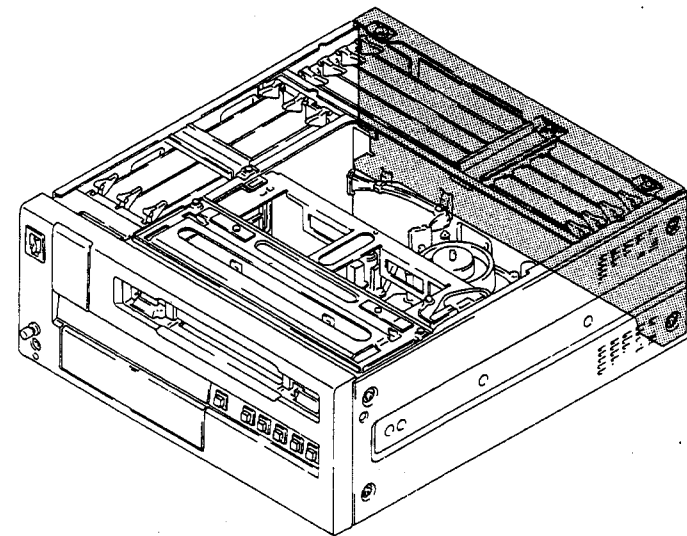

18-3. ELECTRICAL PARTS LISTS

AP-31 BOARD(UVW-1800)

Ref. No.
or Q'ty Part No. SP Description

AP-31 board is used for UVW-1800.

1pc	A-8275-286-A	o MOUNTED CIRCUIT BOARD, AP-31
1pc	3-182-385-01	o PLATE, SHIELD (S), CARD
1pc	7-621-759-45	s SCREW, +PSW2.6x6
1pc	3-179-084-01	s LEVER (R), PC BOARD
1pc	3-179-085-01	s LEVER (L), PC BOARD
1pc	3-182-298-01	o CASE, SHIELD (LID), AP (2)
1pc	3-182-351-01	o CASE, SHIELD, AP (2B)
C2	1-163-121-00	s CERAMIC, CHIP 150pF 5% 50V
C3	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C4	1-163-113-00	s CERAMIC, CHIP 68pF 5% 50V
C5	1-126-964-11	s ELECT 10uF 20% 50V
C6	1-163-127-00	s CERAMIC, CHIP 270pF 5% 50V
C7	1-130-485-00	s MYLAR 0.015uF 5% 50V
C8	1-126-933-11	s ELECT 100uF 20% 16V
C9	1-163-125-00	s CERAMIC, CHIP 220pF 5% 50V
C10	1-126-964-11	s ELECT 10uF 20% 50V
C11	1-124-916-11	s ELECT 22uF 20% 63V
C12	1-163-263-11	s CERAMIC, CHIP 330pF 5% 50V
C15	1-126-964-11	s ELECT 10uF 20% 50V
C16	1-124-916-11	s ELECT 22uF 20% 63V
C18	1-124-916-11	s ELECT 22uF 20% 63V
C20	1-130-498-00	s MYLAR 0.18uF 5% 50V
C21-C26	1-130-487-00	s MYLAR 0.022uF 5% 50V
C27	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C28	1-163-017-00	s CERAMIC, CHIP 0.0047uF 5% 50V
C29	1-130-483-00	s MYLAR 0.01uF 5% 50V
C30	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C31	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C32	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C33	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C34	1-130-483-00	s MYLAR 0.01uF 5% 50V
C35	1-163-139-00	s CERAMIC, CHIP 820pF 5% 50V
C36	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C37	1-164-232-11	s CERAMIC, CHIP 0.01uF 10% 100V
C38	1-164-232-11	s CERAMIC, CHIP 0.01uF 10% 100V
C39	1-124-925-11	s ELECT 2.2uF 20% 100V
C40	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C41	1-107-498-91	s FILM, CHIP 0.0022uF 2% 50V
C42	1-107-498-91	s FILM, CHIP 0.0022uF 2% 50V
C43	1-107-499-91	s FILM, CHIP 0.0039uF 2% 16V
C44	1-131-345-00	s TANTALUM 0.47uF 10% 35V
C45	1-130-497-00	s MYLAR 0.15uF 5% 50V
C46	1-124-925-11	s ELECT 2.2uF 20% 100V
C47	1-104-553-11	s FILM, CHIP 0.015uF 5% 16V
C48	1-130-499-00	s MYLAR 0.22uF 5% 50V
C49	1-164-344-11	s CERAMIC, CHIP 0.068uF 10% 25V
C50	1-104-560-91	s FILM, CHIP 0.056uF 5% 16V
C51	1-124-925-11	s ELECT 2.2uF 20% 100V
C52	1-107-553-91	s FILM, CHIP 0.0056uF 2% 16V
C53	1-104-551-11	s FILM, CHIP 0.01uF 16V
C54	1-130-478-00	s MYLAR 0.0039uF 5% 50V
C55	1-130-478-00	s MYLAR 0.0039uF 5% 50V
C56	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C57	1-126-947-11	s ELECT 47uF 20% 35V
C58	1-163-263-11	s CERAMIC, CHIP 330pF 5% 50V
C59	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V
C60	1-126-964-11	s ELECT 10uF 20% 50V

(AP-31 BOARD(UVW-1800))

Ref. No.
or Q'ty Part No. SP Description

C61	1-126-964-11	s ELECT 10uF 20% 50V
C62	1-126-926-11	s ELECT 1000uF 20% 10V
C63	1-126-926-11	s ELECT 1000uF 20% 10V
C64	1-126-926-11	s ELECT 1000uF 20% 10V
C65	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C66	1-126-926-11	s ELECT 1000uF 20% 10V
C67	1-126-947-11	s ELECT 47uF 20% 35V
C68	1-124-903-11	s ELECT 1uF 20% 50V
C69	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C70	1-126-947-11	s ELECT 47uF 20% 35V
C71	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V
C72	1-163-809-11	s CERAMIC, CHIP 0.047uF 10% 25V
C73	1-130-491-00	s MYLAR 0.047uF 5% 50V
C74	1-130-491-00	s MYLAR 0.047uF 5% 50V
C75	1-130-491-00	s MYLAR 0.047uF 5% 50V
C76	1-130-491-00	s MYLAR 0.047uF 5% 50V
C77	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C78	1-126-964-11	s ELECT 10uF 20% 50V
C79	1-126-964-11	s ELECT 10uF 20% 50V
C80	1-126-964-11	s ELECT 10uF 20% 50V
C81	1-130-483-00	s MYLAR 0.01uF 5% 50V
C82	1-126-926-11	s ELECT 1000uF 20% 10V
C83	1-126-926-11	s ELECT 1000uF 20% 10V
C84	1-124-925-11	s ELECT 2.2uF 20% 100V
C85	1-131-352-00	s TANTALUM 6.8uF 10% 35V
C87	1-126-964-11	s ELECT 10uF 20% 50V
C88	1-126-964-11	s ELECT 10uF 20% 50V
C202	1-163-121-00	s CERAMIC, CHIP 150pF 5% 50V
C203	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C204	1-163-113-00	s CERAMIC, CHIP 68pF 5% 50V
C205	1-126-964-11	s ELECT 10uF 20% 50V
C206	1-163-127-00	s CERAMIC, CHIP 270pF 5% 50V
C207	1-130-485-00	s MYLAR 0.015uF 5% 50V
C208	1-126-933-11	s ELECT 100uF 20% 16V
C209	1-163-125-00	s CERAMIC, CHIP 220pF 5% 50V
C210	1-126-964-11	s ELECT 10uF 20% 50V
C211	1-124-916-11	s ELECT 22uF 20% 63V
C212	1-163-263-11	s CERAMIC, CHIP 330pF 5% 50V
C215	1-126-964-11	s ELECT 10uF 20% 50V
C216	1-124-916-11	s ELECT 22uF 20% 63V
C218	1-124-916-11	s ELECT 22uF 20% 63V
C220	1-130-498-00	s MYLAR 0.18uF 5% 50V
C221-226	1-130-487-00	s MYLAR 0.022uF 5% 50V
C227	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C228	1-163-017-00	s CERAMIC, CHIP 0.0047uF 5% 50V
C229	1-130-483-00	s MYLAR 0.01uF 5% 50V
C230	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C231	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C232	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C233	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C234	1-130-483-00	s MYLAR 0.01uF 5% 50V
C235	1-163-139-00	s CERAMIC, CHIP 820pF 5% 50V
C236	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C237	1-124-925-11	s ELECT 2.2uF 20% 100V
C238	1-107-498-91	s FILM, CHIP 0.0022uF 2% 50V
C239	1-107-498-91	s FILM, CHIP 0.0022uF 2% 50V
C240	1-107-499-91	s FILM, CHIP 0.0039uF 2% 16V
C241	1-131-345-00	s TANTALUM 0.47uF 10% 35V
C242	1-130-497-00	s MYLAR 0.15uF 5% 50V

(AP-31 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
C243	1-124-925-11	s ELECT 2.2uF 20% 100V
C244	1-104-553-11	s FILM, CHIP 0.015uF 5% 16V
C245	1-130-499-00	s MYLAR 0.22uF 5% 50V
C246	1-164-344-11	s CERAMIC, CHIP 0.068uF 10% 25V
C247	1-104-560-91	s FILM, CHIP 0.056uF 5% 16V
C248	1-124-925-11	s ELECT 2.2uF 20% 100V
C249	1-107-553-91	s FILM, CHIP 0.0056uF 2% 16V
C250	1-104-551-11	s FILM, CHIP 0.01uF 16V
C251	1-130-478-00	s MYLAR 0.0039uF 5% 50V
C252	1-130-478-00	s MYLAR 0.0039uF 5% 50V
C253	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C254	1-126-947-11	s ELECT 47uF 20% 35V
C255	1-163-263-11	s CERAMIC, CHIP 330pF 5% 50V
C256	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V
C257	1-126-964-11	s ELECT 10uF 20% 50V
C258	1-126-964-11	s ELECT 10uF 20% 50V
C259	1-126-926-11	s ELECT 1000uF 20% 10V
C260	1-126-926-11	s ELECT 1000uF 20% 10V
C261	1-126-926-11	s ELECT 1000uF 20% 10V
C262	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C263	1-126-926-11	s ELECT 1000uF 20% 10V
C264	1-126-947-11	s ELECT 47uF 20% 35V
C265	1-124-903-11	s ELECT 1uF 20% 50V
C266	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C267	1-126-947-11	s ELECT 47uF 20% 35V
C268	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V
C269	1-163-809-11	s CERAMIC, CHIP 0.047uF 10% 25V
C270	1-124-925-11	s ELECT 2.2uF 20% 100V
C271	1-131-352-00	s TANTALUM 6.8uF 10% 35V
C272	1-126-964-11	s ELECT 10uF 20% 50V
C278	1-126-964-11	s ELECT 10uF 20% 50V
C279	1-126-964-11	s ELECT 10uF 20% 50V
C280	1-126-964-11	s ELECT 10uF 20% 50V
C281	1-130-483-00	s MYLAR 0.01uF 5% 50V
C282	1-126-926-11	s ELECT 1000uF 20% 10V
C283	1-126-926-11	s ELECT 1000uF 20% 10V
C401	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C402	1-126-933-11	s ELECT 100uF 20% 16V
C403	1-163-989-11	s CERAMIC, CHIP 0.033uF 10% 25V
C404	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C405	1-164-232-11	s CERAMIC, CHIP 0.01uF 10% 100V
C406	1-164-232-11	s CERAMIC, CHIP 0.01uF 10% 100V
C408	1-126-964-11	s ELECT 10uF 20% 50V
C409	1-163-239-11	s CERAMIC, CHIP 33pF 5% 50V
C410	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C411	1-163-989-11	s CERAMIC, CHIP 0.033uF 10% 25V
C412	1-126-964-11	s ELECT 10uF 20% 50V
C413	1-126-964-11	s ELECT 10uF 20% 50V
C414	1-126-964-11	s ELECT 10uF 20% 50V
C415	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C416	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C417	1-126-933-11	s ELECT 100uF 20% 16V
C418	1-126-933-11	s ELECT 100uF 20% 16V
C419	1-126-964-11	s ELECT 10uF 20% 50V
C420	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C421	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C422	1-126-933-11	s ELECT 100uF 20% 16V
C423	1-126-933-11	s ELECT 100uF 20% 16V
C424	1-126-933-11	s ELECT 100uF 20% 16V

(AP-31 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
C425	1-126-933-11	s ELECT 100uF 20% 16V
C426	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C427	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C428	1-163-989-11	s CERAMIC, CHIP 0.033uF 10% 25V
C429	1-161-021-11	s CERAMIC 0.047uF 10% 25V
C430	1-161-021-11	s CERAMIC 0.047uF 10% 25V
C500	1-163-125-00	s CERAMIC, CHIP 220pF 5% 50V
C501	1-102-114-00	s CERAMIC 470pF 10% 50V
CN1	1-506-468-11	s CONNECTOR 3P, MALE
CN2	1-564-002-41	s CONNECTOR 3P, MALE
CN3	1-506-468-11	s CONNECTOR 3P, MALE
CN111	1-573-600-21	s CONNECTOR, PHEC 100P, MALE
D1	8-719-941-23	s DIODE DA204U
D2	8-719-941-23	s DIODE DA204U
D3	8-719-941-23	s DIODE DA204U
D5	8-719-941-23	s DIODE DA204U
D6	8-719-123-85	s DIODE 1SS304
D7	8-719-941-23	s DIODE DA204U
D8	8-719-123-85	s DIODE 1SS304
D10	8-719-123-85	s DIODE 1SS304
D11	8-719-123-85	s DIODE 1SS304
D12	8-719-123-85	s DIODE 1SS304
D13	8-719-123-85	s DIODE 1SS304
D15	8-719-123-85	s DIODE 1SS304
D16	8-719-123-85	s DIODE 1SS304
D17	8-719-941-23	s DIODE DA204U
D18	8-719-911-19	s DIODE 1SS119
D201	8-719-941-23	s DIODE DA204U
D202	8-719-941-23	s DIODE DA204U
D203	8-719-941-23	s DIODE DA204U
D204	8-719-941-23	s DIODE DA204U
D205	8-719-123-85	s DIODE 1SS304
D206	8-719-941-23	s DIODE DA204U
D207	8-719-123-85	s DIODE 1SS304
D209	8-719-123-85	s DIODE 1SS304
D210	8-719-941-23	s DIODE DA204U
D211	8-719-911-19	s DIODE 1SS119
D401	8-719-941-23	s DIODE DA204U
D403	8-719-941-23	s DIODE DA204U
IC1	8-759-701-25	s IC NJM2068D-D
IC2	8-759-701-25	s IC NJM2068D-D
IC3	8-759-701-25	s IC NJM2068D-D
IC4	8-759-701-25	s IC NJM2068D-D
IC5	8-759-705-58	s IC NJM4558D-D
IC6	8-759-705-58	s IC NJM4558D-D
IC7	8-759-705-58	s IC NJM4558D-D
IC8	8-752-018-80	s IC CX20188
IC9	8-759-705-58	s IC NJM4558D-D
IC10	8-759-705-58	s IC NJM4558D-D
IC11	8-759-145-57	s IC UPC4557C
IC12	8-759-917-18	s IC SN74HCU04AN
IC13	8-759-917-18	s IC SN74HCU04AN
IC14	8-759-145-57	s IC UPC4557C
IC15	8-759-705-58	s IC NJM4558D-D
IC201	8-759-701-25	s IC NJM2068D-D
IC202	8-759-701-25	s IC NJM2068D-D
IC203	8-759-701-25	s IC NJM2068D-D
IC204	8-759-701-25	s IC NJM2068D-D

(AP-31 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
IC205	8-759-705-58 s	IC NJM4558D-D
IC206	8-759-705-58 s	IC NJM4558D-D
IC207	8-759-705-58 s	IC NJM4558D-D
IC208	8-759-705-58 s	IC NJM4558D-D
IC209	8-759-705-58 s	IC NJM4558D-D
IC210	8-759-145-57 s	IC UPC4557C
IC211	8-759-705-58 s	IC NJM4558D-D
IC401	8-759-701-25 s	IC NJM2068D-D
IC402	8-759-981-64 s	IC LM2903DQ
IC405	8-759-172-41 s	IC L78M09T-TL
IC406	8-759-173-37 s	IC L79M09T-TL
IC407	8-759-635-83 s	IC M51957BFP
IC408	8-759-172-41 s	IC L78M09T-TL
IC409	8-759-173-37 s	IC L79M09T-TL
IC410	8-759-701-25 s	IC NJM2068D-D
L1	1-410-068-11 s	INDUCTOR 5.60mH
L2	1-408-423-00 s	INDUCTOR 150uH
L201	1-410-068-11 s	INDUCTOR 5.60mH
L202	1-408-423-00 s	INDUCTOR 150uH
L401	1-410-470-11 s	INDUCTOR 10uH
L402	1-410-470-11 s	INDUCTOR 10uH
PS1	▲1-532-727-11 s	LINK, IC 0.25A
PS2	▲1-532-727-11 s	LINK, IC 0.25A
Q1	8-729-209-06 s	TRANSISTOR 2SC4213-A
Q2	8-729-803-89 s	TRANSISTOR 2SC3332-T
Q3	8-729-803-89 s	TRANSISTOR 2SC3332-T
Q4	8-729-209-06 s	TRANSISTOR 2SC4213-A
Q5	8-729-209-06 s	TRANSISTOR 2SC4213-A
Q6	8-729-209-06 s	TRANSISTOR 2SC4213-A
Q7	8-729-209-06 s	TRANSISTOR 2SC4213-A
Q8	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q9	8-729-109-44 s	TRANSISTOR 2SK94
Q10	8-729-203-30 s	TRANSISTOR 2SJ106Y
Q11	8-729-905-18 s	TRANSISTOR DTC144EU
Q12	8-729-905-12 s	TRANSISTOR DTA144EU
Q13	8-729-118-56 s	TRANSISTOR 2SK852-X2
Q14	8-729-209-06 s	TRANSISTOR 2SC4213-A
Q15	8-729-209-06 s	TRANSISTOR 2SC4213-A
Q16	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q17	8-729-118-56 s	TRANSISTOR 2SK852-X2
Q18	8-729-423-93 s	TRANSISTOR 2SD2136-R(TA)
Q19	8-729-022-00 s	TRANSISTOR 2SB1416-R(TA)
Q20	8-729-021-98 s	TRANSISTOR 2SJ226-AZ
Q21	8-729-021-98 s	TRANSISTOR 2SJ226-AZ
Q22	8-729-117-32 s	TRANSISTOR 2SC4177
Q23	8-729-117-32 s	TRANSISTOR 2SC4177
Q25	8-729-140-93 s	TRANSISTOR 2SB733-34
Q26	8-729-209-06 s	TRANSISTOR 2SC4213-A
Q27	8-729-209-06 s	TRANSISTOR 2SC4213-A
Q28	8-729-804-09 s	TRANSISTOR 2SA1319-T
Q29	8-729-804-09 s	TRANSISTOR 2SA1319-T
Q30	8-729-140-93 s	TRANSISTOR 2SB733-34
Q34	8-729-905-18 s	TRANSISTOR DTC144EU
Q35	8-729-905-12 s	TRANSISTOR DTA144EU
Q36	8-729-118-56 s	TRANSISTOR 2SK852-X2
Q201	8-729-209-06 s	TRANSISTOR 2SC4213-A
Q202	8-729-803-89 s	TRANSISTOR 2SC3332-T
Q203	8-729-803-89 s	TRANSISTOR 2SC3332-T

(AP-31 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
Q204	8-729-209-06 s	TRANSISTOR 2SC4213-A
Q205	8-729-209-06 s	TRANSISTOR 2SC4213-A
Q206	8-729-209-06 s	TRANSISTOR 2SC4213-A
Q207	8-729-209-06 s	TRANSISTOR 2SC4213-A
Q208	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q209	8-729-109-44 s	TRANSISTOR 2SK94
Q210	8-729-203-30 s	TRANSISTOR 2SJ106Y
Q211	8-729-118-56 s	TRANSISTOR 2SK852-X2
Q212	8-729-209-06 s	TRANSISTOR 2SC4213-A
Q213	8-729-209-06 s	TRANSISTOR 2SC4213-A
Q214	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q215	8-729-118-56 s	TRANSISTOR 2SK852-X2
Q216	8-729-423-93 s	TRANSISTOR 2SD2136-R(TA)
Q217	8-729-022-00 s	TRANSISTOR 2SB1416-R(TA)
Q218	8-729-021-98 s	TRANSISTOR 2SJ226-AZ
Q219	8-729-021-98 s	TRANSISTOR 2SJ226-AZ
Q220	8-729-117-32 s	TRANSISTOR 2SC4177
Q221	8-729-117-32 s	TRANSISTOR 2SC4177
Q223	8-729-140-93 s	TRANSISTOR 2SB733-34
Q224	8-729-905-18 s	TRANSISTOR DTC144EU
Q225	8-729-905-12 s	TRANSISTOR DTA144EU
Q226	8-729-118-56 s	TRANSISTOR 2SK852-X2
Q401	8-729-209-06 s	TRANSISTOR 2SC4213-A
Q402	8-729-209-06 s	TRANSISTOR 2SC4213-A
Q403	8-729-209-06 s	TRANSISTOR 2SC4213-A
R1	1-216-603-11 s	METAL, CHIP 10 0.5% 1/10W
R2	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R3	1-216-057-00 s	METAL, CHIP 2.2k 5% 1/10W
R4	1-216-057-00 s	METAL, CHIP 2.2k 5% 1/10W
R5	1-216-097-00 s	METAL, CHIP 100k 5% 1/10W
R6	1-216-097-00 s	METAL, CHIP 100k 5% 1/10W
R7	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R8	1-216-105-00 s	METAL, CHIP 220k 5% 1/10W
R9	1-216-626-11 s	METAL, CHIP 91 0.5% 1/10W
R10	1-216-651-11 s	METAL, CHIP 1k 0.5% 1/10W
R11	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R12	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R13	1-216-659-11 s	METAL, CHIP 2.2k 0.5% 1/10W
R14	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R16	1-216-009-00 s	METAL, CHIP 22 5% 1/10W
R17	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R19-R23	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R24	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R25	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R26	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R27	1-216-085-00 s	METAL, CHIP 33k 5% 1/10W
R28	1-216-085-00 s	METAL, CHIP 33k 5% 1/10W
R30	1-216-675-11 s	METAL, CHIP 10k 0.5% 1/10W
R31	1-216-041-00 s	METAL, CHIP 470 5% 1/10W
R32	1-216-642-11 s	METAL, CHIP 430 0.5% 1/10W
R33	1-216-675-11 s	METAL, CHIP 10k 0.5% 1/10W
R34	1-216-691-11 s	METAL, CHIP 47k 0.5% 1/10W
R35	1-216-675-11 s	METAL, CHIP 10k 0.5% 1/10W
R36	1-216-683-11 s	METAL, CHIP 22k 0.5% 1/10W
R37	1-215-473-00 s	METAL 150k 1% 1/6W
R38	1-215-471-00 s	METAL 120k 1% 1/6W
R39	1-215-479-00 s	METAL 270k 1% 1/6W
R40	1-216-681-11 s	METAL, CHIP 18k 0.5% 1/10W
R41	1-216-679-11 s	METAL, CHIP 15k 0.5% 1/10W

(AP-31 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
R42	1-216-695-11	s METAL, CHIP 68k 0.5% 1/10W
R43	1-215-469-00	s METAL 100k 1% 1/6W
R44	1-215-473-00	s METAL 150k 1% 1/6W
R45	1-215-461-00	s METAL 47k 1% 1/6W
R46	1-216-681-11	s METAL, CHIP 18k 0.5% 1/10W
R47	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R48	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R49	1-216-071-00	s METAL, CHIP 8.2k 5% 1/10W
R50	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R51	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R52	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R53	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R54	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R56	1-216-009-00	s METAL, CHIP 22 5% 1/10W
R57	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R58	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W
R59	1-216-622-11	s METAL, CHIP 62 0.5% 1/10W
R60	1-216-678-11	s METAL, CHIP 13k 0.5% 1/10W
R61	1-216-673-11	s METAL, CHIP 8.2k 0.5% 1/10W
R62	1-216-652-11	s METAL, CHIP 1.1k 0.5% 1/10W
R63	1-216-622-11	s METAL, CHIP 62 0.5% 1/10W
R64	1-216-653-11	s METAL, CHIP 1.2k 0.5% 1/10W
R65	1-216-676-11	s METAL, CHIP 11k 0.5% 1/10W
R66	1-216-677-11	s METAL, CHIP 12k 0.5% 1/10W
R67	1-216-654-11	s METAL, CHIP 1.3k 0.5% 1/10W
R68	1-215-493-00	s METAL 1M 1% 1/6W
R69	1-216-666-11	s METAL, CHIP 4.3k 0.5% 1/10W
R70	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R71	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R72	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R73	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R74	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R75	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R76	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R77	1-216-699-11	s METAL, CHIP 100k 0.5% 1/10W
R78	1-216-686-11	s METAL, CHIP 30k 0.5% 1/10W
R79	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R80	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R81	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R82	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R83	1-216-658-11	s METAL, CHIP 2k 0.5% 1/10W
R84	1-216-677-11	s METAL, CHIP 12k 0.5% 1/10W
R85	1-216-645-11	s METAL, CHIP 560 0.5% 1/10W
R86	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R87	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R88	1-216-672-11	s METAL, CHIP 7.5k 0.5% 1/10W
R89	1-216-045-00	s METAL, CHIP 680 5% 1/10W
R90	1-216-674-11	s METAL, CHIP 9.1k 0.5% 1/10W
R91	1-216-681-11	s METAL, CHIP 18k 0.5% 1/10W
R92	1-216-657-11	s METAL, CHIP 1.8k 0.5% 1/10W
R93	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R94	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R95	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R96	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R97	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R98	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R99	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R100	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R101	1-216-073-00	s METAL, CHIP 10k 5% 1/10W

(AP-31 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
R102	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R103	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R104	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R105	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R106	1-216-069-00	s METAL, CHIP 6.8k 5% 1/10W
R107	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R108	1-216-668-11	s METAL, CHIP 5.1k 0.5% 1/10W
R109	1-216-663-11	s METAL, CHIP 3.3k 0.5% 1/10W
R110	1-216-650-11	s METAL, CHIP 910 0.5% 1/10W
R111	1-216-663-11	s METAL, CHIP 3.3k 0.5% 1/10W
R112	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R113	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R114	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R115	1-216-067-00	s METAL, CHIP 5.6k 5% 1/10W
R116	1-216-067-00	s METAL, CHIP 5.6k 5% 1/10W
R117	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R118	1-247-807-31	s CARBON 100 5% 1/4W
R119	△ 1-216-399-00	s WIREWOUND 6.8 10% 3W
R120	△ 1-216-399-00	s WIREWOUND 6.8 10% 3W
R121	1-247-807-31	s CARBON 100 5% 1/4W
R122	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R123	1-249-389-11	s CARBON 4.7 5% 1/4W
R124	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R125	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R126	1-216-075-00	s METAL, CHIP 12k 5% 1/10W
R127	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R128	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R129	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R130	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R131	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R132	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R133	1-216-095-00	s METAL, CHIP 82k 5% 1/10W
R134	1-216-676-11	s METAL, CHIP 11k 0.5% 1/10W
R135	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R136	1-216-678-11	s METAL, CHIP 13k 0.5% 1/10W
R137	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R138	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R139	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R140	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R141	1-216-684-11	s METAL, CHIP 24k 0.5% 1/10W
R142	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R143	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R144	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R145-154	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R155	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R156	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R157	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R158	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R159	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R160	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R161	1-216-063-00	s METAL, CHIP 3.9k 5% 1/10W
R162	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R163	1-216-053-00	s METAL, CHIP 1.5k 5% 1/10W
R164	1-216-059-00	s METAL, CHIP 2.7k 5% 1/10W
R165	1-216-071-00	s METAL, CHIP 8.2k 5% 1/10W
R167	1-216-295-91	s RES, CHIP 0
R168	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R169	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R170	1-216-063-00	s METAL, CHIP 3.9k 5% 1/10W

(AP-31 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
R171	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R172	1-216-053-00	s METAL, CHIP 1.5k 5% 1/10W
R173	1-216-059-00	s METAL, CHIP 2.7k 5% 1/10W
R174	1-216-071-00	s METAL, CHIP 8.2k 5% 1/10W
R175	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R176	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R177	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R178	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R179	1-216-664-11	s METAL, CHIP 3.6k 0.5% 1/10W
R180	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R181	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R182	1-216-646-11	s METAL, CHIP 620 0.5% 1/10W
R183	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R184	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R186	1-216-095-00	s METAL, CHIP 82k 5% 1/10W
R187	1-216-668-11	s METAL, CHIP 5.1k 0.5% 1/10W
R188	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R201	1-216-603-11	s METAL, CHIP 10 0.5% 1/10W
R202	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R203	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R204	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R205	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R206	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R207	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R208	1-216-105-00	s METAL, CHIP 220k 5% 1/10W
R209	1-216-626-11	s METAL, CHIP 91 0.50% 1/10W
R210	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R211	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R212	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R213	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R214	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R216	1-216-009-00	s METAL, CHIP 22 5% 1/10W
R217	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R219-223	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R224	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R225	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R226	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R227	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R228	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R230	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R231	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R232	1-216-642-11	s METAL, CHIP 430 0.5% 1/10W
R233	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R234	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R235	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R236	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R237	1-215-473-00	s METAL 150k 1% 1/6W
R238	1-215-471-00	s METAL 120k 1% 1/6W
R239	1-215-479-00	s METAL 270k 1% 1/6W
R240	1-216-681-11	s METAL, CHIP 18k 0.5% 1/10W
R241	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R242	1-216-699-11	s METAL, CHIP 100k 0.5% 1/10W
R243	1-215-479-00	s METAL 270k 1% 1/6W
R244	1-215-460-00	s METAL 43k 1% 1/6W
R245	1-215-460-00	s METAL 43k 1% 1/6W
R246	1-216-681-11	s METAL, CHIP 18k 0.5% 1/10W
R247	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R248	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R249	1-216-071-00	s METAL, CHIP 8.2k 5% 1/10W

(AP-31 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
R250	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R251	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R252	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R253	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R254	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R255	1-216-009-00	s METAL, CHIP 22 5% 1/10W
R256	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R257	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W
R258	1-216-622-11	s METAL, CHIP 62 0.5% 1/10W
R259	1-216-678-11	s METAL, CHIP 13k 0.5% 1/10W
R260	1-216-673-11	s METAL, CHIP 8.2k 0.5% 1/10W
R261	1-216-652-11	s METAL, CHIP 1.1k 0.5% 1/10W
R262	1-216-622-11	s METAL, CHIP 62 0.5% 1/10W
R263	1-216-653-11	s METAL, CHIP 1.2k 0.5% 1/10W
R264	1-216-676-11	s METAL, CHIP 11k 0.5% 1/10W
R265	1-216-677-11	s METAL, CHIP 12k 0.5% 1/10W
R266	1-216-654-11	s METAL, CHIP 1.3k 0.5% 1/10W
R267	1-215-493-00	s METAL 1M 1% 1/6W
R268	1-216-666-11	s METAL, CHIP 4.3k 0.5% 1/10W
R269	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R270	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R271	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R272	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R273	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R274	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R275	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R276	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R277	1-216-658-11	s METAL, CHIP 2k 0.5% 1/10W
R278	1-216-677-11	s METAL, CHIP 12k 0.5% 1/10W
R279	1-216-645-11	s METAL, CHIP 560 0.5% 1/10W
R280	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R281	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R282	1-216-672-11	s METAL, CHIP 7.5k 0.5% 1/10W
R283	1-216-045-00	s METAL, CHIP 680 5% 1/10W
R284	1-216-674-11	s METAL, CHIP 9.1k 0.5% 1/10W
R285	1-216-681-11	s METAL, CHIP 18k 0.5% 1/10W
R286	1-216-657-11	s METAL, CHIP 1.8k 0.5% 1/10W
R287	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R288	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R289	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R290	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R291	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R292	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R293	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R294	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R295	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R296	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R297	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R298	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R299	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R300	1-216-069-00	s METAL, CHIP 6.8k 5% 1/10W
R301	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R302	1-216-668-11	s METAL, CHIP 5.1k 0.5% 1/10W
R303	1-216-663-11	s METAL, CHIP 3.3k 0.5% 1/10W
R304	1-216-650-11	s METAL, CHIP 910 0.5% 1/10W
R305	1-216-663-11	s METAL, CHIP 3.3k 0.5% 1/10W
R306	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R307	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R308	1-216-033-00	s METAL, CHIP 220 5% 1/10W

(AP-31 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
R309	1-216-067-00	s METAL, CHIP 5.6k 5% 1/10W
R310	1-216-067-00	s METAL, CHIP 5.6k 5% 1/10W
R311	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R312	1-247-807-31	s CARBON 100 5% 1/4W
R313	△1-216-399-00	s WIREWOUND 6.8 10% 3W
R314	△1-216-399-00	s WIREWOUND 6.8 10% 3W
R315	1-247-807-31	s CARBON 100 5% 1/4W
R316	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R317	1-249-389-11	s CARBON 4.7 5% 1/4W
R318	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R319	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R320	1-216-075-00	s METAL, CHIP 12k 5% 1/10W
R321	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R322	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R323	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R324	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R325	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R326	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R327	1-216-095-00	s METAL, CHIP 82k 5% 1/10W
R328	1-216-676-11	s METAL, CHIP 11k 0.5% 1/10W
R329	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R330	1-216-678-11	s METAL, CHIP 13k 0.5% 1/10W
R331	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R332	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R333	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R334	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R335	1-216-684-11	s METAL, CHIP 24k 0.5% 1/10W
R336	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R337	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R338	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R339	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R341	1-216-095-00	s METAL, CHIP 82k 5% 1/10W
R342	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R344	1-216-295-91	s RES, CHIP 0
R345	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R346	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R347	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R387	1-216-668-11	s METAL, CHIP 5.1k 0.5% 1/10W
R400	1-216-603-11	s METAL, CHIP 10 0.5% 1/10W
R402	1-216-295-91	s RES, CHIP 0
R403	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R404	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R405	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R406	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R407	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R408	1-216-053-00	s METAL, CHIP 1.5k 5% 1/10W
R409	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R410	1-216-053-00	s METAL, CHIP 1.5k 5% 1/10W
R411	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R412	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R413	1-216-067-00	s METAL, CHIP 5.6k 5% 1/10W
R414	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R415	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R416	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R417	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R418	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R419	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R420	1-216-113-00	s METAL, CHIP 470k 5% 1/10W
R421	1-216-025-00	s METAL, CHIP 100 5% 1/10W

(AP-31 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
R422	1-216-067-00	s METAL, CHIP 5.6k 5% 1/10W
R423	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R424	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R425	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R426	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R427	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R428	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R500	1-215-403-00	s METAL 180 1% 1/6W
R501	1-215-403-00	s METAL 180 1% 1/6W
RV1	1-241-789-21	s RES, ADJ METAL 220k
RV2	1-241-784-11	s RES, ADJ METAL 4.7k
RV3	1-241-783-11	s RES, ADJ METAL 2.2k
RV4	1-241-785-11	s RES, ADJ METAL 10k
RV5	1-241-123-11	s RES, ADJ CARBON 47k
RV201	1-241-789-21	s RES, ADJ METAL 220k
RV202	1-241-784-11	s RES, ADJ METAL 4.7k
RV203	1-241-783-11	s RES, ADJ METAL 2.2k
RV204	1-241-785-11	s RES, ADJ METAL 10k
RV205	1-241-123-11	s RES, ADJ CARBON 47k
S1	1-570-602-11	s SWITCH, DIP 2-CKT
S2	1-570-602-11	s SWITCH, DIP 2-CKT
S201	1-570-602-11	s SWITCH, DIP 2-CKT
S202	1-570-602-11	s SWITCH, DIP 2-CKT
TH1	1-800-199-11	s THERMISTOR S-1250
TH2	1-800-199-11	s THERMISTOR S-1250

AP-31A BOARD(UVW-1600)

Ref. No.
or Q'ty Part No. SP Description

AP-31A board is used for UVW-1600.

1pc	A-8275-279-A	o MOUNTED CIRCUIT BOARD, AP-31A
1pc	3-182-385-01	o PLATE, SHIELD (S), CARD
1pc	7-621-759-45	s SCREW, +PSW2.6x6
1pc	3-179-084-01	s LEVER (R), PC BOARD
1pc	3-179-085-01	s LEVER (L), PC BOARD
1pc	3-182-298-01	o CASE, SHIELD (LID), AP (2)
1pc	3-182-351-01	o CASE, SHIELD, AP (2B)
C2	1-163-121-00	s CERAMIC, CHIP 150pF 5% 50V
C3	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C4	1-163-113-00	s CERAMIC, CHIP 68pF 5% 50V
C6	1-163-127-00	s CERAMIC, CHIP 270pF 5% 50V
C7	1-130-485-00	s MYLAR 0.015uF 5% 50V
C8	1-126-933-11	s ELECT 100uF 20% 16V
C9	1-163-125-00	s CERAMIC, CHIP 220pF 5% 50V
C10	1-126-964-11	s ELECT 10uF 20% 50V
C15	1-126-964-11	s ELECT 10uF 20% 50V
C16	1-124-916-11	s ELECT 22uF 20% 63V
C18	1-124-916-11	s ELECT 22uF 20% 63V
C20	1-130-498-00	s MYLAR 0.18uF 5% 50V
C21-C26	1-130-487-00	s MYLAR 0.022uF 5% 50V
C27	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C29	1-130-483-00	s MYLAR 0.01uF 5% 50V
C30	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C31	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C32	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C33	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C34	1-130-483-00	s MYLAR 0.01uF 5% 50V
C35	1-163-139-00	s CERAMIC, CHIP 820pF 5% 50V
C36	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C37	1-164-232-11	s CERAMIC, CHIP 0.01uF 10% 100V
C38	1-164-232-11	s CERAMIC, CHIP 0.01uF 10% 100V
C39	1-124-925-11	s ELECT 2.2uF 20% 100V
C40	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C41	1-107-498-91	s FILM, CHIP 0.0022uF 2% 50V
C42	1-107-498-91	s FILM, CHIP 0.0022uF 2% 50V
C43	1-107-499-91	s FILM, CHIP 0.0039uF 2% 16V
C44	1-131-345-00	s TANTALUM 0.47uF 10% 35V
C45	1-130-497-00	s MYLAR 0.15uF 5% 50V
C46	1-124-925-11	s ELECT 2.2uF 20% 100V
C47	1-104-553-11	s FILM, CHIP 0.015uF 5% 16V
C48	1-130-499-00	s MYLAR 0.22uF 5% 50V
C49	1-164-344-11	s CERAMIC, CHIP 0.068uF 10% 25V
C50	1-104-560-91	s FILM, CHIP 0.056uF 5% 16V
C51	1-124-925-11	s ELECT 2.2uF 20% 100V
C52	1-107-553-91	s FILM, CHIP 0.0056uF 2% 16V
C53	1-104-551-11	s FILM, CHIP 0.01uF 16V
C56	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C57	1-126-947-11	s ELECT 47uF 20% 35V
C58	1-163-263-11	s CERAMIC, CHIP 330pF 5% 50V
C59	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V
C60	1-126-964-11	s ELECT 10uF 20% 50V
C61	1-126-964-11	s ELECT 10uF 20% 50V
C62	1-126-926-11	s ELECT 1000uF 20% 10V
C63	1-126-926-11	s ELECT 1000uF 20% 10V
C64	1-126-926-11	s ELECT 1000uF 20% 10V
C65	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C66	1-126-926-11	s ELECT 1000uF 20% 10V

(AP-31A BOARD(UVW-1600))

Ref. No.
or Q'ty Part No. SP Description

C67	1-126-947-11	s ELECT 47uF 20% 35V
C68	1-124-903-11	s ELECT 1uF 20% 50V
C69	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C70	1-126-947-11	s ELECT 47uF 20% 35V
C71	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V
C72	1-163-809-11	s CERAMIC, CHIP 0.047uF 10% 25V
C77	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C78	1-126-964-11	s ELECT 10uF 20% 50V
C79	1-126-964-11	s ELECT 10uF 20% 50V
C80	1-126-964-11	s ELECT 10uF 20% 50V
C81	1-130-483-00	s MYLAR 0.01uF 5% 50V
C82	1-126-926-11	s ELECT 1000uF 20% 10V
C83	1-126-926-11	s ELECT 1000uF 20% 10V
C84	1-124-925-11	s ELECT 2.2uF 20% 100V
C87	1-126-964-11	s ELECT 10uF 20% 50V
C88	1-126-964-11	s ELECT 10uF 20% 50V
C202	1-163-121-00	s CERAMIC, CHIP 150pF 5% 50V
C203	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C204	1-163-113-00	s CERAMIC, CHIP 68pF 5% 50V
C206	1-163-127-00	s CERAMIC, CHIP 270pF 5% 50V
C207	1-130-485-00	s MYLAR 0.015uF 5% 50V
C208	1-126-933-11	s ELECT 100uF 20% 16V
C209	1-163-125-00	s CERAMIC, CHIP 220pF 5% 50V
C210	1-126-964-11	s ELECT 10uF 20% 50V
C215	1-126-964-11	s ELECT 10uF 20% 50V
C216	1-124-916-11	s ELECT 22uF 20% 63V
C218	1-124-916-11	s ELECT 22uF 20% 63V
C220	1-130-498-00	s MYLAR 0.18uF 5% 50V
C221-226	1-130-487-00	s MYLAR 0.022uF 5% 50V
C227	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C229	1-130-483-00	s MYLAR 0.01uF 5% 50V
C230	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C231	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C232	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C233	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C234	1-130-483-00	s MYLAR 0.01uF 5% 50V
C235	1-163-139-00	s CERAMIC, CHIP 820pF 5% 50V
C236	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C237	1-124-925-11	s ELECT 2.2uF 20% 100V
C238	1-107-498-91	s FILM, CHIP 0.0022uF 2% 50V
C239	1-107-498-91	s FILM, CHIP 0.0022uF 2% 50V
C240	1-107-499-91	s FILM, CHIP 0.0039uF 2% 16V
C241	1-131-345-00	s TANTALUM 0.47uF 10% 35V
C242	1-130-497-00	s MYLAR 0.15uF 5% 50V
C243	1-124-925-11	s ELECT 2.2uF 20% 100V
C244	1-104-553-11	s FILM, CHIP 0.015uF 5% 16V
C245	1-130-499-00	s MYLAR 0.22uF 5% 50V
C246	1-164-344-11	s CERAMIC, CHIP 0.068uF 10% 25V
C247	1-104-560-91	s FILM, CHIP 0.056uF 5% 16V
C248	1-124-925-11	s ELECT 2.2uF 20% 100V
C249	1-107-553-91	s FILM, CHIP 0.0056uF 2% 16V
C250	1-104-551-11	s FILM, CHIP 0.01uF 16V
C253	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C254	1-126-947-11	s ELECT 47uF 20% 35V
C255	1-163-263-11	s CERAMIC, CHIP 330pF 5% 50V
C256	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V
C257	1-126-964-11	s ELECT 10uF 20% 50V
C258	1-126-964-11	s ELECT 10uF 20% 50V
C259	1-126-926-11	s ELECT 1000uF 20% 10V

(AP-31A BOARD(UVW-1600))

Ref. No. or Q'ty	Part No.	SP Description
C260	1-126-926-11	s ELECT 1000uF 20% 10V
C261	1-126-926-11	s ELECT 1000uF 20% 10V
C262	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C263	1-126-926-11	s ELECT 1000uF 20% 10V
C264	1-126-947-11	s ELECT 47uF 20% 35V
C265	1-124-903-11	s ELECT 1uF 20% 50V
C266	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C267	1-126-947-11	s ELECT 47uF 20% 35V
C268	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V
C269	1-163-809-11	s CERAMIC, CHIP 0.047uF 10% 25V
C270	1-124-925-11	s ELECT 2.2uF 20% 100V
C272	1-131-352-00	s TANTALUM 6.8uF 10% 35V
C278	1-126-964-11	s ELECT 10uF 20% 50V
C279	1-126-964-11	s ELECT 10uF 20% 50V
C280	1-126-964-11	s ELECT 10uF 20% 50V
C281	1-130-483-00	s MYLAR 0.01uF 5% 50V
C282	1-126-926-11	s ELECT 1000uF 20% 10V
C283	1-126-926-11	s ELECT 1000uF 20% 10V
C402	1-126-933-11	s ELECT 100uF 20% 16V
C403	1-163-989-11	s CERAMIC, CHIP 0.033uF 10% 25V
C408	1-126-964-11	s ELECT 10uF 20% 50V
C409	1-163-239-11	s CERAMIC, CHIP 33pF 5% 50V
C410	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C411	1-163-989-11	s CERAMIC, CHIP 0.033uF 10% 25V
C412	1-126-964-11	s ELECT 10uF 20% 50V
C413	1-126-964-11	s ELECT 10uF 20% 50V
C414	1-126-964-11	s ELECT 10uF 20% 50V
C415	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C416	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C417	1-126-933-11	s ELECT 100uF 20% 16V
C418	1-126-933-11	s ELECT 100uF 20% 16V
C419	1-126-964-11	s ELECT 10uF 20% 50V
C420	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C421	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C422	1-126-933-11	s ELECT 100uF 20% 16V
C423	1-126-933-11	s ELECT 100uF 20% 16V
C424	1-126-933-11	s ELECT 100uF 20% 16V
C425	1-126-933-11	s ELECT 100uF 20% 16V
C426	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C427	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C428	1-163-989-11	s CERAMIC, CHIP 0.033uF 10% 25V
C500	1-163-125-00	s CERAMIC, CHIP 220pF 5% 50V
C501	1-102-114-00	s CERAMIC 470pF 10% 50V
CN1	1-506-468-11	s CONNECTOR 3P, MALE
CN2	1-564-002-41	s CONNECTOR 3P, MALE
CN3	1-506-468-11	s CONNECTOR 3P, MALE
CN111	1-573-600-21	s CONNECTOR, PHEC 100P, MALE
D1	8-719-941-23	s DIODE DA204U
D7	8-719-941-23	s DIODE DA204U
D8	8-719-123-85	s DIODE 1SS304
D10	8-719-123-85	s DIODE 1SS304
D11	8-719-123-85	s DIODE 1SS304
D201	8-719-941-23	s DIODE DA204U
D206	8-719-941-23	s DIODE DA204U
D207	8-719-123-85	s DIODE 1SS304
D209	8-719-123-85	s DIODE 1SS304
D401	8-719-941-23	s DIODE DA204U
D403	8-719-941-23	s DIODE DA204U

(AP-31A BOARD(UVW-1600))

Ref. No. or Q'ty	Part No.	SP Description
IC1	8-759-701-25	s IC NJM2068D-D
IC2	8-759-701-25	s IC NJM2068D-D
IC3	8-759-701-25	s IC NJM2068D-D
IC4	8-759-701-25	s IC NJM2068D-D
IC5	8-759-705-58	s IC NJM4558D-D
IC6	8-759-705-58	s IC NJM4558D-D
IC7	8-759-705-58	s IC NJM4558D-D
IC8	8-752-018-80	s IC CX20188
IC9	8-759-705-58	s IC NJM4558D-D
IC10	8-759-705-58	s IC NJM4558D-D
IC11	8-759-145-57	s IC UPC4557C
IC12	8-759-917-18	s IC SN74HCU04AN
IC13	8-759-917-18	s IC SN74HCU04AN
IC14	8-759-145-57	s IC UPC4557C
IC15	8-759-705-58	s IC NJM4558D-D
IC201	8-759-701-25	s IC NJM2068D-D
IC202	8-759-701-25	s IC NJM2068D-D
IC203	8-759-701-25	s IC NJM2068D-D
IC204	8-759-701-25	s IC NJM2068D-D
IC205	8-759-705-58	s IC NJM4558D-D
IC206	8-759-705-58	s IC NJM4558D-D
IC207	8-759-705-58	s IC NJM4558D-D
IC208	8-759-705-58	s IC NJM4558D-D
IC209	8-759-705-58	s IC NJM4558D-D
IC210	8-759-145-57	s IC UPC4557C
IC211	8-759-705-58	s IC NJM4558D-D
IC401	8-759-701-25	s IC NJM2068D-D
IC402	8-759-981-64	s IC LM2903DQ
IC405	8-759-172-41	s IC L78M09T-TL
IC406	8-759-173-37	s IC L79M09T-TL
IC407	8-759-635-83	s IC M51957BFP
IC408	8-759-172-41	s IC L78M09T-TL
IC409	8-759-173-37	s IC L79M09T-TL
IC410	8-759-701-25	s IC NJM2068D-D
L1	1-410-068-11	s INDUCTOR 5.60mH
L2	1-408-423-00	s INDUCTOR 150uH
L201	1-410-068-11	s INDUCTOR 5.60mH
L202	1-408-423-00	s INDUCTOR 150uH
L401	1-410-470-11	s INDUCTOR 10uH
L402	1-410-470-11	s INDUCTOR 10uH
PS1	▲1-532-727-11	s LINK, IC 0.25A
PS2	▲1-532-727-11	s LINK, IC 0.25A
Q5	8-729-209-06	s TRANSISTOR 2SC4213-A
Q6	8-729-209-06	s TRANSISTOR 2SC4213-A
Q7	8-729-209-06	s TRANSISTOR 2SC4213-A
Q9	8-729-109-44	s TRANSISTOR 2SK94
Q11	8-729-905-18	s TRANSISTOR DTC144EU
Q12	8-729-905-12	s TRANSISTOR DTA144EU
Q13	8-729-118-56	s TRANSISTOR 2SK852-X2
Q18	8-729-423-93	s TRANSISTOR 2SD2136-R(TA)
Q19	8-729-022-00	s TRANSISTOR 2SB1416-R(TA)
Q20	8-729-021-98	s TRANSISTOR 2SJ226-AZ
Q21	8-729-021-98	s TRANSISTOR 2SJ226-AZ
Q22	8-729-117-32	s TRANSISTOR 2SC4177
Q23	8-729-117-32	s TRANSISTOR 2SC4177
Q25	8-729-140-93	s TRANSISTOR 2SB733-34
Q30	8-729-140-93	s TRANSISTOR 2SB733-34

(AP-31A BOARD(UVW-1600))

Ref. No. or Q'ty	Part No.	SP Description
Q205	8-729-209-06	s TRANSISTOR 2SC4213-A
Q206	8-729-209-06	s TRANSISTOR 2SC4213-A
Q207	8-729-209-06	s TRANSISTOR 2SC4213-A
Q209	8-729-109-44	s TRANSISTOR 2SK94
Q211	8-729-118-56	s TRANSISTOR 2SK852-X2
Q216	8-729-423-93	s TRANSISTOR 2SD2136-R(TA)
Q217	8-729-022-00	s TRANSISTOR 2SB1416-R(TA)
Q218	8-729-021-98	s TRANSISTOR 2SJ226-AZ
Q219	8-729-021-98	s TRANSISTOR 2SJ226-AZ
Q220	8-729-117-32	s TRANSISTOR 2SC4177
Q221	8-729-117-32	s TRANSISTOR 2SC4177
Q223	8-729-140-93	s TRANSISTOR 2SB733-34
Q403	8-729-209-06	s TRANSISTOR 2SC4213-A
R1	1-216-603-11	s METAL, CHIP 10 0.5% 1/10W
R5	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R6	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R8	1-216-105-00	s METAL, CHIP 220k 5% 1/10W
R9	1-216-626-11	s METAL, CHIP 91 0.5% 1/10W
R10	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R13	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R16	1-216-009-00	s METAL, CHIP 22 5% 1/10W
R17	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R19	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R20	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R23	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R24	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R25	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R26	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R27	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R28	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R28	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R30	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R31	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R32	1-216-642-11	s METAL, CHIP 430 0.5% 1/10W
R33	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R34	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R35	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R36	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R37	1-215-473-00	s METAL 150k 1% 1/6W
R38	1-215-471-00	s METAL 120k 1% 1/6W
R39	1-215-479-00	s METAL 270k 1% 1/6W
R40	1-216-681-11	s METAL, CHIP 18k 0.5% 1/10W
R41	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R42	1-216-695-11	s METAL, CHIP 68k 0.5% 1/10W
R43	1-215-475-00	s METAL 180k 1% 1/6W
R44	1-215-493-00	s METAL 1M 1% 1/6W
R45	1-215-461-00	s METAL 47k 1% 1/6W
R46	1-216-681-11	s METAL, CHIP 18k 0.5% 1/10W
R47	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R51	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R56	1-216-009-00	s METAL, CHIP 22 5% 1/10W
R57	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R58	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W
R59	1-216-622-11	s METAL, CHIP 62 0.5% 1/10W
R60	1-216-678-11	s METAL, CHIP 13k 0.5% 1/10W
R61	1-216-673-11	s METAL, CHIP 8.2k 0.5% 1/10W
R62	1-216-652-11	s METAL, CHIP 1.1k 0.5% 1/10W
R63	1-216-622-11	s METAL, CHIP 62 0.5% 1/10W

(AP-31A BOARD(UVW-1600))

Ref. No. or Q'ty	Part No.	SP Description
R64	1-216-653-11	s METAL, CHIP 1.2k 0.5% 1/10W
R65	1-216-676-11	s METAL, CHIP 11k 0.5% 1/10W
R66	1-216-677-11	s METAL, CHIP 12k 0.5% 1/10W
R67	1-216-654-11	s METAL, CHIP 1.3k 0.5% 1/10W
R68	1-215-493-00	s METAL 1M 1% 1/6W
R69	1-216-666-11	s METAL, CHIP 4.3k 0.5% 1/10W
R70	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R71	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R72	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R73	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R74	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R75	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R76	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R77	1-216-699-11	s METAL, CHIP 100k 0.5% 1/10W
R78	1-216-686-11	s METAL, CHIP 30k 0.5% 1/10W
R79	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R80	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R82	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R83	1-216-658-11	s METAL, CHIP 2k 0.5% 1/10W
R84	1-216-677-11	s METAL, CHIP 12k 0.5% 1/10W
R85	1-216-645-11	s METAL, CHIP 560 0.5% 1/10W
R86	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R87	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R88	1-216-672-11	s METAL, CHIP 7.5k 0.5% 1/10W
R89	1-216-045-00	s METAL, CHIP 680 5% 1/10W
R90	1-216-674-11	s METAL, CHIP 9.1k 0.5% 1/10W
R91	1-216-681-11	s METAL, CHIP 18k 0.5% 1/10W
R92	1-216-657-11	s METAL, CHIP 1.8k 0.5% 1/10W
R93	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R106	1-216-069-00	s METAL, CHIP 6.8k 5% 1/10W
R107	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R108	1-216-668-11	s METAL, CHIP 5.1k 0.5% 1/10W
R109	1-216-663-11	s METAL, CHIP 3.3k 0.5% 1/10W
R110	1-216-650-11	s METAL, CHIP 910 0.5% 1/10W
R111	1-216-663-11	s METAL, CHIP 3.3k 0.5% 1/10W
R112	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R113	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R114	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R115	1-216-067-00	s METAL, CHIP 5.6k 5% 1/10W
R116	1-216-067-00	s METAL, CHIP 5.6k 5% 1/10W
R117	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R118	1-247-807-31	s CARBON 100 5% 1/4W
R119	1-216-399-00	s WIREWOUND 6.8 10% 3W
R120	1-216-399-00	s WIREWOUND 6.8 10% 3W
R121	1-247-807-31	s CARBON 100 5% 1/4W
R122	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R123	1-249-389-11	s CARBON 4.7 5% 1/4W
R124	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R125	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R126	1-216-075-00	s METAL, CHIP 12k 5% 1/10W
R127	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R128	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R129	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R130	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R131	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R132	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R133	1-216-095-00	s METAL, CHIP 82k 5% 1/10W
R134	1-216-676-11	s METAL, CHIP 11k 0.5% 1/10W
R135	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W

(AP-31A BOARD(UVW-1600))

Ref. No. or Q'ty	Part No.	SP Description
R136	1-216-678-11 s	METAL, CHIP 13k 0.5% 1/10W
R137	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R138	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R139	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R140	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R141	1-216-684-11 s	METAL, CHIP 24k 0.5% 1/10W
R142	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R143	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R144	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R145-154	1-216-097-00 s	METAL, CHIP 100k 5% 1/10W
R166	1-216-295-91 s	RES, CHIP 0
R178	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R179	1-216-664-11 s	METAL, CHIP 3.6k 0.5% 1/10W
R180	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R181	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R182	1-216-646-11 s	METAL, CHIP 620 0.5% 1/10W
R183	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R184	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R186	1-216-095-00 s	METAL, CHIP 82k 5% 1/10W
R187	1-216-668-11 s	METAL, CHIP 5.1k 0.5% 1/10W
R201	1-216-603-11 s	METAL, CHIP 10 0.5% 1/10W
R205	1-216-097-00 s	METAL, CHIP 100k 5% 1/10W
R206	1-216-097-00 s	METAL, CHIP 100k 5% 1/10W
R208	1-216-105-00 s	METAL, CHIP 220k 5% 1/10W
R209	1-216-626-11 s	METAL, CHIP 91 0.5% 1/10W
R210	1-216-651-11 s	METAL, CHIP 1k 0.5% 1/10W
R213	1-216-659-11 s	METAL, CHIP 2.2k 0.5% 1/10W
R216	1-216-009-00 s	METAL, CHIP 22 5% 1/10W
R217	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R219	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R220	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R223	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R224	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R225	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R226	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R227	1-216-097-00 s	METAL, CHIP 100k 5% 1/10W
R228	1-216-097-00 s	METAL, CHIP 100k 5% 1/10W
R230	1-216-675-11 s	METAL, CHIP 10k 0.5% 1/10W
R231	1-216-041-00 s	METAL, CHIP 470 5% 1/10W
R232	1-216-642-11 s	METAL, CHIP 430 0.5% 1/10W
R233	1-216-675-11 s	METAL, CHIP 10k 0.5% 1/10W
R234	1-216-691-11 s	METAL, CHIP 47k 0.5% 1/10W
R235	1-216-675-11 s	METAL, CHIP 10k 0.5% 1/10W
R236	1-216-683-11 s	METAL, CHIP 22k 0.5% 1/10W
R237	1-215-473-00 s	METAL 150k 1% 1/6W
R238	1-215-471-00 s	METAL 120k 1% 1/6W
R239	1-215-479-00 s	METAL 270k 1% 1/6W
R240	1-216-681-11 s	METAL, CHIP 18k 0.5% 1/10W
R241	1-216-675-11 s	METAL, CHIP 10k 0.5% 1/10W
R242	1-216-699-11 s	METAL, CHIP 100k 0.5% 1/10W
R243	1-215-483-00 s	METAL 390k 1% 1/6W
R244	1-215-493-00 s	METAL 1M 1% 1/6W
R245	1-215-459-00 s	METAL 39k 1% 1/6W
R246	1-216-681-11 s	METAL, CHIP 18k 0.5% 1/10W
R247	1-216-683-11 s	METAL, CHIP 22k 0.5% 1/10W
R251	1-216-121-00 s	METAL, CHIP 1M 5% 1/10W
R255	1-216-009-00 s	METAL, CHIP 22 5% 1/10W
R256	1-216-691-11 s	METAL, CHIP 47k 0.5% 1/10W
R257	1-216-643-11 s	METAL, CHIP 470 0.5% 1/10W

(AP-31A BOARD(UVW-1600))

Ref. No. or Q'ty	Part No.	SP Description
R258	1-216-622-11 s	METAL, CHIP 62 0.5% 1/10W
R259	1-216-678-11 s	METAL, CHIP 13k 0.5% 1/10W
R260	1-216-673-11 s	METAL, CHIP 8.2k 0.5% 1/10W
R261	1-216-652-11 s	METAL, CHIP 1.1k 0.5% 1/10W
R262	1-216-622-11 s	METAL, CHIP 62 0.5% 1/10W
R263	1-216-653-11 s	METAL, CHIP 1.2k 0.5% 1/10W
R264	1-216-676-11 s	METAL, CHIP 11k 0.5% 1/10W
R265	1-216-677-11 s	METAL, CHIP 12k 0.5% 1/10W
R266	1-216-654-11 s	METAL, CHIP 1.3k 0.5% 1/10W
R267	1-215-493-00 s	METAL 1M 1% 1/6W
R268	1-216-666-11 s	METAL, CHIP 4.3k 0.5% 1/10W
R269	1-216-691-11 s	METAL, CHIP 47k 0.5% 1/10W
R270	1-216-675-11 s	METAL, CHIP 10k 0.5% 1/10W
R271	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R272	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R273	1-216-081-00 s	METAL, CHIP 22k 5% 1/10W
R274	1-216-081-00 s	METAL, CHIP 22k 5% 1/10W
R276	1-216-659-11 s	METAL, CHIP 2.2k 0.5% 1/10W
R277	1-216-658-11 s	METAL, CHIP 2k 0.5% 1/10W
R278	1-216-677-11 s	METAL, CHIP 12k 0.5% 1/10W
R279	1-216-645-11 s	METAL, CHIP 560 0.5% 1/10W
R280	1-216-121-00 s	METAL, CHIP 1M 5% 1/10W
R281	1-216-683-11 s	METAL, CHIP 22k 0.5% 1/10W
R282	1-216-672-11 s	METAL, CHIP 7.5k 0.5% 1/10W
R283	1-216-045-00 s	METAL, CHIP 680 5% 1/10W
R284	1-216-674-11 s	METAL, CHIP 9.1k 0.5% 1/10W
R285	1-216-681-11 s	METAL, CHIP 18k 0.5% 1/10W
R286	1-216-657-11 s	METAL, CHIP 1.8k 0.5% 1/10W
R287	1-216-121-00 s	METAL, CHIP 1M 5% 1/10W
R300	1-216-069-00 s	METAL, CHIP 6.8k 5% 1/10W
R301	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R302	1-216-668-11 s	METAL, CHIP 5.1k 0.5% 1/10W
R303	1-216-663-11 s	METAL, CHIP 3.3k 0.5% 1/10W
R304	1-216-650-11 s	METAL, CHIP 910 0.5% 1/10W
R305	1-216-663-11 s	METAL, CHIP 3.3k 0.5% 1/10W
R306	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R307	1-216-667-11 s	METAL, CHIP 4.7k 0.5% 1/10W
R308	1-216-033-00 s	METAL, CHIP 220 5% 1/10W
R309	1-216-067-00 s	METAL, CHIP 5.6k 5% 1/10W
R310	1-216-067-00 s	METAL, CHIP 5.6k 5% 1/10W
R311	1-216-679-11 s	METAL, CHIP 15k 0.5% 1/10W
R312	1-247-807-31 s	CARBON 100 5% 1/4W
R313	△ 1-216-399-00 s	WIREWOUND 6.8 10% 3W
R314	△ 1-216-399-00 s	WIREWOUND 6.8 10% 3W
R315	1-247-807-31 s	CARBON 100 5% 1/4W
R316	1-216-121-00 s	METAL, CHIP 1M 5% 1/10W
R317	1-249-389-11 s	CARBON 4.7 5% 1/4W
R318	1-216-121-00 s	METAL, CHIP 1M 5% 1/10W
R319	1-216-057-00 s	METAL, CHIP 2.2k 5% 1/10W
R320	1-216-075-00 s	METAL, CHIP 12k 5% 1/10W
R321	1-216-081-00 s	METAL, CHIP 22k 5% 1/10W
R322	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R323	1-216-121-00 s	METAL, CHIP 1M 5% 1/10W
R324	1-216-033-00 s	METAL, CHIP 220 5% 1/10W
R325	1-216-065-00 s	METAL, CHIP 4.7k 5% 1/10W
R326	1-216-081-00 s	METAL, CHIP 22k 5% 1/10W
R327	1-216-095-00 s	METAL, CHIP 82k 5% 1/10W
R328	1-216-676-11 s	METAL, CHIP 11k 0.5% 1/10W
R329	1-216-057-00 s	METAL, CHIP 2.2k 5% 1/10W

(AP-31A BOARD(UVW-1600))

Ref. No. or Q'ty	Part No.	SP Description
R330	1-216-678-11	s METAL, CHIP 13k 0.5% 1/10W
R331	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R332	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R333	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R334	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R335	1-216-684-11	s METAL, CHIP 24k 0.5% 1/10W
R336	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R337	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R338	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R341	1-216-095-00	s METAL, CHIP 82k 5% 1/10W
R342	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R343	1-216-295-91	s RES, CHIP 0
R387	1-216-668-11	s METAL, CHIP 5.1k 0.5% 1/10W
R400	1-216-603-11	s METAL, CHIP 10 0.5% 1/10W
R401	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R402	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R403	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R405	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R406	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R407	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R408	1-216-053-00	s METAL, CHIP 1.5k 5% 1/10W
R410	1-216-053-00	s METAL, CHIP 1.5k 5% 1/10W
R412	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R413	1-216-067-00	s METAL, CHIP 5.6k 5% 1/10W
R414	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R415	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R416	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R417	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R418	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R419	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R420	1-216-113-00	s METAL, CHIP 470k 5% 1/10W
R421	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R422	1-216-067-00	s METAL, CHIP 5.6k 5% 1/10W
R423	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R424	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R425	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R426	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R427	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R428	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R500	1-215-403-00	s METAL 180 1% 1/6W
R501	1-215-403-00	s METAL 180 1% 1/6W
RV1	1-241-789-21	s RES, ADJ METAL 220k
RV2	1-241-784-11	s RES, ADJ METAL 4.7k
RV3	1-241-783-11	s RES, ADJ METAL 2.2k
RV4	1-241-785-11	s RES, ADJ METAL 10k
RV5	1-241-123-11	s RES, ADJ CARBON 47k
RV201	1-241-789-21	s RES, ADJ METAL 220k
RV202	1-241-784-11	s RES, ADJ METAL 4.7k
RV203	1-241-783-11	s RES, ADJ METAL 2.2k
RV204	1-241-785-11	s RES, ADJ METAL 10k
RV205	1-241-123-11	s RES, ADJ CARBON 47k
S1	1-570-602-11	s SWITCH, DIP 2-CKT
S2	1-570-602-11	s SWITCH, DIP 2-CKT
S201	1-570-602-11	s SWITCH, DIP 2-CKT
S202	1-570-602-11	s SWITCH, DIP 2-CKT
TH1	1-800-199-11	s THERMISTOR S-1250
TH2	1-800-199-11	s THERMISTOR S-1250

AR-14 BOARD(UVW-1800)

Ref. No.
or Q'ty Part No. SP Description

AR-14 board is used for UVW-1800.

1pc	A-8275-287-A	o MOUNTED CIRCUIT BOARD, AR-14
1pc	3-179-084-01	s LEVER (R), PC BOARD
1pc	3-179-085-01	s LEVER (L), PC BOARD
C1	1-163-137-00	s CERAMIC, CHIP 680pF 5% 50V
C2	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C3	1-163-137-00	s CERAMIC, CHIP 680pF 5% 50V
C4	1-126-964-11	s ELECT 10uF 20% 50V
C5	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C6	1-163-137-00	s CERAMIC, CHIP 680pF 5% 50V
C7	1-126-964-11	s ELECT 10uF 20% 50V
C8	1-126-964-11	s ELECT 10uF 20% 50V
C9	1-126-964-11	s ELECT 10uF 20% 50V
C10	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C11	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C12	1-126-933-11	s ELECT 100uF 20% 16V
C13	1-126-933-11	s ELECT 100uF 20% 16V
C14	1-126-933-11	s ELECT 100uF 20% 16V
C15	1-126-933-11	s ELECT 100uF 20% 16V
C16-C20	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C21	1-126-933-11	s ELECT 100uF 20% 16V
C22	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C23	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C101	1-126-947-11	s ELECT 47uF 20% 35V
C102	1-126-947-11	s ELECT 47uF 20% 35V
C103	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C104	1-126-940-11	s ELECT 330uF 20% 25V
C105	1-163-239-11	s CERAMIC, CHIP 33pF 5% 50V
C106	1-163-239-11	s CERAMIC, CHIP 33pF 5% 50V
C107	1-163-113-00	s CERAMIC, CHIP 68pF 5% 50V
C108	1-163-113-00	s CERAMIC, CHIP 68pF 5% 50V
C109	1-126-947-11	s ELECT 47uF 20% 35V
C110	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C111	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C112	1-126-933-11	s ELECT 100uF 20% 16V
C113	1-126-933-11	s ELECT 100uF 20% 16V
C114	1-131-365-00	s TANTALUM 10uF 10% 20V
C115	1-130-475-00	s MYLAR 0.0022uF 5% 50V
C116	1-130-471-00	s MYLAR 0.001uF 5% 50V
C117	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C118	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C119	1-130-489-00	s MYLAR 0.033uF 5% 50V
C120	1-130-473-00	s MYLAR 0.0015uF 5% 50V
C121	1-130-494-11	s MYLAR 0.082uF 5% 50V
C122	1-126-964-11	s ELECT 10uF 20% 50V
C123	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C124	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C125	1-136-439-11	s FILM 330pF 5% 630V
C126	1-136-439-11	s FILM 330pF 5% 630V
C127	1-136-439-11	s FILM 330pF 5% 630V
C128	1-136-439-11	s FILM 330pF 5% 630V
C129	1-136-438-11	s FILM 270pF 5% 630V
C130	1-126-964-11	s ELECT 10uF 20% 50V
C131	1-163-263-11	s CERAMIC, CHIP 330pF 5% 50V
C132	1-130-485-00	s MYLAR 0.015uF 5% 50V
C133	1-163-125-00	s CERAMIC, CHIP 220pF 5% 50V
C134	1-163-125-00	s CERAMIC, CHIP 220pF 5% 50V
C135	1-130-475-00	s MYLAR 0.0022uF 5% 50V

(AR-14 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
C136	1-130-487-00	s MYLAR 0.022uF 5% 50V
C137	1-126-964-11	s ELECT 10uF 20% 50V
C201	1-126-947-11	s ELECT 47uF 20% 35V
C202	1-126-947-11	s ELECT 47uF 20% 35V
C203	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C204	1-126-940-11	s ELECT 330uF 20% 25V
C205	1-163-239-11	s CERAMIC, CHIP 33pF 5% 50V
C206	1-163-239-11	s CERAMIC, CHIP 33pF 5% 50V
C207	1-163-113-00	s CERAMIC, CHIP 68pF 5% 50V
C208	1-163-113-00	s CERAMIC, CHIP 68pF 5% 50V
C209	1-126-947-11	s ELECT 47uF 20% 35V
C210	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C211	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C212	1-126-933-11	s ELECT 100uF 20% 16V
C213	1-126-933-11	s ELECT 100uF 20% 16V
C214	1-131-365-00	s TANTALUM 10uF 10% 20V
C215	1-130-475-00	s MYLAR 0.0022uF 5% 50V
C216	1-130-471-00	s MYLAR 0.001uF 5% 50V
C217	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C218	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C219	1-130-489-00	s MYLAR 0.033uF 5% 50V
C220	1-130-473-00	s MYLAR 0.0015uF 5% 50V
C221	1-130-494-11	s MYLAR 0.082uF 5% 50V
C222	1-126-964-11	s ELECT 10uF 20% 50V
C223	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C224	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C225	1-136-439-11	s FILM 330pF 5% 630V
C226	1-136-439-11	s FILM 330pF 5% 630V
C227	1-136-439-11	s FILM 330pF 5% 630V
C228	1-136-439-11	s FILM 330pF 5% 630V
C229	1-136-438-11	s FILM 270pF 5% 630V
C230	1-126-964-11	s ELECT 10uF 20% 50V
C231	1-163-263-11	s CERAMIC, CHIP 330pF 5% 50V
C232	1-130-485-00	s MYLAR 0.015uF 5% 50V
C233	1-163-125-00	s CERAMIC, CHIP 220pF 5% 50V
C234	1-163-125-00	s CERAMIC, CHIP 220pF 5% 50V
C235	1-130-475-00	s MYLAR 0.0022uF 5% 50V
C236	1-130-487-00	s MYLAR 0.022uF 5% 50V
C237	1-126-964-11	s ELECT 10uF 20% 50V
C301	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V
C302	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V
C303	1-163-257-11	s CERAMIC, CHIP 180pF 5% 50V
C305	1-163-133-00	s CERAMIC, CHIP 470pF 5% 50V
C307	1-131-347-00	s TANTALUM 1uF 10% 35V
C308	1-131-347-00	s TANTALUM 1uF 10% 35V
C309	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C312	1-131-347-00	s TANTALUM 1uF 10% 35V
C313	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C322	1-131-347-00	s TANTALUM 1uF 10% 35V
C323	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C332	1-131-349-00	s TANTALUM 2.2uF 10% 35V
C333	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C334	1-126-947-11	s ELECT 47uF 20% 35V
C335	1-136-561-11	s FILM 0.0068uF 5% 630V
C336	1-131-347-00	s TANTALUM 1uF 10% 35V
C337	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C342	1-131-349-00	s TANTALUM 2.2uF 10% 35V
C343	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C344	1-126-947-11	s ELECT 47uF 20% 35V

(AR-14 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
C345	1-136-561-11	s FILM 0.0068uF 5% 630V
C346	1-131-347-00	s TANTALUM 1uF 10% 35V
C347	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C352	1-131-349-00	s TANTALUM 2.2uF 10% 35V
C353	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C354	1-126-947-11	s ELECT 47uF 20% 35V
C355	1-136-561-11	s FILM 0.0068uF 5% 630V
C356	1-131-347-00	s TANTALUM 1uF 10% 35V
CN1	1-506-474-11	s CONNECTOR 9P, MALE
CN112	1-573-600-21	s CONNECTOR, PHEC 100P, MALE
D1	8-719-123-85	s DIODE 1SS304
D101	8-719-941-23	s DIODE DA204U
D102	8-719-941-23	s DIODE DA204U
D103	8-719-941-23	s DIODE DA204U
D201	8-719-941-23	s DIODE DA204U
D202	8-719-941-23	s DIODE DA204U
D203	8-719-941-23	s DIODE DA204U
D301	8-719-123-82	s DIODE 1SS303-T1
D302	8-719-123-82	s DIODE 1SS303-T1
D303	8-719-123-82	s DIODE 1SS303-T1
D304	8-719-157-23	s DIODE RD4.7M-B
D305	8-719-123-82	s DIODE 1SS303-T1
D306	8-719-157-23	s DIODE RD4.7M-B
D311	8-719-123-82	s DIODE 1SS303-T1
D312	8-719-157-23	s DIODE RD4.7M-B
D313	8-719-123-82	s DIODE 1SS303-T1
D314	8-719-123-82	s DIODE 1SS303-T1
D321	8-719-123-82	s DIODE 1SS303-T1
D322	8-719-157-23	s DIODE RD4.7M-B
D323	8-719-123-82	s DIODE 1SS303-T1
D324	8-719-123-82	s DIODE 1SS303-T1
D331	8-719-123-82	s DIODE 1SS303-T1
D332	8-719-157-23	s DIODE RD4.7M-B
D334	8-719-123-82	s DIODE 1SS303-T1
IC1	8-759-140-53	s IC UPD4053BC
IC2	8-759-705-58	s IC NJM4558D-D
IC3	8-759-917-18	s IC SN74HC04AN
IC5	8-759-168-20	s IC TA78L09S
IC6	8-759-700-68	s IC NJM79L09A
IC7	8-759-168-20	s IC TA78L09S
IC101	8-759-705-58	s IC NJM4558D-D
IC102	8-759-705-58	s IC NJM4558D-D
IC103	8-759-705-58	s IC NJM4558D-D
IC104	8-759-705-58	s IC NJM4558D-D
IC105	8-759-705-58	s IC NJM4558D-D
IC201	8-759-705-58	s IC NJM4558D-D
IC202	8-759-705-58	s IC NJM4558D-D
IC203	8-759-705-58	s IC NJM4558D-D
IC204	8-759-705-58	s IC NJM4558D-D
IC205	8-759-705-58	s IC NJM4558D-D
IC301	8-759-917-18	s IC SN74HC04AN
IC302	8-759-917-37	s IC MC74HC024N
IC303	8-759-000-01	s IC MC74HC4538N
IC304	8-759-916-16	s IC MC74HC08AN
IC305	8-759-921-19	s IC SN74HC161N
IC306	8-759-916-29	s IC SN74HC74N
IC307	8-759-917-18	s IC SN74HC04AN
IC308	8-759-916-16	s IC MC74HC08AN

(AR-14 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
IC309	8-759-135-80 s	IC UPC358C
IC310	8-759-135-80 s	IC UPC358C
IC311	8-759-916-12 s	IC SN74HC00N
IC312	8-759-917-18 s	IC SN74HC004AN
IC313	8-759-135-80 s	IC UPC358C
IC314	8-759-916-12 s	IC SN74HC00N
IC315	8-759-705-58 s	IC NJM4558D-D
IC316	8-759-705-58 s	IC NJM4558D-D
L1	1-410-470-11 s	INDUCTOR 10uH
L2	1-410-470-11 s	INDUCTOR 10uH
L101	1-410-478-11 s	INDUCTOR 47uH
L102	1-407-499-00 s	INDUCTOR 3.9mH
L201	1-410-478-11 s	INDUCTOR 47uH
L202	1-407-499-00 s	INDUCTOR 3.9mH
L301	1-410-470-11 s	INDUCTOR 10uH
L311	1-410-470-11 s	INDUCTOR 10uH
L321	1-410-470-11 s	INDUCTOR 10uH
LV101	1-410-853-21 s	COIL, VAR 4.5uH
LV201	1-410-853-21 s	COIL, VAR 4.5uH
LV301	1-414-007-11 s	COIL, VAR 1.5uH
LV311	1-414-007-11 s	COIL, VAR 1.5uH
LV321	1-414-007-11 s	COIL, VAR 1.5uH
PS1	▲1-532-727-11 s	LINK, IC 0.25A
PS2	▲1-532-727-11 s	LINK, IC 0.25A
Q1	8-729-117-32 s	TRANSISTOR 2SC4177
Q2	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q3	8-729-905-12 s	TRANSISTOR DTA144EU
Q4	8-729-905-12 s	TRANSISTOR DTA144EU
Q5	8-729-905-12 s	TRANSISTOR DTA144EU
Q101	8-729-209-06 s	TRANSISTOR 2SC4213-A
Q102	8-729-905-18 s	TRANSISTOR DTC144EU
Q103	8-729-905-12 s	TRANSISTOR DTA144EU
Q104	8-729-140-98 s	TRANSISTOR 2SD773-3
Q105	8-729-140-98 s	TRANSISTOR 2SD773-3
Q201	8-729-209-06 s	TRANSISTOR 2SC4213-A
Q202	8-729-905-18 s	TRANSISTOR DTC144EU
Q203	8-729-905-12 s	TRANSISTOR DTA144EU
Q204	8-729-140-98 s	TRANSISTOR 2SD773-3
Q205	8-729-140-98 s	TRANSISTOR 2SD773-3
Q301	8-729-203-30 s	TRANSISTOR 2SJ106Y
Q302	8-729-140-93 s	TRANSISTOR 2SB733-34
Q303	8-729-203-30 s	TRANSISTOR 2SJ106Y
Q304	8-729-140-93 s	TRANSISTOR 2SB733-34
Q305	8-729-140-98 s	TRANSISTOR 2SD773-3
Q306	8-729-140-98 s	TRANSISTOR 2SD773-3
Q311	8-729-203-30 s	TRANSISTOR 2SJ106Y
Q312	8-729-140-93 s	TRANSISTOR 2SB733-34
Q313	8-729-905-12 s	TRANSISTOR DTA144EU
Q314	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q315	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q316	8-729-140-98 s	TRANSISTOR 2SD773-3
Q317	8-729-140-98 s	TRANSISTOR 2SD773-3
Q318	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q319	8-729-140-98 s	TRANSISTOR 2SD773-3
Q321	8-729-203-30 s	TRANSISTOR 2SJ106Y
Q322	8-729-140-93 s	TRANSISTOR 2SB733-34
Q323	8-729-905-12 s	TRANSISTOR DTA144EU
Q324	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6

(AR-14 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
Q325	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q326	8-729-140-98 s	TRANSISTOR 2SD773-3
Q327	8-729-140-98 s	TRANSISTOR 2SD773-3
Q328	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q329	8-729-140-98 s	TRANSISTOR 2SD773-3
Q331	8-729-203-30 s	TRANSISTOR 2SJ106Y
Q332	8-729-140-93 s	TRANSISTOR 2SB733-34
Q333	8-729-905-12 s	TRANSISTOR DTA144EU
Q334	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q335	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q336	8-729-140-98 s	TRANSISTOR 2SD773-3
Q337	8-729-140-98 s	TRANSISTOR 2SD773-3
Q339	8-729-140-98 s	TRANSISTOR 2SD773-3
R1	1-216-686-11 s	METAL, CHIP 30k 0.5% 1/10W
R2	1-216-686-11 s	METAL, CHIP 30k 0.5% 1/10W
R3	1-216-097-00 s	METAL, CHIP 100k 5% 1/10W
R4	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R5	1-216-097-00 s	METAL, CHIP 100k 5% 1/10W
R6	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R7	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R8	1-216-097-00 s	METAL, CHIP 100k 5% 1/10W
R9	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R10	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R11	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R12	1-216-097-00 s	METAL, CHIP 100k 5% 1/10W
R13	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R14	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R15	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R16	1-216-097-00 s	METAL, CHIP 100k 5% 1/10W
R17	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R18-R25	1-216-097-00 s	METAL, CHIP 100k 5% 1/10W
R26	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R27	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R103	1-216-668-11 s	METAL, CHIP 5.1k 0.5% 1/10W
R104	1-216-668-11 s	METAL, CHIP 5.1k 0.5% 1/10W
R105	1-216-642-11 s	METAL, CHIP 430 0.5% 1/10W
R106	1-216-641-11 s	METAL, CHIP 390 0.5% 1/10W
R107	1-216-633-11 s	METAL, CHIP 180 0.5% 1/10W
R108	1-216-097-00 s	METAL, CHIP 100k 5% 1/10W
R109	1-216-097-00 s	METAL, CHIP 100k 5% 1/10W
R110	1-216-061-00 s	METAL, CHIP 3.3k 5% 1/10W
R111	1-216-061-00 s	METAL, CHIP 3.3k 5% 1/10W
R112	1-216-061-00 s	METAL, CHIP 3.3k 5% 1/10W
R113	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R114	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R115	1-216-065-00 s	METAL, CHIP 4.7k 5% 1/10W
R116	1-216-065-00 s	METAL, CHIP 4.7k 5% 1/10W
R117	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R118	1-216-057-00 s	METAL, CHIP 2.2k 5% 1/10W
R119	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R120	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R121	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R122	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R123	1-216-057-00 s	METAL, CHIP 2.2k 5% 1/10W
R124	1-216-057-00 s	METAL, CHIP 2.2k 5% 1/10W
R125	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R126	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R127	1-215-444-00 s	METAL 9.1k 1% 1/6W

(AR-14 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
R128	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R129	1-216-109-00	s METAL, CHIP 330k 5% 1/10W
R130	1-216-095-00	s METAL, CHIP 82k 5% 1/10W
R131	1-216-295-91	s RES, CHIP 0
R132	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R133	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R134	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R135	1-216-009-00	s METAL, CHIP 22 5% 1/10W
R136	1-216-045-00	s METAL, CHIP 680 5% 1/10W
R137	1-216-077-00	s METAL, CHIP 15k 5% 1/10W
R138	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R139	△ 1-215-905-11	s METAL 10 5% 3W
R140	△ 1-215-905-11	s METAL 10 5% 3W
R141	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R142	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R143	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R144	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R146	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R147	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R148	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R149	1-216-117-00	s METAL, CHIP 680k 5% 1/10W
R150	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R151-155	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R156	1-215-435-00	s METAL 3.9k 1% 1/6W
R203	1-216-668-11	s METAL, CHIP 5.1k 0.5% 1/10W
R204	1-216-668-11	s METAL, CHIP 5.1k 0.5% 1/10W
R205	1-216-642-11	s METAL, CHIP 430 0.5% 1/10W
R206	1-216-641-11	s METAL, CHIP 390 0.5% 1/10W
R207	1-216-633-11	s METAL, CHIP 180 0.5% 1/10W
R208	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R209	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R210	1-216-061-00	s METAL, CHIP 3.3k 5% 1/10W
R211	1-216-061-00	s METAL, CHIP 3.3k 5% 1/10W
R212	1-216-061-00	s METAL, CHIP 3.3k 5% 1/10W
R213	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R214	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R215	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R216	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R217	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R218	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R219	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R220	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R221	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R222	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R223	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R224	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R225	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R226	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R227	1-215-444-00	s METAL 9.1k 1% 1/6W
R228	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R229	1-216-109-00	s METAL, CHIP 330k 5% 1/10W
R230	1-216-095-00	s METAL, CHIP 82k 5% 1/10W
R231	1-216-295-91	s RES, CHIP 0
R232	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R233	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R234	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R235	1-216-009-00	s METAL, CHIP 22 5% 1/10W
R236	1-216-045-00	s METAL, CHIP 680 5% 1/10W
R237	1-216-077-00	s METAL, CHIP 15k 5% 1/10W

(AR-14 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
R238	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R239	△ 1-215-905-11	s METAL 10 5% 3W
R240	△ 1-215-905-11	s METAL 10 5% 3W
R241	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R242	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R243	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R244	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R246	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R247	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R248	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R249	1-216-117-00	s METAL, CHIP 680k 5% 1/10W
R250	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R251-255	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R256	1-215-435-00	s METAL 3.9k 1% 1/6W
R301	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R302	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R303	1-216-677-11	s METAL, CHIP 12k 0.5% 1/10W
R304	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R305	1-216-672-11	s METAL, CHIP 7.5k 0.5% 1/10W
R306	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R307	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R308	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R309	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R310	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R311	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R312	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R313	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R314	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R315	1-216-689-11	s METAL, CHIP 39k 0.5% 1/10W
R316	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R317	1-216-673-11	s METAL, CHIP 8.2k 0.5% 1/10W
R318	1-216-077-00	s METAL, CHIP 15k 5% 1/10W
R319	1-216-077-00	s METAL, CHIP 15k 5% 1/10W
R320	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R321	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R322	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R323	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R324	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R325	1-216-689-11	s METAL, CHIP 39k 0.5% 1/10W
R326	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R327	1-216-673-11	s METAL, CHIP 8.2k 0.5% 1/10W
R328	1-216-077-00	s METAL, CHIP 15k 5% 1/10W
R329	1-216-077-00	s METAL, CHIP 15k 5% 1/10W
R330	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R331	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R332	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R341	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R342	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R343	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R344	1-216-295-91	s RES, CHIP 0
R345	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R346	1-216-687-11	s METAL, CHIP 33k 0.5% 1/10W
R347	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R348	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R349	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R350	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R351	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R352	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R353	1-216-073-00	s METAL, CHIP 10k 5% 1/10W

(AR-14 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
R354	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R355	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R356	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R357	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R358	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R359	△1-216-397-11	s METAL 4.7 5% 3W
R361	△1-216-397-11	s METAL 4.7 5% 3W
R363	1-217-671-11	s METAL, CHIP 1 5% 1/10W
R364	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R365	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R366	1-216-699-11	s METAL, CHIP 100k 0.5% 1/10W
R371	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R372	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R373	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R374	1-216-295-91	s RES, CHIP 0
R375	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R376	1-216-687-11	s METAL, CHIP 33k 0.5% 1/10W
R377	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R378	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R379	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R380	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R381	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R382	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R383	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R384	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R385	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R386	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R387	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R388	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R389	△1-216-397-11	s METAL 4.7 5% 3W
R391	△1-216-397-11	s METAL 4.7 5% 3W
R393	1-217-671-11	s METAL, CHIP 1 5% 1/10W
R394	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R395	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R396	1-216-699-11	s METAL, CHIP 100k 0.5% 1/10W
R401	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R402	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R403	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R404	1-216-295-91	s RES, CHIP 0
R405	1-216-669-11	s METAL, CHIP 5.6k 0.5% 1/10W
R406	1-216-687-11	s METAL, CHIP 33k 0.5% 1/10W
R407	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R408	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R409	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R410	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R411	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R412	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R413	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R414	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R415	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R416	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R417	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R418	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R419	△1-216-397-11	s METAL 4.7 5% 3W
R421	△1-216-397-11	s METAL 4.7 5% 3W
R423	1-217-671-11	s METAL, CHIP 1 5% 1/10W
R426	1-216-699-11	s METAL, CHIP 100k 0.5% 1/10W
RV106	1-241-785-11	s RES, ADJ METAL 10k

(AR-14 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
RV107	1-241-786-11	s RES, ADJ METAL 22k
RV108	1-241-785-11	s RES, ADJ METAL 10k
RV109	1-241-781-11	s RES, ADJ METAL 470
RV110	1-241-761-11	s RES, ADJ METAL 1k
RV111	1-241-784-11	s RES, ADJ METAL 4.7k
RV112	1-241-785-11	s RES, ADJ METAL 10k
RV206	1-241-785-11	s RES, ADJ METAL 10k
RV207	1-241-786-11	s RES, ADJ METAL 22k
RV208	1-241-785-11	s RES, ADJ METAL 10k
RV209	1-241-781-11	s RES, ADJ METAL 470
RV210	1-241-761-11	s RES, ADJ METAL 1k
RV211	1-241-784-11	s RES, ADJ METAL 4.7k
RV212	1-241-785-11	s RES, ADJ METAL 10k
RV301	1-241-765-11	s RES, ADJ METAL 22k
RV302	1-241-765-11	s RES, ADJ METAL 22k
RY301	1-515-434-00	s RELAY, REED
RY311	1-515-434-00	s RELAY, REED
S103	1-570-602-11	s SWITCH, DIP 2-CKT
S203	1-570-602-11	s SWITCH, DIP 2-CKT
T101	1-423-870-11	s TRANSFORMER, BIAS OSC
T201	1-423-870-11	s TRANSFORMER, BIAS OSC
T301	1-424-511-11	s TRANSFORMER, FE
T311	1-424-511-11	s TRANSFORMER, FE
T321	1-424-511-11	s TRANSFORMER, FE
TH1	1-800-199-11	s THERMISTOR S-1250
TH2	1-800-199-11	s THERMISTOR S-1250
X301	1-567-861-21	s CRYSTAL 4.194304MHZ

CL-25 BOARD(UVW-1800/1600)

Ref. No.
or Q'ty Part No. SP Description

Two CL-25 boards are used in UVW-1800/1600.
One board has the following parts.

1pc	1-640-170-13	o PRINTED CIRCUIT BOARD, CL-25
1pc	3-171-424-01	o HOLDER, SENSOR
C1	1-161-051-00	s CERAMIC 0.01uF 10% 50V
CN930	1-564-011-11	o CONNECTOR 12P, MALE
CN931	1-564-001-11	o CONNECTOR 2P, MALE
CN933	1-573-599-11	s CONNECTOR 5P, FEMALE
CN935	1-564-001-11	o CONNECTOR 2P, MALE
D1	8-719-938-07	s LED GL480, INFRARED
D2	8-719-938-07	s LED GL480, INFRARED
Q1	8-729-903-81	s PHOTOTRANSISTOR PT480
Q2	8-729-903-81	s PHOTOTRANSISTOR PT480
R1	1-249-414-11	s CARBON 560 5% 1/4W
R2	1-249-414-11	s CARBON 560 5% 1/4W

CP-225 BOARD(UVW-1800)

Ref. No.
or Q'ty Part No. SP Description

CP-225 board is used for UVW-1800.

1pc	A-8276-738-A	o MOUNTED CIRCUIT BOARD, CP-225
C1	1-126-933-11	s ELECT 100uF 20% 16V
C2	1-126-933-11	s ELECT 100uF 20% 16V
C3	1-126-933-11	s ELECT 100uF 20% 16V
C5	1-163-809-11	s CERAMIC, CHIP 0.047uF 10% 25V
C6	1-163-809-11	s CERAMIC, CHIP 0.047uF 10% 25V
C7	1-163-809-11	s CERAMIC, CHIP 0.047uF 10% 25V
CN1	1-573-582-11	s CONNECTOR, BNC, FEMALE
CN2	1-573-582-11	s CONNECTOR, BNC, FEMALE
CN3	1-573-590-12	s CONNECTOR, CIRCULAR 4P, FEMALE
CN4	1-573-584-11	s CONNECTOR, BNC, FEMALE
CN5	1-573-582-11	s CONNECTOR, BNC, FEMALE
CN6	1-573-582-11	s CONNECTOR, BNC, FEMALE
CN7	1-573-590-12	s CONNECTOR, CIRCULAR 4P, FEMALE
CN8	1-573-584-11	s CONNECTOR, BNC, FEMALE
CN9	1-691-273-11	s JACK, PIN 1P, FEMALE
CN10	1-573-589-11	s CONNECTOR, CIRCULAR 12P, MALE
CN11	1-573-592-11	s CONNECTOR, CIRCULAR 12P, FEMALE
CN651	1-564-014-11	s CONNECTOR 4P, MALE
CN652	1-506-486-11	s CONNECTOR 7P, MALE
CN653	1-506-485-11	s CONNECTOR 6P, MALE
CN654	1-506-491-11	s CONNECTOR 12P, MALE
CN655	1-506-493-11	s CONNECTOR 14P, MALE
CN656	1-564-001-11	o CONNECTOR 2P, MALE
FL5	1-236-129-11	s ENCAPSULATED COMPONENTS, LC
FL6	1-236-129-11	s ENCAPSULATED COMPONENTS, LC
FL7	1-236-129-11	s ENCAPSULATED COMPONENTS, LC
FL8	1-236-129-11	s ENCAPSULATED COMPONENTS, LC
FL9	1-236-129-11	s ENCAPSULATED COMPONENTS, LC
FL10	1-236-129-11	s ENCAPSULATED COMPONENTS, LC
FL11	1-236-129-11	s ENCAPSULATED COMPONENTS, LC
FL12	1-236-129-11	s ENCAPSULATED COMPONENTS, LC
Q1	8-729-117-32	s TRANSISTOR 2SC4177
Q2	8-729-117-32	s TRANSISTOR 2SC4177
R1	1-216-009-00	s METAL, CHIP 22 5% 1/10W
R2	1-216-077-00	s METAL, CHIP 15k 5% 1/10W
R3	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W
R4	1-216-045-00	s METAL, CHIP 680 5% 1/10W
R5	1-216-009-00	s METAL, CHIP 22 5% 1/10W
R6	1-216-077-00	s METAL, CHIP 15k 5% 1/10W
R7	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W
R8	1-216-045-00	s METAL, CHIP 680 5% 1/10W
R9	1-216-009-00	s METAL, CHIP 22 5% 1/10W
R10	1-216-009-00	s METAL, CHIP 22 5% 1/10W
R11-R16	1-216-625-11	s METAL, CHIP 82 0.5% 1/10W
S1	1-570-157-51	s SWITCH, SLIDE
S2	1-570-157-51	s SWITCH, SLIDE
S3	1-570-756-11	s SWITCH, SLIDE

CP-225A BOARD(UVW-1600)

Ref. No.
or Q'ty Part No. SP Description

CP-225A board is used for UVW-1600.

1pc A-8276-732-A o MOUNTED CIRCUIT BOARD, CP-225A

C1 1-126-933-11 s ELECT 100uF 20% 16V
C5 1-163-809-11 s CERAMIC, CHIP 0.047uF 10% 25V
C6 1-163-809-11 s CERAMIC, CHIP 0.047uF 10% 25V
C7 1-163-809-11 s CERAMIC, CHIP 0.047uF 10% 25V

CN1 1-764-165-11 s CONNECTOR, 2-BNC, FEMALE
CN5 1-573-583-11 s CONNECTOR, BNC, FEMALE
CN6 1-573-582-11 s CONNECTOR, BNC, FEMALE
CN7 1-573-590-12 s CONNECTOR, CIRCULAR 4P, FEMALE
CN8 1-573-584-11 s CONNECTOR, BNC, FEMALE

CN9 1-691-273-11 s JACK, PIN 1P, FEMALE
CN11 1-573-592-11 s CONNECTOR, CIRCULAR 12P, FEMALE
CN651 1-564-014-11 s CONNECTOR 4P, MALE
CN652 1-506-486-11 s CONNECTOR 7P, MALE
CN653 1-506-485-11 s CONNECTOR 6P, MALE

CN655 1-506-493-11 s CONNECTOR 14P, MALE
CN656 1-564-001-11 o CONNECTOR 2P, MALE

FL1 1-236-129-11 s ENCAPSULATED COMPONENTS, LC
FL6 1-236-129-11 s ENCAPSULATED COMPONENTS, LC
FL7 1-236-129-11 s ENCAPSULATED COMPONENTS, LC
FL8 1-236-129-11 s ENCAPSULATED COMPONENTS, LC
FL9 1-236-129-11 s ENCAPSULATED COMPONENTS, LC

FL10 1-236-129-11 s ENCAPSULATED COMPONENTS, LC
FL11 1-236-129-11 s ENCAPSULATED COMPONENTS, LC
FL12 1-236-129-11 s ENCAPSULATED COMPONENTS, LC

Q1 8-729-117-32 s TRANSISTOR 2SC4177

R1 1-216-009-00 s METAL, CHIP 22 5% 1/10W
R2 1-216-077-00 s METAL, CHIP 15k 5% 1/10W
R3 1-216-624-11 s METAL, CHIP 75 0.5% 1/10W
R4 1-216-045-00 s METAL, CHIP 680 5% 1/10W
R9 1-216-009-00 s METAL, CHIP 22 5% 1/10W

R16 1-216-625-11 s METAL, CHIP 82 0.5% 1/10W

S1 1-570-157-51 s SWITCH, SLIDE

CP-226 BOARD(UVW-1800(UC))

Ref. No.
or Q'ty Part No. SP Description

CP-226 board is used for UVW-1800(UC).

1pc A-8276-739-A o MOUNTED CIRCUIT BOARD, CP-226

C1 1-163-809-11 s CERAMIC, CHIP 0.047uF 10% 25V
C21 1-163-809-11 s CERAMIC, CHIP 0.047uF 10% 25V

CN101 1-750-786-11 s CONNECTOR, XLR 3P, FEMALE
CN102 1-750-785-11 s CONNECTOR, XLR 3P, MALE
CN274 1-506-486-11 s CONNECTOR 7P, MALE
CN275 1-506-485-11 s CONNECTOR 6P, MALE
CN276 1-564-001-11 o CONNECTOR 2P, MALE

R1 1-216-295-91 s RES, CHIP 0
R2 1-216-295-91 s RES, CHIP 0
R5 1-216-646-11 s METAL, CHIP 620 0.5% 1/10W
R6 1-216-295-91 s RES, CHIP 0
R7 1-216-025-00 s METAL, CHIP 100 5% 1/10W

R8 1-216-295-91 s RES, CHIP 0
R11 1-216-295-91 s RES, CHIP 0
R12 1-216-295-91 s RES, CHIP 0
R21 1-216-295-91 s RES, CHIP 0
R22 1-216-295-91 s RES, CHIP 0

R25 1-216-646-11 s METAL, CHIP 620 0.5% 1/10W
R27 1-216-025-00 s METAL, CHIP 100 5% 1/10W
R28 1-216-295-91 s RES, CHIP 0
R31 1-216-295-91 s RES, CHIP 0

S1 1-570-157-11 s SWITCH, SLIDE
S2 1-570-157-11 s SWITCH, SLIDE

T1 1-427-586-11 s TRANSFORMER, INPUT/OUTPUT
T2 1-427-586-11 s TRANSFORMER, INPUT/OUTPUT

CP-226A BOARD(UVW-1600(UC))

Ref. No.
or Q'ty Part No. SP Description

CP-226A board is used for UVW-1600(UC).

1pc	A-8276-733-A	o MOUNTED CIRCUIT BOARD, CP-226A
C1	1-163-809-11	s CERAMIC, CHIP 0.047uF 10% 25V
C21	1-163-809-11	s CERAMIC, CHIP 0.047uF 10% 25V
CN102	1-750-785-11	s CONNECTOR, XLR 3P, MALE
CN274	1-506-486-11	s CONNECTOR 7P, MALE
CN276	1-564-001-11	o CONNECTOR 2P, MALE
R7	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R8	1-216-295-91	s RES, CHIP 0
R11	1-216-295-91	s RES, CHIP 0
R12	1-216-295-91	s RES, CHIP 0
R27	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R28	1-216-295-91	s RES, CHIP 0
R31	1-216-295-91	s RES, CHIP 0
T1	1-427-586-11	s TRANSFORMER, INPUT/OUTPUT
T2	1-427-586-11	s TRANSFORMER, INPUT/OUTPUT

CP-226J BOARD(UVW-1800(J))

Ref. No.
or Q'ty Part No. SP Description

CP-226J board is used for UVW-1800(J).

1pc	A-8276-762-A	o MOUNTED CIRCUIT BOARD, CP-226J
C1	1-163-809-11	s CERAMIC, CHIP 0.047uF 10% 25V
C21	1-163-809-11	s CERAMIC, CHIP 0.047uF 10% 25V
CN101	1-750-785-11	s CONNECTOR, XLR 3P, MALE
CN102	1-750-786-11	s CONNECTOR, XLR 3P, FEMALE
CN274	1-506-486-11	s CONNECTOR 7P, MALE
CN275	1-506-485-11	s CONNECTOR 6P, MALE
CN276	1-564-001-11	o CONNECTOR 2P, MALE
R3	1-216-295-91	s RES, CHIP 0
R4	1-216-295-91	s RES, CHIP 0
R5	1-216-646-11	s METAL, CHIP 620 0.5% 1/10W
R6	1-216-295-91	s RES, CHIP 0
R7	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R9	1-216-295-91	s RES, CHIP 0
R10	1-216-295-91	s RES, CHIP 0
R12	1-216-295-91	s RES, CHIP 0
R23	1-216-295-91	s RES, CHIP 0
R24	1-216-295-91	s RES, CHIP 0
R25	1-216-646-11	s METAL, CHIP 620 0.5% 1/10W
R27	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R29	1-216-295-91	s RES, CHIP 0
R30	1-216-295-91	s RES, CHIP 0
S1	1-570-157-11	s SWITCH, SLIDE
S2	1-570-157-11	s SWITCH, SLIDE
T1	1-427-586-11	s TRANSFORMER, INPUT/OUTPUT
T2	1-427-586-11	s TRANSFORMER, INPUT/OUTPUT

CP-226AJ BOARD(UVW-1600(J))

Ref. No.
or Q'ty Part No. SP Description

CP-226AJ board is used for UVW-1600(J).

1pc A-8276-763-A o MOUNTED CIRCUIT BOARD, CP-226AJ

C1 1-163-809-11 s CERAMIC, CHIP 0.047uF 10% 25V
C21 1-163-809-11 s CERAMIC, CHIP 0.047uF 10% 25V

CN102 1-750-786-11 s CONNECTOR, XLR 3P, FEMALE
CN274 1-506-486-11 s CONNECTOR 7P, MALE
CN276 1-564-001-11 o CONNECTOR 2P, MALE

R7 1-216-025-00 s METAL, CHIP 100 5% 1/10W
R9 1-216-295-91 s RES, CHIP 0
R10 1-216-295-91 s RES, CHIP 0
R12 1-216-295-91 s RES, CHIP 0
R27 1-216-025-00 s METAL, CHIP 100 5% 1/10W

R29 1-216-295-91 s RES, CHIP 0
R30 1-216-295-91 s RES, CHIP 0

T1 1-427-586-11 s TRANSFORMER, INPUT/OUTPUT
T2 1-427-586-11 s TRANSFORMER, INPUT/OUTPUT

CP-237 BOARD(UVW-1800)

Ref. No.
or Q'ty Part No. SP Description

1pc A-8276-741-A o MOUNTED CIRCUIT BOARD, CP-237

CN501 1-764-259-11 s CONNECTOR, D-SUB 15P, MALE
CN502 1-573-566-11 s CONNECTOR, D-SUB 9P, FEMALE
CN532 1-563-462-11 o CONNECTOR, FPC 17P

CP-237A BOARD(UVW-1600)

Ref. No.
or Q'ty Part No. SP Description

CP-237A board is used for UVW-1600.

1pc A-8276-734-A o MOUNTED CIRCUIT BOARD, CP-237A

CN501 1-764-259-11 s CONNECTOR, D-SUB 15P, MALE
CN502 1-573-566-11 s CONNECTOR, D-SUB 9P, FEMALE
CN532 1-563-462-11 o CONNECTOR, FPC 17P

DR-214 BOARD(UVW-1800/1600)

Ref. No.
or Q'ty Part No. SP Description

1pc A-8275-290-A o MOUNTED CIRCUIT BOARD, DR-214
1pc 1-532-679-00 s LINK, IC 0.6A
6pcs 4-911-232-01 s SHEET, INSULATING
1pc 3-182-357-01 o HEAT SINK (L), DR
1pc 3-182-358-01 o HEAT SINK (R), DR

16pcs 7-682-548-04 s SCREW, +B3x8
1pc 9-911-841-XX s CUSHION (B)

C1 1-126-940-11 s ELECT 330uF 20% 25V
C2 1-126-940-11 s ELECT 330uF 20% 25V
C3 1-126-933-11 s ELECT 100uF 20% 16V
C4 1-126-933-11 s ELECT 100uF 20% 16V
C5 1-124-589-11 s ELECT 47uF 20% 16V

C6 1-125-404-00 s DOUBLE LAYERS 0.47F 5.5V
C7 1-131-347-00 s TANTALUM 1uF 10% 35V
C8 1-126-940-11 s ELECT 330uF 20% 25V
C51 1-164-095-11 s CERAMIC 0.01uF 10% 16V
C52 1-164-095-11 s CERAMIC 0.01uF 10% 16V

C53 1-164-095-11 s CERAMIC 0.01uF 10% 16V
C54 1-164-095-11 s CERAMIC 0.01uF 10% 16V
C55 1-130-489-00 s MYLAR 0.033uF 5% 50V
C56 1-130-489-00 s MYLAR 0.033uF 5% 50V
C57 1-130-489-00 s MYLAR 0.033uF 5% 50V

C58 1-126-096-11 s ELECT 10uF 20% 35V
C59 1-126-096-11 s ELECT 10uF 20% 35V
C60 1-126-096-11 s ELECT 10uF 20% 35V
C61 1-164-097-11 s CERAMIC 0.022uF 50V
C62 1-164-097-11 s CERAMIC 0.022uF 50V

C101 1-164-095-11 s CERAMIC 0.01uF 10% 16V
C102 1-130-489-00 s MYLAR 0.033uF 5% 50V
C103 1-164-035-11 s CERAMIC 47pF 5% 50V
C104 1-164-035-11 s CERAMIC 47pF 5% 50V
C151-155 1-126-096-11 s ELECT 10uF 20% 35V

C156 1-164-095-11 s CERAMIC 0.01uF 10% 16V
C201 1-124-248-00 s ELECT 22uF 20% 35V
C202 1-124-248-00 s ELECT 22uF 20% 35V
C203 1-124-248-00 s ELECT 22uF 20% 35V
C204 1-124-248-00 s ELECT 22uF 20% 35V

C205 1-130-489-00 s MYLAR 0.033uF 5% 50V
C206 1-130-489-00 s MYLAR 0.033uF 5% 50V
C207 1-164-035-11 s CERAMIC 47pF 5% 50V
C208 1-164-035-11 s CERAMIC 47pF 5% 50V
C209 1-164-035-11 s CERAMIC 47pF 5% 50V

C210 1-164-097-11 s CERAMIC 0.022uF 50V
C211 1-164-097-11 s CERAMIC 0.022uF 50V
C212 1-164-035-11 s CERAMIC 47pF 5% 50V
C251 1-124-248-00 s ELECT 22uF 20% 35V
C252 1-124-248-00 s ELECT 22uF 20% 35V

C253 1-124-248-00 s ELECT 22uF 20% 35V
C254 1-124-248-00 s ELECT 22uF 20% 35V
C255 1-130-489-00 s MYLAR 0.033uF 5% 50V
C256 1-130-489-00 s MYLAR 0.033uF 5% 50V
C257 1-164-097-11 s CERAMIC 0.022uF 50V

C258 1-164-097-11 s CERAMIC 0.022uF 50V
C259 1-164-035-11 s CERAMIC 47pF 5% 50V
C260 1-164-035-11 s CERAMIC 47pF 5% 50V
C261 1-164-035-11 s CERAMIC 47pF 5% 50V
C264 1-164-035-11 s CERAMIC 47pF 5% 50V

C301 1-124-248-00 s ELECT 22uF 20% 35V

(DR-214 BOARD(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
C303	1-130-491-00	s MYLAR 0.047uF 5% 50V
C304	1-130-495-00	s MYLAR 0.1uF 5% 50V
C305	1-126-160-11	s ELECT 1uF 20% 50V
C306	1-126-096-11	s ELECT 10uF 20% 35V
C308	1-164-097-11	s CERAMIC 0.022uF 50V
C309	1-164-097-11	s CERAMIC 0.022uF 50V
C310	1-161-494-00	s CERAMIC 0.022uF 25V
C311	1-161-494-00	s CERAMIC 0.022uF 25V
C313	1-130-491-00	s MYLAR 0.047uF 5% 50V
C314	1-130-495-00	s MYLAR 0.1uF 5% 50V
C315	1-130-495-00	s MYLAR 0.1uF 5% 50V
C316	1-130-491-00	s MYLAR 0.047uF 5% 50V
C317	1-130-477-00	s MYLAR 0.0033uF 5% 50V
C318	1-162-290-31	s CERAMIC 470pF 10% 50V
C319	1-130-477-00	s MYLAR 0.0033uF 5% 50V
C320	1-126-096-11	s ELECT 10uF 20% 35V
C321	1-162-290-31	s CERAMIC 470pF 10% 50V
C322	1-162-282-31	s CERAMIC 100pF 10% 50V
C323	1-162-282-31	s CERAMIC 100pF 10% 50V
C324	1-126-096-11	s ELECT 10uF 20% 35V
C325	1-161-494-00	s CERAMIC 0.022uF 25V
C326	1-161-494-00	s CERAMIC 0.022uF 25V
C327	1-161-494-00	s CERAMIC 0.022uF 25V
C328	1-130-495-00	s MYLAR 0.1uF 5% 50V
C331	1-130-487-00	s MYLAR 0.022uF 5% 50V
C332	1-126-096-11	s ELECT 10uF 20% 35V
C333	1-130-495-00	s MYLAR 0.1uF 5% 50V
C335	1-130-491-00	s MYLAR 0.047uF 5% 50V
C337	1-162-288-31	s CERAMIC 330pF 10% 50V
C339	1-131-388-00	s TANTALUM 68uF 10% 6.3V
C340	1-131-388-00	s TANTALUM 68uF 10% 6.3V
C341	1-124-248-00	s ELECT 22uF 20% 35V
C343	1-124-248-00	s ELECT 22uF 20% 35V
C345	1-126-947-11	s ELECT 47uF 20% 35V
C349	1-164-097-11	s CERAMIC 0.022uF 50V
CN300	1-573-600-21	s CONNECTOR, PHEC 100P, MALE
CN301	1-563-017-11	o CONNECTOR, FPC 30P
CN302	1-563-017-11	o CONNECTOR, FPC 30P
CN303	1-563-017-11	o CONNECTOR, FPC 30P
D1	8-719-986-73	s DIODE RB441Q
D151-156	8-719-200-02	s DIODE 10E2
D301	8-719-911-19	s DIODE 1SS119
D302	8-719-911-19	s DIODE 1SS119
D303	8-719-911-19	s DIODE 1SS119
D304	8-719-911-19	s DIODE 1SS119
D306	8-719-911-19	s DIODE 1SS119
IC1	8-759-603-69	s IC M51957BL
IC51	8-759-106-41	s IC UPC4570C
IC52	8-759-801-95	s IC LB1620
IC151	8-759-205-56	s IC TA7267P
IC152	8-759-205-56	s IC TA7267P
IC153	8-759-205-56	s IC TA7267P
IC201	8-759-106-41	s IC UPC4570C
IC251	8-759-106-41	s IC UPC4570C
IC301	8-759-106-41	s IC UPC4570C
IC302	8-759-106-41	s IC UPC4570C
IC303	8-759-729-03	s IC NJM2903D
IC304	8-759-106-41	s IC UPC4570C

(DR-214 BOARD(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
IC305	8-759-106-41	s IC UPC4570C
IC306	8-759-729-03	s IC NJM2903D
IC307	8-759-140-53	s IC UPD4053BC
IC308	8-759-800-72	s IC LA7205
IC310	8-743-914-00	s IC BX3914
IC311	8-759-700-58	s IC NJM4558D-FA
IC313	8-759-140-53	s IC UPD4053BC
L1	1-412-533-21	s INDUCTOR 47uH
Q1	8-729-900-89	s TRANSISTOR DTC144ES
Q51	8-729-265-52	s TRANSISTOR 2SC2655-Y
Q52	8-729-021-83	s TRANSISTOR 2SA1020-Y-TPE6
Q53	8-729-400-12	s TRANSISTOR 2SB941-P
Q101	8-729-265-52	s TRANSISTOR 2SC2655-Y
Q102	8-729-021-83	s TRANSISTOR 2SA1020-Y-TPE6
Q103	8-729-400-12	s TRANSISTOR 2SB941-P
Q151	8-729-265-52	s TRANSISTOR 2SC2655-Y
Q152	8-729-141-83	s TRANSISTOR 2SA473-Y
Q153	8-729-265-52	s TRANSISTOR 2SC2655-Y
Q154	8-729-400-12	s TRANSISTOR 2SB941-P
Q155	8-729-021-83	s TRANSISTOR 2SA1020-Y-TPE6
Q201	8-729-265-52	s TRANSISTOR 2SC2655-Y
Q202	8-729-021-83	s TRANSISTOR 2SA1020-Y-TPE6
Q203	8-729-102-47	s TRANSISTOR 2SA1141-Q
Q204	8-729-102-57	s TRANSISTOR 2SC3012
Q205	8-729-102-14	s TRANSISTOR 2SD1021-F
Q206	8-729-205-02	s TRANSISTOR 2SA1150-Y
Q207	8-729-102-47	s TRANSISTOR 2SA1141-Q
Q208	8-729-102-57	s TRANSISTOR 2SC3012
Q251	8-729-265-52	s TRANSISTOR 2SC2655-Y
Q252	8-729-021-83	s TRANSISTOR 2SA1020-Y-TPE6
Q253	8-729-102-47	s TRANSISTOR 2SA1141-Q
Q254	8-729-102-57	s TRANSISTOR 2SC3012
Q255	8-729-102-14	s TRANSISTOR 2SD1021-F
Q256	8-729-205-02	s TRANSISTOR 2SA1150-Y
Q257	8-729-102-47	s TRANSISTOR 2SA1141-Q
Q258	8-729-102-57	s TRANSISTOR 2SC3012
Q301	8-729-900-89	s TRANSISTOR DTC144ES
Q302	8-729-900-89	s TRANSISTOR DTC144ES
Q303	8-729-119-76	s TRANSISTOR 2SA1115P
R1	△1-215-860-11	s METAL 33 5% 1W
R2	1-215-461-00	s METAL 47k 1% 1/6W
R3	1-215-457-00	s METAL 33k 1% 1/6W
R4	1-249-437-11	s CARBON 47k 5% 1/4W
R51	1-249-429-11	s CARBON 10k 5% 1/4W
R52	1-249-429-11	s CARBON 10k 5% 1/4W
R53	△1-216-389-11	s METAL 1 5% 3W
R54	1-249-437-11	s CARBON 47k 5% 1/4W
R55	1-249-437-11	s CARBON 47k 5% 1/4W
R56	1-249-393-11	s CARBON 10 5% 1/4W
R57	1-249-393-11	s CARBON 10 5% 1/4W
R58	1-249-393-11	s CARBON 10 5% 1/4W
R59	1-249-408-11	s CARBON 180 5% 1/4W
R60	1-249-406-11	s CARBON 120 5% 1/4W
R101	1-247-887-00	s CARBON 220k 5% 1/4W
R102	△1-215-863-11	s METAL 100 5% 1W
R103	△1-215-863-11	s METAL 100 5% 1W
R104	△1-216-383-11	s METAL 0.33 5% 3W

(DR-214 BOARD(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
R105	△1-216-365-00	s METAL 0.47 5% 2W
R106	1-249-429-11	s CARBON 10k 5% 1/4W
R107	1-249-429-11	s CARBON 10k 5% 1/4W
R108	1-249-437-11	s CARBON 47k 5% 1/4W
R109	1-249-437-11	s CARBON 47k 5% 1/4W
R151	1-249-429-11	s CARBON 10k 5% 1/4W
R152	1-249-429-11	s CARBON 10k 5% 1/4W
R153	1-249-429-11	s CARBON 10k 5% 1/4W
R154	△1-215-866-11	s METAL 330 5% 1W
R155-160	1-249-429-11	s CARBON 10k 5% 1/4W
R161	1-247-887-00	s CARBON 220k 5% 1/4W
R162	△1-215-863-11	s METAL 100 5% 1W
R163	△1-215-867-00	s METAL 470 5% 1W
R164	△1-215-868-00	s METAL 680 5% 1W
R165	△1-216-383-11	s METAL 0.33 5% 3W
R166	△1-216-383-11	s METAL 0.33 5% 3W
R167	△1-216-383-11	s METAL 0.33 5% 3W
R168	△1-216-385-11	s METAL 0.47 5% 3W
R201	1-249-429-11	s CARBON 10k 5% 1/4W
R202	1-249-417-11	s CARBON 1k 5% 1/4W
R203	1-249-417-11	s CARBON 1k 5% 1/4W
R204	1-249-429-11	s CARBON 10k 5% 1/4W
R205	1-249-417-11	s CARBON 1k 5% 1/4W
R206	△1-215-863-11	s METAL 100 5% 1W
R207	△1-215-889-00	s METAL 330 5% 2W
R208	△1-215-889-00	s METAL 330 5% 2W
R209	△1-215-863-11	s METAL 100 5% 1W
R210	1-249-417-11	s CARBON 1k 5% 1/4W
R211	1-249-417-11	s CARBON 1k 5% 1/4W
R212	△1-216-365-00	s METAL 0.47 5% 2W
R213	1-249-429-11	s CARBON 10k 5% 1/4W
R214	1-249-437-11	s CARBON 47k 5% 1/4W
R215	1-249-429-11	s CARBON 10k 5% 1/4W
R216	1-249-429-11	s CARBON 10k 5% 1/4W
R217	1-249-437-11	s CARBON 47k 5% 1/4W
R218	1-249-437-11	s CARBON 47k 5% 1/4W
R219	1-249-429-11	s CARBON 10k 5% 1/4W
R220	1-249-437-11	s CARBON 47k 5% 1/4W
R221	△1-216-365-00	s METAL 0.47 5% 2W
R251	1-249-429-11	s CARBON 10k 5% 1/4W
R252	1-249-417-11	s CARBON 1k 5% 1/4W
R253	1-249-417-11	s CARBON 1k 5% 1/4W
R254	1-249-429-11	s CARBON 10k 5% 1/4W
R255	1-249-417-11	s CARBON 1k 5% 1/4W
R256	△1-215-863-11	s METAL 100 5% 1W
R257	△1-215-889-00	s METAL 330 5% 2W
R258	△1-215-889-00	s METAL 330 5% 2W
R259	△1-215-863-11	s METAL 100 5% 1W
R260	1-249-417-11	s CARBON 1k 5% 1/4W
R261	1-249-417-11	s CARBON 1k 5% 1/4W
R262	1-249-437-11	s CARBON 47k 5% 1/4W
R263	△1-216-365-00	s METAL 0.47 5% 2W
R264	1-249-429-11	s CARBON 10k 5% 1/4W
R265	1-249-429-11	s CARBON 10k 5% 1/4W
R266	1-249-429-11	s CARBON 10k 5% 1/4W
R267	1-249-437-11	s CARBON 47k 5% 1/4W
R268	1-249-437-11	s CARBON 47k 5% 1/4W
R269	1-249-429-11	s CARBON 10k 5% 1/4W
R270	△1-216-365-00	s METAL 0.47 5% 2W

(DR-214 BOARD(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
R271	1-249-437-11	s CARBON 47k 5% 1/4W
R301	1-249-417-11	s CARBON 1k 5% 1/4W
R302	1-249-417-11	s CARBON 1k 5% 1/4W
R303	1-249-417-11	s CARBON 1k 5% 1/4W
R304	1-249-417-11	s CARBON 1k 5% 1/4W
R305	1-249-433-11	s CARBON 22k 5% 1/4W
R306	1-249-433-11	s CARBON 22k 5% 1/4W
R307	1-247-885-00	s CARBON 180k 5% 1/4W
R308	1-249-426-11	s CARBON 5.6k 5% 1/4W
R309	1-249-429-11	s CARBON 10k 5% 1/4W
R310	1-249-429-11	s CARBON 10k 5% 1/4W
R311	1-249-441-11	s CARBON 100k 5% 1/4W
R312	1-249-441-11	s CARBON 100k 5% 1/4W
R313	1-249-429-11	s CARBON 10k 5% 1/4W
R314	1-249-433-11	s CARBON 22k 5% 1/4W
R315	1-249-417-11	s CARBON 1k 5% 1/4W
R316	1-247-895-00	s CARBON 470k 5% 1/4W
R317	1-249-421-11	s CARBON 2.2k 5% 1/4W
R318	1-249-421-11	s CARBON 2.2k 5% 1/4W
R319	1-215-429-00	s METAL 2.2k 1% 1/6W
R320	1-215-429-00	s METAL 2.2k 1% 1/6W
R321	1-215-461-00	s METAL 47k 1% 1/6W
R322	1-215-461-00	s METAL 47k 1% 1/6W
R323	1-249-426-11	s CARBON 5.6k 5% 1/4W
R324	1-249-426-11	s CARBON 5.6k 5% 1/4W
R325	1-215-481-00	s METAL 330k 1% 1/6W
R326	1-249-441-11	s CARBON 100k 5% 1/4W
R327	1-249-435-11	s CARBON 33k 5% 1/4W
R328	1-249-441-11	s CARBON 100k 5% 1/4W
R329	1-249-429-11	s CARBON 10k 5% 1/4W
R330	1-249-441-11	s CARBON 100k 5% 1/4W
R331	1-249-435-11	s CARBON 33k 5% 1/4W
R332	1-249-429-11	s CARBON 10k 5% 1/4W
R333	1-249-441-11	s CARBON 100k 5% 1/4W
R334	1-215-481-00	s METAL 330k 1% 1/6W
R335	1-247-903-00	s CARBON 1M 5% 1/4W
R336	1-247-903-00	s CARBON 1M 5% 1/4W
R337	1-249-429-11	s CARBON 10k 5% 1/4W
R338	1-249-429-11	s CARBON 10k 5% 1/4W
R339	1-249-437-11	s CARBON 47k 5% 1/4W
R340	1-249-425-11	s CARBON 4.7k 5% 1/4W
R341	1-215-416-00	s METAL 620 1% 1/6W
R342	1-249-425-11	s CARBON 4.7k 5% 1/4W
R343	1-249-437-11	s CARBON 47k 5% 1/4W
R344	1-215-461-00	s METAL 47k 1% 1/6W
R345	1-215-461-00	s METAL 47k 1% 1/6W
R346	1-249-418-11	s CARBON 1.2k 5% 1/4W
R347	1-249-437-11	s CARBON 47k 5% 1/4W
R349	1-249-429-11	s CARBON 10k 5% 1/4W
R350	1-249-427-11	s CARBON 6.8k 5% 1/4W
R351	1-259-882-11	s CARBON 3.3M 5% 1/4W
R352	1-249-429-11	s CARBON 10k 5% 1/4W
R353	1-249-429-11	s CARBON 10k 5% 1/4W
R354	1-249-429-11	s CARBON 10k 5% 1/4W
R356	1-249-427-11	s CARBON 6.8k 5% 1/4W
R357	1-249-425-11	s CARBON 4.7k 5% 1/4W
R358	△1-215-886-11	s METAL 100 5% 2W

HP-61 BOARD(UVW-1800)

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-648-917-11	o PRINTED CIRCUIT BOARD, HP-61
CN401	1-506-475-11	s CONNECTOR 10P, MALE
CN403	1-564-002-41	s CONNECTOR 3P, MALE
J1	1-507-863-51	s JACK, PHONE
J2	1-507-743-21	s JACK, MINI STEREO
RV1	1-241-577-11	s RES, VAR CARBON 20k/20k

HP-61A BOARD(UVW-1600)

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-648-917-21	o PRINTED CIRCUIT BOARD, HP-61A
CN401	1-506-475-11	s CONNECTOR 10P, MALE
CN403	1-564-002-41	s CONNECTOR 3P, MALE
J1	1-507-863-51	s JACK, PHONE
J2	1-507-743-21	s JACK, MINI STEREO
RV1	1-241-577-11	s RES, VAR CARBON 20k/20k

KY-249 BOARD(UVW-1800)

Ref. No. or Q'ty	Part No.	SP Description
KY-249 board is used for UVW-1800.		
1pc	A-8275-289-A	o MOUNTED CIRCUIT BOARD, KY-249
1pc	3-182-359-02	o HOLDER, VFD
C1	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C3	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C4	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C5	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C6	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C7	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C8	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C14	1-126-400-11	s ELECT, CHIP 22uF 20% 35V
C15	1-126-400-11	s ELECT, CHIP 22uF 20% 35V
C16-C20	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C21	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C22	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C25	1-163-133-00	s CERAMIC, CHIP 470pF 5% 50V
C26	1-163-133-00	s CERAMIC, CHIP 470pF 5% 50V
CN590	1-506-494-11	s CONNECTOR 15P, MALE
CN591	1-563-003-21	o CONNECTOR, FPC 20P
CN592	1-564-014-11	s CONNECTOR 4P, MALE
CN593	1-563-003-21	o CONNECTOR, FPC 20P
D1	8-719-123-85	s DIODE 1SS304
D2-D11	8-719-123-82	s DIODE 1SS303-T1
IC1	8-759-505-99	s IC MSC7128-04GS-V1K
IC2	8-759-150-61	s IC UPC78L05T
IC3	8-759-194-79	s IC UPD750286C-542-AB8
IC6	8-759-925-74	s IC TC74HCO4NS
ND1	1-517-246-11	s UNIT, FLD
Q1-Q8	8-729-924-19	s TRANSISTOR DTA123JU
Q9-Q33	8-729-905-12	s TRANSISTOR DTA144EU
Q34	8-729-924-19	s TRANSISTOR DTA123JU
Q35	8-729-924-19	s TRANSISTOR DTA123JU
Q36-Q41	8-729-905-12	s TRANSISTOR DTA144EU
Q42	8-729-924-19	s TRANSISTOR DTA123JU
R1	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R3	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R4	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R5	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R6	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R7-R19	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R22	1-216-011-00	s METAL 27 5% 1/10W
R23	1-216-011-00	s METAL 27 5% 1/10W
R25	1-216-011-00	s METAL 27 5% 1/10W
R26	1-216-011-00	s METAL 27 5% 1/10W
R27	1-216-011-00	s METAL 27 5% 1/10W
R28	1-216-019-00	s METAL, CHIP 56 5% 1/10W
R29-R63	1-216-103-00	s METAL, CHIP 180k 5% 1/10W
R76	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R77-R82	1-216-083-00	s METAL, CHIP 27k 5% 1/10W
R83	1-216-103-00	s METAL, CHIP 180k 5% 1/10W
R84	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R85	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R1021	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R1022	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
RV1	1-237-695-11	s RES, VAR CARBON 5k

(KY-249 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
RV2	1-237-695-11	s RES, VAR CARBON 5k
S1	1-692-609-11	s SWITCH, PUSH
S2	1-692-609-21	s SWITCH, PUSH
S3	1-692-612-41	s SWITCH, PUSH
S4	1-692-612-31	s SWITCH, PUSH
S5	1-692-612-21	s SWITCH, PUSH
S7	1-692-611-21	s SWITCH, PUSH
S8	1-571-787-11	s SWITCH, PUSH
S9	1-571-787-11	s SWITCH, PUSH
S10	1-571-787-11	s SWITCH, PUSH
S11	1-571-787-11	s SWITCH, PUSH
S12	1-571-787-11	s SWITCH, PUSH
S13	1-571-787-11	s SWITCH, PUSH
S14	1-571-787-11	s SWITCH, PUSH
S15	1-571-787-11	s SWITCH, PUSH
S16	1-572-992-11	s SWITCH, SLIDE
S17	1-572-992-11	s SWITCH, SLIDE
S18	1-571-787-11	s SWITCH, PUSH
S19	1-571-640-21	s SWITCH, SLIDE
S20	1-571-640-21	s SWITCH, SLIDE
S21	1-571-640-21	s SWITCH, SLIDE
X1	1-577-101-11	s RESONATOR CERAMIC 4.19MHz

KY-249A BOARD(UVW-1600)

Ref. No. or Q'ty	Part No.	SP Description
---------------------	----------	----------------

KY-249A board is used for UVW-1600.

1pc	A-8275-283-A	o MOUNTED CIRCUIT BOARD, KY-249A
1pc	3-182-359-02	o HOLDER, VFD
C1	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C3	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C4	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C5	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C6	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C7	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C8	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C14	1-126-400-11	s ELECT, CHIP 22uF 20% 35V
C15	1-126-400-11	s ELECT, CHIP 22uF 20% 35V
C16-C20	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C21	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C22	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C25	1-163-133-00	s CERAMIC, CHIP 470pF 5% 50V
C26	1-163-133-00	s CERAMIC, CHIP 470pF 5% 50V
CN590	1-506-494-11	s CONNECTOR 15P, MALE
CN591	1-563-003-21	o CONNECTOR, FPC 20P
CN592	1-564-014-11	s CONNECTOR 4P, MALE
CN593	1-563-003-21	o CONNECTOR, FPC 20P
D1	8-719-123-85	s DIODE 1SS304
D2-D11	8-719-123-82	s DIODE 1SS303-T1
IC1	8-759-505-99	s IC MSC7128-04GS-V1K
IC2	8-759-150-61	s IC UPC78L05T
IC3	8-759-194-79	s IC UPD75028GC-542-AB8
IC6	8-759-925-74	s IC TC74HC04NS
ND1	1-517-246-11	s UNIT, FLD
Q1-Q8	8-729-924-19	s TRANSISTOR DTA123JU
Q9-Q33	8-729-905-12	s TRANSISTOR DTA144EU
Q34	8-729-924-19	s TRANSISTOR DTA123JU
Q35	8-729-924-19	s TRANSISTOR DTA123JU
Q36-Q40	8-729-905-12	s TRANSISTOR DTA144EU
Q42	8-729-924-19	s TRANSISTOR DTA123JU
R1	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R3	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R4	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R5	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R6	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R7	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R10-R19	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R22	1-216-011-00	s METAL 27 5% 1/10W
R23	1-216-011-00	s METAL 27 5% 1/10W
R25	1-216-011-00	s METAL 27 5% 1/10W
R26	1-216-011-00	s METAL 27 5% 1/10W
R27	1-216-011-00	s METAL 27 5% 1/10W
R29-R63	1-216-103-91	s METAL, CHIP 180k 5% 1/10W
R76	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R77-R81	1-216-083-00	s METAL, CHIP 27k 5% 1/10W
R83	1-216-103-91	s METAL, CHIP 180k 5% 1/10W
R84	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R85	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R1021	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R1022	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
RV1	1-237-695-11	s RES, VAR CARBON 5k

(KY-249A BOARD(UVW-1600))

Ref. No. or Q'ty	Part No.	SP Description
RV2	1-237-695-11	s RES, VAR CARBON 5k
S1	1-692-609-11	s SWITCH, PUSH
S2	1-692-609-21	s SWITCH, PUSH
S3	1-692-612-41	s SWITCH, PUSH
S4	1-692-612-31	s SWITCH, PUSH
S5	1-692-612-21	s SWITCH, PUSH
S8	1-571-787-11	s SWITCH, PUSH
S9	1-571-787-11	s SWITCH, PUSH
S10	1-571-787-11	s SWITCH, PUSH
S11	1-571-787-11	s SWITCH, PUSH
S12	1-571-787-11	s SWITCH, PUSH
S13	1-571-787-11	s SWITCH, PUSH
S15	1-571-787-11	s SWITCH, PUSH
S16	1-572-992-11	s SWITCH, SLIDE
S18	1-571-787-11	s SWITCH, PUSH
S20	1-571-640-21	s SWITCH, SLIDE
S21	1-571-640-21	s SWITCH, SLIDE
X1	1-577-101-11	s RESONATOR CERAMIC 4.19MHz

MB-470 BOARD(UVW-1800)

Ref. No. or Q'ty	Part No.	SP Description
---------------------	----------	----------------

MB-470 board is used for UVW-1800.

1pc	A-8276-736-A	o MOUNTED CIRCUIT BOARD, MB-470
1pc	3-683-631-01	o CLAMP
C1	1-126-964-11	s ELECT 10uF 20% 50V
C2	1-126-964-11	s ELECT 10uF 20% 50V
CN101	1-573-784-71	o CONNECTOR, DIN 60P, FEMALE
CN102	1-573-784-71	o CONNECTOR, DIN 60P, FEMALE
CN103	1-573-784-71	o CONNECTOR, DIN 60P, FEMALE
CN104	1-573-784-71	o CONNECTOR, DIN 60P, FEMALE
CN105	1-573-784-71	o CONNECTOR, DIN 60P, FEMALE
CN106	1-573-784-71	o CONNECTOR, DIN 60P, FEMALE
CN107	1-573-784-71	o CONNECTOR, DIN 60P, FEMALE
CN108	1-573-784-71	o CONNECTOR, DIN 60P, FEMALE
CN109	1-573-784-71	o CONNECTOR, DIN 60P, FEMALE
CN200	1-564-905-11	o CONNECTOR, VH 9P, MALE
CN201	1-564-512-11	o CONNECTOR 9P, MALE
CN211	1-506-491-11	s CONNECTOR 12P, MALE
CN214	1-580-195-21	s CONNECTOR, PHEC 100P, FEMALE
CN231	1-563-018-11	o CONNECTOR, FPC 34P
CN232	1-563-462-11	o CONNECTOR, FPC 17P
CN235	1-564-013-41	s CONNECTOR 3P, MALE
CN262	1-506-494-11	s CONNECTOR 15P, MALE
CN266	1-506-469-11	s CONNECTOR 4P, MALE
CN267	1-506-472-11	s CONNECTOR 7P, MALE
CN268	1-506-479-11	s CONNECTOR 14P MALE
CN269	1-564-005-11	o CONNECTOR 6P, MALE
CN271	1-564-011-11	o CONNECTOR 12P, MALE
F1	△1-532-777-21	s FUSE 1.25A 125V
F2	△1-532-777-21	s FUSE 1.25A 125V
F3	△1-532-777-21	s FUSE 1.25A 125V
IC1	8-759-701-59	s IC NJM78M09FA
IC2	8-759-982-54	s IC RC79M09FA

MB-470A BOARD(UVW-1600)

Ref. No.
or Q'ty Part No. SP Description

MB-470A board is used for UVW-1600.

1pc	A-8276-730-A	o MOUNTED CIRCUIT BOARD, MB-470A
1pc	3-683-631-01	o CLAMP
C1	1-126-964-11	s ELECT 10uF 20% 50V
C2	1-126-964-11	s ELECT 10uF 20% 50V
CN103	1-573-784-71	o CONNECTOR, DIN 60P, FEMALE
CN104	1-573-784-71	o CONNECTOR, DIN 60P, FEMALE
CN105	1-573-784-71	o CONNECTOR, DIN 60P, FEMALE
CN106	1-573-784-71	o CONNECTOR, DIN 60P, FEMALE
CN107	1-573-784-71	o CONNECTOR, DIN 60P, FEMALE
CN108	1-573-784-71	o CONNECTOR, DIN 60P, FEMALE
CN109	1-573-784-71	o CONNECTOR, DIN 60P, FEMALE
CN200	1-564-905-11	o CONNECTOR, VH 9P, MALE
CN201	1-564-512-11	o CONNECTOR 9P, MALE
CN211	1-506-491-11	s CONNECTOR 12P, MALE
CN214	1-580-195-21	s CONNECTOR, PHEC 100P, FEMALE
CN231	1-563-018-11	o CONNECTOR, FPC 34P
CN232	1-563-462-11	o CONNECTOR, FPC 17P
CN235	1-564-013-41	s CONNECTOR 3P, MALE
CN262	1-506-494-11	s CONNECTOR 15P, MALE
CN266	1-506-469-11	s CONNECTOR 4P, MALE
CN267	1-506-472-11	s CONNECTOR 7P, MALE
CN268	1-506-479-11	s CONNECTOR 14P MALE
CN269	1-564-005-11	o CONNECTOR 6P, MALE
F1	▲1-532-777-21	s FUSE 1.25A 125V
F2	▲1-532-777-21	s FUSE 1.25A 125V
F3	▲1-532-777-21	s FUSE 1.25A 125V
IC1	8-759-701-59	s IC NJM78M09FA
IC2	8-759-982-54	s IC RC79M09FA

MB-471 BOARD(UVW-1800)

Ref. No.
or Q'ty Part No. SP Description

MB-471 board is used for UVW-1800.

1pc	A-8276-737-A	o MOUNTED CIRCUIT BOARD, MB-471
CN110	1-573-598-11	s CONNECTOR, PHEC 100P, FEMALE
CN111	1-573-598-11	s CONNECTOR, PHEC 100P, FEMALE
CN112	1-573-598-11	s CONNECTOR, PHEC 100P, FEMALE
CN251	1-564-524-11	s CONNECTOR 9P, MALE
CN261	1-506-491-11	s CONNECTOR 12P, MALE
CN263	1-506-481-11	s CONNECTOR 2P, MALE
CN264	1-506-486-11	s CONNECTOR 7P, MALE
CN265	1-564-013-11	o CONNECTOR 3P, MALE
CN274	1-506-486-11	s CONNECTOR 7P, MALE
CN275	1-506-485-11	s CONNECTOR 6P, MALE
CN276	1-506-485-11	s CONNECTOR 6P, MALE
CN277	1-564-014-11	s CONNECTOR 4P, MALE
CN278	1-506-489-11	o CONNECTOR 10P, MALE
CN281	1-563-018-11	o CONNECTOR, FPC 34P

MB-471A BOARD(UVW-1600)

Ref. No.
or Q'ty Part No. SP Description

MB-471A board is used for UVW-1600.

1pc	A-8276-731-A	o MOUNTED CIRCUIT BOARD, MB-471A
CN110	1-573-598-11	s CONNECTOR, PHEC 100P, FEMALE
CN111	1-573-598-11	s CONNECTOR, PHEC 100P, FEMALE
CN251	1-564-524-11	s CONNECTOR 9P, MALE
CN261	1-506-491-11	s CONNECTOR 12P, MALE
CN263	1-506-481-11	s CONNECTOR 2P, MALE
CN274	1-506-486-11	s CONNECTOR 7P, MALE
CN277	1-564-014-11	s CONNECTOR 4P, MALE
CN278	1-506-489-11	o CONNECTOR 10P, MALE
CN281	1-563-018-11	o CONNECTOR, FPC 34P

MS-39 BOARD(UVW-1800)

Ref. No.
or Q'ty Part No. SP Description

MS-39 board is used for UVW-1800.

1pc A-8275-291-A o MOUNTED CIRCUIT BOARD, MS-39
1pc 3-182-355-01 o COVER, MC SENSOR
2pcs 3-180-854-02 o COVER, MR SENSOR

C3 1-164-097-11 s CERAMIC 0.022uF 50V
C5 1-126-933-11 s ELECT 100uF 20% 16V
C6 1-164-097-11 s CERAMIC 0.022uF 50V
C11 1-126-947-11 s ELECT 47uF 20% 35V
C12 1-126-947-11 s ELECT 47uF 20% 35V

C13 1-164-097-11 s CERAMIC 0.022uF 50V
C14 1-130-728-00 s FILM 0.0022uF 1% 100V
C15 1-130-728-00 s FILM 0.0022uF 1% 100V
C16 1-164-097-11 s CERAMIC 0.022uF 50V

CN350 1-564-011-11 o CONNECTOR 12P, MALE
CN351 1-506-469-11 s CONNECTOR 4P, MALE
CN352 1-564-001-11 o CONNECTOR 2P, MALE
CN353 1-506-472-11 s CONNECTOR 7P, MALE
CN354 1-506-480-11 s CONNECTOR 15P, MALE

CN355 1-564-007-11 o CONNECTOR 8P, MALE
CN356 1-562-708-11 o CONNECTOR, FPC 13P
CN357 1-562-708-11 o CONNECTOR, FPC 13P
CN358 1-564-005-11 o CONNECTOR 6P, MALE
CN359 1-506-469-11 s CONNECTOR 4P, MALE

CN360 1-506-469-11 s CONNECTOR 4P, MALE
CN361 1-506-468-11 s CONNECTOR 3P, MALE
CN362 1-562-993-11 o CONNECTOR, FPC 30P
CN363 1-562-993-11 o CONNECTOR, FPC 30P
CN364 1-562-993-11 o CONNECTOR, FPC 30P

D1 8-719-938-07 s LED GL480, INFRARED
D2 8-719-938-07 s LED GL480, INFRARED
D3 8-719-938-07 s LED GL480, INFRARED
D4 8-719-938-07 s LED GL480, INFRARED
D7 8-719-933-30 s DIODE DA210S

D8 8-719-933-30 s DIODE DA210S
D9 8-719-933-30 s DIODE DA210S
D10 8-719-933-30 s DIODE DA210S

IC1 8-759-196-00 s IC UPD75048CW-018
IC2 8-759-600-34 s IC M54532P
IC3 8-759-645-23 s IC M54523P
IC7 8-759-189-43 s IC AN77L05-TA
IC8 8-759-507-17 s IC PQ30RV1

Q1 8-729-903-81 s PHOTOTRANSISTOR PT480
Q2 8-729-903-81 s PHOTOTRANSISTOR PT480
Q3 8-729-903-81 s PHOTOTRANSISTOR PT480
Q4 8-729-903-81 s PHOTOTRANSISTOR PT480

R2 1-249-437-11 s CARBON 47k 5% 1/4W
R3 1-249-429-11 s CARBON 10k 5% 1/4W
R5 1-249-437-11 s CARBON 47k 5% 1/4W
R6 1-249-429-11 s CARBON 10k 5% 1/4W
R7 1-249-409-11 s CARBON 220 5% 1/4W

R8 1-249-437-11 s CARBON 47k 5% 1/4W
R9 1-249-429-11 s CARBON 10k 5% 1/4W
R10 1-249-409-11 s CARBON 220 5% 1/4W
R11 1-249-437-11 s CARBON 47k 5% 1/4W
R12 1-249-429-11 s CARBON 10k 5% 1/4W

R13 1-249-409-11 s CARBON 220 5% 1/4W
R14 1-249-437-11 s CARBON 47k 5% 1/4W

(MS-39 BOARD(UVW-1800))

Ref. No.
or Q'ty Part No. SP Description

R15 1-249-429-11 s CARBON 10k 5% 1/4W
R16 1-249-409-11 s CARBON 220 5% 1/4W
R17 1-249-437-11 s CARBON 47k 5% 1/4W
R18 1-249-429-11 s CARBON 10k 5% 1/4W
R19-R24 1-249-437-11 s CARBON 47k 5% 1/4W

R25-R30 1-249-429-11 s CARBON 10k 5% 1/4W
R31 1-249-437-11 s CARBON 47k 5% 1/4W
R32 1-249-437-11 s CARBON 47k 5% 1/4W
R34 1-249-417-11 s CARBON 1k 5% 1/4W
R35 1-249-417-11 s CARBON 1k 5% 1/4W

R36 1-249-417-11 s CARBON 1k 5% 1/4W
R37 1-249-417-11 s CARBON 1k 5% 1/4W
R38 1-249-437-11 s CARBON 47k 5% 1/4W
R42 1-249-429-11 s CARBON 10k 5% 1/4W
R43 1-249-429-11 s CARBON 10k 5% 1/4W

R44 1-247-895-00 s CARBON 470k 5% 1/4W
R46 1-249-437-11 s CARBON 47k 5% 1/4W
R47 1-249-429-11 s CARBON 10k 5% 1/4W
R49 1-249-437-11 s CARBON 47k 5% 1/4W
R50 1-249-429-11 s CARBON 10k 5% 1/4W

R51 1-249-429-11 s CARBON 10k 5% 1/4W
R52 1-249-429-11 s CARBON 10k 5% 1/4W
R53 1-249-429-11 s CARBON 10k 5% 1/4W
R63 1-249-429-11 s CARBON 10k 5% 1/4W
R64 1-215-432-00 s METAL 3k 1% 1/6W

R65 1-215-411-00 s METAL 390 1% 1/6W

X1 1-579-232-11 s RESONATOR CERAMIC 2.50MHz

MS-39A BOARD(UVW-1600)

Ref. No.
or Q'ty Part No. SP Description

MS-39A board is used for UVW-1600.

1pc	A-8275-288-A	o MOUNTED CIRCUIT BOARD, MS-39A
1pc	3-182-355-01	o COVER, MC SENSOR
C3	1-164-097-11	s CERAMIC 0.022uF 50V
C5	1-126-933-11	s ELECT 100uF 20% 16V
C6	1-164-097-11	s CERAMIC 0.022uF 50V
C11	1-126-947-11	s ELECT 47uF 20% 35V
C12	1-126-947-11	s ELECT 47uF 20% 35V
C13	1-164-097-11	s CERAMIC 0.022uF 50V
C14	1-130-728-00	s FILM 0.0022uF 1% 100V
C15	1-130-728-00	s FILM 0.0022uF 1% 100V
C16	1-164-097-11	s CERAMIC 0.022uF 50V
CN350	1-564-011-11	o CONNECTOR 12P, MALE
CN351	1-506-469-11	s CONNECTOR 4P, MALE
CN352	1-564-001-11	o CONNECTOR 2P, MALE
CN353	1-506-472-11	s CONNECTOR 7P, MALE
CN354	1-506-480-11	s CONNECTOR 15P, MALE
CN355	1-564-007-11	o CONNECTOR 8P, MALE
CN356	1-562-708-11	o CONNECTOR, FPC 13P
CN357	1-562-708-11	o CONNECTOR, FPC 13P
CN358	1-564-005-11	o CONNECTOR 6P, MALE
CN359	1-506-469-11	s CONNECTOR 4P, MALE
CN360	1-506-469-11	s CONNECTOR 4P, MALE
CN361	1-506-468-11	s CONNECTOR 3P, MALE
CN362	1-562-993-11	o CONNECTOR, FPC 30P
CN363	1-562-993-11	o CONNECTOR, FPC 30P
CN364	1-562-993-11	o CONNECTOR, FPC 30P
D1	8-719-938-07	s LED GL480, INFRARED
D2	8-719-938-07	s LED GL480, INFRARED
D7	8-719-933-30	s DIODE DA210S
D8	8-719-933-30	s DIODE DA210S
D9	8-719-933-30	s DIODE DA210S
D10	8-719-933-30	s DIODE DA210S
IC1	8-759-196-00	s IC UPD75048CW-018
IC2	8-759-600-34	s IC M54532P
IC3	8-759-645-23	s IC M54523P
IC7	8-759-189-43	s IC AN77L05-TA
IC8	8-759-507-17	s IC PQ30RV1
Q1	8-729-903-81	s PHOTOTRANSISTOR PT480
Q2	8-729-903-81	s PHOTOTRANSISTOR PT480
R2	1-249-437-11	s CARBON 47k 5% 1/4W
R3	1-249-429-11	s CARBON 10k 5% 1/4W
R5	1-249-437-11	s CARBON 47k 5% 1/4W
R6	1-249-429-11	s CARBON 10k 5% 1/4W
R7	1-249-409-11	s CARBON 220 5% 1/4W
R8	1-249-437-11	s CARBON 47k 5% 1/4W
R9	1-249-429-11	s CARBON 10k 5% 1/4W
R10	1-249-409-11	s CARBON 220 5% 1/4W
R11	1-249-437-11	s CARBON 47k 5% 1/4W
R12	1-249-429-11	s CARBON 10k 5% 1/4W
R14	1-249-437-11	s CARBON 47k 5% 1/4W
R15	1-249-429-11	s CARBON 10k 5% 1/4W
R17	1-249-437-11	s CARBON 47k 5% 1/4W
R18	1-249-429-11	s CARBON 10k 5% 1/4W
R19-R24	1-249-437-11	s CARBON 47k 5% 1/4W
R25-R30	1-249-429-11	s CARBON 10k 5% 1/4W

(MS-39A BOARD(UVW-1600))

Ref. No.
or Q'ty Part No. SP Description

R31	1-249-437-11	s CARBON 47k 5% 1/4W
R32	1-249-437-11	s CARBON 47k 5% 1/4W
R34	1-249-417-11	s CARBON 1k 5% 1/4W
R35	1-249-417-11	s CARBON 1k 5% 1/4W
R36	1-249-417-11	s CARBON 1k 5% 1/4W
R37	1-249-417-11	s CARBON 1k 5% 1/4W
R38	1-249-437-11	s CARBON 47k 5% 1/4W
R42	1-249-429-11	s CARBON 10k 5% 1/4W
R43	1-249-429-11	s CARBON 10k 5% 1/4W
R44	1-247-895-00	s CARBON 470k 5% 1/4W
R46	1-249-437-11	s CARBON 47k 5% 1/4W
R47	1-249-429-11	s CARBON 10k 5% 1/4W
R49	1-249-437-11	s CARBON 47k 5% 1/4W
R50	1-249-429-11	s CARBON 10k 5% 1/4W
R51	1-249-429-11	s CARBON 10k 5% 1/4W
R52	1-249-429-11	s CARBON 10k 5% 1/4W
R53	1-249-429-11	s CARBON 10k 5% 1/4W
R63	1-249-429-11	s CARBON 10k 5% 1/4W
R64	1-215-432-00	s METAL 3k 1% 1/6W
R65	1-215-411-00	s METAL 390 1% 1/6W
X1	1-579-232-11	s RESONATOR CERAMIC 2.50MHZ

PC-62 BOARD(UVW-1800/1600)

Ref. No.
or Q'ty Part No. SP Description

Two PC-62 boards are used in UVW-1800/1600.
One board has the following parts.

1pc	1-640-171-12	o PRINTED CIRCUIT BOARD, PC-62
1pc	3-176-598-02	o SPRING, GROUND
CN934	1-565-038-11	s CONNECTOR, FPC 5P
PH1	8-719-939-05	s PHOTOINTERRUPTER GP-1S54
PH2	8-719-939-05	s PHOTOINTERRUPTER GP-1S54
PH3	8-719-939-05	s PHOTOINTERRUPTER GP-1S54
R1	1-249-414-11	s CARBON 560 5% 1/4W
R2	1-249-414-11	s CARBON 560 5% 1/4W
R3	1-249-414-11	s CARBON 560 5% 1/4W

PD-35 BOARD(UVW-1800/1600)

Ref. No.
or Q'ty Part No. SP Description

1pc	1-622-596-11	o PRINTED CIRCUIT BOARD, PD-35
CN85	1-564-001-11	o CONNECTOR 2P, MALE
CN854	1-564-005-11	o CONNECTOR 6P, MALE

PTC-66 BOARD(UVW-1800/1600)

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-648-926-11	o PRINTED CIRCUIT BOARD, PTC-66
CN944	1-564-014-11	s CONNECTOR 4P, MALE
PH1	8-719-939-05	s PHOTOINTERRUPTER GP-1S54
PH2	8-719-939-05	s PHOTOINTERRUPTER GP-1S54
R1	1-249-409-11	s CARBON 220 5% 1/4W
R2	1-249-409-11	s CARBON 220 5% 1/4W

PTC-67 BOARD(UVW-1800/1600)

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-648-922-11	o PRINTED CIRCUIT BOARD, PTC-67
C1	1-164-096-11	s CERAMIC 0.01uF 50V
CN941	1-506-472-11	s CONNECTOR 7P, MALE
CN942	1-564-001-11	o CONNECTOR 2P, MALE
CN943	1-506-481-11	s CONNECTOR 2P, MALE
PH1	8-719-939-05	s PHOTOINTERRUPTER GP-1S54
R1	1-249-408-11	s CARBON 180 5% 1/4W

PTC-68 BOARD(UVW-1800/1600)

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-648-927-11	o PRINTED CIRCUIT BOARD, PTC-68
CN940	1-506-469-11	s CONNECTOR 4P, MALE
PH1	8-719-939-05	s PHOTOINTERRUPTER GP-1S54
PH2	8-719-939-05	s PHOTOINTERRUPTER GP-1S54
R1	1-249-409-11	s CARBON 220 5% 1/4W
R2	1-249-409-11	s CARBON 220 5% 1/4W

RM-126 BOARD(UVW-1800/1600)

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-648-924-11	o PRINTED CIRCUIT BOARD, RM-126
CN946	1-563-233-11	o CONNECTOR, FPC 13P
CN947	1-564-014-11	s CONNECTOR 4P, MALE
CN948	1-564-718-11	o CONNECTOR 2P, MALE
CN949	1-564-013-11	o CONNECTOR 3P, MALE

RM-127 BOARD(UVW-1800/1600)

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-648-925-11	o PRINTED CIRCUIT BOARD, RM-127
CN951	1-563-233-11	o CONNECTOR, FPC 13P
CN952	1-564-014-11	s CONNECTOR 4P, MALE
CN953	1-564-718-11	o CONNECTOR 2P, MALE
CN954	1-564-013-11	o CONNECTOR 3P, MALE

RP-70 BOARD(UVW-1800)

Ref. No.
or Q'ty Part No. SP Description

RP-70 board is used for UVW-1800.

1pc	A-8275-285-A	o MOUNTED CIRCUIT BOARD, RP-70
1pc	3-182-385-01	o PLATE, SHIELD (S), CARD
1pc	7-621-759-45	s SCREW, +PSW2.6x6
1pc	8-769-401-59	s TRANSISTOR 2SK613-3
1pc	3-179-084-01	s LEVER (R), PC BOARD
1pc	3-179-085-01	s LEVER (L), PC BOARD
C2	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C3	1-126-933-11	s ELECT 100uF 20% 16V
C4	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C5	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C6	1-126-933-11	s ELECT 100uF 20% 16V
C7	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C8	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C11	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C12	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C13	1-126-933-11	s ELECT 100uF 20% 16V
C14	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C15	1-126-933-11	s ELECT 100uF 20% 16V
C16	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C17	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C18	1-126-933-11	s ELECT 100uF 20% 16V
C19	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C20	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C21	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C23	1-126-933-11	s ELECT 100uF 20% 16V
C103	1-126-933-11	s ELECT 100uF 20% 16V
C104	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C105	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C106	1-126-933-11	s ELECT 100uF 20% 16V
C107	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C108	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C111	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C112	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C113	1-126-933-11	s ELECT 100uF 20% 16V
C114	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C115	1-126-933-11	s ELECT 100uF 20% 16V
C116	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C117	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C118	1-126-933-11	s ELECT 100uF 20% 16V
C119	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C120	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C121	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C123	1-126-933-11	s ELECT 100uF 20% 16V
C202	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C203	1-126-933-11	s ELECT 100uF 20% 16V
C204	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C205	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C206	1-126-933-11	s ELECT 100uF 20% 16V
C207	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C208	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C211	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C212	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C213	1-126-933-11	s ELECT 100uF 20% 16V
C214	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C215	1-126-933-11	s ELECT 100uF 20% 16V
C216	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V

(RP-70 BOARD(UVW-1800))

Ref. No.
or Q'ty Part No. SP Description

C217	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C218	1-126-933-11	s ELECT 100uF 20% 16V
C219	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C220	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C221	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C223	1-126-933-11	s ELECT 100uF 20% 16V
C303	1-126-933-11	s ELECT 100uF 20% 16V
C304	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C305	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C306	1-126-933-11	s ELECT 100uF 20% 16V
C307	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C308	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C311	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C312	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C313	1-126-933-11	s ELECT 100uF 20% 16V
C314	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C315	1-126-933-11	s ELECT 100uF 20% 16V
C316	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C317	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C318	1-126-933-11	s ELECT 100uF 20% 16V
C319	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C320	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C321	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C323	1-126-933-11	s ELECT 100uF 20% 16V
C501-507	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C601	1-126-933-11	s ELECT 100uF 20% 16V
C602	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C603	1-130-477-00	s MYLAR 0.0033uF 5% 50V
C604	1-130-487-00	s MYLAR 0.022uF 5% 50V
C605	1-163-121-00	s CERAMIC, CHIP 150pF 5% 50V
C606	1-137-361-91	s FILM 330pF 5% 50V
C607	1-163-121-00	s CERAMIC, CHIP 150pF 5% 50V
C609	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C610	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C611	1-126-933-11	s ELECT 100uF 20% 16V
C612	1-126-933-11	s ELECT 100uF 20% 16V
C613	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C614	1-130-477-00	s MYLAR 0.0033uF 5% 50V
C615	1-130-487-00	s MYLAR 0.022uF 5% 50V
C616	1-163-121-00	s CERAMIC, CHIP 150pF 5% 50V
C617	1-137-361-91	s FILM 330pF 5% 50V
C618	1-163-121-00	s CERAMIC, CHIP 150pF 5% 50V
C620	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C621	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C622	1-126-933-11	s ELECT 100uF 20% 16V
C623	1-126-933-11	s ELECT 100uF 20% 16V
C624	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C625	1-126-933-11	s ELECT 100uF 20% 16V
C626	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C627	1-126-933-11	s ELECT 100uF 20% 16V
C628	1-126-933-11	s ELECT 100uF 20% 16V
C629	1-163-017-00	s CERAMIC, CHIP 0.0047uF 5% 50V
C630	1-163-017-00	s CERAMIC, CHIP 0.0047uF 5% 50V
C631	1-164-232-11	s CERAMIC 0.01uF 10% 100V
C632	1-164-182-11	s CERAMIC CHIP 3300pF 10% 100V
C635	1-136-562-11	s FILM 0.0082uF 5% 630V
C636	1-131-368-00	s TANTALUM 3.3uF 10% 16V
C701	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C702	1-126-933-11	s ELECT 100uF 20% 16V

(RP-70 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
C703	1-126-933-11	s ELECT 100uF 20% 16V
C704	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C705	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C706	1-126-933-11	s ELECT 100uF 20% 16V
C707	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C708	1-126-933-11	s ELECT 100uF 20% 16V
C709	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C710	1-126-933-11	s ELECT 100uF 20% 16V
C711	1-126-933-11	s ELECT 100uF 20% 16V
C712	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C713	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C714	1-126-933-11	s ELECT 100uF 20% 16V
C715	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C716	1-126-933-11	s ELECT 100uF 20% 16V
C717	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C718	1-126-933-11	s ELECT 100uF 20% 16V
C719	1-126-933-11	s ELECT 100uF 20% 16V
C720	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C721	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C722	1-126-933-11	s ELECT 100uF 20% 16V
C723	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C724	1-126-933-11	s ELECT 100uF 20% 16V
C725	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C726	1-126-933-11	s ELECT 100uF 20% 16V
C727	1-126-933-11	s ELECT 100uF 20% 16V
C728	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C729	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C730	1-126-933-11	s ELECT 100uF 20% 16V
C731	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C732	1-126-933-11	s ELECT 100uF 20% 16V
CN1	1-506-468-11	o CONNECTOR 3P, MALE
CN101	1-506-468-11	o CONNECTOR 3P, MALE
CN110	1-573-600-21	s CONNECTOR, PHEC 100P, MALE
CN201	1-506-468-11	o CONNECTOR 3P, MALE
CN301	1-506-468-11	o CONNECTOR 3P, MALE
D701	8-719-123-82	s DIODE 1SS303-T1
D702	8-719-123-82	s DIODE 1SS303-T1
D703	8-719-123-85	s DIODE 1SS304
D704	8-719-123-85	s DIODE 1SS304
IC1	1-810-336-11	s HIC BP-025
IC2	1-810-335-11	s HIC BP-024
IC101	1-810-336-11	s HIC BP-025
IC102	1-810-335-11	s HIC BP-024
IC201	1-810-336-11	s HIC BP-025
IC202	1-810-335-11	s HIC BP-024
IC301	1-810-336-11	s HIC BP-025
IC302	1-810-335-11	s HIC BP-024
IC501	8-759-010-44	s IC MC14069UBF-T2
IC502	8-759-010-44	s IC MC14069UBF-T2
IC503	8-759-010-44	s IC MC14069UBF-T2
IC601	8-759-908-17	s IC TL082CPS
IC602	8-759-908-17	s IC TL082CPS
IC701	8-759-182-84	s IC PQ05SZ5U
IC702	8-759-189-43	s IC AN77L05-TA
IC703	8-759-168-20	s IC TA78L09S
IC704	8-759-168-20	s IC TA78L09S
IC705	8-759-822-95	s IC L79M05T-FA
IC706	8-759-700-65	s IC NJM79L05A
IC707	8-759-700-68	s IC NJM79L09A

(RP-70 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
IC708	8-759-700-68	s IC NJM79L09A
L1-L5	1-410-482-31	s INDUCTOR 100uH
L101-105	1-410-482-31	s INDUCTOR 100uH
L201-205	1-410-482-31	s INDUCTOR 100uH
L301-305	1-410-482-31	s INDUCTOR 100uH
L603	1-412-533-21	s INDUCTOR 47uH
L604	1-408-397-00	s INDUCTOR 1uH
L605	1-408-397-00	s INDUCTOR 1uH
L701	1-412-533-21	s INDUCTOR 47uH
L702	1-412-533-21	s INDUCTOR 47uH
L703	1-412-533-21	s INDUCTOR 47uH
L704	1-412-533-21	s INDUCTOR 47uH
Q1	8-729-117-72	s TRANSISTOR 2SC4178
Q2	8-729-117-72	s TRANSISTOR 2SC4178
Q3	8-729-117-72	s TRANSISTOR 2SC4178
Q102	8-729-117-72	s TRANSISTOR 2SC4178
Q103	8-729-117-72	s TRANSISTOR 2SC4178
Q201	8-729-117-72	s TRANSISTOR 2SC4178
Q202	8-729-117-72	s TRANSISTOR 2SC4178
Q203	8-729-117-72	s TRANSISTOR 2SC4178
Q302	8-729-117-72	s TRANSISTOR 2SC4178
Q303	8-729-117-72	s TRANSISTOR 2SC4178
Q501	8-729-209-06	s TRANSISTOR 2SC4213-A
Q601	8-729-119-76	s TRANSISTOR 2SA1115P
Q602	8-729-119-78	s TRANSISTOR 2SC2785-HFE
Q603	8-729-320-60	s TRANSISTOR 2SD788-34
Q604	8-729-320-60	s TRANSISTOR 2SD788-34
Q605	8-729-119-76	s TRANSISTOR 2SA1115P
Q606	8-729-119-78	s TRANSISTOR 2SC2785-HFE
Q607	8-729-320-60	s TRANSISTOR 2SD788-34
Q608	8-729-320-60	s TRANSISTOR 2SD788-34
Q609	8-729-905-18	s TRANSISTOR DTC144EU
Q610	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q611	8-729-022-00	s TRANSISTOR 2SB1416-R(TA)
Q612	8-729-117-32	s TRANSISTOR 2SC4177
Q613	8-729-159-65	s TRANSISTOR 2SD596-DV5
Q614	8-729-159-65	s TRANSISTOR 2SD596-DV5
Q615	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q616	8-729-209-06	s TRANSISTOR 2SC4213-A
Q617	8-729-209-06	s TRANSISTOR 2SC4213-A
R1	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R2	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W
R4	1-216-001-00	s METAL, CHIP 10 5% 1/10W
R5	1-216-047-00	s METAL, CHIP 820 5% 1/10W
R6	1-216-047-00	s METAL, CHIP 820 5% 1/10W
R7	1-216-053-00	s METAL, CHIP 1.5k 5% 1/10W
R8	1-216-009-00	s METAL, CHIP 22 5% 1/10W
R9	1-216-055-00	s METAL, CHIP 1.8k 5% 1/10W
R10	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R11	1-216-009-00	s METAL, CHIP 22 5% 1/10W
R12	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R13	1-216-001-00	s METAL, CHIP 10 5% 1/10W
R16	1-216-001-00	s METAL, CHIP 10 5% 1/10W
R18	1-216-001-00	s METAL, CHIP 10 5% 1/10W
R19	1-216-687-11	s METAL, CHIP 33k 0.5% 1/10W
R21	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R22	1-216-625-11	s METAL, CHIP 82 0.5% 1/10W

(RP-70 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
R106	1-216-047-00	s METAL, CHIP 820 5% 1/10W
R107	1-216-053-00	s METAL, CHIP 1.5k 5% 1/10W
R108	1-216-009-00	s METAL, CHIP 22 5% 1/10W
R109	1-216-055-00	s METAL, CHIP 1.8k 5% 1/10W
R110	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R111	1-216-009-00	s METAL, CHIP 22 5% 1/10W
R112	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R113	1-216-001-00	s METAL, CHIP 10 5% 1/10W
R116	1-216-001-00	s METAL, CHIP 10 5% 1/10W
R118	1-216-001-00	s METAL, CHIP 10 5% 1/10W
R119	1-216-687-11	s METAL, CHIP 33k 0.5% 1/10W
R121	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R122	1-216-625-11	s METAL, CHIP 82 0.5% 1/10W
R201	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R202	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W
R204	1-216-001-00	s METAL, CHIP 10 5% 1/10W
R205	1-216-047-00	s METAL, CHIP 820 5% 1/10W
R206	1-216-047-00	s METAL, CHIP 820 5% 1/10W
R207	1-216-053-00	s METAL, CHIP 1.5k 5% 1/10W
R208	1-216-009-00	s METAL, CHIP 22 5% 1/10W
R209	1-216-055-00	s METAL, CHIP 1.8k 5% 1/10W
R210	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R211	1-216-009-00	s METAL, CHIP 22 5% 1/10W
R212	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R213	1-216-001-00	s METAL, CHIP 10 5% 1/10W
R216	1-216-001-00	s METAL, CHIP 10 5% 1/10W
R218	1-216-001-00	s METAL, CHIP 10 5% 1/10W
R219	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R221	1-216-689-11	s METAL, CHIP 39k 0.5% 1/10W
R222	1-216-625-11	s METAL, CHIP 82 0.5% 1/10W
R306	1-216-047-00	s METAL, CHIP 820 5% 1/10W
R307	1-216-053-00	s METAL, CHIP 1.5k 5% 1/10W
R308	1-216-009-00	s METAL, CHIP 22 5% 1/10W
R309	1-216-055-00	s METAL, CHIP 1.8k 5% 1/10W
R310	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R311	1-216-009-00	s METAL, CHIP 22 5% 1/10W
R312	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R313	1-216-001-00	s METAL, CHIP 10 5% 1/10W
R316	1-216-001-00	s METAL, CHIP 10 5% 1/10W
R318	1-216-001-00	s METAL, CHIP 10 5% 1/10W
R319	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R321	1-216-689-11	s METAL, CHIP 39k 0.5% 1/10W
R322	1-216-625-11	s METAL, CHIP 82 0.5% 1/10W
R501	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R502	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R503	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R504	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R505	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R506	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R507	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R508	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R509	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R510	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R511	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R512	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R513	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R514	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R515	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R516	1-216-049-00	s METAL, CHIP 1k 5% 1/10W

(RP-70 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
R517	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R518	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R519	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R601	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R602	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R603	1-249-402-11	s CARBON 56 5% 1/4W
R604	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R605	1-249-417-11	s CARBON 1k 5% 1/4W
R606	1-216-663-11	s METAL, CHIP 3.3k 0.5% 1/10W
R607	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R608	1-216-669-11	s METAL, CHIP 5.6k 0.5% 1/10W
R609	1-249-402-11	s CARBON 56 5% 1/4W
R610	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R611	1-215-403-00	s METAL 180 1% 1/6W
R612	1-216-061-00	s METAL, CHIP 3.3k 5% 1/10W
R613	1-216-061-00	s METAL, CHIP 3.3k 5% 1/10W
R614	1-216-077-00	s METAL, CHIP 15k 5% 1/10W
R615	1-216-061-00	s METAL, CHIP 3.3k 5% 1/10W
R616	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R617	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R618	1-249-402-11	s CARBON 56 5% 1/4W
R619	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R620	1-249-417-11	s CARBON 1k 5% 1/4W
R621	1-216-663-11	s METAL, CHIP 3.3k 0.5% 1/10W
R622	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R623	1-216-669-11	s METAL, CHIP 5.6k 0.5% 1/10W
R624	1-249-402-11	s CARBON 56 5% 1/4W
R625	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R626	1-215-403-00	s METAL 180 1% 1/6W
R627	1-216-061-00	s METAL, CHIP 3.3k 5% 1/10W
R628	1-216-061-00	s METAL, CHIP 3.3k 5% 1/10W
R629	1-216-077-00	s METAL, CHIP 15k 5% 1/10W
R630	1-216-061-00	s METAL, CHIP 3.3k 5% 1/10W
R631	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R632	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R633	1-216-051-00	s METAL, CHIP 1.2k 5% 1/10W
R634	1-216-071-00	s METAL, CHIP 8.2k 5% 1/10W
R635	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R636	1-216-093-00	s METAL, CHIP 68k 5% 1/10W
R637	1-216-093-00	s METAL, CHIP 68k 5% 1/10W
R639	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R640	1-216-077-00	s METAL, CHIP 15k 5% 1/10W
R641	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R642	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
RV1	1-241-783-11	s RES, ADJ METAL 2.2k
RV2	1-241-761-11	s RES, ADJ METAL 1k
RV101	1-241-783-11	s RES, ADJ METAL 2.2k
RV102	1-241-761-11	s RES, ADJ METAL 1k
RV201	1-241-783-11	s RES, ADJ METAL 2.2k
RV202	1-241-761-11	s RES, ADJ METAL 1k
RV301	1-241-783-11	s RES, ADJ METAL 2.2k
RV302	1-241-761-11	s RES, ADJ METAL 1k
S1	1-553-977-00	s SWITCH, SLIDE
S101	1-553-977-00	s SWITCH, SLIDE
S201	1-553-977-00	s SWITCH, SLIDE
S301	1-553-977-00	s SWITCH, SLIDE
T1	1-423-659-11	s TRANSFORMER, RF OUTPUT
T2	1-423-658-11	s TRANSFORMER, RF INPUT

(RP-70 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
T101	1-423-659-11	s TRANSFORMER, RF OUTPUT
T102	1-423-658-11	s TRANSFORMER, RF INPUT
T201	1-423-659-11	s TRANSFORMER, RF OUTPUT
T202	1-423-657-11	s TRANSFORMER, RF INPUT
T301	1-423-659-11	s TRANSFORMER, RF OUTPUT
T302	1-423-657-11	s TRANSFORMER, RF INPUT
T601	1-423-656-11	s TRANSFORMER, ROTARY ERASE
T602	1-423-656-11	s TRANSFORMER, ROTARY ERASE
T603	1-424-511-11	s TRANSFORMER, FE

RP-70A BOARD(UVW-1600)

Ref. No. or Q'ty	Part No.	SP Description
---------------------	----------	----------------

RP-70A board is used for UVW-1600.

1pc	A-8275-278-A	o MOUNTED CIRCUIT BOARD, RP-70A
1pc	3-182-385-01	o PLATE, SHIELD (S), CARD
1pc	7-621-759-45	s SCREW, +PSW2.6x6
1pc	8-769-401-59	s TRANSISTOR 2SK613-3
1pc	3-179-084-01	s LEVER (R), PC BOARD
1pc	3-179-085-01	s LEVER (L), PC BOARD
C17	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C18	1-126-933-11	s ELECT 100uF 20% 16V
C19	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C21	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C23	1-126-933-11	s ELECT 100uF 20% 16V
C117	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C118	1-126-933-11	s ELECT 100uF 20% 16V
C119	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C121	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C123	1-126-933-11	s ELECT 100uF 20% 16V
C217	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C218	1-126-933-11	s ELECT 100uF 20% 16V
C219	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C221	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C223	1-126-933-11	s ELECT 100uF 20% 16V
C317	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C318	1-126-933-11	s ELECT 100uF 20% 16V
C319	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C321	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C323	1-126-933-11	s ELECT 100uF 20% 16V
C709	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C710	1-126-933-11	s ELECT 100uF 20% 16V
C711	1-126-933-11	s ELECT 100uF 20% 16V
C712	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C713	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C714	1-126-933-11	s ELECT 100uF 20% 16V
C715	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C716	1-126-933-11	s ELECT 100uF 20% 16V
CN1	1-506-468-11	o CONNECTOR 3P, MALE
CN101	1-506-468-11	o CONNECTOR 3P, MALE
CN110	1-573-600-21	s CONNECTOR, PHEC 100P, MALE
CN201	1-506-468-11	o CONNECTOR 3P, MALE
CN301	1-506-468-11	o CONNECTOR 3P, MALE
D702	8-719-123-82	s DIODE 1SS303-T1
IC2	1-810-335-11	s HIC BP-024
IC102	1-810-335-11	s HIC BP-024
IC202	1-810-335-11	s HIC BP-024
IC302	1-810-335-11	s HIC BP-024
IC703	8-759-168-20	s IC TA78L09S
IC704	8-759-168-20	s IC TA78L09S
L702	1-412-533-21	s INDUCTOR 47uH
R17	1-216-295-91	s RES, CHIP 0
R18	1-216-001-00	s METAL, CHIP 10 5% 1/10W
R19	1-216-687-11	s METAL, CHIP 33k 0.5% 1/10W
R21	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R22	1-216-625-11	s METAL, CHIP 82 0.5% 1/10W
R117	1-216-295-91	s RES, CHIP 0
R118	1-216-001-00	s METAL, CHIP 10 5% 1/10W

(RP-70A BOARD(UVW-1600))

Ref. No. or Q'ty	Part No.	SP Description
R119	1-216-687-11	s METAL, CHIP 33k 0.5% 1/10W
R121	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R122	1-216-625-11	s METAL, CHIP 82 0.5% 1/10W
R217	1-216-295-91	s RES, CHIP 0
R218	1-216-001-00	s METAL, CHIP 10 5% 1/10W
R219	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R221	1-216-689-11	s METAL, CHIP 39k 0.5% 1/10W
R222	1-216-625-11	s METAL, CHIP 82 0.5% 1/10W
R317	1-216-295-91	s RES, CHIP 0
R318	1-216-001-00	s METAL, CHIP 10 5% 1/10W
R319	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R321	1-216-689-11	s METAL, CHIP 39k 0.5% 1/10W
R322	1-216-625-11	s METAL, CHIP 82 0.5% 1/10W
R651-658	1-216-295-91	s RES, CHIP 0
T2	1-423-658-11	s TRANSFORMER, RF INPUT
T102	1-423-658-11	s TRANSFORMER, RF INPUT
T202	1-423-657-11	s TRANSFORMER, RF INPUT
T302	1-423-657-11	s TRANSFORMER, RF INPUT

SE-207 BOARD(UVW-1800/1600)

Ref. No.
or Q'ty Part No. SP Description

Two SE-207 boards are used in UVW-1800/1600.
One board has the following parts.

1pc	1-648-923-11	o PRINTED CIRCUIT BOARD, SE-207
CN950	1-565-876-11	o CONNECTOR 4P, MALE
PH1	8-749-924-54	s PHOTO-INTERRUPTER GP1A30R
R1	1-249-408-11	s CARBON 180 5% 1/4W

SS-53 BOARD(UVW-1800/1600)

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8275-284-A	o MOUNTED CIRCUIT BOARD, SS-53
1pc	3-179-084-01	s LEVER (R), PC BOARD
1pc	3-179-085-01	s LEVER (L), PC BOARD
C1	1-135-076-21	s TANTALUM, CHIP 1uF 10% 35V
C2	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C5-C16	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C19	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C20	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C21	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C22	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C23	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C24	1-126-924-11	s ELECT 330uF 20% 10V
C100	1-126-964-11	s ELECT 10uF 20% 50V
C101	1-126-964-11	s ELECT 10uF 20% 50V
C102	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C103	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C104	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C106	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V
C109	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V
C110	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V
C111	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C112	1-164-232-11	s CERAMIC 0.01uF 10% 100V
C113	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C114	1-126-924-11	s ELECT 330uF 20% 10V
C115	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C116	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C117	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C200	1-135-076-21	s TANTALUM, CHIP 1uF 10% 35V
C201	1-163-809-11	s CERAMIC, CHIP 0.047uF 10% 25V
C202-209	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C210	1-163-237-11	s CERAMIC, CHIP 27pF 5% 50V
C211	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C212	1-163-102-00	s CERAMIC, CHIP 24pF 5% 50V
C213	1-126-924-11	s ELECT 330uF 20% 10V
C214	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C215-230	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C232	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C233	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V
C234	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V
C235	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V
C236	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V
C237	1-164-232-11	s CERAMIC 0.01uF 10% 100V
C238	1-164-232-11	s CERAMIC 0.01uF 10% 100V
C239	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C240	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V
C241	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V
C242	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V
C243	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V
C245	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V
C246	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V
C247	1-164-161-11	s CERAMIC, CHIP 0.0022uF 10% 100V
C248	1-164-161-11	s CERAMIC, CHIP 0.0022uF 10% 100V
C249	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C251-269	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C270-275	1-126-947-11	s ELECT 47uF 20% 35V
C276	1-163-989-11	s CERAMIC, CHIP 0.033uF 10% 25V
C277	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C278	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V

(SS-53 BOARD(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
C279	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C400	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C401	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C402	1-163-809-11	s CERAMIC, CHIP 0.047uF 10% 25V
C403	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C404	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C405	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C406	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V
C407	1-163-809-11	s CERAMIC, CHIP 0.047uF 10% 25V
C408	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C409	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C410	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C411	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C412	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V
CN1	1-506-484-11	s CONNECTOR 5P, MALE
CN2	1-506-481-11	s CONNECTOR 2P, MALE
CN3	1-560-369-00	o CONNECTOR, IIG 8P, MALE
CN107	1-573-782-21	o CONNECTOR, PHEC 60P, MALE
CN108	1-573-782-21	o CONNECTOR, PHEC 60P, MALE
CN109	1-573-782-21	o CONNECTOR, PHEC 60P, MALE
CN14	1-251-102-11	o SOCKET, IC 32P
CN1212	1-251-102-11	o SOCKET, IC 32P
CV1	1-141-389-11	s CAP, TRIMMER 50pF
D100-105	8-719-941-23	s DIODE DA204U
D200-208	8-719-941-23	s DIODE DA204U
D210	8-719-938-72	s DIODE SB01-05CP
D211	8-719-941-23	s DIODE DA204U
D213	8-719-941-23	s DIODE DA204U
D214	8-719-941-23	s DIODE DA204U
D215	8-719-941-23	s DIODE DA204U
IC1	8-759-151-97	s IC UPD70320GJ-8-5BG
IC2	8-759-043-34	s IC CXD8310M
IC3	8-759-507-51	s IC MS6264CLL-10FC-EF
IC4	8-759-252-00	o IC C010-UVW1000SY-V100, EPROM
IC5	8-759-095-41	s IC CXD8176AQ
IC6	8-759-054-54	s IC SRM2016M10
IC7	8-759-632-39	s IC M51958A
IC8	8-759-061-67	s IC MC34051M
IC9	8-759-926-77	s IC SN74HC541NS
IC10	8-759-925-74	s IC TC74HC04NS
IC11	8-759-925-85	s IC SN74HC32NS
IC12	8-759-925-90	s IC SN74HC74NS
IC15	8-759-192-25	s IC UPD6453GT-635-E2
IC100	8-759-175-77	s IC CXD8384Q
IC101	8-759-100-96	s IC UPC4558G2
IC102	8-759-925-05	s IC LM2903PS
IC103	8-759-700-45	s IC NJM4556M-A
IC200	8-759-300-71	s IC HD14053BFP
IC201	8-759-100-94	s IC UPC358G2
IC202	8-759-192-26	s IC HD6435348RA00F
IC203	8-759-925-76	s IC SN74HC08NS
IC204	8-759-925-74	s IC TC74HC04NS
IC206	8-759-925-83	s IC SN74HC27ANS
IC207	8-759-925-79	s IC SN74HC11ANS
IC208	8-759-926-11	s IC SN74HC138NS
IC209	8-759-925-85	s IC SN74HC32NS

(SS-53 BOARD(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
IC210	8-759-925-76	s IC SN74HC08NS
IC211	8-759-938-68	s IC CXD1095Q
IC212	8-759-252-01	o IC C020-UVW1000SV-V100, EPROM
IC213	8-759-507-51	s IC MS6264CLL-10FC-EF
IC214	8-759-300-71	s IC HD14053BFP
IC215	8-759-300-71	s IC HD14053BFP
IC216	8-759-925-05	s IC LM2903PS
IC217	8-759-925-97	s IC SN74HC86ANS
IC219	8-752-343-05	s IC CXD2202Q
IC220	8-759-100-95	s IC UPC324G2
IC221	8-759-300-71	s IC HD14053BFP
IC222	8-759-100-95	s IC UPC324G2
IC223	8-759-106-02	s IC UPC4570G2
IC224	8-759-141-05	s IC UPC4574G2
IC225	8-759-106-02	s IC UPC4570G2
IC226	8-759-938-68	s IC CXD1095Q
IC227	8-759-913-99	s IC MB88201-173N
IC228	8-759-927-29	s IC SN74HC04ANS
IC229	8-759-977-80	s IC MB88342PF
IC230	8-759-925-05	s IC LM2903PS
IC231	8-759-106-02	s IC UPC4570G2
IC232	8-759-925-05	s IC LM2903PS
IC233	8-759-106-02	s IC UPC4570G2
L1	1-408-411-00	s INDUCTOR 15uH
L200	1-412-533-21	s INDUCTOR 47uH
L201	1-412-533-21	s INDUCTOR 47uH
PS1	△1-532-637-00	s LINK, IC 1.0A
PS2	△1-532-637-00	s LINK, IC 1.0A
Q105	8-729-905-12	s TRANSISTOR DTA144EU
Q106	8-729-118-56	s TRANSISTOR 2SK852-X2
Q107	8-729-905-12	s TRANSISTOR DTA144EU
Q108	8-729-118-56	s TRANSISTOR 2SK852-X2
Q204-209	8-729-905-18	s TRANSISTOR DTC144EU
Q210	8-729-209-06	s TRANSISTOR 2SC4213-A
Q211	8-729-209-06	s TRANSISTOR 2SC4213-A
R1	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R2	1-216-077-00	s METAL, CHIP 15k 5% 1/10W
R3	1-216-077-00	s METAL, CHIP 15k 5% 1/10W
R4	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R5	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R6	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R7	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R9	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R11	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R12	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R14	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R24	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R26	1-216-686-11	s METAL, CHIP 30k 0.5% 1/10W
R27	1-216-680-11	s METAL, CHIP 16k 0.5% 1/10W
R31	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R33	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R35	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R36-R41	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R43	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R45	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R47	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R49	1-216-089-91	s METAL, CHIP 47k 5% 1/10W

(SS-53 BOARD(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
R51	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R55	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R56	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R57	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R61	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R62	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R63	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R64	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R65	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R66	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R67	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R68	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R69	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R100	1-216-663-11	s METAL, CHIP 3.3k 0.5% 1/10W
R101	1-216-648-11	s METAL, CHIP 750 0.5% 1/10W
R102	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R103	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R104	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R105	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R106	1-216-699-11	s METAL, CHIP 100k 0.5% 1/10W
R107	1-216-699-11	s METAL, CHIP 100k 0.5% 1/10W
R108	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R109	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R110	1-216-067-00	s METAL, CHIP 5.6k 5% 1/10W
R111	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R112	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R128	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R129	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R130	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R131	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R132	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R133	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R134	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R135	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R136	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R137	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R138	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R139	1-216-061-00	s METAL, CHIP 3.3k 5% 1/10W
R140	1-216-071-00	s METAL, CHIP 8.2k 5% 1/10W
R141	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W
R142	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R145	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R146	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R149	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R150	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R151	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R200	1-216-699-11	s METAL, CHIP 100k 0.5% 1/10W
R201	1-216-699-11	s METAL, CHIP 100k 0.5% 1/10W
R202	1-216-687-11	s METAL, CHIP 33k 0.5% 1/10W
R203	1-218-764-11	s METAL 330k 0.5% 1/10W
R204-213	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R214	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R215	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R216	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R217	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R218	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R219	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R220	1-216-686-11	s METAL, CHIP 30k 0.5% 1/10W
R221	1-216-665-11	s METAL, CHIP 3.9k 0.5% 1/10W

(SS-53 BOARD(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
R222	1-216-648-11	s METAL, CHIP 750 0.5% 1/10W
R223	1-216-699-11	s METAL, CHIP 100k 0.5% 1/10W
R224	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R225	1-218-764-11	s METAL, CHIP 330k 0.5% 1/10W
R227	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R228	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R229	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R231	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R232	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R233	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R234	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R235	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R236	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R237	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R238	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R239	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R240	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R241	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R242	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R243	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R244	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R245	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R254	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R255	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R256	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R257	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R258	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R260	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R261	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R262	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R263	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R264	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R265	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R268	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R269	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R275	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R276	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R277	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R281	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R282	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R283	1-220-221-11	s METAL, CHIP 100 5% 1/2W
R284	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R285	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R286	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R287	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R288	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R289	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R290	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R291	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R292	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R294	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R295	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R297	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R298	1-216-109-00	s METAL, CHIP 330k 5% 1/10W
R299	1-216-109-00	s METAL, CHIP 330k 5% 1/10W
R300	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R302	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R303	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R304	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W

(SS-53 BOARD(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
R306	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R307	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R309	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R310	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R311	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R312	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R313	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R314	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R315	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R316	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R317	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R318	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R319	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R320	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R321	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R322	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R323	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R324	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R325	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R326-331	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R332	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R333	1-216-061-00	s METAL, CHIP 3.3k 5% 1/10W
R334	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R335	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R336	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R337	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R338	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R339	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R340	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R341	1-216-061-00	s METAL, CHIP 3.3k 5% 1/10W
R342	1-216-061-00	s METAL, CHIP 3.3k 5% 1/10W
R343	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R344	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R345	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R346-350	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R351	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R352	1-216-039-00	s METAL, CHIP 390 5% 1/10W
R353-381	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R382	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R383	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R385	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R386	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R387	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R388	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R389	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R390	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R391	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R392	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R393	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R394	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R395	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R396	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R397	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R398	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R399	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R400	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R401	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R402	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R403	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W

(SS-53 BOARD(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
R404	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R405	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R406	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R407	1-216-695-11	s METAL, CHIP 68k 0.5% 1/10W
R408	1-216-695-11	s METAL, CHIP 68k 0.5% 1/10W
R409	1-216-699-11	s METAL, CHIP 100k 0.5% 1/10W
R410	1-216-687-11	s METAL, CHIP 33k 0.5% 1/10W
R411	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R412	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R413	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R414	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R415	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R416	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R417	1-216-695-11	s METAL, CHIP 68k 0.5% 1/10W
R418	1-216-695-11	s METAL, CHIP 68k 0.5% 1/10W
R419	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R420	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R421	1-216-687-11	s METAL, CHIP 33k 0.5% 1/10W
R422	1-216-699-11	s METAL, CHIP 100k 0.5% 1/10W
R423	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
RB1	1-239-464-11	s RESISTOR BLOCK, CHIP 2.2kx8
RB2	1-239-308-11	s RESISTOR BLOCK, CHIP 47kx8
RB201	1-239-464-11	s RESISTOR BLOCK, CHIP 2.2kx8
RB202	1-239-309-11	s RESISTOR BLOCK, CHIP 100kx8
RB203	1-239-306-11	s RESISTOR BLOCK, CHIP 10kx8
S1	1-692-535-11	s SWITCH, DIP 4-CKT
S201	1-692-536-11	s SWITCH, DIP 8-CKT
X1	1-579-930-12	s RESONATOR CERAMIC 16.00MHz
X101	1-579-993-21	s CRYSTAL 13.50MHz
X200	1-579-996-11	s RESONATOR CERAMIC 20.00MHz

TBC-25 BOARD(UVW-1800/1600)

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8275-282-A	o MOUNTED CIRCUIT BOARD, TBC-25
1pc	3-182-386-01	o PLATE, SHIELD (L), CARD
1pc	7-621-759-45	s SCREW, +PSW2.6x6
1pc	3-179-084-01	s LEVER (R), PC BOARD
1pc	3-179-085-01	s LEVER (L), PC BOARD
2pcs	1-750-484-11	s BUS-BAR
C1	1-126-933-11	s ELECT 100uF 20% 16V
C2	1-126-933-11	s ELECT 100uF 20% 16V
C3	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C4	1-126-933-11	s ELECT 100uF 20% 16V
C5	1-126-933-11	s ELECT 100uF 20% 16V
C6	1-126-933-11	s ELECT 100uF 20% 16V
C7	1-126-933-11	s ELECT 100uF 20% 16V
C8	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C9	1-126-933-11	s ELECT 100uF 20% 16V
C10	1-126-933-11	s ELECT 100uF 20% 16V
C11	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C12	1-126-933-11	s ELECT 100uF 20% 16V
C13	1-126-933-11	s ELECT 100uF 20% 16V
C14	1-126-933-11	s ELECT 100uF 20% 16V
C15	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C16-C21	1-126-933-11	s ELECT 100uF 20% 16V
C22	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C100	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C101	1-126-947-11	s ELECT 47uF 20% 35V
C102	1-163-097-00	s CERAMIC, CHIP 15pF 5% 50V
C103	1-163-097-00	s CERAMIC, CHIP 15pF 5% 50V
C104	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C105	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C106	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C107	1-126-947-11	s ELECT 47uF 20% 35V
C108	1-163-809-11	s CERAMIC, CHIP 0.047uF 10% 25V
C109	1-124-903-11	s ELECT 1uF 20% 50V
C110	1-126-964-11	s ELECT 10uF 20% 50V
C111	1-163-239-11	s CERAMIC, CHIP 33pF 5% 50V
C112	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C113	1-126-934-11	s ELECT 220uF 20% 16V
C114	1-126-947-11	s ELECT 47uF 20% 35V
C115	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C116	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C117	1-126-947-11	s ELECT 47uF 20% 35V
C118	1-126-933-11	s ELECT 100uF 20% 16V
C200	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C201	1-126-947-11	s ELECT 47uF 20% 35V
C202	1-163-097-00	s CERAMIC, CHIP 15pF 5% 50V
C203	1-163-097-00	s CERAMIC, CHIP 15pF 5% 50V
C204	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C205	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C206	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C207	1-126-947-11	s ELECT 47uF 20% 35V
C208	1-163-809-11	s CERAMIC, CHIP 0.047uF 10% 25V
C209	1-124-903-11	s ELECT 1uF 20% 50V
C210	1-126-964-11	s ELECT 10uF 20% 50V
C211	1-163-239-11	s CERAMIC, CHIP 33pF 5% 50V
C212	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C213	1-126-934-11	s ELECT 220uF 20% 16V
C214	1-126-947-11	s ELECT 47uF 20% 35V
C215	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V

(TBC-25 BOARD(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
C216	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C218	1-126-933-11	s ELECT 100uF 20% 16V
C300	1-126-947-11	s ELECT 47uF 20% 35V
C301	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C302	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C303	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C305	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C306	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C307	1-163-133-00	s CERAMIC, CHIP 470pF 5% 50V
C308	1-163-263-11	s CERAMIC, CHIP 330pF 5% 50V
C309	1-126-947-11	s ELECT 47uF 20% 35V
C310	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C311	1-126-947-11	s ELECT 47uF 20% 35V
C312-316	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C317	1-126-963-11	s ELECT 4.7uF 20% 50V
C318	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C319	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C320	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C321	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C322	1-163-133-00	s CERAMIC, CHIP 470pF 5% 50V
C324	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C325	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C326	1-164-232-11	s CERAMIC 0.01uF 10% 100V
C327	1-124-903-11	s ELECT 1uF 20% 50V
C328	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C329	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C330	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C331	1-124-903-11	s ELECT 1uF 20% 50V
C332	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C333	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C334	1-126-933-11	s ELECT 100uF 20% 16V
C335	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C336	1-163-133-00	s CERAMIC, CHIP 470pF 5% 50V
C337	1-164-232-11	s CERAMIC 0.01uF 10% 100V
C338	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C339	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C340	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C341	1-163-125-00	s CERAMIC, CHIP 220pF 5% 50V
C342	1-163-133-00	s CERAMIC, CHIP 470pF 5% 50V
C344	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C345	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C347	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C350	1-126-933-11	s ELECT 100uF 20% 16V
C351	1-164-222-11	s CERAMIC 0.22uF 25V
C352	1-124-925-11	s ELECT 2.2uF 20% 100V
C353	1-124-925-11	s ELECT 2.2uF 20% 100V
C355	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C356	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C357	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C359	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C360	1-126-947-11	s ELECT 47uF 20% 35V
C361	1-126-947-11	s ELECT 47uF 20% 35V
C362	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C363	1-126-947-11	s ELECT 47uF 20% 35V
C364	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C400	1-126-947-11	s ELECT 47uF 20% 35V
C401	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C402	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C404	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V

(TBC-25 BOARD(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
C405	1-126-947-11	s ELECT 47uF 20% 35V
C406	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C407	1-163-222-11	s CERAMIC, CHIP 5pF 50V
C408	1-163-102-00	s CERAMIC, CHIP 24pF 5% 50V
C409	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C410	1-126-947-11	s ELECT 47uF 20% 35V
C411	1-163-106-00	s CERAMIC 36pF 5% 50V
C412	1-163-120-00	s CERAMIC 130pF 5% 50V
C413	1-163-263-11	s CERAMIC, CHIP 330pF 5% 50V
C414-419	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C420	1-163-239-11	s CERAMIC, CHIP 33pF 5% 50V
C421	1-163-125-00	s CERAMIC, CHIP 220pF 5% 50V
C422	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C423	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C424	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C425	1-164-232-11	s CERAMIC 0.01uF 10% 100V
C426	1-124-903-11	s ELECT 1uF 20% 50V
C427	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C428	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C429	1-124-903-11	s ELECT 1uF 20% 50V
C430	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C431	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C432	1-164-232-11	s CERAMIC 0.01uF 10% 100V
C433	1-163-263-11	s CERAMIC, CHIP 330pF 5% 50V
C434	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C435	1-126-933-11	s ELECT 100uF 20% 16V
C436	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C437	1-163-133-00	s CERAMIC, CHIP 470pF 5% 50V
C438	1-164-232-11	s CERAMIC 0.01uF 10% 100V
C439	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C440	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C441	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C443	1-163-125-00	s CERAMIC, CHIP 220pF 5% 50V
C444	1-163-263-11	s CERAMIC, CHIP 330pF 5% 50V
C445	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C446	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C447	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C448	1-126-933-11	s ELECT 100uF 20% 16V
C449	1-164-222-11	s CERAMIC 0.22uF 25V
C450	1-124-925-11	s ELECT 2.2uF 20% 100V
C451	1-124-925-11	s ELECT 2.2uF 20% 100V
C452	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C454	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C455	1-126-947-11	s ELECT 47uF 20% 35V
C456	1-126-947-11	s ELECT 47uF 20% 35V
C457	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C458	1-126-947-11	s ELECT 47uF 20% 35V
C459	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C461	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C462	1-163-102-00	s CERAMIC, CHIP 24pF 5% 50V
C501	1-163-125-00	s CERAMIC, CHIP 220pF 5% 50V
C502	1-163-125-00	s CERAMIC, CHIP 220pF 5% 50V
C503	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C504	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C505	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C506	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C507	1-126-947-11	s ELECT 47uF 20% 35V
C508	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C509	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V

(TBC-25 BOARD(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
C510	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C511	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C512	1-163-125-00	s CERAMIC, CHIP 220pF 5% 50V
C513	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C514	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C515-523	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C524	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C525	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C526	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C527	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C528	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C529	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C530	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C531	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C532	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C533	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C534	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C535	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C536	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C537	1-126-947-11	s ELECT 47uF 20% 35V
C538	1-126-947-11	s ELECT 47uF 20% 35V
C539	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C540	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C541	1-163-097-00	s CERAMIC, CHIP 15pF 5% 50V
C542	1-126-947-11	s ELECT 47uF 20% 35V
C543	1-126-947-11	s ELECT 47uF 20% 35V
C544	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C545	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C546	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C547-553	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C700	1-164-232-11	s CERAMIC 0.01uF 10% 100V
C701	1-164-232-11	s CERAMIC 0.01uF 10% 100V
C702	1-126-964-11	s ELECT 10uF 20% 50V
C703	1-126-964-11	s ELECT 10uF 20% 50V
C704	1-163-239-11	s CERAMIC, CHIP 33pF 5% 50V
C705	1-163-125-00	s CERAMIC, CHIP 220pF 5% 50V
C706	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C707	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C708	1-126-947-11	s ELECT 47uF 20% 35V
C709-715	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C716	1-163-239-11	s CERAMIC, CHIP 33pF 5% 50V
C717	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C718	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C719	1-126-947-11	s ELECT 47uF 20% 35V
C720	1-130-489-00	s MYLAR 0.033uF 5% 50V
C721	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C722	1-126-947-11	s ELECT 47uF 20% 35V
C723-728	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C729	1-126-947-11	s ELECT 47uF 20% 35V
C730	1-126-947-11	s ELECT 47uF 20% 35V
C731	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C732	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C733	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C734	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C735	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C736	1-163-121-00	s CERAMIC, CHIP 150pF 5% 50V
C737	1-163-125-00	s CERAMIC, CHIP 220pF 5% 50V
C738	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C739	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V

(TBC-25 BOARD(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
C740	1-163-275-11 s	CERAMIC, CHIP 0.001uF 5% 50V
C741	1-131-347-00 s	TANTALUM 1uF 10% 35V
C742	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C743	1-131-363-00 s	TANTALUM 4.7uF 10% 20V
C744	1-164-232-11 s	CERAMIC 0.01uF 10% 100V
C746	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C747	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C748	1-163-106-00 s	CERAMIC, CHIP 36pF 5% 50V
C749	1-163-239-11 s	CERAMIC, CHIP 33pF 5% 50V
C750	1-163-251-11 s	CERAMIC, CHIP 100pF 5% 50V
C751	1-163-251-11 s	CERAMIC, CHIP 100pF 5% 50V
C752	1-164-232-11 s	CERAMIC 0.01uF 10% 100V
C753	1-164-232-11 s	CERAMIC 0.01uF 10% 100V
C754	1-163-263-11 s	CERAMIC, CHIP 330pF 5% 50V
C755	1-163-263-11 s	CERAMIC, CHIP 330pF 5% 50V
C756	1-163-809-11 s	CERAMIC, CHIP 0.047uF 10% 25V
C757	1-163-809-11 s	CERAMIC, CHIP 0.047uF 10% 25V
C758	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C759	1-164-004-11 s	CERAMIC, CHIP 0.1uF 10% 25V
C760	1-164-004-11 s	CERAMIC, CHIP 0.1uF 10% 25V
C761	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C762	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C763	1-126-947-11 s	ELECT 47uF 20% 35V
C764	1-126-947-11 s	ELECT 47uF 20% 35V
C765	1-124-903-11 s	ELECT 1uF 20% 50V
C766	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C767	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C768	1-163-243-11 s	CERAMIC, CHIP 47pF 5% 50V
C769	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C770	1-164-004-11 s	CERAMIC, CHIP 0.1uF 10% 25V
C771	1-164-004-11 s	CERAMIC, CHIP 0.1uF 10% 25V
C772	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C773	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C774	1-164-004-11 s	CERAMIC, CHIP 0.1uF 10% 25V
C775	1-164-004-11 s	CERAMIC, CHIP 0.1uF 10% 25V
C776	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C777	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C778	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C779	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C780	1-126-947-11 s	ELECT 47uF 20% 35V
C781	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C782	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C783	1-126-947-11 s	ELECT 47uF 20% 35V
C784	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C785	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C786	1-163-097-00 s	CERAMIC, CHIP 15pF 5% 50V
C787	1-163-125-00 s	CERAMIC, CHIP 220pF 5% 50V
C788	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C789	1-126-964-11 s	ELECT 10uF 20% 50V
C790	1-126-964-11 s	ELECT 10uF 20% 50V
C791	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C792	1-126-947-11 s	ELECT 47uF 20% 35V
C793	1-126-947-11 s	ELECT 47uF 20% 35V
C794	1-124-903-11 s	ELECT 1uF 20% 50V
C795	1-164-222-11 s	CERAMIC, CHIP 0.22uF 25V
C796	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C797	1-164-232-11 s	CERAMIC, CHIP 0.01uF 10% 100V
C798	1-164-232-11 s	CERAMIC, CHIP 0.01uF 10% 100V
C799	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V

(TBC-25 BOARD(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
C800	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C801	1-163-239-11 s	CERAMIC, CHIP 33pF 5% 50V
C802	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C803	1-163-121-00 s	CERAMIC, CHIP 150pF 5% 50V
C804	1-163-251-11 s	CERAMIC, CHIP 100pF 5% 50V
CN1	1-564-005-11 o	CONNECTOR 6P, MALE
CN2	1-564-005-11 o	CONNECTOR 6P, MALE
CN105	1-573-782-21 o	CONNECTOR, PHEC 60P, MALE
CN106	1-573-782-21 o	CONNECTOR, PHEC 60P, MALE
CV700	1-141-304-21 s	CAP, TRIMMER 10pF
CV701	1-141-304-21 s	CAP, TRIMMER 10pF
D1	8-719-941-04 s	DIODE SB007-03CP
D2	8-719-941-04 s	DIODE SB007-03CP
D100	8-719-941-23 s	DIODE DA204U
D101	8-719-123-82 s	DIODE 1SS303-T1
D102	8-719-123-85 s	DIODE 1SS304
D200	8-719-941-23 s	DIODE DA204U
D301	8-719-941-23 s	DIODE DA204U
D302	8-719-105-38 s	DIODE RD3.0M-B1
D303	8-719-041-39 s	DIODE KV1470
D304	8-719-041-39 s	DIODE KV1470
D401	8-719-941-23 s	DIODE DA204U
D402	8-719-105-38 s	DIODE RD3.0M-B1
D403	8-719-041-39 s	DIODE KV1470
D404	8-719-041-39 s	DIODE KV1470
D502	8-719-123-82 s	DIODE 1SS303-T1
D503	8-719-123-82 s	DIODE 1SS303-T1
D504	8-719-941-23 s	DIODE DA204U
D505	8-719-123-85 s	DIODE 1SS304
D506	8-719-123-85 s	DIODE 1SS304
D701	8-719-123-82 s	DIODE 1SS303-T1
D702	8-713-300-88 s	DIODE 1T33C-01
D703	8-713-300-88 s	DIODE 1T33C-01
FL500	1-239-769-11 s	FILTER, LOW-PASS 5MHz
FL501	1-239-767-11 s	FILTER, LOW-PASS 2MHz
FL502	1-239-767-11 s	FILTER, LOW-PASS 2MHz
IC1	8-759-168-20 s	IC TA78L09S
IC2	8-759-168-20 s	IC TA78L09S
IC3	8-759-822-95 s	IC L79M05T-FA
IC4	8-759-822-95 s	IC L79M05T-FA
IC5	8-759-182-84 s	IC PQ05SZ5U
IC6	8-759-182-84 s	IC PQ05SZ5U
IC7	8-759-182-84 s	IC PQ05SZ5U
IC100	8-759-030-74 s	IC SC14S66FEL
IC101	8-759-908-17 s	IC TL082CPS
IC102	8-759-908-15 s	IC TL431CLP
IC103	8-752-334-55 s	IC CXD1175M
IC200	8-759-030-74 s	IC SC14S66FEL
IC203	8-752-334-55 s	IC CXD1175M
IC300	8-759-702-08 s	IC NJM360M
IC301	8-752-339-03 s	IC CXD2207Q
IC302	8-759-300-71 s	IC HD14053BFP
IC303	8-759-100-96 s	IC UPC4558G2
IC304	8-759-100-96 s	IC UPC4558G2
IC305	8-759-194-31 s	IC MB4002PF-ER
IC306	8-759-907-81 s	IC SN74LS221NS
IC307	8-759-991-85 s	IC 74F00SJ

(TBC-25 BOARD(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
IC308	8-759-030-74 s	IC SC14S66FEL
IC400	8-759-702-08 s	IC NJM360M
IC401	8-752-339-03 s	IC CXD2207Q
IC402	8-759-100-96 s	IC UPC4558G2
IC403	8-759-100-96 s	IC UPC4558G2
IC404	8-759-194-31 s	IC MB4002PF-ER
IC405	8-759-907-81 s	IC SN74LS221NS
IC406	8-759-926-24 s	IC SN74HC164NS
IC407	8-759-991-85 s	IC 74F00SJ
IC408	8-759-030-74 s	IC SC14S66FEL
IC501	8-752-362-70 s	IC CXD101-106Q
IC502	8-752-362-70 s	IC CXD101-106Q
IC503	8-759-055-71 s	IC CXD8313Q
IC504	8-759-055-71 s	IC CXD8313Q
IC505	8-752-340-52 s	IC CXK48324Q
IC506	8-759-927-02 s	IC SN74HC7266NS
IC507	8-759-147-05 s	IC UPD42101G-3
IC508	8-752-340-52 s	IC CXK48324Q
IC509	8-759-927-46 s	IC SN74HC00NS
IC510	8-759-926-77 s	IC SN74HC541NS
IC511	8-759-925-78 s	IC SN74HC10NS
IC512	8-759-926-18 s	IC SN74HC157ANS
IC513	8-759-926-18 s	IC SN74HC157ANS
IC514	8-759-239-55 s	IC TC74HC123AF
IC515	8-759-100-96 s	IC UPC4558G2
IC516	8-759-100-96 s	IC UPC4558G2
IC517	8-759-100-96 s	IC UPC4558G2
IC518	8-752-352-34 s	IC CXD1171M-1
IC519	8-752-352-34 s	IC CXD1171M-1
IC520	8-752-352-34 s	IC CXD1171M-1
IC521	8-752-052-77 s	IC CXA1450M
IC522	8-759-926-24 s	IC SN74HC164NS
IC523	8-759-925-85 s	IC SN74HC32NS
IC524	8-759-926-18 s	IC SN74HC157ANS
IC525	8-759-926-18 s	IC SN74HC157ANS
IC526	8-759-926-18 s	IC SN74HC157ANS
IC527	8-759-926-18 s	IC SN74HC157ANS
IC528	8-759-925-90 s	IC SN74HC74NS
IC529	8-759-926-27 s	IC SN74HC173NS
IC530	8-759-926-27 s	IC SN74HC173NS
IC531	8-759-926-27 s	IC SN74HC173NS
IC532	8-759-926-27 s	IC SN74HC173NS
IC533	8-759-031-84 s	IC TC7S04F
IC534	8-759-926-56 s	IC SN74HC273NS
IC700	8-759-300-71 s	IC HD14053BFP
IC701	8-759-908-17 s	IC TL082CPS
IC702	8-759-009-05 s	IC MC14051BF
IC703	8-759-987-27 s	IC LM1881M
IC704	8-759-100-96 s	IC UPC4558G2
IC705	8-759-908-17 s	IC TL082CPS
IC706	8-759-702-08 s	IC NJM360M
IC707	8-759-100-96 s	IC UPC4558G2
IC708	8-759-908-15 s	IC TL431CLP
IC709	8-759-980-04 s	IC LM311PS
IC710	8-759-239-55 s	IC TC74HC123AF
IC711	8-759-925-74 s	IC TC74HC04NS
IC712	8-759-250-81 s	IC TC5081AP
IC713	8-752-335-47 s	IC CXD1216M
IC714	8-759-196-23 s	IC MC68HC705C8FU

(TBC-25 BOARD(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
IC715	8-759-300-71 s	IC HD14053BFP
IC716	8-759-925-76 s	IC SN74HC08NS
IC717	8-759-241-03 s	IC TC74HC191AF
IC718	8-759-031-84 s	IC TC7S04F
IC719	8-759-031-84 s	IC TC7S04F
IC720	8-759-925-90 s	IC SN74HC74NS
IC721	8-759-239-55 s	IC TC74HC123AF
IC722	8-759-519-49 s	IC CXD8165Q
IC723	8-752-334-64 s	IC CXD1171M
IC724	8-752-334-64 s	IC CXD1171M
IC725	8-752-052-77 s	IC CXA1450M
IC726	8-759-908-17 s	IC TL082CPS
IC727	8-759-239-55 s	IC TC74HC123AF
L1-L5	1-412-533-21 s	INDUCTOR 47uH
L100	1-410-478-11 s	INDUCTOR 47uH
L101	1-410-476-11 s	INDUCTOR 33uH
L102	1-410-478-11 s	INDUCTOR 47uH
L103	1-410-478-11 s	INDUCTOR 47uH
L200	1-410-478-11 s	INDUCTOR 47uH
L201	1-410-476-11 s	INDUCTOR 33uH
L202	1-410-478-11 s	INDUCTOR 47uH
L203	1-410-478-11 s	INDUCTOR 47uH
L300	1-410-478-11 s	INDUCTOR 47uH
L301	1-410-478-11 s	INDUCTOR 47uH
L302	1-408-427-00 s	INDUCTOR 330uH
L303	1-410-492-11 s	INDUCTOR 680uH
L304	1-408-419-00 s	INDUCTOR 68uH
L305	1-410-478-11 s	INDUCTOR 47uH
L306	1-410-478-11 s	INDUCTOR 47uH
L307	1-408-406-00 s	INDUCTOR 5.6uH
L400	1-410-478-11 s	INDUCTOR 47uH
L401	1-410-478-11 s	INDUCTOR 47uH
L402	1-408-411-00 s	INDUCTOR 15uH
L403	1-410-476-11 s	INDUCTOR 33uH
L404	1-410-482-31 s	INDUCTOR 100uH
L405	1-408-425-00 s	INDUCTOR 220uH
L406	1-408-416-00 s	INDUCTOR 39uH
L407	1-410-478-11 s	INDUCTOR 47uH
L408	1-410-478-11 s	INDUCTOR 47uH
L500-504	1-410-478-11 s	INDUCTOR 47uH
L700	1-410-482-31 s	INDUCTOR 100uH
L701	1-408-419-00 s	INDUCTOR 68uH
L702-709	1-410-478-11 s	INDUCTOR 47uH
LV300	1-406-746-11 s	INDUCTOR, VAR 22uH
LV400	1-406-745-11 s	INDUCTOR, VAR 6.8uH
Q100	8-729-117-32 s	TRANSISTOR 2SC4177
Q101	8-729-117-32 s	TRANSISTOR 2SC4177
Q102	8-729-117-32 s	TRANSISTOR 2SC4177
Q103	8-729-118-56 s	TRANSISTOR 2SK852-X2
Q104	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q200	8-729-117-32 s	TRANSISTOR 2SC4177
Q201	8-729-117-32 s	TRANSISTOR 2SC4177
Q202	8-729-117-32 s	TRANSISTOR 2SC4177
Q203	8-729-118-56 s	TRANSISTOR 2SK852-X2
Q300	8-729-117-32 s	TRANSISTOR 2SC4177
Q301	8-729-117-32 s	TRANSISTOR 2SC4177
Q302	8-729-117-32 s	TRANSISTOR 2SC4177
Q303	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6

(TBC-25 BOARD(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
Q304	8-729-140-47	s TRANSISTOR 2SC3735-B34
Q305	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q306	8-729-117-32	s TRANSISTOR 2SC4177
Q400	8-729-117-32	s TRANSISTOR 2SC4177
Q401	8-729-117-32	s TRANSISTOR 2SC4177
Q402	8-729-117-32	s TRANSISTOR 2SC4177
Q403	8-729-117-32	s TRANSISTOR 2SC4177
Q404	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q405	8-729-140-47	s TRANSISTOR 2SC3735-B34
Q406	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q407	8-729-117-32	s TRANSISTOR 2SC4177
Q500	8-729-117-32	s TRANSISTOR 2SC4177
Q501	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q502	8-729-117-32	s TRANSISTOR 2SC4177
Q503	8-729-117-32	s TRANSISTOR 2SC4177
Q700	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q701	8-729-117-32	s TRANSISTOR 2SC4177
Q702	8-729-117-32	s TRANSISTOR 2SC4177
Q703	8-729-201-27	s TRANSISTOR 2SC2715-Y
Q704	8-729-201-27	s TRANSISTOR 2SC2715-Y
Q705	8-729-140-47	s TRANSISTOR 2SC3735-B34
Q706	8-729-140-47	s TRANSISTOR 2SC3735-B34
Q707-711	8-729-117-32	s TRANSISTOR 2SC4177
R100	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W
R101	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R102	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R103	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R104	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R105	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R106	1-216-652-11	s METAL, CHIP 1.1k 0.5% 1/10W
R107	1-216-652-11	s METAL, CHIP 1.1k 0.5% 1/10W
R108	1-216-059-00	s METAL, CHIP 2.7k 5% 1/10W
R109	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R110	1-216-093-00	s METAL, CHIP 68k 5% 1/10W
R111	1-216-061-00	s METAL, CHIP 3.3k 5% 1/10W
R112	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R113	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R114	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R115	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R116	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R117	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R118	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R119	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R120	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R121	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R122	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R123	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R200	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W
R201	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R202	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R203	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R204	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R205	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R206	1-216-652-11	s METAL, CHIP 1.1k 0.5% 1/10W
R207	1-216-652-11	s METAL, CHIP 1.1k 0.5% 1/10W
R208	1-216-059-00	s METAL, CHIP 2.7k 5% 1/10W
R209	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R210	1-216-081-00	s METAL, CHIP 22k 5% 1/10W

(TBC-25 BOARD(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
R211	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R212	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R213	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R214	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R215	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R222	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R223	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R301	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R302	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R303	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R304	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R305	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R306	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R307	1-216-051-00	s METAL, CHIP 1.2k 5% 1/10W
R308	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R309	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R310	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R311	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R312	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R313	1-216-059-00	s METAL, CHIP 2.7k 5% 1/10W
R314	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R315	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R316	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R317	1-216-069-00	s METAL, CHIP 6.8k 5% 1/10W
R318	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R319	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R320	1-216-295-91	s RES, CHIP 0
R321	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R322	1-216-677-11	s METAL, CHIP 12k 0.5% 1/10W
R323	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R324	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R325	1-216-117-00	s METAL, CHIP 680k 5% 1/10W
R326	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R328	1-216-687-11	s METAL, CHIP 33k 0.5% 1/10W
R329	1-216-669-11	s METAL, CHIP 5.6k 0.5% 1/10W
R330	1-216-634-11	s METAL, CHIP 200 0.5% 1/10W
R331	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R332	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R333	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R334	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R335	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R336	1-216-061-00	s METAL, CHIP 3.3k 5% 1/10W
R337	1-216-671-11	s METAL, CHIP 6.8k 0.5% 1/10W
R338	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R339	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R340	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R341	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R342	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R343	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R344	1-216-661-11	s METAL, CHIP 2.7k 0.5% 1/10W
R345	1-216-658-11	s METAL, CHIP 2k 0.5% 1/10W
R346	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R348	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R350	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R352	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R353	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R354	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R358	1-216-061-00	s METAL, CHIP 3.3k 5% 1/10W
R360	1-216-109-00	s METAL, CHIP 330k 5% 1/10W

(TBC-25 BOARD(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
R361	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R363	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R367	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R369	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R371	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R372	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R373	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R374	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R375	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R376	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R380	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R400	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R401	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R402	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R403	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R404	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R405	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R406	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R407	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R408	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R409	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R410	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R411	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R412	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R413	1-216-059-00	s METAL, CHIP 2.7k 5% 1/10W
R414	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R415	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R416	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R417	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R418	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R419	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R420	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R421	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R422	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R423	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R424	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R425	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R426	1-216-117-00	s METAL, CHIP 680k 5% 1/10W
R427	1-216-645-11	s METAL, CHIP 560 0.5% 1/10W
R428	1-216-623-11	s METAL, CHIP 68 0.5% 1/10W
R429	1-216-655-11	s METAL, CHIP 1.5k 0.5% 1/10W
R430	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R431	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R432	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R433	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R434	1-216-673-11	s METAL, CHIP 8.2k 0.5% 1/10W
R435	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R436	1-216-061-00	s METAL, CHIP 3.3k 5% 1/10W
R437	1-216-671-11	s METAL, CHIP 6.8k 0.5% 1/10W
R438	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R439	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R440	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R441	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R442	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R443	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R444	1-216-661-11	s METAL, CHIP 2.7k 0.5% 1/10W
R445	1-216-658-11	s METAL, CHIP 2k 0.5% 1/10W
R446	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R447	1-216-037-00	s METAL, CHIP 330 5% 1/10W

(TBC-25 BOARD(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
R448	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R449	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R450	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R451	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R452	1-216-061-00	s METAL, CHIP 3.3k 5% 1/10W
R453	1-216-109-00	s METAL, CHIP 330k 5% 1/10W
R454	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R455	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R456	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R457	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R458	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R459	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R460	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R461	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R462	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R463	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R464	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R468	1-216-634-11	s METAL, CHIP 200 0.5% 1/10W
R469	1-216-669-11	s METAL, CHIP 5.6k 0.5% 1/10W
R500-506	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R507	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R508-512	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R513	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R514	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R515	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R516	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R540	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R541	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R542	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R543	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R545	1-216-678-11	s METAL, CHIP 13k 0.5% 1/10W
R546	1-216-678-11	s METAL, CHIP 13k 0.5% 1/10W
R547	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R548	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R549	1-216-661-11	s METAL, CHIP 2.7k 0.5% 1/10W
R550	1-216-661-11	s METAL, CHIP 2.7k 0.5% 1/10W
R551	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R552	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R553	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R554	1-216-678-11	s METAL, CHIP 13k 0.5% 1/10W
R555	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R556	1-216-671-11	s METAL, CHIP 6.8k 0.5% 1/10W
R557	1-216-665-11	s METAL, CHIP 3.9k 0.5% 1/10W
R558	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R559	1-216-671-11	s METAL, CHIP 6.8k 0.5% 1/10W
R560	1-216-673-11	s METAL, CHIP 8.2k 0.5% 1/10W
R561	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R562	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R563	1-216-677-11	s METAL, CHIP 12k 0.5% 1/10W
R564	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R565	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R566	1-216-661-11	s METAL, CHIP 2.7k 0.5% 1/10W
R567	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R568	1-216-681-11	s METAL, CHIP 18k 0.5% 1/10W
R569	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R570	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R571	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R572	1-216-665-11	s METAL, CHIP 3.9k 0.5% 1/10W
R573	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W

(TBC-25 BOARD(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
R574	1-216-665-11	s METAL, CHIP 3.9k 0.5% 1/10W
R575	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R576	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R577	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R578	1-216-663-11	s METAL, CHIP 3.3k 0.5% 1/10W
R579	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R580	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R581	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R582	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R583	1-216-645-11	s METAL, CHIP 560 0.5% 1/10W
R584	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R585	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W
R586	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W
R587	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R588	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W
R589	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R590	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R591	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R592	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R593	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R595	1-216-113-00	s METAL, CHIP 470k 5% 1/10W
R596	1-216-113-00	s METAL, CHIP 470k 5% 1/10W
R598	1-216-113-00	s METAL, CHIP 470k 5% 1/10W
R700	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R701	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R702	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R703	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R704	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R705	1-216-671-11	s METAL, CHIP 6.8k 0.5% 1/10W
R706	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R707	1-216-665-11	s METAL, CHIP 3.9k 0.5% 1/10W
R708	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R709	1-216-671-11	s METAL, CHIP 6.8k 0.5% 1/10W
R710	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R711	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R712	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R713	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R714	1-216-677-11	s METAL, CHIP 12k 0.5% 1/10W
R715	1-216-059-00	s METAL, CHIP 2.7k 5% 1/10W
R716	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R717	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R718	1-216-059-00	s METAL, CHIP 2.7k 5% 1/10W
R719	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R720	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R721	1-216-686-11	s METAL, CHIP 30k 0.5% 1/10W
R722	1-216-069-00	s METAL, CHIP 6.8k 5% 1/10W
R723	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R724	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R725	1-216-686-11	s METAL, CHIP 30k 0.5% 1/10W
R726	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R727	1-216-669-11	s METAL, CHIP 5.6k 0.5% 1/10W
R728	1-216-686-11	s METAL, CHIP 30k 0.5% 1/10W
R729	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R730	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R731	1-216-093-00	s METAL, CHIP 68k 5% 1/10W
R732	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R733	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R734	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R735	1-216-671-11	s METAL, CHIP 6.8k 0.5% 1/10W

(TBC-25 BOARD(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
R736	1-216-061-00	s METAL, CHIP 3.3k 5% 1/10W
R737	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R738	1-216-687-11	s METAL, CHIP 33k 0.5% 1/10W
R739	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R740	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R741	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R742	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R743	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R744	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R745	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R746	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R747	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R748	1-216-687-11	s METAL, CHIP 33k 0.5% 1/10W
R750	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R751	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R753	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R755	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R756	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R757	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R758	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R759	1-216-295-91	s RES, CHIP 0
R760	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R761	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R762	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R763	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R764	1-216-658-11	s METAL, CHIP 2k 0.5% 1/10W
R765	1-216-051-00	s METAL, CHIP 1.2k 5% 1/10W
R766	1-216-658-11	s METAL, CHIP 2k 0.5% 1/10W
R767	1-216-051-00	s METAL, CHIP 1.2k 5% 1/10W
R768	1-216-648-11	s METAL, CHIP 750 0.5% 1/10W
R769	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R770	1-216-648-11	s METAL, CHIP 750 0.5% 1/10W
R771	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R772	1-216-069-00	s METAL, CHIP 6.8k 5% 1/10W
R773	1-216-686-11	s METAL, CHIP 30k 0.5% 1/10W
R774	1-216-069-00	s METAL, CHIP 6.8k 5% 1/10W
R775	1-216-686-11	s METAL, CHIP 30k 0.5% 1/10W
R776	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R777	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R778	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R780	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R781	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R782	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R783	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R784	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R785	1-216-665-11	s METAL, CHIP 3.9k 0.5% 1/10W
R786	1-216-663-11	s METAL, CHIP 3.3k 0.5% 1/10W
R787	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W
R788	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W
R789	1-216-677-11	s METAL, CHIP 12k 0.5% 1/10W
R790	1-216-677-11	s METAL, CHIP 12k 0.5% 1/10W
R791	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R792	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R793	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W
R794	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W
R795-799	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R800	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R801	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R802-807	1-216-041-00	s METAL, CHIP 470 5% 1/10W

(TBC-25 BOARD(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
R808	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R810	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R811	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R812	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R813	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R814	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R815	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R816	1-216-677-11	s METAL, CHIP 12k 0.5% 1/10W
R817	1-216-677-11	s METAL, CHIP 12k 0.5% 1/10W
R818	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R819	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R820	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R821	1-216-059-00	s METAL, CHIP 2.7k 5% 1/10W
R822	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R823	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R824	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R825	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R826	1-216-051-00	s METAL, CHIP 1.2k 5% 1/10W
R827	1-216-648-11	s METAL, CHIP 750 0.5% 1/10W
R828	1-216-673-11	s METAL, CHIP 8.2k 0.5% 1/10W
R829	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R830	1-216-677-11	s METAL, CHIP 12k 0.5% 1/10W
R831	1-216-686-11	s METAL, CHIP 30k 0.5% 1/10W
R832	1-216-665-11	s METAL, CHIP 3.9k 0.5% 1/10W
R833	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R834	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R835	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R836	1-216-677-11	s METAL, CHIP 12k 0.5% 1/10W
R837	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R838	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
RV100	1-241-758-21	s RES, ADJ METAL 100
RV200	1-241-758-21	s RES, ADJ METAL 100
RV300	1-241-786-11	s RES, ADJ METAL 22k
RV301	1-241-763-11	s RES, ADJ METAL 4.7k
RV400	1-241-786-11	s RES, ADJ METAL 22k
RV401	1-241-763-11	s RES, ADJ METAL 4.7k
RV500	1-241-784-11	s RES, ADJ METAL 4.7k
RV501	1-241-784-11	s RES, ADJ METAL 4.7k
RV502	1-241-785-11	s RES, ADJ METAL 10k
RV700	1-241-785-11	s RES, ADJ METAL 10k
RV701	1-241-785-11	s RES, ADJ METAL 10k
RV702	1-241-786-11	s RES, ADJ METAL 22k
RV703	1-241-784-11	s RES, ADJ METAL 4.7k
S500	1-692-535-11	s SWITCH, DIP 4-CKT
TH400	1-807-972-11	s THERMISTOR SV-1715 1.25k
X700	1-527-722-00	s CRYSTAL 14.31818MHz
X701	1-579-459-11	s CRYSTAL 13.5MHz

TR-84 BOARD(UVW-1800/1600)

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-648-921-11	o PRINTED CIRCUIT BOARD, TR-84
1pc	3-182-257-01	s HOLDER, DME
CN945	1-565-876-11	o CONNECTOR 4P, MALE
IC1	8-745-001-07	s DME DM-230-1

VP-43 BOARD(UVW-1800)

Ref. No.
or Q'ty Part No. SP Description

VP-43 board is used for UVW-1800.

1pc	A-8275-281-A	o	MOUNTED CIRCUIT BOARD, VP-43
1pc	3-182-386-01	o	PLATE, SHIELD (L), CARD
1pc	7-621-759-45	s	SCREW, +PSW2.6x6
1pc	3-179-084-01	s	LEVER (R), PC BOARD
1pc	3-179-085-01	s	LEVER (L), PC BOARD
C101	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C102	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C103	1-163-275-11	s	CERAMIC, CHIP 0.001uF 5% 50V
C104	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C105	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C106	1-126-933-11	s	ELECT 100uF 20% 16V
C107	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C108	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C109	1-163-108-00	s	CERAMIC, CHIP 43pF 5% 50V
C110	1-163-115-00	s	CERAMIC, CHIP 82pF 5% 50V
C111	1-163-108-00	s	CERAMIC, CHIP 43pF 5% 50V
C112	1-124-903-11	s	ELECT 1uF 20% 50V
C113	1-124-903-11	s	ELECT 1uF 20% 50V
C114	1-163-275-11	s	CERAMIC, CHIP 0.001uF 5% 50V
C115	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C116	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C117	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C118	1-163-245-11	s	CERAMIC 56pF 5% 50V
C119	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V
C120-127	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C128	1-163-133-00	s	CERAMIC, CHIP 470pF 5% 50V
C129	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C130	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C131	1-126-933-11	s	ELECT 100uF 20% 16V
C132	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C133	1-163-113-00	s	CERAMIC, CHIP 68pF 5% 50V
C134-142	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C143	1-126-933-11	s	ELECT 100uF 20% 16V
C144	1-126-933-11	s	ELECT 100uF 20% 16V
C145	1-126-933-11	s	ELECT 100uF 20% 16V
C146	1-126-933-11	s	ELECT 100uF 20% 16V
C147	1-163-097-00	s	CERAMIC, CHIP 15pF 5% 50V
C148	1-163-241-11	s	CERAMIC, CHIP 39pF 5% 50V
C149	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C150	1-126-933-11	s	ELECT 100uF 20% 16V
C201-212	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C213	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C214	1-163-222-11	s	CERAMIC, CHIP 5pF 50V
C215	1-126-925-11	s	ELECT 470uF 20% 10V
C216	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C217	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C218	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C219	1-163-227-11	s	CERAMIC, CHIP 10pF 5% 50V
C220	1-164-161-11	s	CERAMIC, CHIP 0.0022uF 10% 100V
C221	1-163-091-00	s	CERAMIC, CHIP 8pF 50V
C222	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C223	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C224	1-126-925-11	s	ELECT 470uF 20% 10V
C225	1-126-925-11	s	ELECT 470uF 20% 10V
C226-230	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C231	1-126-925-11	s	ELECT 470uF 20% 10V
C232	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V

(VP-43 BOARD(UVW-1800))

Ref. No.
or Q'ty Part No. SP Description

C234	1-107-552-21	s	MICA, CHIP 150pF 1% 50V
C235	1-126-933-11	s	ELECT 100uF 20% 16V
C236	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C237	1-126-963-11	s	ELECT 4.7uF 20% 50V
C238	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V
C239	1-163-114-00	s	CERAMIC, CHIP 75pF 5% 50V
C240	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C241	1-163-243-11	s	CERAMIC, CHIP 47pF 5% 50V
C242	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C243	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C244	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C245	1-126-925-11	s	ELECT 470uF 20% 10V
C246	1-126-933-11	s	ELECT 100uF 20% 16V
C247	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C248	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C249	1-126-933-11	s	ELECT 100uF 20% 16V
C250	1-126-933-11	s	ELECT 100uF 20% 16V
C251	1-126-964-11	s	ELECT 10uF 20% 50V
C301	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C302	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C303	1-163-275-11	s	CERAMIC, CHIP 0.001uF 5% 50V
C304	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C305	1-126-933-11	s	ELECT 100uF 20% 16V
C306	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C307	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C308	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C309	1-163-110-00	s	CERAMIC, CHIP 51pF 5% 50V
C310	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V
C311	1-163-110-00	s	CERAMIC, CHIP 51pF 5% 50V
C312	1-124-903-11	s	ELECT 1uF 20% 50V
C313	1-124-903-11	s	ELECT 1uF 20% 50V
C314	1-163-275-11	s	CERAMIC, CHIP 0.001uF 5% 50V
C315	1-163-135-00	s	CERAMIC, CHIP 560pF 5% 50V
C316	1-163-257-11	s	CERAMIC, CHIP 180pF 5% 50V
C317	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C318	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C319	1-163-243-11	s	CERAMIC, CHIP 47pF 5% 50V
C320	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C321	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C322	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V
C323	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C324	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C325	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C326	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C327	1-163-133-00	s	CERAMIC, CHIP 470pF 5% 50V
C328	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C329	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C330	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C331	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C332	1-126-933-11	s	ELECT 100uF 20% 16V
C333	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C334	1-163-253-11	s	CERAMIC, CHIP 120pF 5% 50V
C335-339	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C340	1-126-933-11	s	ELECT 100uF 20% 16V
C341	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C342	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C343	1-126-933-11	s	ELECT 100uF 20% 16V
C344	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V
C345	1-163-033-00	s	CERAMIC, CHIP 0.022uF 50V

(VP-43 BOARD(UVW-1800))

(VP-43 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
C346	1-163-097-00	s CERAMIC, CHIP 15pF 5% 50V
C347	1-126-933-11	s ELECT 100uF 20% 16V
C348	1-126-933-11	s ELECT 100uF 20% 16V
C349	1-163-241-11	s CERAMIC, CHIP 39pF 5% 50V
C350	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C351	1-126-933-11	s ELECT 100uF 20% 16V
C401-408	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C409	1-126-925-11	s ELECT 470uF 20% 10V
C410	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C411	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C412	1-163-222-11	s CERAMIC, CHIP 5pF 50V
C413	1-163-222-11	s CERAMIC, CHIP 5pF 50V
C414	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C415	1-164-161-11	s CERAMIC, CHIP 0.0022uF 10% 100V
C416	1-163-222-11	s CERAMIC, CHIP 5pF 50V
C417	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C418	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C419	1-126-925-11	s ELECT 470uF 20% 10V
C420	1-126-925-11	s ELECT 470uF 20% 10V
C421-425	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C426	1-126-933-11	s ELECT 100uF 20% 16V
C427	1-126-925-11	s ELECT 470uF 20% 10V
C428	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C429	1-163-084-00	s CERAMIC, CHIP 1.5pF 50V
C430	1-107-552-21	s MICA, CHIP 150pF 1% 50V
C431	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C432	1-126-963-11	s ELECT 4.7uF 20% 50V
C433	1-163-239-11	s CERAMIC, CHIP 33pF 5% 50V
C434	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C435	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C436	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C437	1-126-925-11	s ELECT 470uF 20% 10V
C438	1-126-933-11	s ELECT 100uF 20% 16V
C439	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C440	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C441	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C442	1-126-933-11	s ELECT 100uF 20% 16V
C443	1-126-933-11	s ELECT 100uF 20% 16V
C501	1-126-933-11	s ELECT 100uF 20% 16V
C502	1-126-933-11	s ELECT 100uF 20% 16V
C503	1-126-933-11	s ELECT 100uF 20% 16V
C504	1-126-933-11	s ELECT 100uF 20% 16V
C505-509	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C510	1-131-365-00	s TANTALUM 10uF 10% 20V
C511	1-131-365-00	s TANTALUM 10uF 10% 20V
C512	1-126-933-11	s ELECT 100uF 20% 16V
C513	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C514	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C515	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C516	1-130-491-00	s MYLAR 0.047uF 5% 50V
C517	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C518	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C519	1-163-097-00	s CERAMIC, CHIP 15pF 5% 50V
C520	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C521	1-163-253-11	s CERAMIC, CHIP 120pF 5% 50V
C522	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C523	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V
C524	1-126-933-11	s ELECT 100uF 20% 16V
C525-529	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V

Ref. No. or Q'ty	Part No.	SP Description
C530	1-126-933-11	s ELECT 100uF 20% 16V
C531	1-163-224-11	s CERAMIC, CHIP 7pF 50V
C532	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C533	1-131-365-00	s TANTALUM 10uF 10% 20V
C534	1-131-365-00	s TANTALUM 10uF 10% 20V
C535	1-126-933-11	s ELECT 100uF 20% 16V
C536	1-130-491-00	s MYLAR 0.047uF 5% 50V
C537	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C538	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C539	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C540	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C541	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C542	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C543	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C544	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C545	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C546	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C547	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C548	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C549	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C550	1-163-222-11	s CERAMIC, CHIP 5pF 50V
C551-555	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C556	1-126-925-11	s ELECT 470uF 20% 10V
C557	1-126-925-11	s ELECT 470uF 20% 10V
C558	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C559	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C601	1-126-933-11	s ELECT 100uF 20% 16V
C602	1-126-933-11	s ELECT 100uF 20% 16V
C603	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C604	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C605	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C606	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C607	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C608	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C609	1-163-118-00	s CERAMIC, CHIP 110pF 5% 50V
C610	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C611	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C614	1-126-933-11	s ELECT 100uF 20% 16V
C615	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C616	1-126-933-11	s ELECT 100uF 20% 16V
C617	1-126-933-11	s ELECT 100uF 20% 16V
C618	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C619	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C620	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C621	1-163-097-00	s CERAMIC, CHIP 15pF 5% 50V
C622	1-131-347-00	s TANTALUM 1uF 10% 35V
C623	1-163-125-00	s CERAMIC, CHIP 220pF 5% 50V
C624	1-131-347-00	s TANTALUM 1uF 10% 35V
C625	1-131-347-00	s TANTALUM 1uF 10% 35V
C626	1-131-347-00	s TANTALUM 1uF 10% 35V
C627	1-126-933-11	s ELECT 100uF 20% 16V
C628	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C629	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C630	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C631	1-130-491-00	s MYLAR 0.047uF 5% 50V
C632	1-130-491-00	s MYLAR 0.047uF 5% 50V
C633	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C634	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C635-645	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V

(VP-43 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
C646	1-126-933-11	s ELECT 100uF 20% 16V
C647	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C648	1-126-933-11	s ELECT 100uF 20% 16V
C649	1-126-933-11	s ELECT 100uF 20% 16V
C650	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C651	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C652	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C653	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C654	1-163-237-11	s CERAMIC, CHIP 27pF 5% 50V
C655	1-163-237-11	s CERAMIC, CHIP 27pF 5% 50V
C656	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C657	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C658	1-163-245-11	s CERAMIC, CHIP 56pF 5% 50V
C659	1-163-245-11	s CERAMIC, CHIP 56pF 5% 50V
C660	1-163-237-11	s CERAMIC, CHIP 27pF 5% 50V
C661	1-163-237-11	s CERAMIC, CHIP 27pF 5% 50V
C662	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C663	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C664	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C665	1-163-224-11	s CERAMIC, CHIP 7pF 50V
C667	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C668	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C669	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C670	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C671	1-126-933-11	s ELECT 100uF 20% 16V
C701	1-126-933-11	s ELECT 100uF 20% 16V
C702	1-126-933-11	s ELECT 100uF 20% 16V
C703	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C704	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C705	1-163-097-00	s CERAMIC, CHIP 15pF 5% 50V
C706	1-163-097-00	s CERAMIC, CHIP 15pF 5% 50V
C707	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C708	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C709	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C710	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C711	1-163-097-00	s CERAMIC, CHIP 15pF 5% 50V
C712	1-163-097-00	s CERAMIC, CHIP 15pF 5% 50V
C713	1-126-933-11	s ELECT 100uF 20% 16V
C714-719	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C720-724	1-126-933-11	s ELECT 100uF 20% 16V
C725	1-131-365-00	s TANTALUM 10uF 10% 20V
C726	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C727	1-130-475-00	s MYLAR 0.0022uF 5% 50V
CN103	1-573-782-21	o CONNECTOR, PHEC 60P, MALE
CN104	1-573-782-21	o CONNECTOR, PHEC 60P, MALE
CN105	1-506-491-11	s CONNECTOR 12P, MALE
D201	8-719-123-82	s DIODE 1SS303-T1
D401	8-719-123-82	s DIODE 1SS303-T1
D501	8-719-123-82	s DIODE 1SS303-T1
D502	8-719-941-04	s DIODE SB007-03CP
D503	8-719-021-31	s DIODE UZM5.1B
D504	8-719-123-82	s DIODE 1SS303-T1
D601	8-719-941-04	s DIODE SB007-03CP
D602	8-719-123-85	s DIODE 1SS304
D701	8-719-123-85	s DIODE 1SS304
DL101	1-415-154-00	s DELAY LINE 35nS
DL301	1-415-546-11	s DELAY LINE 50nS

(VP-43 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
FL201	1-239-770-11	s FILTER, LOW-PASS 4MHz
FL401	1-239-772-11	s FILTER, LOW-PASS 3MHz
FL601	1-239-771-21	s FILTER, LOW-PASS 6MHz
IC101	8-752-052-75	s IC CXA1479Q
IC102	8-759-300-71	s IC HD14053BFP
IC103	8-759-908-92	s IC TL084CNS
IC104	8-759-702-08	s IC NJM360M
IC201	8-759-908-17	s IC TL082CPS
IC202	8-752-052-48	s IC CXA1370Q
IC203	8-759-700-65	s IC NJM79L05A
IC204	1-810-333-11	s HIC BP-022
IC205	8-759-189-43	s IC AN77L05-TA
IC301	8-752-052-75	s IC CXA1479Q
IC302	8-759-300-71	s IC HD14053BFP
IC303	8-759-908-92	s IC TL084CNS
IC401	8-752-052-48	s IC CXA1370Q
IC402	8-759-700-65	s IC NJM79L05A
IC403	1-810-333-11	s HIC BP-022
IC404	8-759-189-43	s IC AN77L05-TA
IC501	8-759-927-46	s IC SN74HC00NS
IC502	8-759-908-92	s IC TL084CNS
IC503	8-759-300-71	s IC HD14053BFP
IC504	8-759-168-20	s IC TA78L09S
IC505	8-759-700-65	s IC NJM79L05A
IC506	8-759-908-92	s IC TL084CNS
IC507	8-752-052-73	s IC CXA1451M
IC508	8-752-052-73	s IC CXA1451M
IC509	8-752-052-73	s IC CXA1451M
IC510	8-752-052-73	s IC CXA1451M
IC511	8-759-182-84	s IC PQ05SZ5U
IC512	8-759-822-95	s IC L79M05T-FA
IC601	8-759-907-81	s IC SN74LS221NS
IC602	8-759-927-46	s IC SN74HC00NS
IC603	8-759-908-92	s IC TL084CNS
IC604	8-759-300-71	s IC HD14053BFP
IC605	8-759-908-92	s IC TL084CNS
IC606	8-752-068-20	s IC CXA1521M-TH
IC607	8-752-068-20	s IC CXA1521M-TH
IC608	8-759-168-20	s IC TA78L09S
IC609	8-759-906-59	s IC CX22017
IC610	8-759-700-65	s IC NJM79L05A
IC611	8-752-052-73	s IC CXA1451M
IC612	8-759-057-43	s IC MC14576BF
IC701	8-752-052-73	s IC CXA1451M
IC702	8-752-052-73	s IC CXA1451M
IC703	8-759-927-46	s IC SN74HC00NS
IC704	8-759-925-74	s IC TC74HC04NS
IC705	8-759-925-85	s IC SN74HC32NS
L101	1-410-482-31	s INDUCTOR 100uH
L102	1-408-406-00	s INDUCTOR 5.6uH
L103	1-408-406-00	s INDUCTOR 5.6uH
L104	1-410-466-41	s INDUCTOR 4.7uH
L105	1-410-482-31	s INDUCTOR 100uH
L106	1-410-462-11	s INDUCTOR 2.2uH
L107	1-410-482-31	s INDUCTOR 100uH
L108	1-410-482-31	s INDUCTOR 100uH
L109	1-408-427-00	s INDUCTOR 330uH
L110	1-410-482-31	s INDUCTOR 100uH

(VP-43 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
L201	1-410-471-11 s	INDUCTOR 12uH
L202	1-410-482-31 s	INDUCTOR 100uH
L203	1-410-468-11 s	INDUCTOR 6.8uH
L204	1-410-478-11 s	INDUCTOR 47uH
L205	1-410-482-31 s	INDUCTOR 100uH
L206	1-410-482-31 s	INDUCTOR 100uH
L207	1-410-482-31 s	INDUCTOR 100uH
L301	1-410-482-31 s	INDUCTOR 100uH
L302	1-410-468-11 s	INDUCTOR 6.8uH
L303	1-410-468-11 s	INDUCTOR 6.8uH
L304	1-408-429-00 s	INDUCTOR 470uH
L305	1-408-429-00 s	INDUCTOR 470uH
L306	1-408-406-00 s	INDUCTOR 5.6uH
L307	1-410-482-31 s	INDUCTOR 100uH
L308	1-410-462-11 s	INDUCTOR 2.2uH
L309	1-408-427-00 s	INDUCTOR 330uH
L310	1-410-482-31 s	INDUCTOR 100uH
L311	1-410-482-31 s	INDUCTOR 100uH
L312	1-410-482-31 s	INDUCTOR 100uH
L401	1-410-471-11 s	INDUCTOR 12uH
L402	1-410-482-31 s	INDUCTOR 100uH
L403	1-408-408-00 s	INDUCTOR 8.2uH
L404	1-410-482-31 s	INDUCTOR 100uH
L405	1-410-482-31 s	INDUCTOR 100uH
L406	1-410-482-31 s	INDUCTOR 100uH
L501	1-410-482-31 s	INDUCTOR 100uH
L502	1-410-482-31 s	INDUCTOR 100uH
L503	1-410-482-31 s	INDUCTOR 100uH
L505	1-410-482-31 s	INDUCTOR 100uH
L506	1-410-482-31 s	INDUCTOR 100uH
L507	1-408-419-00 s	INDUCTOR 68uH
L508	1-410-478-11 s	INDUCTOR 47uH
L509	1-410-476-11 s	INDUCTOR 33uH
L601-609	1-410-482-31 s	INDUCTOR 100uH
L610	1-410-478-11 s	INDUCTOR 47uH
L611	1-410-478-11 s	INDUCTOR 47uH
L612	1-410-478-11 s	INDUCTOR 47uH
L613	1-410-478-11 s	INDUCTOR 47uH
L614	1-408-413-00 s	INDUCTOR 22uH
L701	1-410-482-31 s	INDUCTOR 100uH
L702	1-410-482-31 s	INDUCTOR 100uH
L703	1-410-476-11 s	INDUCTOR 33uH
L704	1-410-476-11 s	INDUCTOR 33uH
L705	1-410-482-31 s	INDUCTOR 100uH
L706	1-412-533-21 s	INDUCTOR 47uH
L707	1-412-533-21 s	INDUCTOR 47uH
L708	1-412-533-21 s	INDUCTOR 47uH
L709	1-412-533-21 s	INDUCTOR 47uH
L710	1-412-533-21 s	INDUCTOR 47uH
Q101	8-729-117-32 s	TRANSISTOR 2SC4177
Q102	8-729-117-72 s	TRANSISTOR 2SC4178
Q103	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q104	8-729-117-72 s	TRANSISTOR 2SC4178
Q105	8-729-117-72 s	TRANSISTOR 2SC4178
Q106	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q107-111	8-729-117-72 s	TRANSISTOR 2SC4178
Q112	8-729-905-18 s	TRANSISTOR DTC144EU
Q201	8-729-117-72 s	TRANSISTOR 2SC4178
Q202	8-729-143-07 s	TRANSISTOR 2SA1610-YY33

(VP-43 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
Q203	8-729-117-72 s	TRANSISTOR 2SC4178
Q204	8-729-117-72 s	TRANSISTOR 2SC4178
Q205	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q206	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q207	8-729-117-72 s	TRANSISTOR 2SC4178
Q208	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q209	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q210	8-729-117-72 s	TRANSISTOR 2SC4178
Q211	8-729-117-72 s	TRANSISTOR 2SC4178
Q212	8-729-117-72 s	TRANSISTOR 2SC4178
Q213	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q214	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q215	8-729-117-72 s	TRANSISTOR 2SC4178
Q216	8-729-905-12 s	TRANSISTOR DTA144EU
Q217	8-729-117-72 s	TRANSISTOR 2SC4178
Q218	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q219	8-729-117-72 s	TRANSISTOR 2SC4178
Q220	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q301	8-729-117-32 s	TRANSISTOR 2SC4177
Q302	8-729-117-72 s	TRANSISTOR 2SC4178
Q303	8-729-117-72 s	TRANSISTOR 2SC4178
Q304	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q305	8-729-117-72 s	TRANSISTOR 2SC4178
Q306	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q307-311	8-729-117-72 s	TRANSISTOR 2SC4178
Q401	8-729-117-72 s	TRANSISTOR 2SC4178
Q402	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q403	8-729-117-72 s	TRANSISTOR 2SC4178
Q404	8-729-117-72 s	TRANSISTOR 2SC4178
Q405	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q406	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q407	8-729-117-72 s	TRANSISTOR 2SC4178
Q408	8-729-117-72 s	TRANSISTOR 2SC4178
Q409	8-729-117-72 s	TRANSISTOR 2SC4178
Q410	8-729-117-72 s	TRANSISTOR 2SC4178
Q411	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q412	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q413	8-729-117-72 s	TRANSISTOR 2SC4178
Q414	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q415	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q416	8-729-905-12 s	TRANSISTOR DTA144EU
Q417	8-729-117-72 s	TRANSISTOR 2SC4178
Q418	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q501	8-729-117-32 s	TRANSISTOR 2SC4177
Q502	8-729-923-06 s	TRANSISTOR FMW8
Q503	8-729-904-04 s	TRANSISTOR FMS2
Q504	8-729-903-82 s	TRANSISTOR FMW2
Q505	8-729-143-14 s	TRANSISTOR 2SC4176-B35
Q506	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q507	8-729-931-46 s	TRANSISTOR FMW7
Q508	8-729-907-26 s	TRANSISTOR IMX1
Q509	8-729-117-32 s	TRANSISTOR 2SC4177
Q510	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q511	8-729-117-32 s	TRANSISTOR 2SC4177
Q512	8-729-117-32 s	TRANSISTOR 2SC4177
Q513	8-729-117-32 s	TRANSISTOR 2SC4177
Q514	8-729-904-41 s	TRANSISTOR FMY3
Q515	8-729-143-14 s	TRANSISTOR 2SC4176-B35
Q516	8-729-117-32 s	TRANSISTOR 2SC4177

(VP-43 BOARD(UVN-1800))

Ref. No. or Q'ty	Part No.	SP Description
Q517	8-729-904-41	s TRANSISTOR FMY3
Q601	8-729-117-32	s TRANSISTOR 2SC4177
Q602	8-729-117-32	s TRANSISTOR 2SC4177
Q603	8-729-923-06	s TRANSISTOR FMW8
Q604	8-729-923-06	s TRANSISTOR FMW8
Q605	8-729-904-04	s TRANSISTOR FMS2
Q606	8-729-904-04	s TRANSISTOR FMS2
Q607	8-729-903-82	s TRANSISTOR FMW2
Q608	8-729-903-82	s TRANSISTOR FMW2
Q609	8-729-907-26	s TRANSISTOR IMX1
Q610	8-729-907-26	s TRANSISTOR IMX1
Q611	8-729-931-46	s TRANSISTOR FMW7
Q612	8-729-931-46	s TRANSISTOR FMW7
Q613	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q614	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q615	8-729-117-32	s TRANSISTOR 2SC4177
Q616	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q617-626	8-729-117-32	s TRANSISTOR 2SC4177
Q627	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q628	8-729-117-32	s TRANSISTOR 2SC4177
Q701	8-729-117-32	s TRANSISTOR 2SC4177
Q702	8-729-117-32	s TRANSISTOR 2SC4177
Q703	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q704	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q705	8-729-117-32	s TRANSISTOR 2SC4177
Q706	8-729-117-32	s TRANSISTOR 2SC4177
Q707	8-729-117-32	s TRANSISTOR 2SC4177
Q708	8-729-117-32	s TRANSISTOR 2SC4177
Q709	8-729-118-56	s TRANSISTOR 2SK852-X2
Q710	8-729-118-56	s TRANSISTOR 2SK852-X2
Q711	8-729-118-56	s TRANSISTOR 2SK852-X2
Q712	8-729-118-56	s TRANSISTOR 2SK852-X2
Q713	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q714	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
R101	1-216-295-91	s RES, CHIP 0
R102	1-216-295-91	s RES, CHIP 0
R103	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W
R104	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W
R105	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R106	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R107	1-216-295-91	s RES, CHIP 0
R108	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R109	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R110	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R111	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R112	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R113	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R114	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R115	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R116	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R117	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R118	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R119	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R120	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W
R121	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R122	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W
R123	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R124	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R125	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W

(VP-43 BOARD(UVN-1800))

Ref. No. or Q'ty	Part No.	SP Description
R126	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R127	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R128	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R129	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R130	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R131	1-216-644-11	s METAL, CHIP 510 0.5% 1/10W
R132	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W
R133	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R134	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W
R135	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R136	1-216-691-11	s METAL, CHIP 47k 0.5% 1/10W
R137	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R138	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R139	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R140	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R141	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R142	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R143	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R144	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W
R145	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R146	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R147	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R148	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R149	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R150	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R151	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R152	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R153	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R154	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R155	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R156	1-216-035-00	s METAL, CHIP 270 5% 1/10W
R157	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R158	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R159	1-216-077-00	s METAL, CHIP 15k 5% 1/10W
R160	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R161	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R162	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R163	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R164	1-216-661-11	s METAL, CHIP 2.7k 0.5% 1/10W
R165	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R166	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R168	1-216-295-91	s RES, CHIP 0
R169	1-216-295-91	s RES, CHIP 0
R170	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R201	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R202	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R203	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R204	1-216-692-11	s METAL, CHIP 51k 0.5% 1/10W
R205	1-216-650-11	s METAL, CHIP 910 0.5% 1/10W
R206	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R207	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R208	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R209	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R210	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R211	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R212	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R213	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R214	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R215	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W

(VP-43 BOARD(UVW-1800))

(VP-43 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
R216	1-216-673-11	s METAL, CHIP 8.2k 0.5% 1/10W
R217	1-216-653-11	s METAL, CHIP 1.2k 0.5% 1/10W
R218	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R219	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R220	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R221	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R222	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R223	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R224	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R225	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R226	1-216-063-00	s METAL, CHIP 3.9k 5% 1/10W
R227	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R228	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R229	1-216-055-00	s METAL, CHIP 1.8k 5% 1/10W
R230	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R231	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R232	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R233	1-216-055-00	s METAL, CHIP 1.8k 5% 1/10W
R234	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R235	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R236	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R237	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R238	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R239	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R240	1-216-655-11	s METAL, CHIP 1.5k 0.5% 1/10W
R241	1-216-663-11	s METAL, CHIP 3.3k 0.5% 1/10W
R242	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R243	1-216-063-00	s METAL, CHIP 3.9k 5% 1/10W
R244	1-216-646-11	s METAL, CHIP 620 0.5% 1/10W
R245	1-216-673-11	s METAL, CHIP 8.2k 0.5% 1/10W
R246	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R247	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R248	1-216-668-11	s METAL, CHIP 5.1k 0.5% 1/10W
R249	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R250	1-216-113-00	s METAL, CHIP 470k 5% 1/10W
R251	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R253	1-216-686-11	s METAL, CHIP 30k 0.5% 1/10W
R255	1-216-652-11	s METAL, CHIP 1.1k 0.5% 1/10W
R256	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R257	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W
R258	1-216-665-11	s METAL, CHIP 3.9k 0.5% 1/10W
R259	1-216-671-11	s METAL, CHIP 6.8k 0.5% 1/10W
R260	1-216-687-11	s METAL, CHIP 33k 0.5% 1/10W
R262	1-216-685-11	s METAL, CHIP 27k 0.5% 1/10W
R263	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R264	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R265	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R266	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W
R267	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R268	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R269	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R270	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W
R271	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R272	1-216-620-11	s METAL, CHIP 51 0.5% 1/10W
R273	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R274	1-216-295-91	s RES, CHIP 0
R275	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R276	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R301	1-216-629-11	s METAL, CHIP 120 0.5% 1/10W

Ref. No. or Q'ty	Part No.	SP Description
R302	1-216-629-11	s METAL, CHIP 120 0.5% 1/10W
R303	1-216-633-11	s METAL, CHIP 180 0.5% 1/10W
R304	1-216-633-11	s METAL, CHIP 180 0.5% 1/10W
R305	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R306	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R307	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R308	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R309	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R310	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R311	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R312	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R313	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R314	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R315	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W
R316	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R317	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R318	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W
R319	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R320	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R321	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R322	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R323	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R324	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R325	1-216-644-11	s METAL, CHIP 510 0.5% 1/10W
R326	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W
R327	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R328	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R329	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R330	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R331	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R332	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R333	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R334	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R335	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R336	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W
R337	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R338	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R339	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R340	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R341	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R342	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R343	1-216-653-11	s METAL, CHIP 1.2k 0.5% 1/10W
R344	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R345	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R346	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R347	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W
R348	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R349	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R350	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R351	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R352	1-216-077-00	s METAL, CHIP 15k 5% 1/10W
R353	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R354	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R355	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R356	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R357	1-216-661-11	s METAL, CHIP 2.7k 0.5% 1/10W
R358	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R359	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R401	1-216-025-00	s METAL, CHIP 100 5% 1/10W

(VP-43 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
R402	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R403	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R404	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R405	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R406	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R407	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R408	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R409	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R410	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R411	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R412	1-216-055-00	s METAL, CHIP 1.8k 5% 1/10W
R413	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R414	1-216-673-11	s METAL, CHIP 8.2k 0.5% 1/10W
R415	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W
R416	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R417	1-216-055-00	s METAL, CHIP 1.8k 5% 1/10W
R418	1-216-653-11	s METAL, CHIP 1.2k 0.5% 1/10W
R419	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R420	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R421	1-216-649-11	s METAL, CHIP 820 0.5% 1/10W
R422	1-216-664-11	s METAL, CHIP 3.6k 0.5% 1/10W
R423	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R424	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R425	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R426	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R427	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R428	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R429	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R430	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R431	1-216-063-00	s METAL, CHIP 3.9k 5% 1/10W
R432	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R433	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R434	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R435	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R436	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R437	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R438	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R439	1-216-063-00	s METAL, CHIP 3.9k 5% 1/10W
R440	1-216-665-11	s METAL, CHIP 3.9k 0.5% 1/10W
R441	1-216-670-11	s METAL, CHIP 6.2k 0.5% 1/10W
R442	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R443	1-216-113-00	s METAL, CHIP 470k 5% 1/10W
R444	1-216-671-11	s METAL, CHIP 6.8k 0.5% 1/10W
R445	1-216-119-00	s METAL, CHIP 820k 5% 1/10W
R446	1-216-687-11	s METAL, CHIP 33k 0.5% 1/10W
R447	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R448	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R449	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R450	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R451	1-216-665-11	s METAL, CHIP 3.9k 0.5% 1/10W
R452	1-216-671-11	s METAL, CHIP 6.8k 0.5% 1/10W
R453	1-216-689-11	s METAL, CHIP 39k 0.5% 1/10W
R454	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R455	1-216-685-11	s METAL, CHIP 27k 0.5% 1/10W
R456	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R457	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R458	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R459	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W
R460	1-216-049-00	s METAL, CHIP 1k 5% 1/10W

(VP-43 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
R461	1-216-620-11	s METAL, CHIP 51 0.5% 1/10W
R462	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R463	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R464	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R501	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R502	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R503	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R504	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R505	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R506	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R507	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R508	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R509	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R510	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R511	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R512	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R513	1-216-045-00	s METAL, CHIP 680 5% 1/10W
R514	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R515	1-216-077-00	s METAL, CHIP 15k 5% 1/10W
R516	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R517	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R518	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R519	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R520	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R521	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R522	1-216-027-00	s METAL, CHIP 120 5% 1/10W
R523	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R524	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R525	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R526	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R527	1-216-647-11	s METAL, CHIP 680 0.5% 1/10W
R528	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R529	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R530	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R531	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R532	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R533	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R534	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R535	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R536	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R537	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R538	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R539	1-216-653-11	s METAL, CHIP 1.2k 0.5% 1/10W
R540	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R541	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R542	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R543	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R544	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R545	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R546	1-216-113-00	s METAL, CHIP 470k 5% 1/10W
R547	1-216-053-00	s METAL, CHIP 1.5k 5% 1/10W
R548	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R549	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R550	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R551	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R552	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R553	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R554	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R555	1-216-073-00	s METAL, CHIP 10k 5% 1/10W

(VP-43 BOARD(UVW-1800))

(VP-43 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
R556	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R557	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R558	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R559	1-216-053-00	s METAL, CHIP 1.5k 5% 1/10W
R560	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R561	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R562	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R563	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R564	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R565	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R566	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R567	1-216-653-11	s METAL, CHIP 1.2k 0.5% 1/10W
R568-572	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W
R573	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R574	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R575	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R576	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R600	1-249-429-11	s CARBON 10k 5% 1/4W
R601	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R602	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R603	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R604	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R605	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R606	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R607	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R608	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R609	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R610	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R611	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R612	1-216-668-11	s METAL, CHIP 5.1k 0.5% 1/10W
R613	1-216-045-00	s METAL, CHIP 680 5% 1/10W
R614	1-216-045-00	s METAL, CHIP 680 5% 1/10W
R615	1-216-077-00	s METAL, CHIP 15k 5% 1/10W
R616	1-216-077-00	s METAL, CHIP 15k 5% 1/10W
R617	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R618	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R619	1-216-027-00	s METAL, CHIP 120 5% 1/10W
R620	1-216-027-00	s METAL, CHIP 120 5% 1/10W
R621	1-216-687-11	s METAL, CHIP 33k 0.5% 1/10W
R622	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R623	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R626	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R627	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R628	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R629	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R630	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R631	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R632	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R633	1-216-295-91	s RES, CHIP 0
R634	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R635	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R636	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R637	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R638	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R639	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R640	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R641	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R642	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R643	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R644	1-216-081-00	s METAL, CHIP 22k 5% 1/10W

Ref. No. or Q'ty	Part No.	SP Description
R645	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R646	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R647	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R648	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R649	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R650	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R651	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R652	1-216-657-11	s METAL, CHIP 1.8k 0.5% 1/10W
R653	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R654	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R655	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R656	1-216-047-00	s METAL, CHIP 820 5% 1/10W
R657	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R658	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R659	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R660	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R661	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R662	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R663	1-216-077-00	s METAL, CHIP 15k 5% 1/10W
R664	1-216-079-00	s METAL, CHIP 18k 5% 1/10W
R665	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R666	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R667	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R668	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R669	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R670	1-216-677-11	s METAL, CHIP 12k 0.5% 1/10W
R671	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R672	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R673	1-216-637-11	s METAL, CHIP 270 0.5% 1/10W
R674	1-216-669-11	s METAL, CHIP 5.6k 0.5% 1/10W
R675	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R676	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R677	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R678-682	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R683	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R684	1-216-646-11	s METAL, CHIP 620 0.5% 1/10W
R686	1-216-661-11	s METAL, CHIP 2.7k 0.5% 1/10W
R687	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R688	1-216-045-00	s METAL, CHIP 680 5% 1/10W
R689	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R690	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R691	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R692	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R693	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R694	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W
R695	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R696	1-216-095-00	s METAL, CHIP 82k 5% 1/10W
R697	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R698	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R699	1-249-429-11	s CARBON 10k 5% 1/4W
R701	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R702	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R703	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R704	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R705	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R706	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R707	1-216-655-11	s METAL, CHIP 1.5k 0.5% 1/10W
R708	1-216-655-11	s METAL, CHIP 1.5k 0.5% 1/10W
R709	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W

(VP-43 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
R710	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R711	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R712	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R713	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R714	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R715	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R716	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R717	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R718	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R719	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R720	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R721	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R722	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R723	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R724	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R725	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R726	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R727	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R728	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R729	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W
R730	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W
R731	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W
R732	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W
R733-737	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R738	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R739	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R740	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R741	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R742	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R743	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R744	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R745	1-216-113-00	s METAL, CHIP 470k 5% 1/10W
R746	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R747	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R748	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R749	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R750	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R751	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
RV101	1-241-785-11	s RES, ADJ METAL 10k
RV102	1-241-785-11	s RES, ADJ METAL 10k
RV103	1-241-761-11	s RES, ADJ METAL 1k
RV201	1-241-763-11	s RES, ADJ METAL 4.7k
RV301	1-241-785-11	s RES, ADJ METAL 10k
RV302	1-241-785-11	s RES, ADJ METAL 10k
RV303	1-241-761-11	s RES, ADJ METAL 1k
RV401	1-241-764-11	s RES, ADJ METAL 10k
RV501	1-241-761-11	s RES, ADJ METAL 1k
RV502	1-241-761-11	s RES, ADJ METAL 1k
RV503	1-241-761-11	s RES, ADJ METAL 1k
RV504	1-241-761-11	s RES, ADJ METAL 1k
RV505	1-241-761-11	s RES, ADJ METAL 1k
RV506	1-241-758-21	s RES, ADJ METAL 100
RV601	1-241-123-11	s RES, ADJ CARBON 47k
RV602	1-241-123-11	s RES, ADJ CARBON 47k
RV603	1-241-783-11	s RES, ADJ METAL 2.2k
RV604	1-241-784-11	s RES, ADJ METAL 4.7k
RV605	1-241-784-11	s RES, ADJ METAL 4.7k
RV606	1-241-779-21	s RES, ADJ METAL 100

(VP-43 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
RV701	1-241-783-11	s RES, ADJ METAL 2.2k
RV702	1-241-783-11	s RES, ADJ METAL 2.2k
RV703	1-241-761-11	s RES, ADJ METAL 1k
RV704	1-241-761-11	s RES, ADJ METAL 1k
TH201	1-807-972-11	s THERMISTOR SV-1715 1.25k
TH401	1-807-972-11	s THERMISTOR SV-1715 1.25k

VP-43A BOARD(UVW-1600)

Ref. No.
or Q'ty Part No. SP Description

VP-43A board is used for UVW-1600.

1pc	A-8275-277-A	o MOUNTED CIRCUIT BOARD, VP-43A
1pc	3-182-386-01	o PLATE, SHIELD (L), CARD
1pc	7-621-759-45	s SCREW, +PSW2.6x6
1pc	3-179-084-01	s LEVER (R), PC BOARD
1pc	3-179-085-01	s LEVER (L), PC BOARD
C101	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C102	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C103	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C104	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C105	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C106	1-126-933-11	s ELECT 100uF 20% 16V
C107	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C108	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C109	1-163-108-00	s CERAMIC, CHIP 43pF 5% 50V
C110	1-163-115-00	s CERAMIC, CHIP 82pF 5% 50V
C111	1-163-108-00	s CERAMIC, CHIP 43pF 5% 50V
C112	1-124-903-11	s ELECT 1uF 20% 50V
C113	1-124-903-11	s ELECT 1uF 20% 50V
C114	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C115	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C116	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C117	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C118	1-163-245-11	s CERAMIC, CHIP 56pF 5% 50V
C119	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V
C120-127	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C128	1-163-133-00	s CERAMIC, CHIP 470pF 5% 50V
C129	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C130	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C131	1-126-933-11	s ELECT 100uF 20% 16V
C132	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C133	1-163-113-00	s CERAMIC, CHIP 68pF 5% 50V
C134	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C135-142	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C143	1-126-933-11	s ELECT 100uF 20% 16V
C144	1-126-933-11	s ELECT 100uF 20% 16V
C145	1-126-933-11	s ELECT 100uF 20% 16V
C146	1-126-933-11	s ELECT 100uF 20% 16V
C147	1-163-097-00	s CERAMIC, CHIP 15pF 5% 50V
C148	1-163-241-11	s CERAMIC, CHIP 39pF 5% 50V
C149	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C150	1-126-933-11	s ELECT 100uF 20% 16V
C151	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V
C201-212	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C213	1-163-222-11	s CERAMIC, CHIP 5pF 50V
C214	1-163-222-11	s CERAMIC, CHIP 5pF 50V
C215	1-126-925-11	s ELECT 470uF 20% 10V
C216	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C217	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C218	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C219	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C220	1-164-161-11	s CERAMIC, CHIP 0.0022uF 10% 100V
C221	1-163-091-00	s CERAMIC, CHIP 8pF 50V
C222	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C223	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C224	1-126-925-11	s ELECT 470uF 20% 10V
C225	1-126-925-11	s ELECT 470uF 20% 10V
C226-230	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C231	1-126-925-11	s ELECT 470uF 20% 10V

(VP-43A BOARD(UVW-1600))

Ref. No.
or Q'ty Part No. SP Description

C232	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C234	1-107-552-21	s MICA, CHIP 150pF 1% 50V
C235	1-126-933-11	s ELECT 100uF 20% 16V
C236	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C237	1-126-963-11	s ELECT 4.7uF 20% 50V
C238	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V
C239	1-163-114-00	s CERAMIC, CHIP 75pF 5% 50V
C240	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C241	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C242	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C243	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C244	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C245	1-126-925-11	s ELECT 470uF 20% 10V
C246	1-126-933-11	s ELECT 100uF 20% 16V
C247	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C248	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C249	1-126-933-11	s ELECT 100uF 20% 16V
C250	1-126-933-11	s ELECT 100uF 20% 16V
C251	1-126-964-11	s ELECT 10uF 20% 50V
C301	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C302	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C303	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C304	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C305	1-126-933-11	s ELECT 100uF 20% 16V
C306	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C307	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C308	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C309	1-163-110-00	s CERAMIC, CHIP 51pF 5% 50V
C310	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C311	1-163-110-00	s CERAMIC, CHIP 51pF 5% 50V
C312	1-124-903-11	s ELECT 1uF 20% 50V
C313	1-124-903-11	s ELECT 1uF 20% 50V
C314	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C315	1-163-135-00	s CERAMIC, CHIP 560pF 5% 50V
C316	1-163-257-11	s CERAMIC, CHIP 180pF 5% 50V
C317	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C318	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C319	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C320	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C321	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C322	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V
C323	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C324	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C325	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C326	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C327	1-163-133-00	s CERAMIC, CHIP 470pF 5% 50V
C328	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C329	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C330	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C331	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C332	1-126-933-11	s ELECT 100uF 20% 16V
C333	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C334	1-163-253-11	s CERAMIC, CHIP 120pF 5% 50V
C335-339	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C340	1-126-933-11	s ELECT 100uF 20% 16V
C341	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C342	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C343	1-126-933-11	s ELECT 100uF 20% 16V
C344	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V

(VP-43A BOARD(UVW-1600))

Ref. No. or Q'ty	Part No.	SP Description
C345	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C346	1-163-097-00	s CERAMIC, CHIP 15pF 5% 50V
C347	1-126-933-11	s ELECT 100uF 20% 16V
C348	1-126-933-11	s ELECT 100uF 20% 16V
C349	1-163-241-11	s CERAMIC, CHIP 39pF 5% 50V
C350	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C351	1-126-933-11	s ELECT 100uF 20% 16V
C401-408	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C409	1-126-925-11	s ELECT 470uF 20% 10V
C410	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C411	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C412	1-163-222-11	s CERAMIC, CHIP 5pF 50V
C413	1-163-222-11	s CERAMIC, CHIP 5pF 50V
C414	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C415	1-164-161-11	s CERAMIC, CHIP 0.0022uF 10% 100V
C416	1-163-222-11	s CERAMIC, CHIP 5pF 50V
C417	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C418	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C419	1-126-925-11	s ELECT 470uF 20% 10V
C420	1-126-925-11	s ELECT 470uF 20% 10V
C421-425	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C426	1-126-933-11	s ELECT 100uF 20% 16V
C427	1-126-925-11	s ELECT 470uF 20% 10V
C428	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C429	1-163-084-00	s CERAMIC, CHIP 1.5pF 50V
C430	1-107-552-21	s MICA, CHIP 150pF 1% 50V
C431	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C432	1-126-963-11	s ELECT 4.7uF 20% 50V
C433	1-163-239-11	s CERAMIC, CHIP 33pF 5% 50V
C434	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C435	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C436	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C437	1-126-925-11	s ELECT 470uF 20% 10V
C438	1-126-933-11	s ELECT 100uF 20% 16V
C439	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C440	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C441	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C442	1-126-933-11	s ELECT 100uF 20% 16V
C443	1-126-933-11	s ELECT 100uF 20% 16V
C501	1-126-933-11	s ELECT 100uF 20% 16V
C502	1-126-933-11	s ELECT 100uF 20% 16V
C503	1-126-933-11	s ELECT 100uF 20% 16V
C504	1-126-933-11	s ELECT 100uF 20% 16V
C505-509	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C510	1-131-365-00	s TANTALUM 10uF 10% 20V
C511	1-131-365-00	s TANTALUM 10uF 10% 20V
C512	1-126-933-11	s ELECT 100uF 20% 16V
C513	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C514	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C515	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C516	1-130-491-00	s MYLAR 0.047uF 5% 50V
C517	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C518	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C519	1-163-097-00	s CERAMIC, CHIP 15pF 5% 50V
C520	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C521	1-163-253-11	s CERAMIC, CHIP 120pF 5% 50V
C522	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C523	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V
C524	1-126-933-11	s ELECT 100uF 20% 16V

(VP-43A BOARD(UVW-1600))

Ref. No. or Q'ty	Part No.	SP Description
C525-529	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C530	1-126-933-11	s ELECT 100uF 20% 16V
C531	1-163-224-11	s CERAMIC, CHIP 7pF 50V
C532	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C533	1-131-365-00	s TANTALUM 10uF 10% 20V
C534	1-131-365-00	s TANTALUM 10uF 10% 20V
C535	1-126-933-11	s ELECT 100uF 20% 16V
C536	1-130-491-00	s MYLAR 0.047uF 5% 50V
C537	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C538	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C539	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C540	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C541	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C542	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C543	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C544	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C545	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C546	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C547	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C548	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C549	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C550	1-163-222-11	s CERAMIC, CHIP 5pF 50V
C551-555	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C556	1-126-925-11	s ELECT 470uF 20% 10V
C557	1-126-925-11	s ELECT 470uF 20% 10V
C558	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C559	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C601	1-126-933-11	s ELECT 100uF 20% 16V
C602	1-126-933-11	s ELECT 100uF 20% 16V
C603	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C604	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C605	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C606	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C607	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C608	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C609	1-163-118-00	s CERAMIC, CHIP 110pF 5% 50V
C610	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C611	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C614	1-126-933-11	s ELECT 100uF 20% 16V
C615	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C616	1-126-933-11	s ELECT 100uF 20% 16V
C617	1-126-933-11	s ELECT 100uF 20% 16V
C618	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C619	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C620	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C621	1-163-097-00	s CERAMIC, CHIP 15pF 5% 50V
C622	1-131-347-00	s TANTALUM 1uF 10% 35V
C623	1-163-125-00	s CERAMIC, CHIP 220pF 5% 50V
C624	1-131-347-00	s TANTALUM 1uF 10% 35V
C625	1-131-347-00	s TANTALUM 1uF 10% 35V
C626	1-131-347-00	s TANTALUM 1uF 10% 35V
C627	1-126-933-11	s ELECT 100uF 20% 16V
C628	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C629	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C630	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C631	1-130-491-00	s MYLAR 0.047uF 5% 50V
C632	1-130-491-00	s MYLAR 0.047uF 5% 50V
C633	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C634	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V

(VP-43A BOARD(UVW-1600))

Ref. No. or Q'ty	Part No.	SP Description
C635-645	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C646	1-126-933-11	s ELECT 100uF 20% 16V
C647	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C648	1-126-933-11	s ELECT 100uF 20% 16V
C649	1-126-933-11	s ELECT 100uF 20% 16V
C650	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C651	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C652	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C653	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C654	1-163-237-11	s CERAMIC, CHIP 27pF 5% 50V
C655	1-163-237-11	s CERAMIC, CHIP 27pF 5% 50V
C656	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C657	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C658	1-163-245-11	s CERAMIC 56pF 5% 50V
C659	1-163-245-11	s CERAMIC 56pF 5% 50V
C660	1-163-237-11	s CERAMIC, CHIP 27pF 5% 50V
C661	1-163-237-11	s CERAMIC, CHIP 27pF 5% 50V
C662	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C663	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C664	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C665	1-163-224-11	s CERAMIC, CHIP 7pF 50V
C667	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C668	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C669	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C670	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C671	1-126-933-11	s ELECT 100uF 20% 16V
C701	1-126-933-11	s ELECT 100uF 20% 16V
C702	1-126-933-11	s ELECT 100uF 20% 16V
C703	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C704	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C705	1-163-097-00	s CERAMIC, CHIP 15pF 5% 50V
C706	1-163-097-00	s CERAMIC, CHIP 15pF 5% 50V
C707	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C708	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C709	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C710	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C711	1-163-097-00	s CERAMIC, CHIP 15pF 5% 50V
C712	1-163-097-00	s CERAMIC, CHIP 15pF 5% 50V
C713	1-126-933-11	s ELECT 100uF 20% 16V
C714-719	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C720-724	1-126-933-11	s ELECT 100uF 20% 16V
C725	1-131-365-00	s TANTALUM 10uF 10% 20V
C726	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
CN103	1-573-782-21	o CONNECTOR, PHEC 60P, MALE
CN104	1-573-782-21	o CONNECTOR, PHEC 60P, MALE
CN105	1-506-491-11	s CONNECTOR 12P, MALE
D201	8-719-123-82	s DIODE 1SS303-T1
D401	8-719-123-82	s DIODE 1SS303-T1
D501	8-719-123-82	s DIODE 1SS303-T1
D502	8-719-941-04	s DIODE SB007-03CP
D503	8-719-021-31	s DIODE UZM5.1B
D504	8-719-123-82	s DIODE 1SS303-T1
D601	8-719-941-04	s DIODE SB007-03CP
D602	8-719-123-85	s DIODE 1SS304
DL101	1-415-154-00	s DELAY LINE 35nS
DL301	1-415-546-11	s DELAY LINE 50nS
FL201	1-239-770-11	s FILTER, LOW-PASS 4MHz

(VP-43A BOARD(UVW-1600))

Ref. No. or Q'ty	Part No.	SP Description
FL401	1-239-772-11	s FILTER, LOW-PASS 3MHz
FL601	1-239-771-21	s FILTER, LOW-PASS 6MHz
IC101	8-752-052-75	s IC CXA1479Q
IC102	8-759-300-71	s IC HD14053BFP
IC103	8-759-908-92	s IC TL084CNS
IC104	8-759-702-08	s IC NJM360M
IC201	8-759-908-17	s IC TL082CPS
IC202	8-752-052-48	s IC CXA1370Q
IC203	8-759-700-65	s IC NJM79L05A
IC204	1-810-333-11	s HIC BP-022
IC205	8-759-189-43	s IC AN77L05-TA
IC301	8-752-052-75	s IC CXA1479Q
IC302	8-759-300-71	s IC HD14053BFP
IC303	8-759-908-92	s IC TL084CNS
IC401	8-752-052-48	s IC CXA1370Q
IC402	8-759-700-65	s IC NJM79L05A
IC403	1-810-333-11	s HIC BP-022
IC404	8-759-189-43	s IC AN77L05-TA
IC501	8-759-927-46	s IC SN74HC00NS
IC502	8-759-908-92	s IC TL084CNS
IC503	8-759-300-71	s IC HD14053BFP
IC504	8-759-168-20	s IC TA78L09S
IC505	8-759-700-65	s IC NJM79L05A
IC506	8-759-908-92	s IC TL084CNS
IC507	8-752-052-73	s IC CXA1451M
IC508	8-752-052-73	s IC CXA1451M
IC509	8-752-052-73	s IC CXA1451M
IC510	8-752-052-73	s IC CXA1451M
IC511	8-759-182-84	s IC PQ05S25U
IC512	8-759-822-95	s IC L79M05T-FA
IC601	8-759-907-81	s IC SN74LS221NS
IC602	8-759-927-46	s IC SN74HC00NS
IC603	8-759-908-92	s IC TL084CNS
IC604	8-759-300-71	s IC HD14053BFP
IC605	8-759-908-92	s IC TL084CNS
IC606	8-752-068-20	s IC CXA1521M-TH
IC607	8-752-068-20	s IC CXA1521M-TH
IC608	8-759-168-20	s IC TA78L09S
IC609	8-759-906-59	s IC CX22017
IC610	8-759-700-65	s IC NJM79L05A
IC611	8-752-052-73	s IC CXA1451M
IC612	8-759-057-43	s IC MC14576BF
IC701	8-752-052-73	s IC CXA1451M
IC702	8-752-052-73	s IC CXA1451M
IC703	8-759-927-46	s IC SN74HC00NS
IC704	8-759-925-74	s IC TC74HC04NS
IC705	8-759-925-85	s IC SN74HC32NS
L101	1-410-482-31	s INDUCTOR 100uH
L102	1-408-406-00	s INDUCTOR 5.6uH
L103	1-408-406-00	s INDUCTOR 5.6uH
L104	1-410-466-41	s INDUCTOR 4.7uH
L105	1-410-482-31	s INDUCTOR 100uH
L106	1-410-462-11	s INDUCTOR 2.2uH
L107	1-410-482-31	s INDUCTOR 100uH
L108	1-410-482-31	s INDUCTOR 100uH
L109	1-408-427-00	s INDUCTOR 330uH
L110	1-410-482-31	s INDUCTOR 100uH
L111	1-408-406-00	s INDUCTOR 5.6uH
L201	1-410-471-11	s INDUCTOR 12uH

(VP-43A BOARD(UVW-1600))

Ref. No. or Q'ty	Part No.	SP Description
L202	1-410-482-31 s	INDUCTOR 100uH
L203	1-410-468-11 s	INDUCTOR 6.8uH
L204	1-410-478-11 s	INDUCTOR 47uH
L205	1-410-482-31 s	INDUCTOR 100uH
L206	1-410-482-31 s	INDUCTOR 100uH
L207	1-410-482-31 s	INDUCTOR 100uH
L301	1-410-482-31 s	INDUCTOR 100uH
L302	1-410-468-11 s	INDUCTOR 6.8uH
L303	1-410-468-11 s	INDUCTOR 6.8uH
L304	1-408-429-00 s	INDUCTOR 470uH
L305	1-408-429-00 s	INDUCTOR 470uH
L306	1-408-406-00 s	INDUCTOR 5.6uH
L307	1-410-482-31 s	INDUCTOR 100uH
L308	1-410-462-11 s	INDUCTOR 2.2uH
L309	1-408-427-00 s	INDUCTOR 330uH
L310	1-410-482-31 s	INDUCTOR 100uH
L311	1-410-482-31 s	INDUCTOR 100uH
L312	1-410-482-31 s	INDUCTOR 100uH
L401	1-410-471-11 s	INDUCTOR 12uH
L402	1-410-482-31 s	INDUCTOR 100uH
L403	1-408-408-00 s	INDUCTOR 8.2uH
L404	1-410-482-31 s	INDUCTOR 100uH
L405	1-410-482-31 s	INDUCTOR 100uH
L406	1-410-482-31 s	INDUCTOR 100uH
L501	1-410-482-31 s	INDUCTOR 100uH
L502	1-410-482-31 s	INDUCTOR 100uH
L503	1-410-482-31 s	INDUCTOR 100uH
L505	1-410-482-31 s	INDUCTOR 100uH
L506	1-410-482-31 s	INDUCTOR 100uH
L507	1-408-419-00 s	INDUCTOR 68uH
L508	1-410-478-11 s	INDUCTOR 47uH
L509	1-410-476-11 s	INDUCTOR 33uH
L601-609	1-410-482-31 s	INDUCTOR 100uH
L610	1-410-478-11 s	INDUCTOR 47uH
L611	1-410-478-11 s	INDUCTOR 47uH
L612	1-410-478-11 s	INDUCTOR 47uH
L613	1-410-478-11 s	INDUCTOR 47uH
L614	1-408-413-00 s	INDUCTOR 22uH
L701	1-410-482-31 s	INDUCTOR 100uH
L702	1-410-482-31 s	INDUCTOR 100uH
L703	1-410-476-11 s	INDUCTOR 33uH
L704	1-410-476-11 s	INDUCTOR 33uH
L705	1-410-482-31 s	INDUCTOR 100uH
L706-710	1-412-533-21 s	INDUCTOR 47uH
Q101	8-729-117-32 s	TRANSISTOR 2SC4177
Q102	8-729-117-72 s	TRANSISTOR 2SC4178
Q103	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q104	8-729-117-72 s	TRANSISTOR 2SC4178
Q105	8-729-117-72 s	TRANSISTOR 2SC4178
Q106	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q107-111	8-729-117-72 s	TRANSISTOR 2SC4178
Q112	8-729-905-18 s	TRANSISTOR DTC144EU
Q201	8-729-117-72 s	TRANSISTOR 2SC4178
Q202	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q203	8-729-117-72 s	TRANSISTOR 2SC4178
Q204	8-729-117-72 s	TRANSISTOR 2SC4178
Q206	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q207	8-729-117-72 s	TRANSISTOR 2SC4178
Q208	8-729-143-07 s	TRANSISTOR 2SA1610-YY33

(VP-43A BOARD(UVW-1600))

Ref. No. or Q'ty	Part No.	SP Description
Q209	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q210	8-729-117-72 s	TRANSISTOR 2SC4178
Q212	8-729-117-72 s	TRANSISTOR 2SC4178
Q215	8-729-117-72 s	TRANSISTOR 2SC4178
Q216	8-729-905-12 s	TRANSISTOR DTA144EU
Q217	8-729-117-72 s	TRANSISTOR 2SC4178
Q218	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q219	8-729-117-72 s	TRANSISTOR 2SC4178
Q220	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q301	8-729-117-32 s	TRANSISTOR 2SC4177
Q302	8-729-117-72 s	TRANSISTOR 2SC4178
Q303	8-729-117-72 s	TRANSISTOR 2SC4178
Q304	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q305	8-729-117-72 s	TRANSISTOR 2SC4178
Q306	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q307-311	8-729-117-72 s	TRANSISTOR 2SC4178
Q401	8-729-117-72 s	TRANSISTOR 2SC4178
Q402	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q403	8-729-117-72 s	TRANSISTOR 2SC4178
Q404	8-729-117-72 s	TRANSISTOR 2SC4178
Q405	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q406	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q407	8-729-117-72 s	TRANSISTOR 2SC4178
Q408	8-729-117-72 s	TRANSISTOR 2SC4178
Q409	8-729-117-72 s	TRANSISTOR 2SC4178
Q410	8-729-117-72 s	TRANSISTOR 2SC4178
Q411	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q416	8-729-905-12 s	TRANSISTOR DTA144EU
Q417	8-729-117-72 s	TRANSISTOR 2SC4178
Q418	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q501	8-729-117-32 s	TRANSISTOR 2SC4177
Q502	8-729-923-06 s	TRANSISTOR FMW8
Q503	8-729-904-04 s	TRANSISTOR FMS2
Q504	8-729-903-82 s	TRANSISTOR FMW2
Q505	8-729-143-14 s	TRANSISTOR 2SC4176-B35
Q506	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q507	8-729-931-46 s	TRANSISTOR FMW7
Q508	8-729-907-26 s	TRANSISTOR IMX1
Q509	8-729-117-32 s	TRANSISTOR 2SC4177
Q510	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q511	8-729-117-32 s	TRANSISTOR 2SC4177
Q512	8-729-117-32 s	TRANSISTOR 2SC4177
Q513	8-729-117-32 s	TRANSISTOR 2SC4177
Q514	8-729-904-41 s	TRANSISTOR FMY3
Q515	8-729-143-14 s	TRANSISTOR 2SC4176-B35
Q516	8-729-117-32 s	TRANSISTOR 2SC4177
Q517	8-729-904-41 s	TRANSISTOR FMY3
Q601	8-729-117-32 s	TRANSISTOR 2SC4177
Q602	8-729-117-32 s	TRANSISTOR 2SC4177
Q603	8-729-923-06 s	TRANSISTOR FMW8
Q604	8-729-923-06 s	TRANSISTOR FMW8
Q605	8-729-904-04 s	TRANSISTOR FMS2
Q606	8-729-904-04 s	TRANSISTOR FMS2
Q607	8-729-903-82 s	TRANSISTOR FMW2
Q608	8-729-903-82 s	TRANSISTOR FMW2
Q609	8-729-907-26 s	TRANSISTOR IMX1
Q610	8-729-907-26 s	TRANSISTOR IMX1
Q611	8-729-931-46 s	TRANSISTOR FMW7
Q612	8-729-931-46 s	TRANSISTOR FMW7

(VP-43A BOARD(UVW-1600))

Ref. No. or Q'ty	Part No.	SP Description
Q613	8-729-143-14 s	TRANSISTOR 2SC4176-B35
Q614	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q615	8-729-117-32 s	TRANSISTOR 2SC4177
Q616	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q617-626	8-729-117-32 s	TRANSISTOR 2SC4177
Q627	8-729-143-14 s	TRANSISTOR 2SC4176-B35
Q628	8-729-117-32 s	TRANSISTOR 2SC4177
Q701	8-729-117-32 s	TRANSISTOR 2SC4177
Q702	8-729-117-32 s	TRANSISTOR 2SC4177
Q703	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q704	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q705	8-729-117-32 s	TRANSISTOR 2SC4177
Q706	8-729-117-32 s	TRANSISTOR 2SC4177
Q707	8-729-117-32 s	TRANSISTOR 2SC4177
Q708	8-729-117-32 s	TRANSISTOR 2SC4177
Q709	8-729-118-56 s	TRANSISTOR 2SK852-X2
Q710	8-729-118-56 s	TRANSISTOR 2SK852-X2
Q711	8-729-118-56 s	TRANSISTOR 2SK852-X2
Q712	8-729-118-56 s	TRANSISTOR 2SK852-X2
Q713	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q714	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
R101	1-216-627-11 s	METAL, CHIP 100 0.5% 1/10W
R102	1-216-627-11 s	METAL, CHIP 100 0.5% 1/10W
R103	1-216-634-11 s	METAL, CHIP 200 0.5% 1/10W
R104	1-216-634-11 s	METAL, CHIP 200 0.5% 1/10W
R105	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R106	1-216-057-00 s	METAL, CHIP 2.2k 5% 1/10W
R107	1-216-295-91 s	RES, CHIP 0
R108	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R109	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R110	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R111	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R112	1-216-065-00 s	METAL, CHIP 4.7k 5% 1/10W
R113	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R114	1-216-057-00 s	METAL, CHIP 2.2k 5% 1/10W
R115	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R116	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R117	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R118	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R119	1-216-057-00 s	METAL, CHIP 2.2k 5% 1/10W
R120	1-216-638-11 s	METAL, CHIP 300 0.5% 1/10W
R121	1-216-065-00 s	METAL, CHIP 4.7k 5% 1/10W
R122	1-216-638-11 s	METAL, CHIP 300 0.5% 1/10W
R123	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R124	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R125	1-216-065-00 s	METAL, CHIP 4.7k 5% 1/10W
R126	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R127	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R128	1-216-097-00 s	METAL, CHIP 100k 5% 1/10W
R129	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R130	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R131	1-216-644-11 s	METAL, CHIP 510 0.5% 1/10W
R132	1-216-643-11 s	METAL, CHIP 470 0.5% 1/10W
R133	1-216-041-00 s	METAL, CHIP 470 5% 1/10W
R134	1-216-643-11 s	METAL, CHIP 470 0.5% 1/10W
R135	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R136	1-216-691-11 s	METAL, CHIP 47k 0.5% 1/10W
R137	1-216-659-11 s	METAL, CHIP 2.2k 0.5% 1/10W

(VP-43A BOARD(UVW-1600))

Ref. No. or Q'ty	Part No.	SP Description
R138	1-216-065-00 s	METAL, CHIP 4.7k 5% 1/10W
R139	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R140	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R141	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R142	1-216-081-00 s	METAL, CHIP 22k 5% 1/10W
R143	1-216-041-00 s	METAL, CHIP 470 5% 1/10W
R144	1-216-635-11 s	METAL, CHIP 220 0.5% 1/10W
R145	1-216-037-00 s	METAL, CHIP 330 5% 1/10W
R146	1-216-037-00 s	METAL, CHIP 330 5% 1/10W
R147	1-216-065-00 s	METAL, CHIP 4.7k 5% 1/10W
R148	1-216-065-00 s	METAL, CHIP 4.7k 5% 1/10W
R149	1-216-651-11 s	METAL, CHIP 1k 0.5% 1/10W
R150	1-216-663-11 s	METAL, CHIP 3.3k 0.5% 1/10W
R151	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R152	1-216-057-00 s	METAL, CHIP 2.2k 5% 1/10W
R153	1-216-057-00 s	METAL, CHIP 2.2k 5% 1/10W
R154	1-216-037-00 s	METAL, CHIP 330 5% 1/10W
R155	1-216-041-00 s	METAL, CHIP 470 5% 1/10W
R156	1-216-035-00 s	METAL, CHIP 270 5% 1/10W
R157	1-216-037-00 s	METAL, CHIP 330 5% 1/10W
R158	1-216-065-00 s	METAL, CHIP 4.7k 5% 1/10W
R159	1-216-077-00 s	METAL, CHIP 15k 5% 1/10W
R160	1-216-085-00 s	METAL, CHIP 33k 5% 1/10W
R161	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R162	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R163	1-216-675-11 s	METAL, CHIP 10k 0.5% 1/10W
R164	1-216-661-11 s	METAL, CHIP 2.7k 0.5% 1/10W
R165	1-216-065-00 s	METAL, CHIP 4.7k 5% 1/10W
R166	1-216-037-00 s	METAL, CHIP 330 5% 1/10W
R168	1-216-295-91 s	RES, CHIP 0
R169	1-216-295-91 s	RES, CHIP 0
R170	1-216-670-11 s	METAL, CHIP 6.2k 0.5% 1/10W
R201	1-216-675-11 s	METAL, CHIP 10k 0.5% 1/10W
R202	1-216-675-11 s	METAL, CHIP 10k 0.5% 1/10W
R203	1-216-675-11 s	METAL, CHIP 10k 0.5% 1/10W
R204	1-216-692-11 s	METAL, CHIP 51k 0.5% 1/10W
R205	1-216-650-11 s	METAL, CHIP 910 0.5% 1/10W
R206	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R207	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R208	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R209	1-216-639-11 s	METAL, CHIP 330 0.5% 1/10W
R210	1-216-057-00 s	METAL, CHIP 2.2k 5% 1/10W
R211	1-216-651-11 s	METAL, CHIP 1k 0.5% 1/10W
R212	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R213	1-216-639-11 s	METAL, CHIP 330 0.5% 1/10W
R214	1-216-065-00 s	METAL, CHIP 4.7k 5% 1/10W
R215	1-216-651-11 s	METAL, CHIP 1k 0.5% 1/10W
R216	1-216-673-11 s	METAL, CHIP 8.2k 0.5% 1/10W
R217	1-216-653-11 s	METAL, CHIP 1.2k 0.5% 1/10W
R218	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R219	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R220	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R221	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R222	1-216-065-00 s	METAL, CHIP 4.7k 5% 1/10W
R223	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R224	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R227	1-216-065-00 s	METAL, CHIP 4.7k 5% 1/10W
R228	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R229	1-216-055-00 s	METAL, CHIP 1.8k 5% 1/10W

(VP-43A BOARD(UVW-1600))

Ref. No. or Q'ty	Part No.	SP Description
R230	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R232	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R233	1-216-055-00	s METAL, CHIP 1.8k 5% 1/10W
R237	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R240	1-216-655-11	s METAL, CHIP 1.5k 0.5% 1/10W
R241	1-216-663-11	s METAL, CHIP 3.3k 0.5% 1/10W
R244	1-216-646-11	s METAL, CHIP 620 0.5% 1/10W
R245	1-216-673-11	s METAL, CHIP 8.2k 0.5% 1/10W
R246	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R247	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R248	1-216-668-11	s METAL, CHIP 5.1k 0.5% 1/10W
R249	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R250	1-216-113-00	s METAL, CHIP 470k 5% 1/10W
R251	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R253	1-216-686-11	s METAL, CHIP 30k 0.5% 1/10W
R255	1-216-652-11	s METAL, CHIP 1.1k 0.5% 1/10W
R256	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R257	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W
R258	1-216-665-11	s METAL, CHIP 3.9k 0.5% 1/10W
R259	1-216-671-11	s METAL, CHIP 6.8k 0.5% 1/10W
R260	1-216-687-11	s METAL, CHIP 33k 0.5% 1/10W
R262	1-216-685-11	s METAL, CHIP 27k 0.5% 1/10W
R263	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R264	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R265	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R266	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W
R267	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R268	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R269	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R270	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W
R271	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R272	1-216-620-11	s METAL, CHIP 51 0.5% 1/10W
R273	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R274	1-216-295-91	s RES, CHIP 0
R275	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R276	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R301	1-216-633-11	s METAL, CHIP 180 0.5% 1/10W
R302	1-216-633-11	s METAL, CHIP 180 0.5% 1/10W
R303	1-216-629-11	s METAL, CHIP 120 0.5% 1/10W
R304	1-216-629-11	s METAL, CHIP 120 0.5% 1/10W
R305	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R306	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R307	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R308	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R309	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R310	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R311	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R312	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R313	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R314	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R315	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W
R316	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R317	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R318	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W
R319	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R320	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R321	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R322	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R323	1-216-049-00	s METAL, CHIP 1k 5% 1/10W

(VP-43A BOARD(UVW-1600))

Ref. No. or Q'ty	Part No.	SP Description
R324	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R325	1-216-644-11	s METAL, CHIP 510 0.5% 1/10W
R326	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W
R327	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R328	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R329	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R330	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R331	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R332	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R333	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R334	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R335	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R336	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W
R337	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R338	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R339	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R340	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R341	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R342	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R343	1-216-653-11	s METAL, CHIP 1.2k 0.5% 1/10W
R344	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R345	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R346	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R347	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W
R348	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R349	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R350	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R351	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R352	1-216-077-00	s METAL, CHIP 15k 5% 1/10W
R353	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R354	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R355	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R356	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R357	1-216-661-11	s METAL, CHIP 2.7k 0.5% 1/10W
R358	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R359	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R401	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R402	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R403	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R404	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R405	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R406	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R407	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R408	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R409	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R410	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R411	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R412	1-216-055-00	s METAL, CHIP 1.8k 5% 1/10W
R413	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R414	1-216-673-11	s METAL, CHIP 8.2k 0.5% 1/10W
R415	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W
R416	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R417	1-216-055-00	s METAL, CHIP 1.8k 5% 1/10W
R418	1-216-653-11	s METAL, CHIP 1.2k 0.5% 1/10W
R419	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R420	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R421	1-216-649-11	s METAL, CHIP 820 0.5% 1/10W
R422	1-216-664-11	s METAL, CHIP 3.6k 0.5% 1/10W
R423	1-216-073-00	s METAL, CHIP 10k 5% 1/10W

(VP-43A BOARD(UVW-1600))

(VP-43A BOARD(UVW-1600))

Ref. No. or Q'ty	Part No.	SP Description
R424	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R425	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R426	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R427	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R428	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R429	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R440	1-216-665-11	s METAL, CHIP 3.9k 0.5% 1/10W
R441	1-216-670-11	s METAL, CHIP 6.2k 0.5% 1/10W
R442	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R443	1-216-113-00	s METAL, CHIP 470k 5% 1/10W
R444	1-216-671-11	s METAL, CHIP 6.8k 0.5% 1/10W
R445	1-216-119-00	s METAL, CHIP 820k 5% 1/10W
R446	1-216-687-11	s METAL, CHIP 33k 0.5% 1/10W
R447	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R448	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R449	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R450	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R451	1-216-665-11	s METAL, CHIP 3.9k 0.5% 1/10W
R452	1-216-671-11	s METAL, CHIP 6.8k 0.5% 1/10W
R453	1-216-689-11	s METAL, CHIP 39k 0.5% 1/10W
R454	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R455	1-216-685-11	s METAL, CHIP 27k 0.5% 1/10W
R456	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R457	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R458	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R459	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W
R460	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R461	1-216-620-11	s METAL, CHIP 51 0.5% 1/10W
R462	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R463	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R464	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R501	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R502	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R503	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R504	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R505	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R506	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R507	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R508	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R509	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R510	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R511	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R512	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R513	1-216-045-00	s METAL, CHIP 680 5% 1/10W
R514	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R515	1-216-077-00	s METAL, CHIP 15k 5% 1/10W
R516	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R517	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R518	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R519	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R520	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R521	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R522	1-216-027-00	s METAL, CHIP 120 5% 1/10W
R523	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R524	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R525	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R526	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R527	1-216-647-11	s METAL, CHIP 680 0.5% 1/10W
R528	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W

Ref. No. or Q'ty	Part No.	SP Description
R529	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R530	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R531	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R532	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R533	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R534	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R535	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R536	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R537	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R538	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R539	1-216-653-11	s METAL, CHIP 1.2k 0.5% 1/10W
R540	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R541	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R542	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R543	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R544	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R545	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R546	1-216-113-00	s METAL, CHIP 470k 5% 1/10W
R547	1-216-053-00	s METAL, CHIP 1.5k 5% 1/10W
R548	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R549	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R550	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R551	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R552	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R553	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R554	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R555	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R556	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R557	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R558	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R559	1-216-053-00	s METAL, CHIP 1.5k 5% 1/10W
R560	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R561	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R562	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R563	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R564	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R565	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R566	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R567	1-216-653-11	s METAL, CHIP 1.2k 0.5% 1/10W
R568-572	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W
R573	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R574	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R575	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R576	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R600	1-249-429-11	s CARBON 10k 5% 1/4W
R601	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R602	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R603	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R604	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R605	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R606	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R607	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R608	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R609	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R610	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R611	1-216-033-00	s METAL, CHIP 220 5% 1/10W
R612	1-216-668-11	s METAL, CHIP 5.1k 0.5% 1/10W
R613	1-216-045-00	s METAL, CHIP 680 5% 1/10W
R614	1-216-045-00	s METAL, CHIP 680 5% 1/10W
R615	1-216-077-00	s METAL, CHIP 15k 5% 1/10W

(VP-43A BOARD(UVW-1600))

Ref. No. or Q'ty	Part No.	SP Description
R616	1-216-077-00	s METAL, CHIP 15k 5% 1/10W
R617	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R618	1-216-017-00	s METAL, CHIP 47 5% 1/10W
R619	1-216-027-00	s METAL, CHIP 120 5% 1/10W
R620	1-216-027-00	s METAL, CHIP 120 5% 1/10W
R621	1-216-687-11	s METAL, CHIP 33k 0.5% 1/10W
R622	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R623	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R626	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R627	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R628	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R629	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R630	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R631	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R632	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R633	1-216-295-91	s RES, CHIP 0
R634	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R635	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R636	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R637	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R638	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R639	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R640	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R641	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R642	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R643	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R644	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R645	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R646	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R647	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R648	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R649	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R650	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R651	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R652	1-216-657-11	s METAL, CHIP 1.8k 0.5% 1/10W
R653	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R654	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R655	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R656	1-216-047-00	s METAL, CHIP 820 5% 1/10W
R657	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R658	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R659	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R660	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R661	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R662	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R663	1-216-077-00	s METAL, CHIP 15k 5% 1/10W
R664	1-216-079-00	s METAL, CHIP 18k 5% 1/10W
R665	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R666	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R667	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R668	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R669	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R670	1-216-677-11	s METAL, CHIP 12k 0.5% 1/10W
R671	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R672	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R673	1-216-637-11	s METAL, CHIP 270 0.5% 1/10W
R674	1-216-669-11	s METAL, CHIP 5.6k 0.5% 1/10W
R675	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R676	1-216-037-00	s METAL, CHIP 330 5% 1/10W

(VP-43A BOARD(UVW-1600))

Ref. No. or Q'ty	Part No.	SP Description
R677	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R678-682	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R683	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R684	1-216-646-11	s METAL, CHIP 620 0.5% 1/10W
R686	1-216-661-11	s METAL, CHIP 2.7k 0.5% 1/10W
R687	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R688	1-216-045-00	s METAL, CHIP 680 5% 1/10W
R689	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R690	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R691	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R692	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R693	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R694	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W
R695	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R696	1-216-095-00	s METAL, CHIP 82k 5% 1/10W
R697	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R698	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R699	1-249-429-11	s CARBON 10k 5% 1/4W
R701	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R702	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R703	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R704	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R705	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R706	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R707	1-216-655-11	s METAL, CHIP 1.5k 0.5% 1/10W
R708	1-216-655-11	s METAL, CHIP 1.5k 0.5% 1/10W
R709	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R710	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R711	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R712	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R713	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R714	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R715	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R716	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R717	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R718	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R719	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R720	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R721	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R722	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R723	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R724	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R725	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R726	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R727	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R728	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R729	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W
R730	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W
R731	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W
R732	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W
R733-737	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R738	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R739	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R740	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R741	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R742	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R743	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R744	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R745	1-216-113-00	s METAL, CHIP 470k 5% 1/10W

(VP-43A BOARD(UVW-1600))

Ref. No. or Q'ty	Part No.	SP Description
R746	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R747	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R748	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R749	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R750	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R751	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
RV101	1-241-785-11	s RES, ADJ METAL 10k
RV102	1-241-785-11	s RES, ADJ METAL 10k
RV103	1-241-761-11	s RES, ADJ METAL 1k
RV201	1-241-763-11	s RES, ADJ METAL 4.7k
RV301	1-241-785-11	s RES, ADJ METAL 10k
RV302	1-241-785-11	s RES, ADJ METAL 10k
RV303	1-241-761-11	s RES, ADJ METAL 1k
RV401	1-241-764-11	s RES, ADJ METAL 10k
RV501	1-241-761-11	s RES, ADJ METAL 1k
RV502	1-241-761-11	s RES, ADJ METAL 1k
RV503	1-241-761-11	s RES, ADJ METAL 1k
RV504	1-241-761-11	s RES, ADJ METAL 1k
RV505	1-241-761-11	s RES, ADJ METAL 1k
RV506	1-241-758-21	s RES, ADJ METAL 100
RV601	1-241-123-11	s RES, ADJ CARBON 47k
RV602	1-241-123-11	s RES, ADJ CARBON 47k
RV603	1-241-783-11	s RES, ADJ METAL 2.2k
RV604	1-241-784-11	s RES, ADJ METAL 4.7k
RV605	1-241-784-11	s RES, ADJ METAL 4.7k
RV606	1-241-779-21	s RES, ADJ METAL 100
RV701	1-241-783-11	s RES, ADJ METAL 2.2k
RV702	1-241-783-11	s RES, ADJ METAL 2.2k
RV703	1-241-761-11	s RES, ADJ METAL 1k
RV704	1-241-761-11	s RES, ADJ METAL 1k
TH201	1-807-972-11	s THERMISTOR SV-1715 1.25k
TH401	1-807-972-11	s THERMISTOR SV-1715 1.25k

VR-155 BOARD(UVW-1800/1600)

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-648-916-11	o PRINTED CIRCUIT BOARD, VR-155
CN402	1-564-005-11	o CONNECTOR 6P, MALE
RV1	1-237-790-21	s RES, VAR CARBON 10k
RV2	1-237-790-21	s RES, VAR CARBON 10k

VRA-5 BOARD(UVW-1800)

Ref. No.
or Q'ty Part No. SP Description

VRA-5 board is used for UVW-1800.

1pc	A-8275-280-A	o MOUNTED CIRCUIT BOARD, VRA-5
1pc	3-182-386-01	o PLATE, SHIELD (L), CARD
1pc	7-621-759-45	s SCREW, +PSW2.6x6
1pc	8-752-036-77	s IC CXA1179N
1pc	3-179-084-01	s LEVER (R), PC BOARD
1pc	3-179-085-01	s LEVER (L), PC BOARD
C101	1-126-933-11	s ELECT 100uF 20% 16V
C102	1-126-933-11	s ELECT 100uF 20% 16V
C103	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C104	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C105	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C106	1-126-925-11	s ELECT 470uF 20% 10V
C107	1-126-925-11	s ELECT 470uF 20% 10V
C108	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C109	1-126-925-11	s ELECT 470uF 20% 10V
C110	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C111	1-131-347-00	s TANTALUM 1uF 10% 35V
C112	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C113	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C114	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C115	1-126-933-11	s ELECT 100uF 20% 16V
C116	1-126-933-11	s ELECT 100uF 20% 16V
C117	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C118	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C119	1-126-933-11	s ELECT 100uF 20% 16V
C121	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C122	1-163-097-00	s CERAMIC, CHIP 15pF 5% 50V
C123	1-163-097-00	s CERAMIC, CHIP 15pF 5% 50V
C124	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C125	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C126	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C127	1-126-933-11	s ELECT 100uF 20% 16V
C128	1-131-381-00	s TANTALUM 47uF 10% 10V
C129	1-131-381-00	s TANTALUM 47uF 10% 10V
C130	1-131-365-00	s TANTALUM 10uF 10% 20V
C131	1-131-381-00	s TANTALUM 47uF 10% 10V
C132	1-131-381-00	s TANTALUM 47uF 10% 10V
C133	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C134	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C135	1-131-365-00	s TANTALUM 10uF 10% 20V
C136	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C137	1-126-933-11	s ELECT 100uF 20% 16V
C138	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V
C140	1-163-239-11	s CERAMIC, CHIP 33pF 5% 50V
C141	1-163-097-00	s CERAMIC, CHIP 15pF 5% 50V
C142	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C143	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C144	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C145	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V
C200	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C201	1-163-097-00	s CERAMIC, CHIP 15pF 5% 50V
C202	1-163-113-00	s CERAMIC, CHIP 68pF 5% 50V
C203	1-163-113-00	s CERAMIC, CHIP 68pF 5% 50V
C204	1-163-239-11	s CERAMIC, CHIP 33pF 5% 50V
C205	1-163-121-00	s CERAMIC, CHIP 150pF 5% 50V
C206	1-163-121-00	s CERAMIC, CHIP 150pF 5% 50V

(VRA-5 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
C207	1-126-933-11 s	ELECT 100uF 20% 16V
C208	1-163-251-11 s	CERAMIC, CHIP 100pF 5% 50V
C209	1-163-251-11 s	CERAMIC, CHIP 100pF 5% 50V
C210	1-163-251-11 s	CERAMIC, CHIP 100pF 5% 50V
C211	1-163-251-11 s	CERAMIC, CHIP 100pF 5% 50V
C217	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C218	1-163-133-00 s	CERAMIC, CHIP 470pF 5% 50V
C219	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C220	1-163-139-00 s	CERAMIC, CHIP 820pF 5% 50V
C221	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C222	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C223	1-126-925-11 s	ELECT 470uF 20% 10V
C224	1-126-925-11 s	ELECT 470uF 20% 10V
C225-234	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C238	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C239	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C240	1-126-933-11 s	ELECT 100uF 20% 16V
C241-251	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C252	1-126-933-11 s	ELECT 100uF 20% 16V
C253-258	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C259	1-163-251-11 s	CERAMIC, CHIP 100pF 5% 50V
C260	1-163-251-11 s	CERAMIC, CHIP 100pF 5% 50V
C261	1-126-933-11 s	ELECT 100uF 20% 16V
C262	1-126-933-11 s	ELECT 100uF 20% 16V
C263	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C264	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C265	1-163-251-11 s	CERAMIC, CHIP 100pF 5% 50V
C267	1-163-139-00 s	CERAMIC, CHIP 820pF 5% 50V
C268	1-163-139-00 s	CERAMIC, CHIP 820pF 5% 50V
C269	1-163-251-11 s	CERAMIC, CHIP 100pF 5% 50V
C270	1-164-161-11 s	CERAMIC, CHIP 0.0022uF 10% 100V
C271	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C301	1-126-933-11 s	ELECT 100uF 20% 16V
C302	1-126-933-11 s	ELECT 100uF 20% 16V
C303	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C304	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C305	1-126-933-11 s	ELECT 100uF 20% 16V
C306	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C307	1-163-115-00 s	CERAMIC, CHIP 82pF 5% 50V
C308	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C309	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C310	1-163-235-11 s	CERAMIC, CHIP 22pF 5% 50V
C311	1-163-243-11 s	CERAMIC, CHIP 47pF 5% 50V
C312	1-126-964-11 s	ELECT 10uF 20% 50V
C313	1-164-004-11 s	CERAMIC, CHIP 0.1uF 10% 25V
C314	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C316	1-163-263-11 s	CERAMIC, CHIP 330pF 5% 50V
C317	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C318	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C319	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C320	1-126-933-11 s	ELECT 100uF 20% 16V
C321	1-126-933-11 s	ELECT 100uF 20% 16V
C322	1-126-933-11 s	ELECT 100uF 20% 16V
C323	1-163-239-11 s	CERAMIC, CHIP 33pF 5% 50V
C324	1-163-263-11 s	CERAMIC, CHIP 330pF 5% 50V
C325	1-163-121-00 s	CERAMIC, CHIP 150pF 5% 50V
C326	1-164-004-11 s	CERAMIC, CHIP 0.1uF 10% 25V
C327	1-164-004-11 s	CERAMIC, CHIP 0.1uF 10% 25V
C328	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V

(VRA-5 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
C329	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C330	1-126-933-11 s	ELECT 100uF 20% 16V
C331	1-163-017-00 s	CERAMIC, CHIP 0.0047uF 5% 50V
C332	1-163-017-00 s	CERAMIC, CHIP 0.0047uF 5% 50V
C333	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C334	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C335	1-126-933-11 s	ELECT 100uF 20% 16V
C336	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C337	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C338	1-163-133-00 s	CERAMIC, CHIP 470pF 5% 50V
C339	1-163-251-11 s	CERAMIC, CHIP 100pF 5% 50V
C340	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C341	1-126-933-11 s	ELECT 100uF 20% 16V
C342	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C343	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C344	1-163-121-00 s	CERAMIC, CHIP 150pF 5% 50V
C345	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C346	1-164-004-11 s	CERAMIC, CHIP 0.1uF 10% 25V
C347	1-164-004-11 s	CERAMIC, CHIP 0.1uF 10% 25V
C348	1-163-235-11 s	CERAMIC, CHIP 22pF 5% 50V
C349	1-163-239-11 s	CERAMIC, CHIP 33pF 5% 50V
C350	1-126-933-11 s	ELECT 100uF 20% 16V
C351	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C352	1-163-133-00 s	CERAMIC, CHIP 470pF 5% 50V
C353	1-126-933-11 s	ELECT 100uF 20% 16V
C354	1-163-121-00 s	CERAMIC, CHIP 150pF 5% 50V
C355	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C356	1-163-097-00 s	CERAMIC, CHIP 15pF 5% 50V
C357	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C358	1-164-004-11 s	CERAMIC, CHIP 0.1uF 10% 25V
C359	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C360	1-164-004-11 s	CERAMIC, CHIP 0.1uF 10% 25V
C361	1-163-241-11 s	CERAMIC, CHIP 39pF 5% 50V
C362	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C363	1-163-097-00 s	CERAMIC, CHIP 15pF 5% 50V
C364	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C365	1-126-933-11 s	ELECT 100uF 20% 16V
C366	1-163-263-11 s	CERAMIC, CHIP 330pF 5% 50V
C367	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C368	1-126-933-11 s	ELECT 100uF 20% 16V
C369	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C370	1-163-017-00 s	CERAMIC, CHIP 0.0047uF 5% 50V
C371	1-126-933-11 s	ELECT 100uF 20% 16V
C372	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C373	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C374	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C375	1-163-220-11 s	CERAMIC, CHIP 3pF 50V
C376	1-163-227-11 s	CERAMIC, CHIP 10pF 5% 50V
C377	1-126-933-11 s	ELECT 100uF 20% 16V
C378	1-126-933-11 s	ELECT 100uF 20% 16V
C379	1-163-133-00 s	CERAMIC, CHIP 470pF 5% 50V
C380	1-163-251-11 s	CERAMIC, CHIP 100pF 5% 50V
C381	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C382	1-163-251-11 s	CERAMIC, CHIP 100pF 5% 50V
C383	1-164-004-11 s	CERAMIC, CHIP 0.1uF 10% 25V
C384	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C385	1-163-139-00 s	CERAMIC, CHIP 820pF 5% 50V
C386	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V
C387	1-163-033-00 s	CERAMIC, CHIP 0.022uF 50V

(VRA-5 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
C388	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C389	1-126-933-11	s ELECT 100uF 20% 16V
C390	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C391	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C392	1-163-089-00	s CERAMIC, CHIP 6pF 50V
C393	1-163-102-00	s CERAMIC, CHIP 24pF 5% 50V
C394	1-163-113-00	s CERAMIC, CHIP 68pF 5% 50V
C395	1-126-933-11	s ELECT 100uF 20% 16V
C396	1-163-104-00	s CERAMIC, CHIP 30pF 5% 50V
C397	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C398	1-164-232-11	s CERAMIC 0.01uF 10% 100V
C399	1-163-263-11	s CERAMIC, CHIP 330pF 5% 50V
C501	1-126-933-11	s ELECT 100uF 20% 16V
C502	1-126-933-11	s ELECT 100uF 20% 16V
C503	1-126-933-11	s ELECT 100uF 20% 16V
C504	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C505	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C506	1-163-102-00	s CERAMIC, CHIP 24pF 5% 50V
C507	1-163-257-11	s CERAMIC, CHIP 180pF 5% 50V
C508	1-126-933-11	s ELECT 100uF 20% 16V
C509	1-126-933-11	s ELECT 100uF 20% 16V
C510	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C511	1-104-923-21	s MICA, CHIP 180pF 0.25% 50V
C513	1-163-091-00	s CERAMIC, CHIP 8pF 50V
C514	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V
C515	1-163-091-00	s CERAMIC, CHIP 8pF 50V
C516	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C517	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C518	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C519	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C520	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C521	1-131-365-00	s TANTALUM 10uF 10% 20V
C522	1-163-102-00	s CERAMIC, CHIP 24pF 5% 50V
C523	1-126-933-11	s ELECT 100uF 20% 16V
C524	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C525	1-164-004-11	s CERAMIC, CHIP 0.1uF 10% 25V
C526	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C527	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C528	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C529	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C530	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C531	1-164-161-11	s CERAMIC, CHIP 0.0022uF 10% 100V
C603	1-126-933-11	s ELECT 100uF 20% 16V
C604	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C605	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C606	1-163-099-00	s CERAMIC, CHIP 18pF 5% 50V
C607	1-163-125-00	s CERAMIC, CHIP 220pF 5% 50V
C608	1-126-933-11	s ELECT 100uF 20% 16V
C609	1-126-933-11	s ELECT 100uF 20% 16V
C610	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C611	1-104-923-21	s MICA, CHIP 180pF 0.25% 50V
C613	1-163-091-00	s CERAMIC, CHIP 8pF 50V
C614	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C615	1-163-091-00	s CERAMIC, CHIP 8pF 50V
C616	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V
C617	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C618	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C619	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C620	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V

(VRA-5 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
C621	1-131-365-00	s TANTALUM 10uF 10% 20V
C622	1-163-139-00	s CERAMIC, CHIP 820pF 5% 50V
C623	1-163-139-00	s CERAMIC, CHIP 820pF 5% 50V
C624	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C625	1-126-933-11	s ELECT 100uF 20% 16V
C626	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C627	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C628	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C631	1-126-933-11	s ELECT 100uF 20% 16V
C632	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C801	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C802	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C803	1-126-933-11	s ELECT 100uF 20% 16V
C804	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C805	1-163-125-00	s CERAMIC, CHIP 220pF 5% 50V
C806	1-131-347-00	s TANTALUM 1uF 10% 35V
C807	1-131-347-00	s TANTALUM 1uF 10% 35V
C808	1-163-275-11	s CERAMIC, CHIP 0.001uF 5% 50V
C809	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C810	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V
C811	1-131-347-00	s TANTALUM 1uF 10% 35V
C812	1-131-365-00	s TANTALUM 10uF 10% 20V
C813	1-126-933-11	s ELECT 100uF 20% 16V
C814	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C815	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C816	1-126-160-11	s ELECT 1uF 20% 50V
C901	1-126-933-11	s ELECT 100uF 20% 16V
C902	1-126-933-11	s ELECT 100uF 20% 16V
C903	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C904	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C905	1-126-933-11	s ELECT 100uF 20% 16V
C906	1-126-933-11	s ELECT 100uF 20% 16V
C907	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C908	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C909	1-126-933-11	s ELECT 100uF 20% 16V
C910	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C911	1-126-933-11	s ELECT 100uF 20% 16V
C912	1-126-933-11	s ELECT 100uF 20% 16V
C913	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C914	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C915	1-126-933-11	s ELECT 100uF 20% 16V
C916	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
C917	1-126-933-11	s ELECT 100uF 20% 16V
C918	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V
CN101	1-573-782-21	o CONNECTOR, PHEC 60P, MALE
CN102	1-573-782-21	o CONNECTOR, PHEC 60P, MALE
CV301	1-141-304-21	s CAP, TRIMMER 10pF
D101	8-719-941-23	s DIODE DA204U
D102	8-719-941-23	s DIODE DA204U
D109	8-719-123-82	s DIODE 1SS303-T1
D202	8-719-123-82	s DIODE 1SS303-T1
D301	8-719-041-39	s DIODE KV1470
D303	8-719-821-39	s DIODE 1SV160
D305	8-713-300-88	s DIODE 1T33C-01
D306	8-719-911-19	s DIODE 1SS119
D801	8-719-941-23	s DIODE DA204U
FB201	1-543-309-21	s BEAD, FERRITE

(VRA-5 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
FL101	1-239-769-11 s	FILTER, LOW-PASS 5MHz
FL102	1-239-313-11 s	FILTER, LOW-PASS 2MHz
FL103	1-239-313-11 s	FILTER, LOW-PASS 2MHz
FL201	1-239-769-11 s	FILTER, LOW-PASS 5MHz
FL202	1-239-801-11 s	FILTER, LOW-PASS 4MHz
IC101	8-759-300-71 s	IC HD14053BFP
IC102	8-759-300-71 s	IC HD14053BFP
IC103	8-759-908-92 s	IC TL084CNS
IC104	8-759-925-76 s	IC SN74HC08NS
IC201	8-759-925-90 s	IC SN74HC74NS
IC202	8-759-300-71 s	IC HD14053BFP
IC205	8-759-996-29 s	IC MB40568
IC206	8-759-996-29 s	IC MB40568
IC207	8-759-035-93 s	IC TC7532F-TE85L
IC208	8-759-147-02 s	IC UPD42101C-3
IC209	8-759-147-02 s	IC UPD42101C-3
IC210	8-759-513-76 s	IC CXD8161AQ
IC211	8-759-031-84 s	IC TC7S04F
IC212	8-752-329-28 s	IC CXD1151Q
IC213	8-752-352-34 s	IC CXD1171M-1
IC214	8-752-352-34 s	IC CXD1171M-1
IC215	8-759-300-71 s	IC HD14053BFP
IC216	8-759-907-81 s	IC SN74LS221NS
IC217	8-759-008-31 s	IC MC74HC4002F
IC218	8-759-925-85 s	IC SN74HC32NS
IC219	8-759-234-20 s	IC TC7S08F
IC220	8-759-300-71 s	IC HD14053BFP
IC301	8-759-008-67 s	IC MC14066BF
IC302	8-752-339-04 s	IC CXD2208Q
IC303	8-759-908-92 s	IC TL084CNS
IC304	8-759-906-53 s	IC TL062CPS
IC305	8-759-031-84 s	IC TC7S04F
IC306	8-759-908-92 s	IC TL084CNS
IC307	8-759-031-84 s	IC TC7S04F
IC308	8-759-906-53 s	IC TL062CPS
IC309	8-759-300-71 s	IC HD14053BFP
IC310	8-759-520-55 s	IC CXD8243AM
IC311	8-759-008-67 s	IC MC14066BF
IC312	8-759-907-81 s	IC SN74LS221NS
IC313	8-759-239-58 s	IC TC74HC221AF
IC314	8-759-009-06 s	IC MC14052BF
IC315	8-759-908-15 s	IC TL431CLP
IC316	8-759-908-15 s	IC TL431CLP
IC317	8-759-031-84 s	IC TC7S04F
IC501	1-810-334-11 s	HIC BP-023
IC502	8-759-908-15 s	IC TL431CLP
IC601	1-810-334-11 s	HIC BP-023
IC602	8-759-908-15 s	IC TL431CLP
IC801	8-752-064-20 s	IC CXA1727Q
IC802	8-752-356-06 s	IC CXD2122AQ
IC901	8-759-182-84 s	IC PQ05SZ5U
IC902	8-759-822-95 s	IC L79M05T-FA
IC903	8-759-182-84 s	IC PQ05SZ5U
IC904	8-759-172-41 s	IC L78M09T-TL
L101-105	1-410-482-31 s	INDUCTOR 100uH
L107	1-410-482-31 s	INDUCTOR 100uH
L201	1-408-413-00 s	INDUCTOR 22uH
L202	1-410-476-11 s	INDUCTOR 33uH

(VRA-5 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
L203	1-408-419-00 s	INDUCTOR 68uH
L204	1-408-413-00 s	INDUCTOR 22uH
L205	1-410-462-11 s	INDUCTOR 2.2uH
L206	1-410-462-11 s	INDUCTOR 2.2uH
L207	1-410-482-31 s	INDUCTOR 100uH
L208	1-410-482-31 s	INDUCTOR 100uH
L301	1-410-482-31 s	INDUCTOR 100uH
L302	1-410-464-11 s	INDUCTOR 3.3uH
L303	1-410-478-11 s	INDUCTOR 47uH
L304	1-410-476-11 s	INDUCTOR 33uH
L305	1-408-406-00 s	INDUCTOR 5.6uH
L306-314	1-410-482-31 s	INDUCTOR 100uH
L315	1-410-470-11 s	INDUCTOR 10uH
L316	1-410-473-11 s	INDUCTOR 18uH
L317	1-408-416-00 s	INDUCTOR 39uH
L501	1-410-482-31 s	INDUCTOR 100uH
L502	1-410-482-31 s	INDUCTOR 100uH
L503	1-408-419-00 s	INDUCTOR 68uH
L505	1-410-464-11 s	INDUCTOR 3.3uH
L506	1-410-482-31 s	INDUCTOR 100uH
L507	1-410-478-11 s	INDUCTOR 47uH
L603	1-408-420-00 s	INDUCTOR 82uH
L605	1-410-464-11 s	INDUCTOR 3.3uH
L606	1-410-482-31 s	INDUCTOR 100uH
L607	1-408-425-00 s	INDUCTOR 220uH
L608	1-410-482-31 s	INDUCTOR 100uH
L801	1-410-482-31 s	INDUCTOR 100uH
L901-905	1-412-533-21 s	INDUCTOR 47uH
LV301	1-406-745-11 s	INDUCTOR, VAR 6.8uH
Q101	8-729-117-32 s	TRANSISTOR 2SC4177
Q102	8-729-117-32 s	TRANSISTOR 2SC4177
Q103	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q104	8-729-904-41 s	TRANSISTOR FMY3
Q105	8-729-117-32 s	TRANSISTOR 2SC4177
Q106	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q107	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q108	8-729-117-32 s	TRANSISTOR 2SC4177
Q109	8-729-117-32 s	TRANSISTOR 2SC4177
Q110	8-729-117-32 s	TRANSISTOR 2SC4177
Q111	8-729-117-32 s	TRANSISTOR 2SC4177
Q112	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q113	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q114	8-729-117-32 s	TRANSISTOR 2SC4177
Q115	8-729-117-32 s	TRANSISTOR 2SC4177
Q116	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q117-122	8-729-117-32 s	TRANSISTOR 2SC4177
Q123	8-729-118-56 s	TRANSISTOR 2SK852-X2
Q124	8-729-118-56 s	TRANSISTOR 2SK852-X2
Q125	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q126	8-729-117-32 s	TRANSISTOR 2SC4177
Q127	8-729-117-32 s	TRANSISTOR 2SC4177
Q128	8-729-117-32 s	TRANSISTOR 2SC4177
Q129	8-729-117-32 s	TRANSISTOR 2SC4177
Q130	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q131	8-729-117-32 s	TRANSISTOR 2SC4177
Q132	8-729-117-32 s	TRANSISTOR 2SC4177
Q133	8-729-117-32 s	TRANSISTOR 2SC4177
Q201	8-729-117-32 s	TRANSISTOR 2SC4177

(VRA-5 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
Q202	8-729-905-12 s	TRANSISTOR DTA144EU
Q203	8-729-905-18 s	TRANSISTOR DTC144EU
Q204	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q207	8-729-117-32 s	TRANSISTOR 2SC4177
Q209	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q210	8-729-117-32 s	TRANSISTOR 2SC4177
Q211	8-729-117-32 s	TRANSISTOR 2SC4177
Q212	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q213	8-729-117-32 s	TRANSISTOR 2SC4177
Q301	8-729-117-32 s	TRANSISTOR 2SC4177
Q303	8-729-117-32 s	TRANSISTOR 2SC4177
Q305	8-729-117-32 s	TRANSISTOR 2SC4177
Q306	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q307	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q308	8-729-905-18 s	TRANSISTOR DTC144EU
Q309	8-729-905-18 s	TRANSISTOR DTC144EU
Q310	8-729-117-32 s	TRANSISTOR 2SC4177
Q311	8-729-117-32 s	TRANSISTOR 2SC4177
Q312	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q313	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q314	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q315	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q316	8-729-905-18 s	TRANSISTOR DTC144EU
Q317	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q318	8-729-117-32 s	TRANSISTOR 2SC4177
Q319	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q320	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q321	8-729-117-32 s	TRANSISTOR 2SC4177
Q322	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q323	8-729-143-07 s	TRANSISTOR 2SA1610-YY33
Q324	8-729-201-27 s	TRANSISTOR 2SC2715-Y
Q325	8-729-140-47 s	TRANSISTOR 2SC3735-B34
Q508-512	8-729-117-32 s	TRANSISTOR 2SC4177
Q513	8-729-117-72 s	TRANSISTOR 2SC4178
Q514	8-729-117-72 s	TRANSISTOR 2SC4178
Q515	8-729-117-32 s	TRANSISTOR 2SC4177
Q516	8-729-117-72 s	TRANSISTOR 2SC4178
Q517	8-729-117-72 s	TRANSISTOR 2SC4178
Q518	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q519	8-729-117-72 s	TRANSISTOR 2SC4178
Q520	8-729-117-72 s	TRANSISTOR 2SC4178
Q601	8-729-117-32 s	TRANSISTOR 2SC4177
Q602	8-729-117-32 s	TRANSISTOR 2SC4177
Q603	8-729-117-32 s	TRANSISTOR 2SC4177
Q604-610	8-729-117-72 s	TRANSISTOR 2SC4178
Q801	8-729-117-32 s	TRANSISTOR 2SC4177
Q802	8-729-117-32 s	TRANSISTOR 2SC4177
Q803	8-729-117-32 s	TRANSISTOR 2SC4177
Q804	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
R100	1-249-441-11 s	CARBON 100K 5% 1/4W
R101	1-216-651-11 s	METAL, CHIP 1k 0.5% 1/10W
R102	1-216-651-11 s	METAL, CHIP 1k 0.5% 1/10W
R103	1-216-651-11 s	METAL, CHIP 1k 0.5% 1/10W
R104	1-216-651-11 s	METAL, CHIP 1k 0.5% 1/10W
R105	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R106	1-216-013-00 s	METAL, CHIP 33 5% 1/10W
R107	1-216-097-00 s	METAL, CHIP 100k 5% 1/10W
R108	1-216-097-00 s	METAL, CHIP 100k 5% 1/10W
R109	1-216-025-00 s	METAL, CHIP 100 5% 1/10W

(VRA-5 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
R110	1-216-651-11 s	METAL, CHIP 1k 0.5% 1/10W
R111	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R112	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R113	1-216-651-11 s	METAL, CHIP 1k 0.5% 1/10W
R114	1-216-651-11 s	METAL, CHIP 1k 0.5% 1/10W
R115	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R116	1-216-041-00 s	METAL, CHIP 470 5% 1/10W
R117	1-216-639-11 s	METAL, CHIP 330 0.5% 1/10W
R118	1-216-639-11 s	METAL, CHIP 330 0.5% 1/10W
R119	1-216-041-00 s	METAL, CHIP 470 5% 1/10W
R120	1-216-641-11 s	METAL, CHIP 390 0.5% 1/10W
R121	1-216-057-00 s	METAL, CHIP 2.2k 5% 1/10W
R122	1-216-037-00 s	METAL, CHIP 330 5% 1/10W
R123	1-216-065-00 s	METAL, CHIP 4.7k 5% 1/10W
R124	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R125	1-216-065-00 s	METAL, CHIP 4.7k 5% 1/10W
R126	1-216-041-00 s	METAL, CHIP 470 5% 1/10W
R127	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R128	1-216-065-00 s	METAL, CHIP 4.7k 5% 1/10W
R129	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R130	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R131	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R132	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R133	1-216-037-00 s	METAL, CHIP 330 5% 1/10W
R134	1-216-065-00 s	METAL, CHIP 4.7k 5% 1/10W
R135	1-216-657-11 s	METAL, CHIP 1.8k 0.5% 1/10W
R136	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R137	1-216-057-00 s	METAL, CHIP 2.2k 5% 1/10W
R138	1-216-651-11 s	METAL, CHIP 1k 0.5% 1/10W
R139	1-216-683-11 s	METAL, CHIP 22k 0.5% 1/10W
R140	1-216-651-11 s	METAL, CHIP 1k 0.5% 1/10W
R141	1-216-037-00 s	METAL, CHIP 330 5% 1/10W
R142	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R143	1-216-057-00 s	METAL, CHIP 2.2k 5% 1/10W
R144	1-216-037-00 s	METAL, CHIP 330 5% 1/10W
R145	1-216-065-00 s	METAL, CHIP 4.7k 5% 1/10W
R146	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R147	1-216-065-00 s	METAL, CHIP 4.7k 5% 1/10W
R148	1-216-121-00 s	METAL, CHIP 1M 5% 1/10W
R149	1-216-057-00 s	METAL, CHIP 2.2k 5% 1/10W
R150	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R151	1-216-081-00 s	METAL, CHIP 22k 5% 1/10W
R152	1-216-121-00 s	METAL, CHIP 1M 5% 1/10W
R153	1-216-057-00 s	METAL, CHIP 2.2k 5% 1/10W
R154	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R155	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R156	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R157	1-216-081-00 s	METAL, CHIP 22k 5% 1/10W
R158	1-216-073-00 s	METAL, CHIP 10k 5% 1/10W
R159	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R160	1-216-049-00 s	METAL, CHIP 1k 5% 1/10W
R161	1-216-065-00 s	METAL, CHIP 4.7k 5% 1/10W
R162	1-216-037-00 s	METAL, CHIP 330 5% 1/10W
R163	1-216-025-00 s	METAL, CHIP 100 5% 1/10W
R164	1-216-057-00 s	METAL, CHIP 2.2k 5% 1/10W
R165	1-216-651-11 s	METAL, CHIP 1k 0.5% 1/10W
R166	1-216-683-11 s	METAL, CHIP 22k 0.5% 1/10W
R167	1-216-651-11 s	METAL, CHIP 1k 0.5% 1/10W
R168	1-216-037-00 s	METAL, CHIP 330 5% 1/10W

(VRA-5 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
R169	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R170	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R171	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R172	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R173	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R174	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R175	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R176	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R177	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R178	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W
R179	1-216-295-91	s RES, CHIP 0
R180	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R181	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R182	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R183	1-216-295-91	s RES, CHIP 0
R184	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R185	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R186	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R187	1-216-295-91	s RES, CHIP 0
R188	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W
R190	1-216-646-11	s METAL, CHIP 620 0.5% 1/10W
R200	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R201	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R202	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R203	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R204	1-216-655-11	s METAL, CHIP 1.5k 0.5% 1/10W
R205	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W
R206	1-216-655-11	s METAL, CHIP 1.5k 0.5% 1/10W
R207	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W
R208	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W
R209	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W
R210	1-216-009-00	s METAL, CHIP 22 5% 1/10W
R211	1-216-013-00	s METAL, CHIP 33 5% 1/10W
R212	1-216-009-00	s METAL, CHIP 22 5% 1/10W
R216	1-216-013-00	s METAL, CHIP 33 5% 1/10W
R217	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R220	1-218-764-11	s METAL, CHIP 330k 0.5% 1/10W
R223	1-216-663-11	s METAL, CHIP 3.3k 0.5% 1/10W
R224	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R225	1-216-663-11	s METAL, CHIP 3.3k 0.5% 1/10W
R226	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R227	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R228	1-216-687-11	s METAL, CHIP 33k 0.5% 1/10W
R229	1-216-671-11	s METAL, CHIP 6.8k 0.5% 1/10W
R230	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W
R231	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W
R232	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W
R233	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W
R234	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R236	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R238	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R239	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R241	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R242	1-216-696-11	s METAL, CHIP 75k 0.5% 1/10W
R243	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R244	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R245	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R246	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R247	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W

(VRA-5 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
R248	1-216-681-11	s METAL, CHIP 18k 0.5% 1/10W
R249	1-216-081-00	s METAL, CHIP 22k 5% 1/10W
R250	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R251	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R252	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R253	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R254	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R255	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R256	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R257	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R258	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R259	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R261	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R262	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R263	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R265	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R266	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R268	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R269	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R270	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R272-279	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R280	1-216-695-11	s METAL, CHIP 68 5% 1/10W
R301	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R302	1-216-051-00	s METAL, CHIP 1.2k 5% 1/10W
R303	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R304	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R305	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R306	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R307	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R308	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R309	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R310	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R311	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R312	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R313	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R314	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R315	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R316	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R317	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R318	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R319	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R320	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R321	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R322	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R323	1-216-646-11	s METAL, CHIP 620 0.5% 1/10W
R324	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R325	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R326	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R327	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W
R328	1-216-669-11	s METAL, CHIP 5.6k 0.5% 1/10W
R329	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R330	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R331	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W
R332	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R333	1-216-117-00	s METAL, CHIP 680k 5% 1/10W
R334	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R335	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R336	1-216-699-11	s METAL, CHIP 100k 0.5% 1/10W
R338	1-216-089-91	s METAL, CHIP 47k 5% 1/10W

(VRA-5 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
R339	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R340	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R341	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R342	1-218-760-11	s METAL, CHIP 220k 0.5% 1/10W
R343	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R344	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R345	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R346	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R347	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R348	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R349	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R350	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R351	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R352	1-216-670-11	s METAL, CHIP 6.2k 0.5% 1/10W
R353	1-216-634-11	s METAL, CHIP 200 0.5% 1/10W
R354	1-216-663-11	s METAL, CHIP 3.3k 0.5% 1/10W
R355	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R356	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R357	1-216-121-00	s METAL, CHIP 1M 5% 1/10W
R358	1-216-117-00	s METAL, CHIP 680k 5% 1/10W
R359	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W
R360	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R361	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R362	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R363	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R364	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R365	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R367	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R368	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R369	1-216-663-11	s METAL, CHIP 3.3k 0.5% 1/10W
R370	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R371	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W
R372	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R375	1-216-681-11	s METAL, CHIP 18k 0.5% 1/10W
R376	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R377	1-216-653-11	s METAL, CHIP 1.2k 0.5% 1/10W
R378	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R379	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R380	1-216-671-11	s METAL, CHIP 6.8k 0.5% 1/10W
R381	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R382	1-216-673-11	s METAL, CHIP 8.2k 0.5% 1/10W
R383	1-216-673-11	s METAL, CHIP 8.2k 0.5% 1/10W
R384	1-216-673-11	s METAL, CHIP 8.2k 0.5% 1/10W
R385	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R386	1-216-677-11	s METAL, CHIP 12k 0.5% 1/10W
R387	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R388	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R389	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R390	1-216-653-11	s METAL, CHIP 1.2k 0.5% 1/10W
R391	1-216-653-11	s METAL, CHIP 1.2k 0.5% 1/10W
R392	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R393	1-216-663-11	s METAL, CHIP 3.3k 0.5% 1/10W
R394	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R395	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R397	1-216-295-91	s RES, CHIP 0
R399	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R400	1-216-658-11	s METAL, CHIP 2k 0.5% 1/10W
R401	1-216-653-11	s METAL, CHIP 1.2k 0.5% 1/10W
R402	1-216-648-11	s METAL, CHIP 750 0.5% 1/10W

(VRA-5 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
R403	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R404	1-216-671-11	s METAL, CHIP 6.8k 0.5% 1/10W
R405	1-216-686-11	s METAL, CHIP 30k 0.5% 1/10W
R406	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R407	1-216-133-00	s METAL, CHIP 3.3M 5% 1/10W
R501	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R502	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R503	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R504	1-216-663-11	s METAL, CHIP 3.3k 0.5% 1/10W
R505	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R506	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R507	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R508	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R509	1-216-641-11	s METAL, CHIP 390 0.5% 1/10W
R510	1-216-663-11	s METAL, CHIP 3.3k 0.5% 1/10W
R511	1-216-615-11	s METAL, CHIP 33 0.5% 1/10W
R512	1-218-184-11	s METAL, CHIP 997 0.1% 1/16W
R514	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W
R515	1-216-699-11	s METAL, CHIP 100k 0.5% 1/10W
R516	1-218-922-11	s METAL, CHIP 3.26k 0.10% 1/16W
R517	1-216-604-11	s METAL, CHIP 11 0.5% 1/10W
R518	1-216-661-11	s METAL, CHIP 2.7k 0.5% 1/10W
R519	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R520	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R521	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R522	1-216-655-11	s METAL, CHIP 1.5k 0.5% 1/10W
R523	1-216-687-11	s METAL, CHIP 33k 0.5% 1/10W
R524	1-216-295-91	s RES, CHIP 0
R525	1-216-657-11	s METAL, CHIP 1.8k 0.5% 1/10W
R526	1-216-682-11	s METAL, CHIP 20k 0.5% 1/10W
R527	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R528	1-216-295-91	s RES, CHIP 0
R529	1-216-295-91	s RES, CHIP 0
R530	1-216-687-11	s METAL, CHIP 33k 0.5% 1/10W
R531	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W
R532	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R533	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W
R534	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R535	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R536	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R537	1-216-661-11	s METAL, CHIP 2.7k 0.5% 1/10W
R538	1-216-657-11	s METAL, CHIP 1.8k 0.5% 1/10W
R539	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R540	1-216-663-11	s METAL, CHIP 3.3k 0.5% 1/10W
R541	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R542	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R543	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R544	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R545	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R546	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R547	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R548	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R549	1-216-295-91	s RES, CHIP 0
R550	1-216-013-00	s METAL, CHIP 33 5% 1/10W
R551	1-216-013-00	s METAL, CHIP 33 5% 1/10W
R552	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R553	1-216-655-11	s METAL, CHIP 1.5k 0.5% 1/10W
R554	1-216-683-11	s METAL, CHIP 22k 0.5% 1/10W
R555	1-216-663-11	s METAL, CHIP 3.3k 0.5% 1/10W

(VRA-5 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
R556	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R557	1-216-677-11	s METAL, CHIP 12k 0.5% 1/10W
R558	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R559	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R560	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R561	1-216-665-11	s METAL, CHIP 3.9k 0.5% 1/10W
R562	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R563	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R564	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R565	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R601	1-216-085-00	s METAL, CHIP 33k 5% 1/10W
R602	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R603	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R604	1-216-051-00	s METAL, CHIP 1.2k 5% 1/10W
R605	1-216-663-11	s METAL, CHIP 3.3k 0.5% 1/10W
R606	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R607	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R608	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R609	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R610	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W
R611	1-216-659-11	s METAL, CHIP 2.2k 0.5% 1/10W
R612	1-216-611-11	s METAL, CHIP 22 0.5% 1/10W
R613	1-218-184-11	s METAL, CHIP 997 0.1% 1/16W
R614	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R615	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W
R617	1-218-922-11	s METAL, CHIP 3.26k 0.10% 1/16W
R618	1-216-603-11	s METAL, CHIP 10 0.5% 1/10W
R619	1-216-661-11	s METAL, CHIP 2.7k 0.5% 1/10W
R620	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R621	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R622	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R623	1-216-655-11	s METAL, CHIP 1.5k 0.5% 1/10W
R624	1-216-687-11	s METAL, CHIP 33k 0.5% 1/10W
R625	1-216-646-11	s METAL, CHIP 620 0.5% 1/10W
R626	1-216-295-91	s RES, CHIP 0
R627	1-216-682-11	s METAL, CHIP 20k 0.5% 1/10W
R628	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R629	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R630	1-216-295-91	s RES, CHIP 0
R631	1-216-687-11	s METAL, CHIP 33k 0.5% 1/10W
R632	1-216-648-11	s METAL, CHIP 750 0.5% 1/10W
R633	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R634	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R635	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R636	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R637	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R638	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R639	1-216-644-11	s METAL, CHIP 510 0.5% 1/10W
R640	1-216-646-11	s METAL, CHIP 620 0.5% 1/10W
R641	1-216-644-11	s METAL, CHIP 510 0.5% 1/10W
R642	1-216-651-11	s METAL, CHIP 1k 0.5% 1/10W
R643	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R644	1-216-041-00	s METAL, CHIP 470 5% 1/10W
R645	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R646	1-216-057-00	s METAL, CHIP 2.2k 5% 1/10W
R647	1-216-049-00	s METAL, CHIP 1k 5% 1/10W
R648	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R649	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R650	1-216-037-00	s METAL, CHIP 330 5% 1/10W

(VRA-5 BOARD(UVW-1800))

Ref. No. or Q'ty	Part No.	SP Description
R651	1-216-037-00	s METAL, CHIP 330 5% 1/10W
R652	1-216-013-00	s METAL, CHIP 33 5% 1/10W
R653	1-216-013-00	s METAL, CHIP 33 5% 1/10W
R654	1-216-667-11	s METAL, CHIP 4.7k 0.5% 1/10W
R655	1-216-663-11	s METAL, CHIP 3.3k 0.5% 1/10W
R656	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R657	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R658	1-216-675-11	s METAL, CHIP 10k 0.5% 1/10W
R801	1-216-097-00	s METAL, CHIP 100k 5% 1/10W
R802	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R803	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R804	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R805	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R806	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W
R807	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W
R808	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R809	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R810	1-216-679-11	s METAL, CHIP 15k 0.5% 1/10W
R811	1-216-073-00	s METAL, CHIP 10k 5% 1/10W
R812	1-216-646-11	s METAL, CHIP 620 0.5% 1/10W
R813	1-216-025-00	s METAL, CHIP 100 5% 1/10W
R814	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R815	1-216-065-00	s METAL, CHIP 4.7k 5% 1/10W
R816	1-216-089-91	s METAL, CHIP 47k 5% 1/10W
R817	1-249-429-11	s CARBON 10k 5% 1/4W
R818	1-249-429-11	s CARBON 10k 5% 1/4W
RV101	1-241-760-21	s RES, ADJ METAL 470
RV102	1-241-760-21	s RES, ADJ METAL 470
RV103	1-241-762-11	s RES, ADJ METAL 2.2k
RV104	1-241-760-21	s RES, ADJ METAL 470
RV105	1-241-759-21	s RES, ADJ METAL 220
RV201	1-241-784-11	s RES, ADJ METAL 4.7k
RV202	1-241-785-11	s RES, ADJ METAL 10k
RV203	1-241-785-11	s RES, ADJ METAL 10k
RV301	1-241-762-11	s RES, ADJ METAL 2.2k
RV302	1-241-785-11	s RES, ADJ METAL 10k
RV303	1-241-784-11	s RES, ADJ METAL 4.7k
RV304	1-241-784-11	s RES, ADJ METAL 4.7k
RV305	1-241-784-11	s RES, ADJ METAL 4.7k
RV306	1-241-762-11	s RES, ADJ METAL 2.2k
RV501	1-241-761-11	s RES, ADJ METAL 1k
RV502	1-241-762-11	s RES, ADJ METAL 2.2k
RV503	1-241-762-11	s RES, ADJ METAL 2.2k
RV602	1-241-763-11	s RES, ADJ METAL 4.7k
RV603	1-241-763-11	s RES, ADJ METAL 4.7k
S201	1-571-275-31	s SWITCH, SLIDE
TH201	1-807-972-11	s THERMISTOR SV-1715 1.25k
X301	1-527-722-00	s CRYSTAL 14.31818MHz
X302	1-760-109-21	s CRYSTAL 10.738635MHz

AC BOARD/SOPS-1045(UVW-1800/1600)

Ref. No.
or Q'ty Part No. SP Description

1pc **▲**1-413-889-11 s REGULATOR, SWITCHING (SOPS-1045)

All of component parts on the AC board are supplied together when you order switching regulator, SOPS-1045. Therefore, all of components parts on the board should be critical to safe operation.

1pc	1-533-217-31 s	HOLDER, FUSE
1pc	1-580-375-11 s	INLET 3P
3pcs	3-899-248-11 s	SCREW, +PSW M3x8
1pc	7-682-961-01 s	SCREW, +PSW4x8
C151	1-161-740-00 s	CERAMIC 470pF 10% 400V
C152	1-161-740-00 s	CERAMIC 470pF 10% 400V
C153	1-161-740-00 s	CERAMIC 470pF 10% 400V
C154	1-161-740-00 s	CERAMIC 470pF 10% 400V
C155	1-136-472-11 s	FILM 0.1uF 20% 250V
C155	1-136-212-12 s	FILM 0.1uF 20% 250V
C156	1-136-472-11 s	FILM 0.1uF 20% 250V
C156	1-136-212-12 s	FILM 0.1uF 20% 250V
CN151	1-564-215-11 o	PIN, CONNECTOR 4P
F151	1-532-746-11 s	FUSE 4A 125V
L151	1-424-353-11 s	FILTER, LINE
L152	1-424-255-11 s	COIL, CHOKE 10uH
L153	1-424-255-11 s	COIL, CHOKE 10uH
L203	1-406-953-11 s	COIL, CHOKE 30uH
R155	1-202-849-00 s	COMP 820k 1/2W 10%
VZ151	1-809-337-41 s	VARISTOR ENC471D-07AW

M BOARD/SOPS-1045(UVW-1800/1600)

Ref. No.
or Q'ty Part No. SP Description

1pc **▲**1-413-889-11 s REGULATOR, SWITCHING (SOPS-1045)

All of component parts on the M board are supplied together when you order switching regulator, SOPS-1045. Therefore, all of components parts on the board should be critical to safe operation.

1pc	1-543-060-00 s	BEAD, FERRITE
1pc	1-543-923-11 s	BEADS, FERRITE
C106	1-136-185-00 s	FILM 0.22uF 20% 250V
C107	1-161-742-00 s	CERAMIC 0.0022uF 20% 400V
C108	1-161-742-00 s	CERAMIC 0.0022uF 20% 400V
C113	1-125-715-11 s	ELECT 820uF 20% 200V
C114	1-136-206-11 s	FILM 0.033uF 10% 630V
C115	1-136-165-00 s	FILM 0.1uF 5% 50V
C116	1-124-478-11 s	ELECT 100uF 20% 25V
C117	1-124-477-11 s	ELECT 47uF 20% 25V
C118	1-130-487-00 s	MYLAR 0.022uF 5% 50V
C119	1-136-153-00 s	FILM 0.01uF 5% 50V
C120	1-130-048-00 s	FILM 220pF 5% 50V
C121	1-136-165-00 s	FILM 0.1uF 5% 50V
C122	1-124-927-11 s	ELECT 4.7uF 20% 100V
C123	1-161-742-00 s	CERAMIC 0.0022uF 20% 400V
C124	1-161-741-00 s	CERAMIC 1000pF 20% AC400V
C125	1-161-741-00 s	CERAMIC 1000pF 20% AC400V
C126	1-162-117-11 s	CERAMIC 100pF 10% 500V
C201	1-164-645-11 s	CERAMIC 1000pF 10% 500V
C202	1-164-645-11 s	CERAMIC 1000pF 10% 500V
C203	1-128-102-11 s	ELECT 1200uF 20% 16V
C204	1-128-585-11 s	ELECT 270uF 20% 16V
C206	1-164-646-11 s	CERAMIC 2200pF 10% 500V
C207	1-164-646-11 s	CERAMIC 2200pF 10% 500V
C208	1-128-102-11 s	ELECT 1200uF 20% 16V
C209	1-126-987-11 s	ELECT 220uF 20% 10V
C211	1-164-646-11 s	CERAMIC 2200pF 10% 500V
C212	1-164-646-11 s	CERAMIC 2200pF 10% 500V
C213	1-128-102-11 s	ELECT 1200uF 20% 16V
C214	1-126-987-11 s	ELECT 220uF 20% 10V
C215	1-136-165-00 s	FILM 0.1uF 5% 50V
C216	1-164-646-11 s	CERAMIC 2200pF 10% 500V
C217	1-164-646-11 s	CERAMIC 2200pF 10% 500V
C218	1-128-102-11 s	ELECT 1200uF 20% 16V
C219	1-126-987-11 s	ELECT 220uF 20% 10V
C220	1-136-165-00 s	FILM 0.1uF 5% 50V
C221	1-164-645-11 s	CERAMIC 1000pF 10% 500V
C222	1-164-645-11 s	CERAMIC 1000pF 10% 500V
C223	1-128-102-11 s	ELECT 1200uF 20% 16V
C225	1-128-584-11 s	ELECT 120uF 20% 16V
C226	1-128-585-11 s	ELECT 270uF 20% 16V
C228	1-128-585-11 s	ELECT 270uF 20% 16V
C230	1-130-489-00 s	MYLAR 0.033uF 5% 50V
C231	1-136-169-00 s	MYLAR 0.22uF 5% 50V
C232	1-130-483-00 s	MYLAR 0.01uF 5% 50V
C233	1-136-157-00 s	FILM, CHIP 0.022uF 5% 50V
CN101	1-564-216-00 o	CONNECTOR, VH 5P, MALE
CN102	1-564-215-11 o	PIN, CONNECTOR 4P
CN103	1-564-321-00 o	CONNECTOR, VH 2P, MALE
CN201	1-564-932-11 o	CONNECTOR, 9P

(M BOARD/SOPS-1045(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
D101	8-719-510-71	s DIODE D10XB60
D102	8-719-313-16	s DIODE AU02A
D103	8-719-911-19	s DIODE 1SS119
D104	8-719-510-26	s DIODE D1NL20
D105	8-719-510-26	s DIODE D1NL20
D106	8-719-510-26	s DIODE D1NL20
D107	8-719-911-19	s DIODE 1SS119
D108	8-719-109-84	s DIODE RD5.1ES-B1
D109	8-719-911-19	s DIODE 1SS119
D110	8-719-109-89	s DIODE RD5.6ES-B2
D201	8-719-510-12	s DIODE D10SC4M
D202	8-719-510-39	s DIODE D10LC20U
D203	8-719-510-39	s DIODE D10LC20U
D204	8-719-988-31	s DIODE D10SC6MR
D205	8-719-025-11	s DIODE D8LC20UR
D206	8-719-027-20	s DIODE D3S4M-F
D208	8-719-911-19	s DIODE 1SS119
D209	8-719-109-88	s DIODE RD5.6ES-B1
D210	8-719-911-19	s DIODE 1SS119
D211	8-719-110-12	s DIODE RD9.1ES-B1
D213	8-719-110-42	s DIODE RD15ES-B3
D214	8-719-110-49	s DIODE RD18ES-B2
IC101	8-759-520-23	s IC FA5304P
IC102	8-719-028-92	s PHOTO-COUPLER PS2652-P-V
IC103	8-719-028-92	s PHOTO-COUPLER PS2652-P-V
IC103	8-719-820-67	s PHOTO-COUPLER TLP634GB-LF2
IC201	8-759-604-69	s IC M50460-052P
IC202	8-759-908-15	s IC TL431CLP
L101	1-424-389-11	s FILTER, LINE
L103	1-412-552-11	s INDUCTOR 2.2mH
L201	1-406-929-11	s COIL, CHOKE
L202	1-424-254-31	s COIL, CHOKE 4.7UH
L204	1-424-255-11	s COIL, CHOKE 10UH
L205	1-424-254-31	s COIL, CHOKE 4.7UH
L206	1-424-255-11	s COIL, CHOKE 10UH
L207	1-406-929-11	s COIL, CHOKE
L208	1-424-255-11	s COIL, CHOKE 10UH
Q101	8-729-321-75	s TRANSISTOR 2SK1400A
Q201	8-729-900-80	s TRANSISTOR DTC114ES
R102	1-217-785-11	s WIREWOUND 15 5% 5W
R103	1-260-129-91	s CARBON 330k 1/2W 5%
R104	1-215-902-11	s METAL 47k 5% 2W
R105	1-215-902-11	s METAL 47k 5% 2W
R106	1-215-902-11	s METAL 47k 5% 2W
R107	1-249-404-00	s CARBON 82 5% 1/4W
R108	1-249-394-11	s CARBON 12 5% 1/4W
R109	1-249-441-11	s CARBON 100k 5% 1/4W
R110	1-249-395-11	s CARBON 15 5% 1/4W
R111	1-249-397-11	s CARBON 22 5% 1/4W
R112	1-249-381-11	s CARBON 1 5% 1/4W
R113	1-249-395-11	s CARBON 15 5% 1/4W
R114	1-249-429-11	s CARBON 10k 5% 1/4W
R115	1-249-421-11	s CARBON 2.2k 5% 1/4W
R116	1-247-903-00	s CARBON 1M 5% 1/4W
R117	1-215-902-11	s METAL 47k 5% 2W
R118	1-249-436-11	s CARBON 39k 5% 1/4W
R201-205	1-215-882-00	s METAL 22 5% 2W

(M BOARD/SOPS-1045(UVW-1800/1600))

Ref. No. or Q'ty	Part No.	SP Description
R206	1-249-419-11	s CARBON 1.5k 5% 1/4W
R209	1-215-429-00	s METAL 2.2k 1% 1/6W
R210	1-215-433-00	s METAL 3.3k 1% 1/6W
R212	1-249-413-11	s CARBON 470 5% 1/4W
R213	1-249-405-11	s CARBON 100 5% 1/4W
R214	1-249-433-11	s CARBON 22k 5% 1/4W
RV201	1-237-500-21	s RES, ADJ METAL 1k
RY101	1-515-864-11	s RELAY
T101	1-423-874-11	s TRANSFORMER, CONVERTER
T102	1-424-573-11	s TRANSFORMER, CURRENT

----- FRAME LIST -----

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8260-972-A	s DRUM ASSY, DBH-39A-R (for UVW-1800)
1pc	A-8260-973-A	s UPPER DRUM ASSY, DBR-39-R (for UVW-1800)
1pc	A-8260-976-A	s DRUM ASSY, DBH-41A-R (for UVW-1600)
1pc	A-8260-977-A	s UPPER DRUM ASSY, DBR-41-R (for UVW-1600)
1pc	A1-413-889-11	s REGULATOR, SWITCHING (SOPS-1045)
1pc	1-690-106-12	s WIRE, FLEXIBLE CARD 5P
1pc	A1-810-374-11	s UNIT, FLD
1pc	1-810-381-11	s SENSOR, CONDENSATION
H1001	8-825-778-81	s HEAD, EPS244-2103H
H1002	8-825-554-83	s HEAD, CTL PS244-21B
H1003	8-825-770-72	s HEAD, FE EF291-21
L1001	1-543-316-31	s HEAD, SENSING "TAPE END SENSOR"
L1002	1-543-316-31	s HEAD, SENSING "TAPE TOP SENSOR"
M1001	1-698-152-11	s MOTOR, DC (SVD-1449) "THREADING"
M1002	1-698-152-11	s MOTOR, DC (SVD-1449) "CASSETTE"
M1003	1-698-231-11	s MOTOR, DC "S-REEL"
M1004	1-698-231-11	s MOTOR, DC "S-REEL"
M1005	1-698-179-11	s MOTOR, DC "CAPSTAN"
M1006	1-698-152-11	s MOTOR, DC (SVD-1449) "POSITION"
PM1001	1-454-338-00	s SOLENOID "PINCH"
PM1002	1-454-417-41	s SOLENOID "S-BRAKE"
PM1003	1-454-417-41	s SOLENOID "T-BRAKE"
S1001	A1-570-117-31	s SWITCH, ROCKER "AC POWER"

----- FRAME, HARNESS, CONNECTOR & CONTACT LIST -----

Ref. No. or Q'ty	Part No.	SP Description
to ACE ASSY		
CN921F (for UVW-1800 only)		
	1-565-978-11	o HOUSING 6P
6pcs	1-565-977-11	s CONTACT, FEMALE AWG28-32
CN922F		
	1-568-819-11	o HOUSING 9P
9pcs	1-565-977-11	s CONTACT, FEMALE AWG28-32
to AP-31/31A board		
AP-31: UVW-1800		
AP-31A: UVW-1600		
CN1F		
	1-569-196-41	o HOUSING 3P
1pc	1-569-191-11	o CONTACT, FEMALE AWG22-26
2pcs	1-569-193-11	o CONTACT, FEMALE
CN2F		
	1-569-196-31	o HOUSING 3P
1pc	1-569-191-11	o CONTACT, FEMALE AWG22-26
2pcs	1-569-193-11	o CONTACT, FEMALE
CN3F		
	1-569-196-11	o HOUSING 3P
1pc	1-569-191-11	o CONTACT, FEMALE AWG22-26
2pcs	1-569-193-11	o CONTACT, FEMALE
to AR-14 board (for UVW-1800 only)		
CN1F		
	1-569-202-11	o HOUSING 9P
3pcs	1-569-191-11	o CONTACT, FEMALE AWG22-26
6pcs	1-569-193-11	o CONTACT, FEMALE
to AUDIO LEVEL METER		
CN1F		
	1-559-586-11	o WIRE, FLEXIBLE CARD 20P
CN2F	1-559-586-11	o WIRE, FLEXIBLE CARD 20P
to CAPSTAN MOTOR CONTROL BLOCK		
CN8F		
	1-562-153-11	o HOUSING 8P
8pcs	1-564-026-00	o CONTACT, FEMALE AWG26-30
to CASSETTE		
CN930F		
	1-562-157-11	o HOUSING 12P
12pcs	1-564-026-00	o CONTACT, FEMALE AWG26-30
to CP-225/225A board		
CP-225: UVW-1800		
CP-225A: UVW-1600		
CN651F		
	1-562-149-11	o HOUSING 4P
4pcs	1-564-026-00	o CONTACT, FEMALE AWG26-30
CN652F		
	1-562-152-11	o HOUSING 7P
7pcs	1-564-026-00	o CONTACT, FEMALE AWG26-30
CN653F		
	1-562-151-11	o HOUSING 6P
6pcs	1-564-026-00	o CONTACT, FEMALE AWG26-30
CN654F		
	1-562-157-11	o HOUSING 12P
12pcs	1-564-026-00	o CONTACT, FEMALE AWG26-30
CN655F		
	1-562-185-11	o HOUSING 14P
14pcs	1-564-026-00	o CONTACT, FEMALE AWG26-30
CN656F		
	1-562-147-11	o HOUSING 2P
2pcs	1-564-026-00	o CONTACT, FEMALE AWG26-30

(FRAME, HARNESS, CONNECTOR & CONTACT LIST)

Ref. No. or Q'ty	Part No.	SP Description
to CP-226/226A board		
	CP-226:	UVW-1800
	CP-226A:	UVW-1600
CN274F 7pcs	1-562-152-11 o	HOUSING 7P
	1-564-026-00 o	CONTACT, FEMALE AWG26-30
CN275F 6pcs	1-562-151-11 o	HOUSING 6P
	1-564-026-00 o	CONTACT, FEMALE AWG26-30
CN276F 2pcs	1-562-147-11 o	HOUSING 2P
	1-564-026-00 o	CONTACT, FEMALE AWG26-30
to CP-237/237A board		
	CP-237:	UVW-1800
	CP-237A:	UVW-1600
CN532F	1-575-733-11 s	CABLE, FLAT 17P
to DR-214 board		
CN301F	1-558-261-31 s	WIRE, FLEXIBLE CARD 30P
CN302F	1-558-261-31 s	WIRE, FLEXIBLE CARD 30P
CN303F	1-558-261-31 s	WIRE, FLEXIBLE CARD 30P
to DRUM ASSY		
CN1F 15pcs	1-580-938-11 o	HOUSING 15P
	1-565-740-11 o	CONTACT, FEMALE AWG24-30
CN901F(for UVW-1800 only)	1-565-978-11 o	HOUSING 6P
6pcs	1-565-977-11 s	CONTACT, FEMALE AWG28-32
CN911F 2pcs	1-569-199-11 o	HOUSING CONNECTOR 6P
	1-569-192-11 o	CONTACT, FEMALE AWG22-26
4pcs	1-569-194-11 o	CONTACT, FEMALE AWG24-30
CN912F 2pcs	1-569-199-31 o	HOUSING 6P
	1-569-192-11 o	CONTACT, FEMALE AWG22-26
4pcs	1-569-194-11 o	CONTACT, FEMALE AWG24-30
to DUS-355 board		
CN934F 2pcs	1-569-195-11 s	HOUSING 2P
	1-569-193-11 o	CONTACT, FEMALE
to HP-61/61A board		
	HP-61:	UVW-1800
	HP-61A:	UVW-1600
CN401F 10pcs	1-562-155-11 o	HOUSING 10P
	1-564-026-00 o	CONTACT, FEMALE AWG26-30
CN403F 3pcs	1-562-148-11 o	HOUSING 3P
	1-564-026-00 o	CONTACT, FEMALE AWG26-30
to KY-249/249A board		
	KY-249:	UVW-1800
	KY-249A:	UVW-1600
CN590F 15pcs	1-562-958-11 o	HOUSING 15P
	1-564-026-00 o	CONTACT, FEMALE AWG26-30
CN591F	1-559-586-11 o	WIRE, FLEXIBLE CARD 20P
CN592F 4pcs	1-562-149-11 o	HOUSING 4P
	1-564-026-00 o	CONTACT, FEMALE AWG26-30
CN593F	1-559-586-11 o	WIRE, FLEXIBLE CARD 20P

(FRAME, HARNESS, CONNECTOR & CONTACT LIST)

Ref. No. or Q'ty	Part No.	SP Description
to MB-470/470A board		
	MB-470:	UVW-1800
	MB-470A:	UVW-1600
CN200F 9pcs	1-562-800-11 o	HOUSING 9P
	1-562-210-11 o	CONTACT, FEMALE AWG18-22
CN201F 9pcs	1-562-511-11 o	HOUSING 9P
	1-562-490-11 o	CONTACT, FEMALE AWG22-28
CN211F 12pcs	1-562-157-11 o	HOUSING 12P
	1-564-026-00 o	CONTACT, FEMALE AWG26-30
CN231F	1-751-632-11 s	WIRE, FLEXIBLE CARD 34P
CN232F	1-575-733-11 s	CABLE, FLAT 17P
CN235F 3pcs	1-562-148-11 o	HOUSING 3P
	1-564-026-00 o	CONTACT, FEMALE AWG26-30
CN262F 15pcs	1-562-958-11 o	HOUSING 15P
	1-564-026-00 o	CONTACT, FEMALE AWG26-30
CN266F 4pcs	1-562-149-11 o	HOUSING 4P
	1-564-026-00 o	CONTACT, FEMALE AWG26-30
CN267F 7pcs	1-562-152-11 o	HOUSING 7P
	1-564-026-00 o	CONTACT, FEMALE AWG26-30
CN268F 14pcs	1-562-185-11 o	HOUSING 14P
	1-564-026-00 o	CONTACT, FEMALE AWG26-30
CN269F 6pcs	1-562-151-11 o	HOUSING 6P
	1-564-026-00 o	CONTACT, FEMALE AWG26-30
CN271F 12pcs	1-562-157-11 o	HOUSING 12P
	1-564-026-00 o	CONTACT, FEMALE AWG26-30
to MB-471/471A board		
	MB-471:	UVW-1800
	MB-471A:	UVW-1600
CN251F 9pcs	1-562-508-11 o	HOUSING 6P
	1-562-490-11 o	CONTACT, FEMALE AWG22-28
CN261F 12pcs	1-562-157-11 o	HOUSING 12P
	1-564-026-00 o	CONTACT, FEMALE AWG26-30
CN264F(for UVW-1800 only)	1-569-200-31 o	HOUSING 7P
2pcs	1-569-191-11 o	CONTACT, FEMALE AWG22-26
4pcs	1-569-193-11 o	CONTACT, FEMALE
CN265F(for UVW-1800 only)	1-562-148-11 o	HOUSING 3P
3pcs	1-564-026-00 o	CONTACT, FEMALE AWG26-30
CN274F 7pcs	1-562-152-11 o	HOUSING 7P
	1-564-026-00 o	CONTACT, FEMALE AWG26-30
CN275F 6pcs	1-562-151-11 o	HOUSING 6P
	1-564-026-00 o	CONTACT, FEMALE AWG26-30
CN276F(for UVW-1800 only)	1-562-151-11 o	HOUSING 6P
6pcs	1-564-026-00 o	CONTACT, FEMALE AWG26-30
CN277F 4pcs	1-562-149-11 o	HOUSING 4P
	1-564-026-00 o	CONTACT, FEMALE AWG26-30
CN278F 10pcs	1-562-155-11 o	HOUSING 10P
	1-564-026-00 o	CONTACT, FEMALE AWG26-30
CN281F(for UVW-1800 only)	1-751-632-11 s	WIRE, FLEXIBLE CARD 34P

(FRAME, HARNESS, CONNECTOR & CONTACT LIST)

Ref. No.
or Q'ty Part No. SP Description

to MS-39/39A board

MS-39: UVW-1800
MS-39A: UVW-1600

CN350F 1-562-157-11 o HOUSING 12P
12pcs 1-564-026-00 o CONTACT, FEMALE AWG26-30

CN351F 1-562-149-11 o HOUSING 4P
4pcs 1-564-026-00 o CONTACT, FEMALE AWG26-30

CN352F 1-569-195-11 s HOUSING 2P
2pcs 1-569-193-11 o CONTACT, FEMALE

CN353F 1-562-152-11 o HOUSING 7P
7pcs 1-564-026-00 o CONTACT, FEMALE AWG26-30

CN354F 1-569-208-11 o HOUSING 15P
15pcs 1-569-193-11 o CONTACT, FEMALE

CN355F 1-562-153-11 o HOUSING 8P
8pcs 1-564-026-00 o CONTACT, FEMALE AWG26-30

CN356F 1-751-633-11 s WIRE, FLEXIBLE CARD 13P
CN357F 1-751-634-11 s WIRE, FLEXIBLE CARD 13P

CN358F 1-562-151-11 o HOUSING 6P
6pcs 1-564-026-00 o CONTACT, FEMALE AWG26-30

CN359F 1-562-149-11 o HOUSING 4P
4pcs 1-564-026-00 o CONTACT, FEMALE AWG26-30

CN360F 1-569-197-11 o HOUSING 4P
4pcs 1-569-193-11 o CONTACT, FEMALE

CN361F 1-569-196-11 o HOUSING 3P
1pc 1-569-191-11 o CONTACT, FEMALE AWG22-26
2pcs 1-569-193-11 o CONTACT, FEMALE

CN362F 1-558-261-31 s WIRE, FLEXIBLE CARD 30P
CN363F 1-558-261-31 s WIRE, FLEXIBLE CARD 30P
CN364F 1-558-261-31 s WIRE, FLEXIBLE CARD 30P

to PD-35 board

CN851F 1-562-147-11 o HOUSING 2P
2pcs 1-564-026-00 o CONTACT, FEMALE AWG26-30

CN854F 1-562-151-11 o HOUSING 6P
6pcs 1-564-026-00 o CONTACT, FEMALE AWG26-30

to PTC-66 board

CN944F 1-562-149-11 o HOUSING 4P
4pcs 1-564-026-00 o CONTACT, FEMALE AWG26-30

to PTC-67 board

CN941F 1-562-152-11 o HOUSING 7P
7pcs 1-564-026-00 o CONTACT, FEMALE AWG26-30

CN942F 1-569-195-21 o HOUSING 2P
2pcs 1-569-193-11 o CONTACT, FEMALE

CN943F 1-562-147-11 o HOUSING 2P
2pcs 1-564-026-00 o CONTACT, FEMALE AWG26-30

to PTC-68 board

CN940F 1-562-149-11 o HOUSING 4P
4pcs 1-564-026-00 o CONTACT, FEMALE AWG26-30

(FRAME, HARNESS, CONNECTOR & CONTACT LIST)

Ref. No.
or Q'ty Part No. SP Description

to RM-126 board

CN946F 1-751-633-12 s WIRE, FLEXIBLE CARD 13P

CN947F 1-569-197-11 o HOUSING 4P
4pcs 1-569-193-11 o CONTACT, FEMALE

to RM-127 board

CN951F 1-751-634-12 s WIRE, FLEXIBLE CARD 13P

CN952F 1-569-197-11 o HOUSING 4P
4pcs 1-569-193-11 o CONTACT, FEMALE

to RP-70/70A board

RP-70: UVW-1800
RP-70A: UVW-1600

CN1F 1-569-196-11 o HOUSING 3P
1pc 1-569-192-11 o CONTACT, FEMALE AWG22-26
2pcs 1-569-194-11 o CONTACT, FEMALE AWG24-30

CN101F 1-569-196-31 o HOUSING 3P
1pc 1-569-192-11 o CONTACT, FEMALE AWG22-26
2pcs 1-569-194-11 o CONTACT, FEMALE AWG24-30

CN201F 1-569-196-41 o HOUSING 3P
1pc 1-569-192-11 o CONTACT, FEMALE AWG22-26
2pcs 1-569-194-11 o CONTACT, FEMALE AWG24-30

CN301F 1-569-196-21 o HOUSING 3P
1pc 1-569-192-11 o CONTACT, FEMALE AWG22-26
2pcs 1-569-194-11 o CONTACT, FEMALE AWG24-30

to SE-207 board

CN950F 1-569-619-11 o HOUSING 4P
4pcs 1-565-977-11 s CONTACT, FEMALE AWG28-32

to SWITCHING REGULATOR

CN1F Δ 1-562-800-11 o HOUSING 9P
9pcs Δ 1-562-210-11 o CONTACT, FEMALE AWG18-22

CN101F 1-562-286-11 o HOUSING 5P
2pcs 1-562-210-11 o CONTACT, FEMALE AWG18-22

CN151F 1-562-285-11 o HOUSING 4P
2pcs 1-562-210-11 o CONTACT, FEMALE AWG18-22

to TAPE END SENSOR

CN938F 1-562-147-11 o HOUSING 2P
2pcs 1-564-026-00 o CONTACT, FEMALE AWG26-30

to TAPE TOP SENSOR

CN939F 1-562-147-11 o HOUSING 2P
2pcs 1-564-026-00 o CONTACT, FEMALE AWG26-30

to TR-84 board

CN945F 1-569-619-11 o HOUSING 4P
4pcs 1-565-977-11 s CONTACT, FEMALE AWG28-32

to VR-155 board (for UVW-1800 only)

CN402F 1-562-151-11 o HOUSING 6P
6pcs 1-564-026-00 o CONTACT, FEMALE AWG26-30

18-4. PACKING MATERIALS & ACCESSORIES

Ref. No. or Q'ty	Part No.	SP Description
1pc	▲1-551-812-11	s CORD, POWER 3P (for UC)
1pc	▲1-557-161-11	s CORD, POWER 2P (for J)
1pc	1-751-019-81	o CABLE, D-SUB 9P(RCC5G) 5m
1pc	3-182-362-01	o SPACER
1pc	3-182-442-01	o CUSHION (BOTTOM)
1pc	3-182-443-01	o CUSHION (TOP)
1pc	3-182-233-01	o INDIVIDUAL CARTON(for UVW-1600)
1pc	3-182-444-01	o INDIVIDUAL CARTON(for UVW-1800)
1pc	3-701-648-00	s BAG, POLYETHYLENE
1pc	3-757-560-01	s MANUAL, INSTRUCTION(for UVW-1600(J))
1pc	▲3-757-560-21	s MANUAL, INSTRUCTION(for UVW-1600(UC))
1pc	3-757-561-01	s MANUAL, INSTRUCTION(for UVW-1800(J))
1pc	▲3-757-561-21	s MANUAL, INSTRUCTION(for UVW-1800(UC))
1pc	3-795-581-21	o SAFEGUARD (SONY), IMPORTANT(for UC)

18-5. OPTIONAL FIXTURES

Part No.	SP Description
J-6001-820-A	o DRUM ECCENTRICITY GAUGE (3)
J-6001-830-A	o DRUM ECCENTRICITY GAUGE (2)
J-6001-840-A	o DRUM ECCENTRICITY GAUGE (1)
or	
J-6325-530-A	o DRUM ECCENTRICITY GAUGE (6)
J-6031-820-A	o MULTI CONNECTOR CABLE (DIBNC)
J-6031-830-A	o MULTI CONNECTOR CABLE (DOBNC)
J-6080-029-A	o ADJUSTMENT MIRROR
J-6087-000-A	o DRUM ECCENTRICITY GAUGE (5)
J-6150-960-A	o REEL MOTOR SHAFT SLANTNESS CHECK FIXTURE
J-6152-450-A	o WIRE CLEARANCE GAUGE
J-6320-680-A	o REEL TABLE HEIGHT GAUGE
J-6320-880-A	o CASSETTE BASE PLATE (L)
J-6321-500-A	o TAPE GUIDE ADJUSTMENT DRIVER
J-6332-780-A	o EXTENSION BOARD, EX-278
J-6332-790-A	o EXTENSION BOARD, EX-279
J-6381-380-A	o S CONNECTOR CABLE, EW703
2-034-697-00	o CLEANING PIECE
3-703-360-09	o PARALLEL PIN (3x32)
7-661-018-18	o OIL
7-662-010-04	o GREASE, SGL-505 (20 g)
7-700-736-01	o L-SHAPED HEXAGONAL WRENCH (d:1.27 mm)
7-700-736-05	o L-SHAPED HEXAGONAL WRENCH (d:1.5 mm)
7-700-736-06	o L-SHAPED HEXAGONAL WRENCH (d:0.89 mm)
8-960-096-01	o ALIGNMENT TAPE, CR2-1B
8-960-096-41	o ALIGNMENT TAPE, CR5-1B
8-960-097-45	o ALIGNMENT TAPE, CR8-1A
9-911-053-00	o THICKNESS GAUGE
9-919-573-01	o CLEANING FLUID
STANDARD PRODUCTS	TENTEL METER (T2-H7-SLC)

